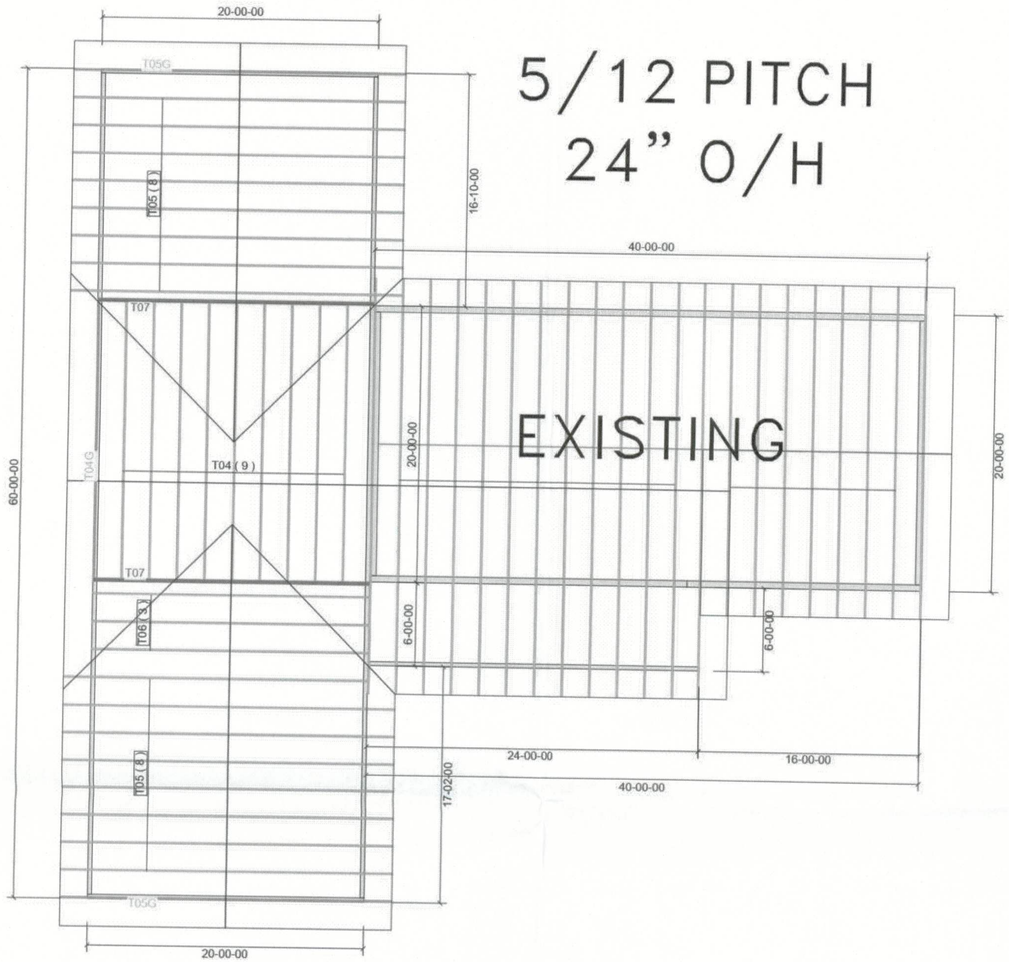

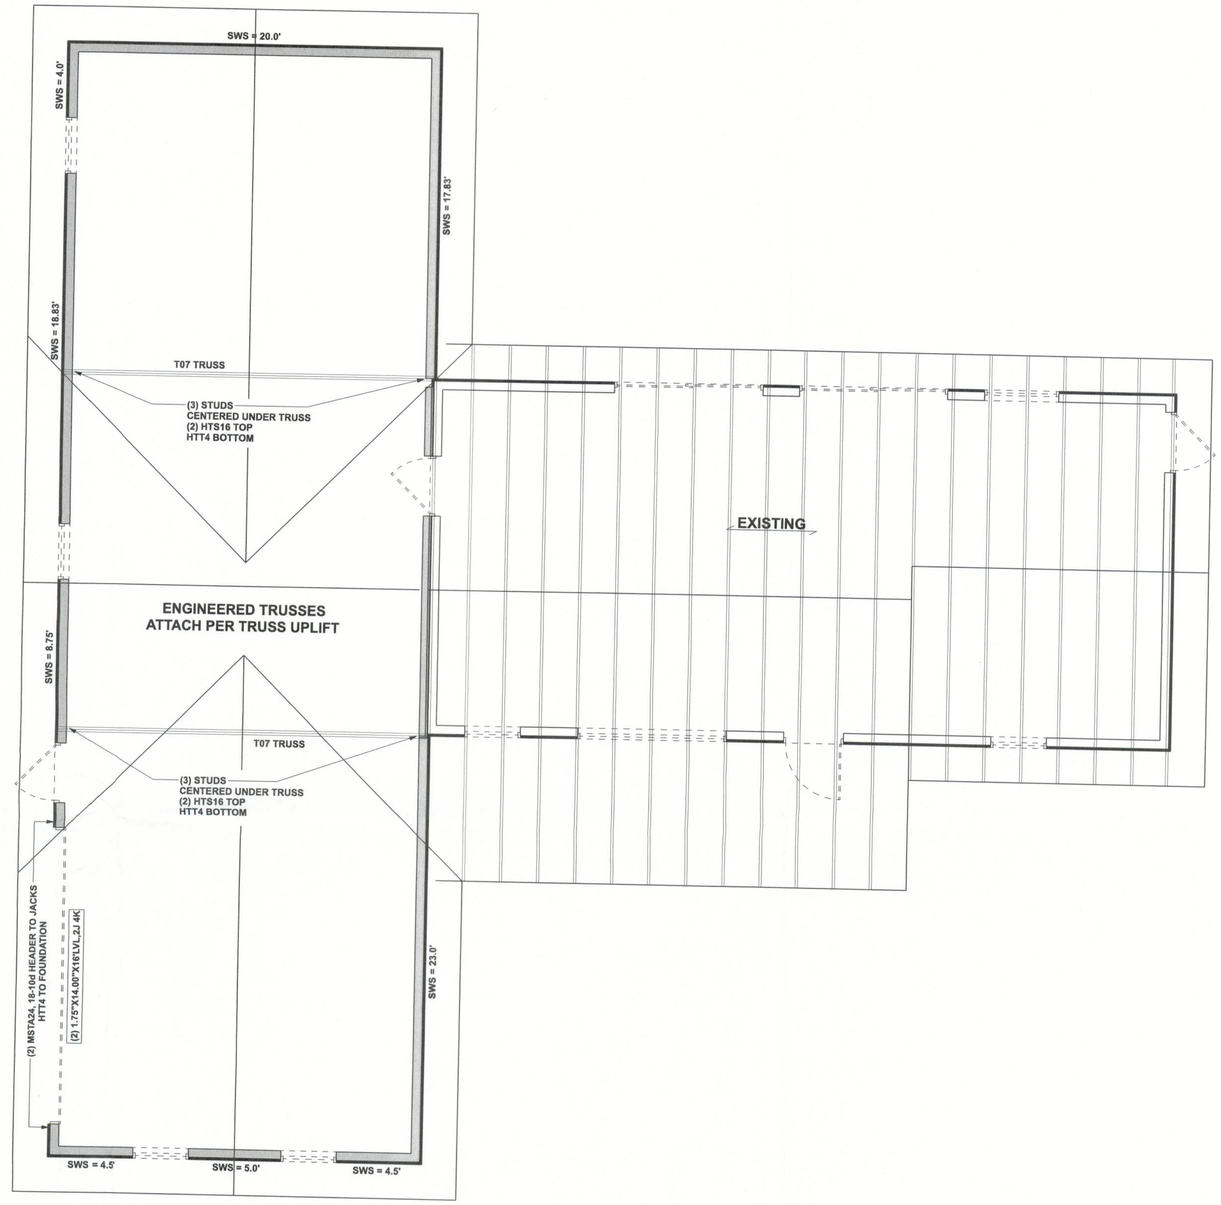

LUMBER SIZE & GRADE MINUMUM REQUIREMENTS

RIDGE BOARD	2X8 SYP #2
RAFTER SPANS 20'-0" OR LESS	2X4 SYP #2
PURLINS / LATERAL BRACING	2X4 SPF #2
SLEEPERS	2X (WIDTH OF RAFTER SEAT CUT) SPF #3 OR 2 PARALLEL 2X4 SPF #3
CRIPPLES & BLOCKING	2X4 SPF #2 OR BETTER
TRUSS BELOW	SEE TRUSS DESIGN - SOUTHERN PINE MATERIAL



VALLEY ROOF PLAN

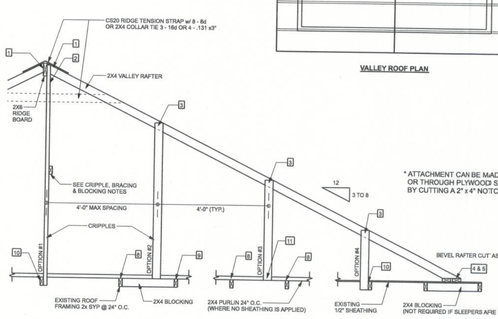

* ATTACHMENT CAN BE MADE DIRECTLY OR THROUGH PLYWOOD SHEATHING BY CUTTING A 2" x 4" NOTCH IN SHEATHING

SECTION CUT PARALLEL TO VALLEY RAFTER

VALLEY ROOF PLAN MEMBER LEGEND

- TRUSS
- TRUSS UNDER VALLEY FRAMING
- VALLEY RAFTER OR RIDGE
- CRIPPLE

CRIPPLES 4'-0" O.C. FOR 20 psf (TL) AND 10 psf (TD) (TYP. SHINGLE ROOF) MAX

CONNECTION REQUIREMENT NOTES

1	2X4 RAFTERS TO RIDGE	3 -16d OR 6 - .131 x 3" TOE NAILS
2	CRIPPLE TO RIDGE	3 - 16d OR 6 - .131 x 3" FACE NAILS
3	CRIPPLE TO RAFTERS	3 - 16d OR 6 - .131 x 3" FACE NAILS
4	RAFTER TO SLEEPER OR BLOCKING	6 -16d OR 12 - .131 x 3" TOE NAILS
5	SLEEPER TO TRUSS	4 - 16d OR 8 - .131 x 3" FACE NAILS EACH TRUSS
6	RIDGE BOARD TO ROOF BLOCK	3 -16d OR 6 - .131 x 3" TOE NAILS
7	RIDGE BOARD TO TRUSS	3 -16d OR 6 - .131 x 3" TOE NAILS
8	PURLIN TO TRUSS (TYP.)	3 -16d OR 6 - .131 x 3" NAILS
9	PURLIN TO TRUSS (IF CRIPPLE IS ATTACHED TO PURLIN)	4 -16d OR 8 - .131 x 3" NAILS
9	TRUSS TO BLOCKING	3 -16d OR 6 - .131 x 3" END NAILS
10	CRIPPLE TO TRUSS	3 -16d OR 6 - .131 x 3" FACE NAILS
11	CRIPPLE TO PURLIN	3 -16d OR 6 - .131 x 3" FACE NAILS

GENERAL NOTES

MAXIMUM RAFTER SPANS
- 8'-0" FOR 2X4, 9'-0" FOR 2X6 SPF #2 OR SYP #2.

MINIMUM ROOF AREA PER SUPPORT
- WIND ZONES 2 & 3 , 24R2 IN ZONE 1. (EXAMPLE: 4'-0" O.C. X 4'-0" SPAN = 16R2 OR 2R2 IN ZONE 1 ONLY)

PURLINS REQUIRED 2'-0" O.C. IF EXISTING SHEATHING IS REMOVED.
PURLINS SHOULD OVERLAP SHEATHING ONE TRUSS SPACING MINIMUM. IN CASES THAT THIS IS IMPRACTICAL, OVERLAP SHEATHING A MINIMUM OF 8", AND NAIL UPWARDS THROUGH SHEATHING INTO PURLIN WITH A MINIMUM OF 8 - 8d COMMON WIRE NAILS.

THIS DRAWING APPLIES TO VALLEYS WITH THE FOLLOWING CONDITIONS:
- -SPANS (DISTANCE BETWEEN HEELS) 40'-0" OR LESS
- MAXIMUM VALLEY HEIGHT: 14'-0" OR LESS
- MAXIMUM ROOF PITCH: 12 TO 3
- MAXIMUM MEAN ROOF HEIGHT: 30 FEET
- MAXIMUM TOTAL LOADING: 40 psf
- MEETS FBC / ASCE 7-16 WIND REQUIREMENTS
- EXPOSURE CATEGORY "C", I = 1.0, Kzt = 1.0
- ENCLOSED BUILDING

CRIPPLE, BRACING, & BLOCKING NOTES

-2X4 CONTINUOUS LATERAL BRACE (CLB) MIN. IS REQUIRED FOR CRIPPLES 5'-0" TO 10'-0" LONG NAILED w/ 2 - 16d NAILS OR 2X4 "T" OR SCAB BRACE NAILD TO PLAT EDGE OF CRIPPLE WITH 8d NAILS @ 8" O.C. "T" OR SCAB MUST BE 90% OF CRIPPLE LENGTH. CRIPPLES OVER 10'-0" LONG REQUIRE TWO CLB's OR BOTH FACES w/ "T" OR SCAB. USE STRESS GRADED LUMBER & BOX OR COMMON NAILS.
- NARROW EDGE OF CRIPPLE CAN FACE RIDGE OR RAFTER, AS LONG AS THE PROPER NUMBER OF NAILS ARE INSTALLED IN EACH MEMBER.
- INSTALL BLOCKING UNDER RAFTER IF SLEEPERS ARE NOT USED.
- INSTALL BLOCKING UNDER CRIPPLES IF CRIPPLES FALL BETWEEN LOWER TRUSS TOP CHORDS AND LATERAL BRACING IS NOT USED.
- APPLY ALL NAILING IN ACCORDANCE TO NDS-1997 SECTION 12. NAILS ARE COMMON WIRE NAILS UNLESS NOTED OTHERWISE.

ROOF OVER FRAMING & BRACING DETAIL

SCALE: N.T.S

STRUCTURAL PLAN

SCALE: 1/4" = 1'-0"

STRUCTURAL PLAN NOTES

SN-1 DIMENSIONS ON STRUCTURAL SHEETS ARE NOT EXACT. REFER TO ARCHITECTURAL FLOOR PLAN FOR ACTUAL DIMENSIONS

SN-2 PERMANENT TRUSS BRACING IS TO BE INSTALLED AT LOCATIONS AS SHOWN ON THE SEALED TRUSS DRAWINGS. LATERAL BRACING IS TO BE RESTRAINED PER BCSI1-03, BCSI-B1, BCSI-B2, & BCSI-B3. BCSI-B1, BCSI-B2, & BCSI-B3 ARE FURNISHED BY THE TRUSS SUPPLIER, WITH THE SEALED TRUSS PACKAGE

HEADER LEGEND

(2) 2X6X0',1J 1K

- HEADER/BEAM CALL-OUT (U.N.O.)
- NUMBER OF KING STUDS EACH SIDE OF OPENING (FULL LENGTH)
- NUMBER OF JACK STUDS EACH SIDE OF OPENING (UNDER HEADER)
- SPAN OF HEADER
- SIZE OF HEADER MATERIAL
- NUMBER OF PLIES IN HEADER

UNLESS NOTED OTHERWISE (MINIMUM REQUIERMENTS)
*****SEE STRUCTURAL PLAN FOR ANY SPECIFIC CALL OUTS*****

BEAM / HEADERS (SIZE)	ALL LOAD BEARING FRAME WALL & PORCH HEADERS SHALL BE A MINIMUM OF (2) 2X6 SP #2 (UNO)
HEADERS (JACK & KING STUDS)	ALL LOAD BEARING FRAME WALL HEADERS SHALL HAVE (1) JACK STUD & (1) KING STUD EACH SIDE (UNO)
HEADERS (STRAPING)	ALL HEADERS w/ UPLIFT TO BE STRAPPED DOWN @ EACH SIDE WITH (1) LSTA24, 14-10d @ TOP & BOTTOM OF WALL WRAP UNDER BOTTOM PLATE & OVER TOP PLATE 1/2" X 10" ANCHOR BOLT w/ 3" X 3" X 1/4" WASHER MUST BE LOCATED WITHIN 6" OF KING STUD @ ALL DOOR LOCATIONS (U.N.O.)
JACK STUDS UNDER GIRDER TRUSS	USE ONE JACK STUD GIRDER SUPPORT PER 2000 LB LOAD

ACTUAL vs REQUIRED SHEARWALL

	TRANSVERSE	LONGITUDUNAL
ACTUAL	11900 LBF	17378 LBF
REQUIRED	10971 LBF	4314 LBF

CONNECTIONS, WALL, & HEADER DESIGN IS BASED ON REACTIONS & UPLIFTS FROM TRUSS ENGINEERING FURNISHED BY BUILDER. BUILDERS FIRST SOURCE JOB #3502888

Bill & Pat Kimble Addition

PROJECT ADDRESS:
319 SW Chippewa Gln, Ft. White, FL

Mark Disosway FL PE 53915

MARK D. DISOSWAY III
LICENSE
No 53915
STATE OF FLORIDA
PROFESSIONAL ENGINEER

Wednesday, May 15, 2024

DIMENSIONS:
Stated dimensions supercede scaled dimensions. Refer all questions to Mark Disosway, P.E. for resolution. Do not proceed without clarification.

COPYRIGHTS AND PROPERTY RIGHTS:
Mark Disosway, P.E. hereby expressly reserves its common law copyrights and property right in these instruments of service. This document is not to be reproduced, altered or copied in any form or manner without first the express written permission and consent of Mark Disosway.

CERTIFICATION: I hereby certify that I have examined this plan, and that the applicable portions of the plan, relating to wind engineering comply with the 8th Edition Florida Building Code Residential (2023) to the best of my knowledge.

LIMITATION: This design is valid for one building, at specified location.

Mark Disosway P.E.
163 SW Midtown Place
Suite 103
Lake City, Florida 32025
386.754.5419
disoswaydesign@gmail.com

JOB NUMBER:
230852

S-3
OF 3 SHEETS