


1/8"=1' 28'x64' 64e4d10

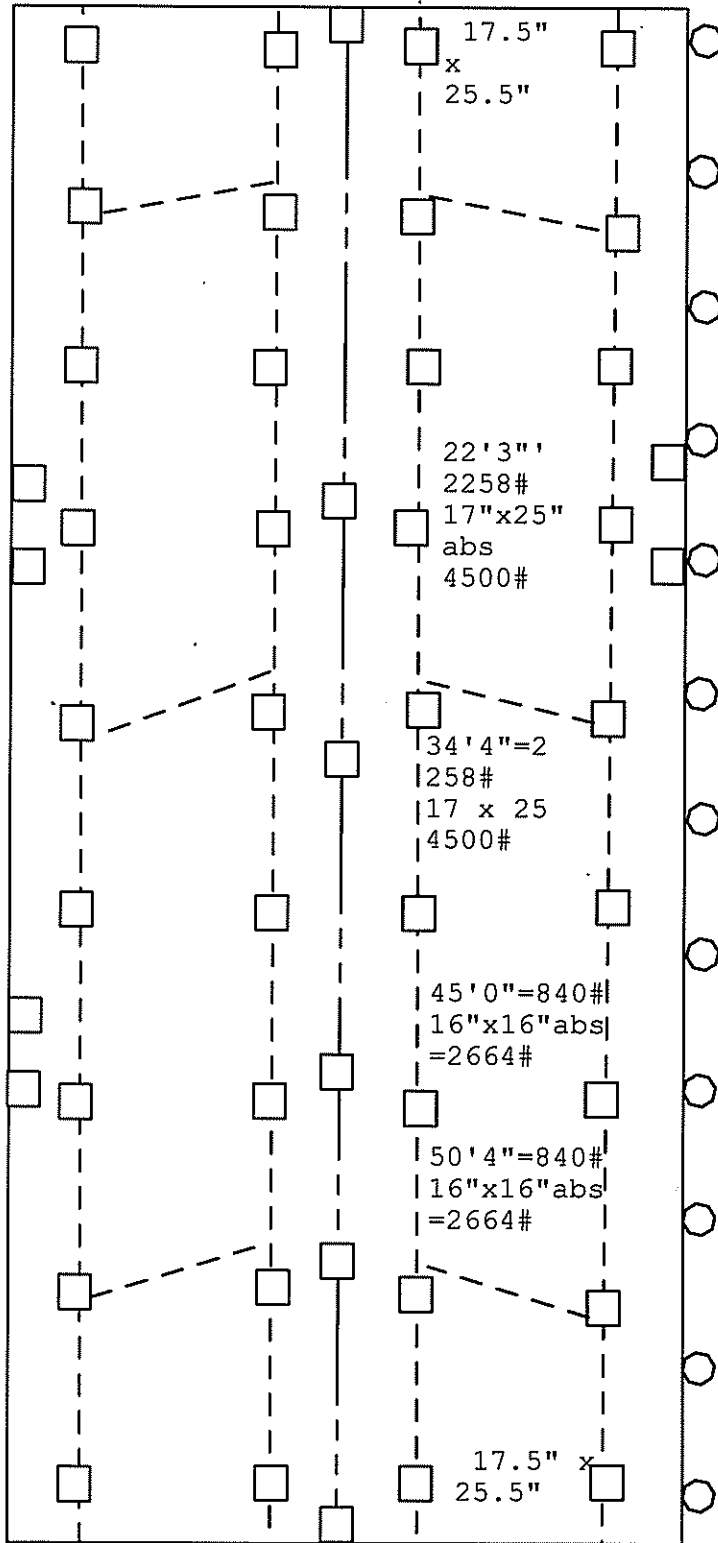

Nobility Homes

- 17"x25" ABS on 87" O.C. on I-beams
soil 1500#
torq 176 in#
- 4' anchors on 5'4"
5' anchors on center line
- 16"x16" ABS for door piers and shearwalls clearly marked on house
- longitudinal pad stabilization 3 per half 6 total may be moved due to obstruction on house

TYPICAL LOCATION MAY CHANGE DUE TO LOCATION OF POSSIBLE OBSTRUCTIONS

ALL PADS WILL BE INSTALLED AS NOTED OR EQUIVALENT/ GREATER THAN WEIGHT REQUIRED

ABS PADS USED FOR THIS SET:
16" X 16" 2664#
17" X 25" 4500#

NLOT-TUTEN

