

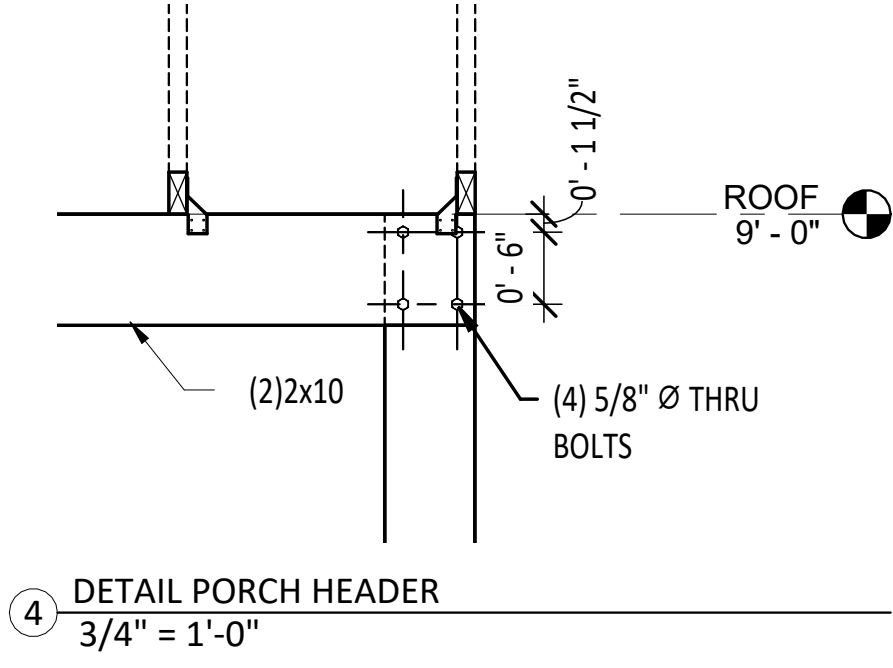
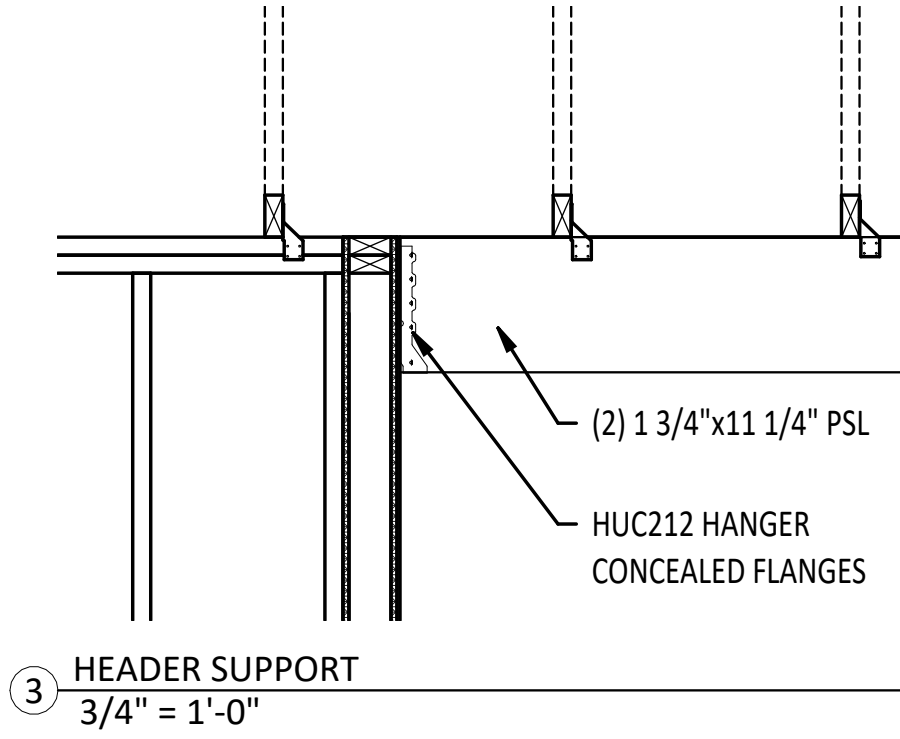


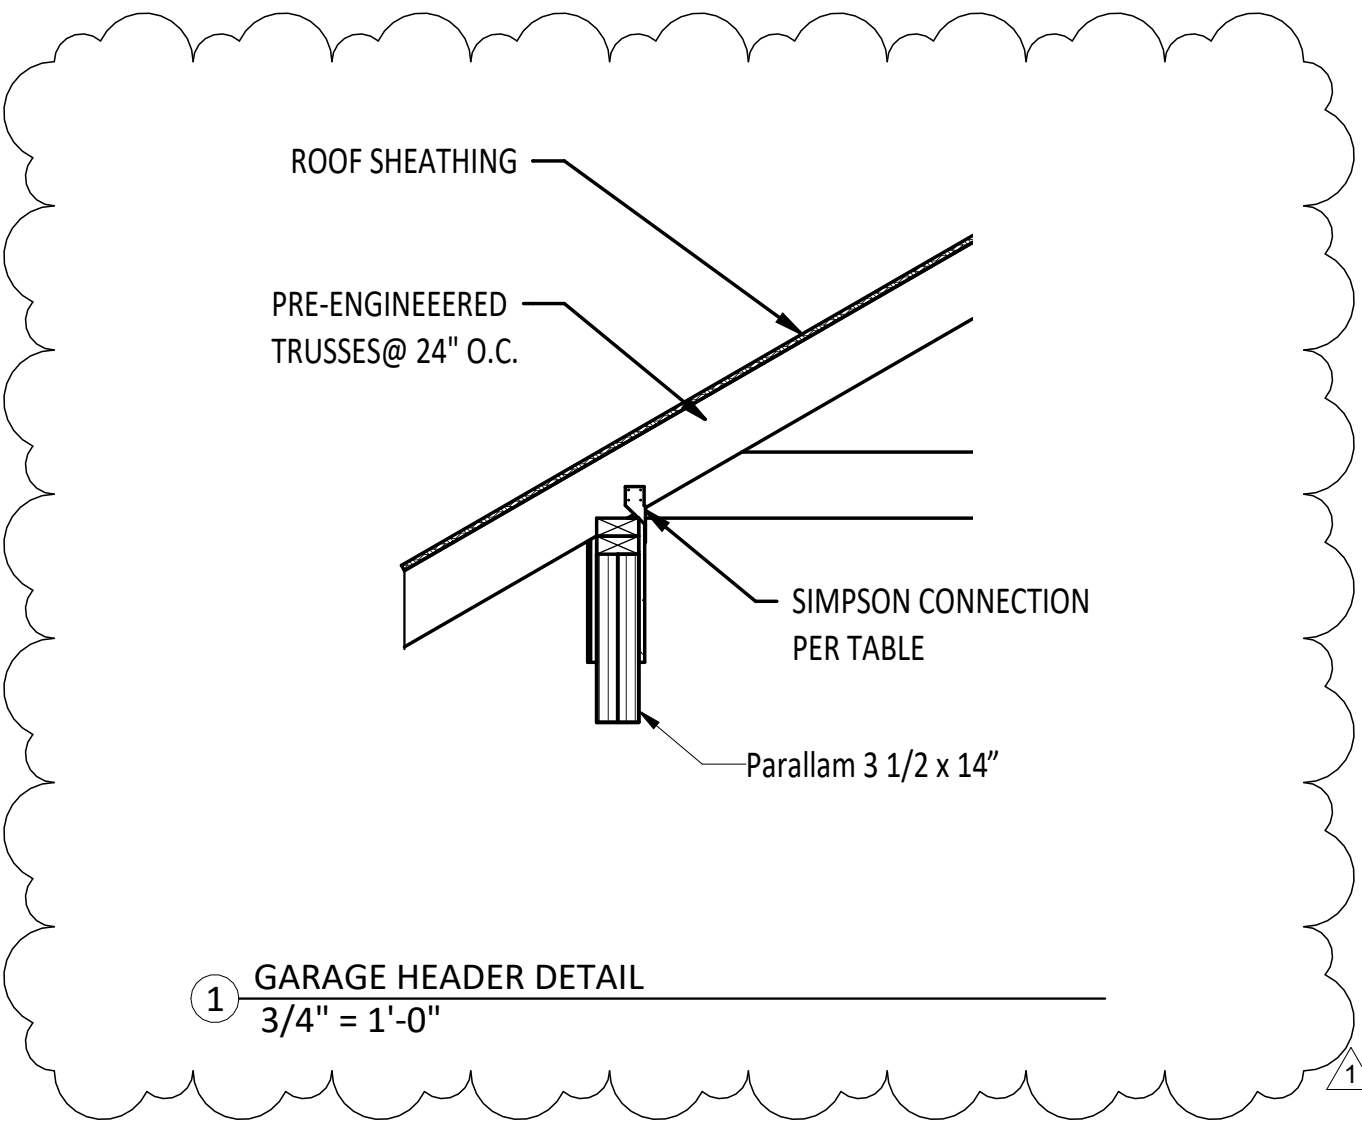

STUD FASTENERS SCHEDULE							
STUD / PLATE	TRUSS UPLIFT (LB)	STUD UPLIFT (LB)	SPACING TOP PLATE (STAGGERED)	SPACING BOTTOM PLATE (STAGGERED)	FASTENER	NAILS REQ'D STUD	NAILS REQ'D PLATE
2x4	< 549	< 368	2' - 8"	2' - 8"	SP4	(6) 10d X 1 1/2"	
2x6	< 549	< 368	2' - 8"	2' - 8"	SP6	(6) 10d X 1 1/2"	
2x	<743	<445	2' - 8"	2' - 8"	SP2	(6) 10d	(6) 10d
2x	<1328	<890	1' - 4"	1' - 4"	SP2	(6) 10d	(6) 10d
2x	<1051	<680	2' - 8"	2' - 8"	SPH4	(12) 10d x 1 1/2"	
2x	<2029	<1360	2' - 8"	2' - 8"	SP4	(12) 10d x 1 1/2"	
2x	<1015	<680	2' - 8"	2' - 8"	SP6	(12) 10d x 1 1/2"	
2x	<2029	<1360	32' - 0"	32' - 0"	SP6	(12) 10d x 1 1/2"	

TRUSS FASTENER SCHEDULE					
NUMBER OF TRUSS PLY	UPLIFT (LBS)	FASTENER QUANT.	FASTENER TYPE	REQ. NAILS IN TRUSS	REQ. NAILS IN PLATE
1	415	1	H2.5	(5) 8d	(5) 8d
1	905	1	H10	(8) 8dx 1 1/2"	(8) 8dx 1 1/2"
1	1200	2	H2.5	(10) 8d	(10) 8d
2	870	1	H10S	(8) 8dx 1 1/2"	(8) 8dx 1 1/2"
2	2150	1	LGT2	(14) 16d SINKERS	(16) 16d SINKERS
3	3685	1	LGT3-SDS2.5	(26) 16d SINKERS	(12) SDS 1/4"x2 1/2"

Revision Schedule		
Revision Number	Revision Description	Revision Date
0	ISSUED FOR PERMITTING	12/8/23
1	ENCLOSED GARAGE	5/30/24

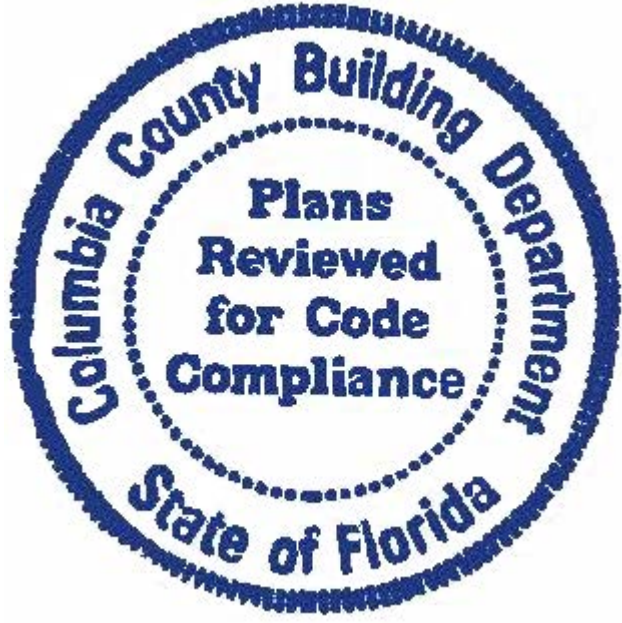

THIS ITEM HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY GARY GILL, PE ON THE DATE AND/OR TIME STAMP SHOWN USING A DIGITAL SIGNATURE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED BY A 3RD PARTY CERTIFICATE AUTHORITY ON ANY ELECTRONIC COPY. FAC 61G15-23.004



Digitally signed by Gary Gill
Date: 2024.05.30 15:08:53 -04'00'

O'NEAL RESIDENCE - STRUCTURAL			
COLUMBIA COUNTY, FL			
GREGORY O'NEAL		GILL ENGINEERING SERVICES, INC AUTH # 30824 GARY GILL PE #51942 P.O. BOX 1420 LIVE OAK, FL 32064 386-590-1242	
DRAWN BY:	GG		
CHKD BY:	GG		
APPRD BY:	GG		
SECTION VIEWS			
PROJECT #: 2334-088	DWG #: S-005	REV #:	1