


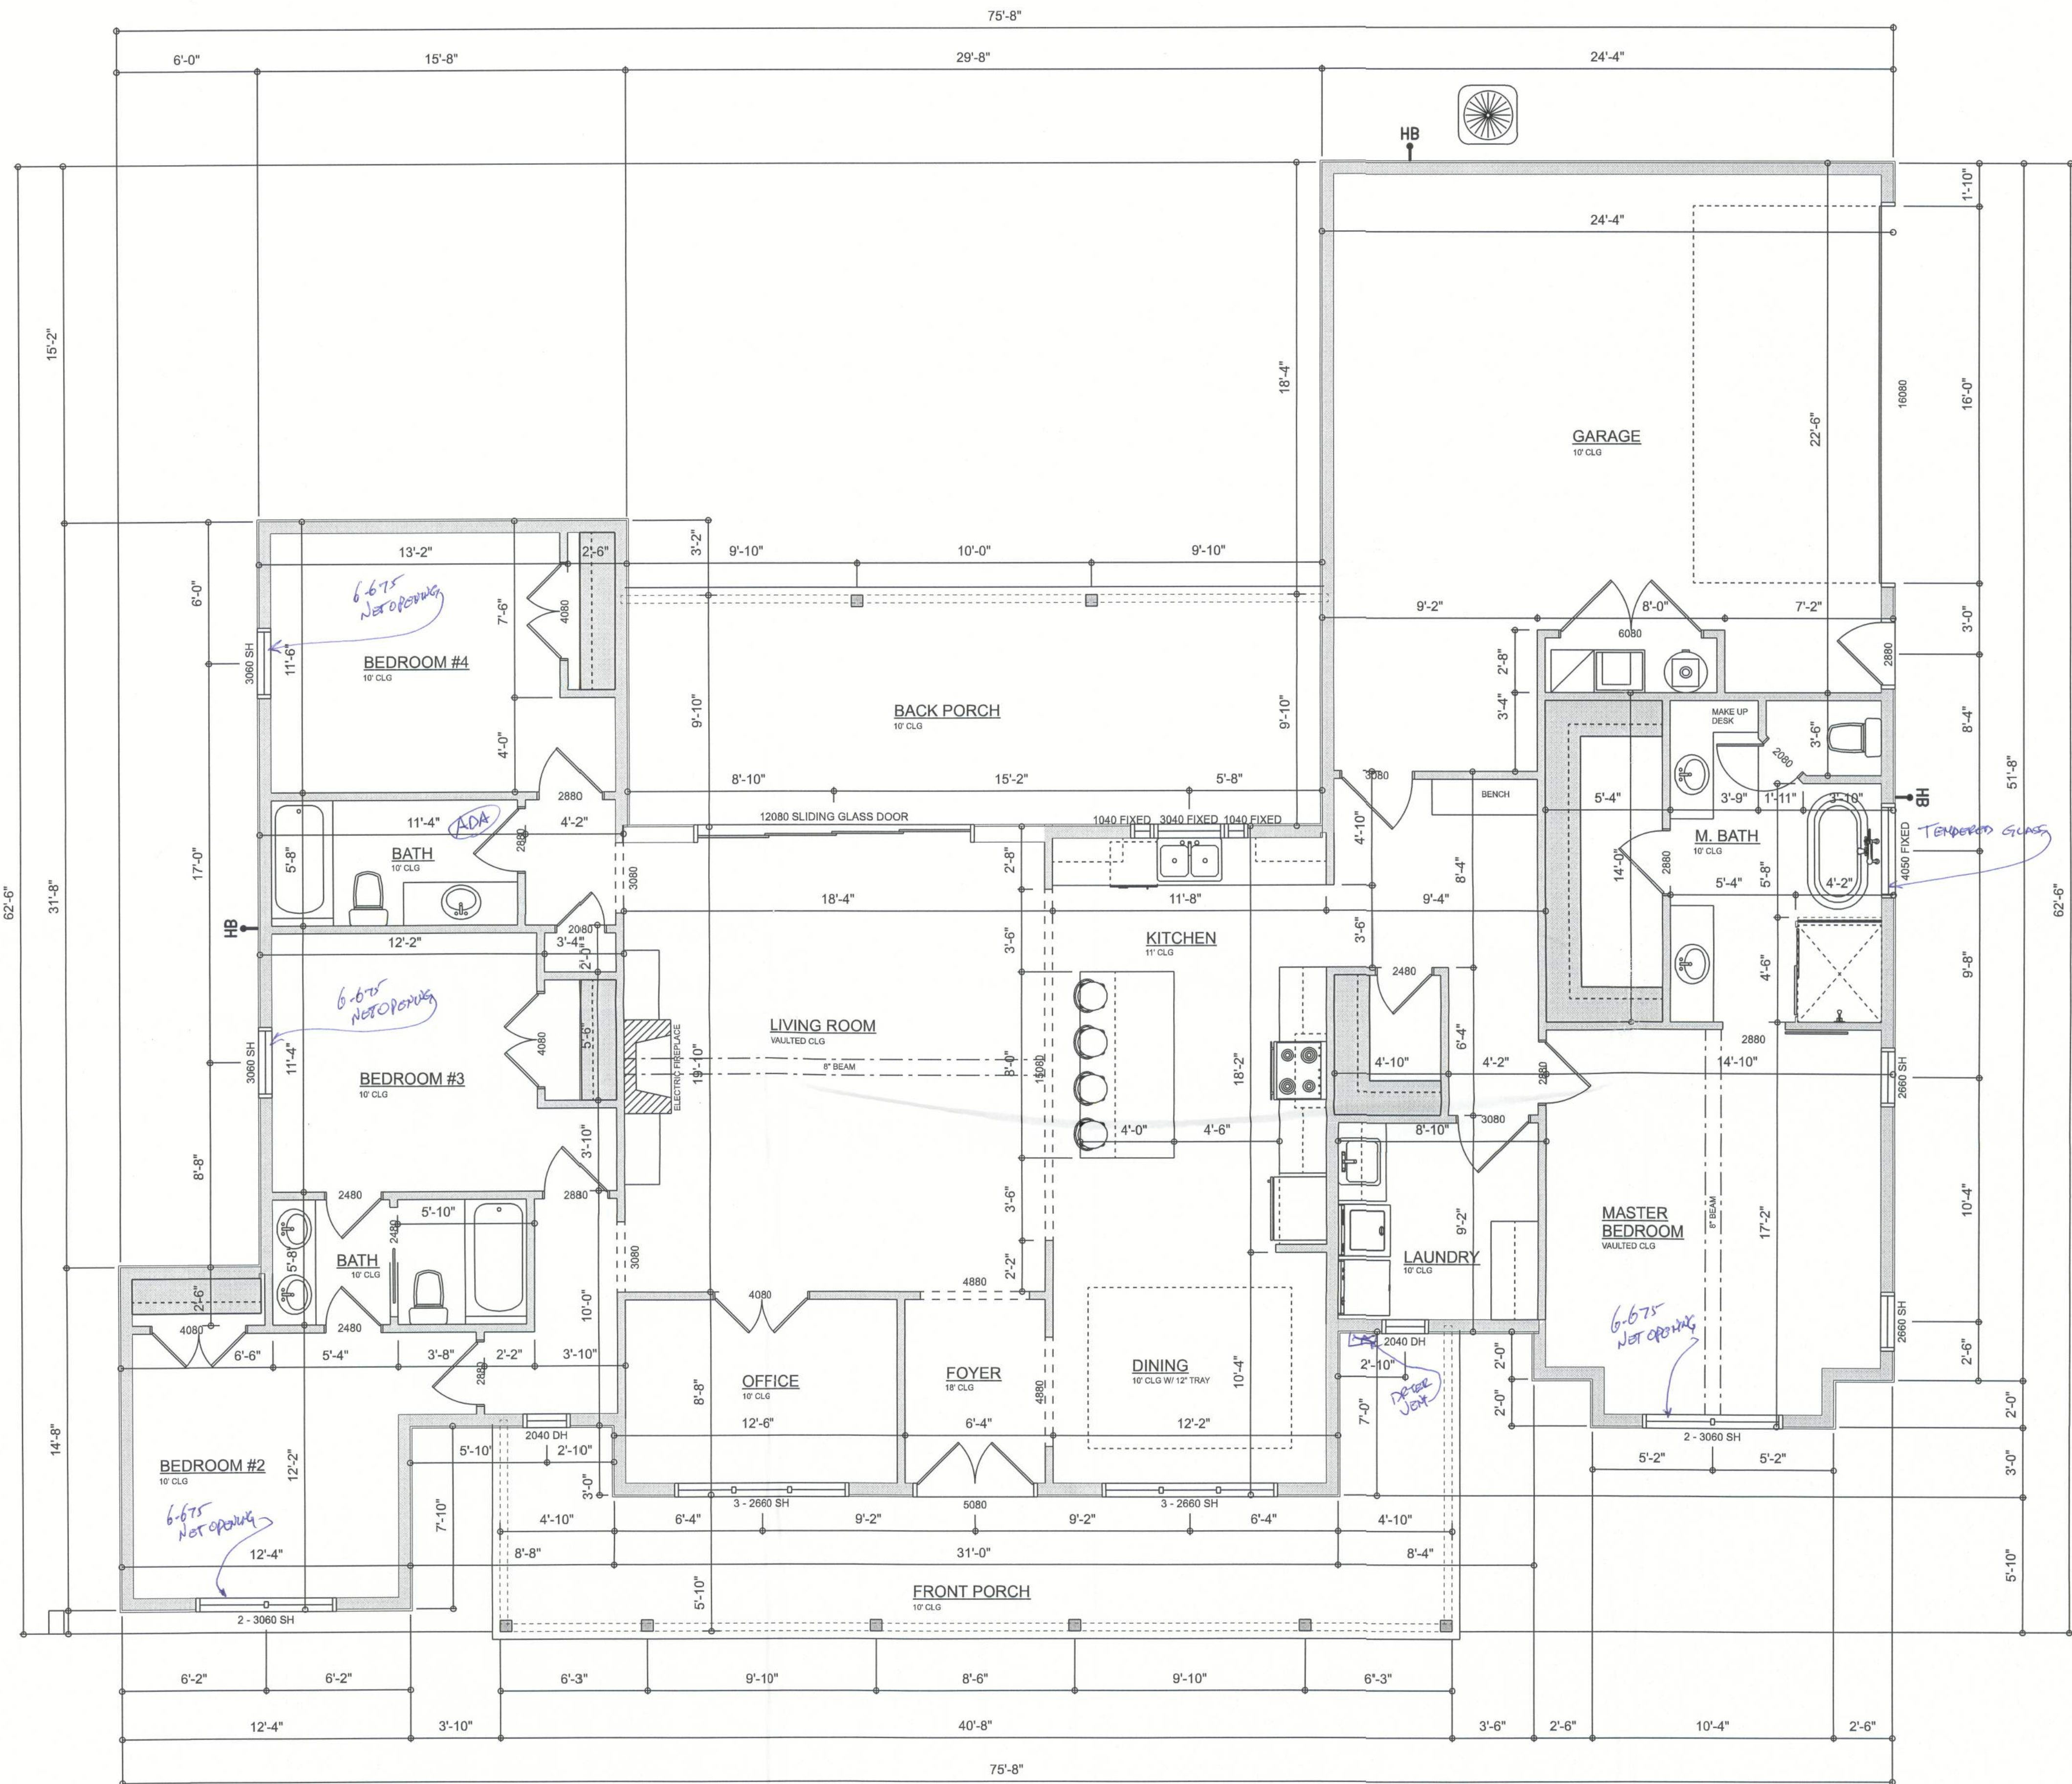

- Garage fire separations shall comply with the following:
1. The private garage shall be separated from the dwelling unit and its attic area by means of a minimum 1/2-inch (12.7 mm) gypsum board applied to the garage side. Garages beneath habitable rooms shall be separated from all habitable rooms above by not less than 5/8-inch Type X gypsum board or equivalent. Door openings between a private garage and the dwelling unit shall be equipped with either solid wood doors, or solid or honeycomb core steel doors not less than 13/8 inches (34.9 mm) thick, or doors in compliance with Section 715.3.3. Openings from a private garage directly into a room used for sleeping purposes shall not be permitted.
 2. Ducts in a private garage and ducts penetrating the walls or ceilings separating the dwelling unit from the garage shall be constructed of a minimum 0.019-inch (0.48 mm) sheet steel and shall have no openings into the garage.
 3. A separation is not required between a Group R-3 and U carport provided the carport is entirely open on two or more sides and there are not enclosed areas above.
 4. When installing an attic access and/or pull-down stair unit in the garage, devise shall have a minimum 20 min. fire rating.

AREA SUMMARY		
LIVING	2,270	S.F.
ENTRY PORCH	286	S.F.
REAR PORCH	292	S.F.
GARAGE	583	S.F.
TOTAL AREA	3,431	S.F.

REVISIONS SCHEDULE				
PROPOSAL	Feb. 15th, 2023			
REVISIONS	Mar. 23rd, 2023			
REVISIONS	Mar. 31st, 2023			
REVISIONS	July 5th, 2023			

CUSTOM HOME FOR:
Vaughn Residence
COLUMBIA COUNTY, FLORIDA

RIDGEPOINT DESIGN
346 SW ARLINGTON BLVD. STE. 101, LAKE CITY, FL 33603
P: 386-288-1188
E: RIDGEPOINTDESIGN@GMAIL.COM