

“0-8”

OVERHANG
1'-6"


$$\frac{8}{4} / \frac{12}{3} / 12$$

REFER TO HIB 91 (RECOMMENDATIONS FOR HANDLING INSTALLATION AND TEMPORARY BRACING REFER TO ENGINEERED DRAWINGS FOR PERMANENT BRACING REQUIRED.

- 7) ALL VALVEYS ARE TO BE CONVENTIONALLY FRAMED BY BUILDER.
- 8) ALL TRUSSES ARE DESIGNED FOR 2.00 MAXIMUM SPACING. UNLESS OTHERWISE NOTED.
- 9) ALL WALLS SHOWN ON PLACEMENT OF RAFTERS ARE TO BE CONSIDERED TO BE LOAD BEARING. UNLESS OTHERWISE NOTED.
- 10) SYAC TRUSSES MUST BE INSTALLED WITH THE TOP BEING UP.
- 11) ALL ROOF TRUSS HANGERS TO BE SIMPSON H1836 UNLESS OTHERWISE NOTED. ALL FLOOR TRUSS HANGERS TO BE SIMPSON THA22 UNLESS OTHERWISE NOTED.
- 12) BEAM/ADEK/ULTR (HQR) TO BE FURNISHED BY BUILDER.

THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TROUSSES AND VOIDS ALL PREVIOUS ARCHITECTURAL OR OTHER ROSS LAYOUTS, REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TROUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHARGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.

Approved by: _____ Date: _____




Sanford
PHONE: 407-322-0059 FAX: 407-322-5553

LEGAL ADDRESS:
COLUMBIA, FL

MODEL: REVISION:

DATE: DRAWN BY: JOB #:

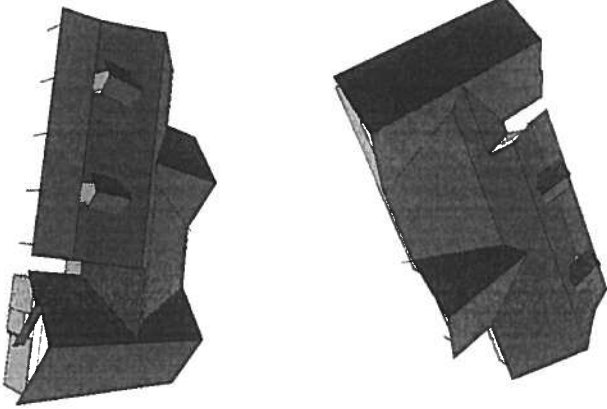

(16) HTU26

