



Lumber design values are in accordance with ANSI/TPI 1 section 6.3
These truss designs rely on lumber values established by others.

RE: 2845633 - IC CONST. - SLAYMAKER RES.

MiTek USA, Inc.
6904 Parke East Blvd.
Tampa, FL 33610-4115

Site Information:

Customer Info: IC Construction Project Name: Slaymaker Res. Model: Custom
Lot/Block: N/A Subdivision: N.A
Address: TBD, TBD
City: Columbia Cty State: FL

Name Address and License # of Structural Engineer of Record, If there is one, for the building.

Name: License #:
Address:
City: State:

General Truss Engineering Criteria & Design Loads (Individual Truss Design Drawings Show Special Loading Conditions):

Design Code: FBC2020/TPI2014 Design Program: MiTek 20/20 8.4
Wind Code: ASCE 7-16 Wind Speed: 130 mph
Roof Load: 37.0 psf Floor Load: N/A psf

This package includes 36 individual, Truss Design Drawings and 0 Additional Drawings.


With my seal affixed to this sheet, I hereby certify that I am the Truss Design Engineer and this index sheet conforms to 61G15-31.003, section 5 of the Florida Board of Professional Engineers Rules.

No.	Seal#	Truss Name	Date	No.	Seal#	Truss Name	Date
1	T24494654	CJ01	6/28/21	23	T24494676	T08	6/28/21
2	T24494655	CJ03	6/28/21	24	T24494677	T09	6/28/21
3	T24494656	EJ01	6/28/21	25	T24494678	T09G	6/28/21
4	T24494657	EJ02	6/28/21	26	T24494679	T10	6/28/21
5	T24494658	HJ08	6/28/21	27	T24494680	T11	6/28/21
6	T24494659	PB01	6/28/21	28	T24494681	T12	6/28/21
7	T24494660	PB01G	6/28/21	29	T24494682	T13	6/28/21
8	T24494661	T01	6/28/21	30	T24494683	T14	6/28/21
9	T24494662	T01G	6/28/21	31	T24494684	T15	6/28/21
10	T24494663	T01GG	6/28/21	32	T24494685	V01	6/28/21
11	T24494664	T02	6/28/21	33	T24494686	V02	6/28/21
12	T24494665	T02G	6/28/21	34	T24494687	V03	6/28/21
13	T24494666	T03	6/28/21	35	T24494688	V04	6/28/21
14	T24494667	T03G	6/28/21	36	T24494689	V05	6/28/21
15	T24494668	T04	6/28/21				
16	T24494669	T04D	6/28/21				
17	T24494670	T04G	6/28/21				
18	T24494671	T05	6/28/21				
19	T24494672	T05G	6/28/21				
20	T24494673	T06	6/28/21				
21	T24494674	T06D	6/28/21				
22	T24494675	T07	6/28/21				

The truss drawing(s) referenced above have been prepared by
MiTek USA, Inc. under my direct supervision based on the parameters
provided by Builders FirstSource-Lake City, FL.

Truss Design Engineer's Name: Magid, Michael
My license renewal date for the state of Florida is February 28, 2023.

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek or TRENCO. Any project specific information included is for MiTek's or TRENCO's customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek or TRENCO has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.



Michael S. Magid PE No. 53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28, 2021

Job 2845633	Truss CJ03	Truss Type Jack-Open	Qty 4	Ply 1	IC CONST. - SLAYMAKER RES. T24494655
----------------	---------------	-------------------------	----------	----------	---

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:16 2021 Page 1

ID: LXM aVS5IAyvNZz7??htND_z2hf0-XP5xaEH1X6UVaQpWOHCPTPhY2woNOZbxDQcyqCz26pz

Job Reference (optional)




Plate Offsets (X,Y)--		[2:0-2-10,Edge]									
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL	20.0	Plate Grip DOL	1.25	TC	0.12	Vert(LL)	0.01 4-7	>999	240	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.10	Vert(CT)	0.01 4-7	>999	180		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.00	Horz(CT)	-0.00 3	n/a	n/a		
BCDL	10.0	Code	FBC2020/TPI2014	Matrix-MP						Weight: 11 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 3=Mechanical, 2=0-3-8, 4=Mechanical
Max Horz 2=42(LC 8)
Max Uplift 3=-28(LC 8), 2=-121(LC 8), 4=-15(LC 9)
Max Grav 3=57(LC 1), 2=210(LC 1), 4=47(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 2-11-4 zone; porch left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 28 lb uplift at joint 3, 121 lb uplift at joint 2 and 15 lb uplift at joint 4.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	IC CONST. - SLAYMAKER RES.	T24494656
2845633	EJ01	Jack-Open	7	1		
Job Reference (optional)						

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:17 2021 Page 1

ID:LXMaVS5IAyvNZz7??htND_z2hf0-?bfJoalfiQcMCAoiy?keQdEf9K4D70r5S4LVMez26py



Scale = 1:12.7




Plate Offsets (X,Y)--		[2:0-1-10,Edge]									
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0		Plate Grip DOL	1.25	TC 0.36		Vert(LL)	0.09 4-7	>673	240	MT20	244/190
TCDL 7.0		Lumber DOL	1.25	BC 0.38		Vert(CT)	0.08 4-7	>767	180		
BCLL 0.0 *		Rep Stress Incr	YES	WB 0.00		Horz(CT)	-0.00 3	n/a	n/a		
BCDL 10.0		Code FBC2020/TPI2014		Matrix-MP						Weight: 18 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 3=Mechanical, 2=0-3-8, 4=Mechanical
Max Horz 2=60(LC 8)
Max Uplift 3=-57(LC 8), 2=-149(LC 8), 4=-30(LC 8)
Max Grav 3=110(LC 1), 2=276(LC 1), 4=85(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 4-11-4 zone; porch left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 57 lb uplift at joint 3, 149 lb uplift at joint 2 and 30 lb uplift at joint 4.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	IC CONST. - SLAYMAKER RES.	T24494657
2845633	EJ02	Monopitch Supported Gable	1	1	Job Reference (optional)	

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:18 2021 Page 1
ID:LXMaVS5IAyvNZz7??htND_z2hf0-TnDh?wJH3kkDqkyuWiFtzqmtWkTOst5Egk52u5z26px



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.19	Vert(LL)	0.00	1	n/r	120	MT20
TCDL 7.0	Lumber DOL	1.25	BC 0.13	Vert(CT)	0.00	1	n/r	120	244/190
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.00		n/a	n/a	
BCDL 10.0	Code FBC2020/TPI2014		Matrix-P						
								Weight: 14 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-6-1 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 4=3-6-1, 2=3-6-1
Max Horz 2=45(LC 8)
Max Uplift 4=-30(LC 12), 2=-99(LC 8)
Max Grav 4=106(LC 1), 2=223(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Corner(3E) -1-6-0 to 1-6-0, Exterior(2N) 1-6-0 to 3-4-5 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- 3) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 4) Gable requires continuous bottom chord bearing.
- 5) Gable studs spaced at 2-0-0 oc.
- 6) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 7) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 30 lb uplift at joint 4 and 99 lb uplift at joint 2.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job 2845633	Truss HJ08	Truss Type Diagonal Hip Girder	Qty 2	Ply 1	IC CONST. - SLAYMAKER RES. Job Reference (optional)	T24494658
----------------	---------------	-----------------------------------	----------	----------	--	-----------

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:19 2021 Page 1
ID:LXMaVS5IAyvNZz7??htND_z2hf0-x_n3DGKvq1s4StX44Qm6V2JwB8ifbwLNvOqcQXz26pw



Scale = 1:17.0




Plate Offsets (X,Y)--		[2:0-2-15,0-0-6]									
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0		Plate Grip DOL	1.25	TC 0.64		Vert(LL)	0.14 4-7	>596	240	MT20	244/190
TCDL 7.0		Lumber DOL	1.25	BC 0.51		Vert(CT)	-0.21 4-7	>400	180		
BCLL 0.0 *		Rep Stress Incr	NO	WB 0.00		Horz(CT)	0.00 2	n/a	n/a		
BCDL 10.0		Code FBC2020/TPI2014		Matrix-MS						Weight: 24 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 3=Mechanical, 2=0-4-9, 4=Mechanical
Max Horz 2=59(LC 4)
Max Uplift 3=-78(LC 4), 2=-219(LC 4), 4=-44(LC 4)
Max Grav 3=157(LC 1), 2=394(LC 1), 4=121(LC 3)


FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; porch left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 78 lb uplift at joint 3, 219 lb uplift at joint 2 and 44 lb uplift at joint 4.
- 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 21 lb down and 33 lb up at 4-4-0, and 21 lb down and 33 lb up at 4-4-0 on top chord, and 44 lb down and 22 lb up at 1-6-1, 44 lb down and 22 lb up at 1-6-1, and 18 lb down and 23 lb up at 4-4-0, and 18 lb down and 23 lb up at 4-4-0 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-3=-54, 4-5=-20
Concentrated Loads (lb)
Vert: 8=-0(F=-0, B=-0) 9=-13(F=-7, B=-7)



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job 2845633	Truss PB01	Truss Type Piggyback	Qty 16	Ply 1	IC CONST. - SLAYMAKER RES. T24494659
----------------	---------------	-------------------------	-----------	----------	---


Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:20 2021 Page 1

ID:LXMaVS5IAyvNZz7??htND_z2hf0-QAKRQcLXbL_x316Hd7HL2FsEjXA?KNHX82a9zzz26pv



Scale = 1:13.5



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.08	Vert(LL)	0.00	5	n/r	MT20	244/190
TCDL 7.0	Lumber DOL	1.25	BC 0.06	Vert(CT)	0.00	5	n/r		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.02	Horz(CT)	0.00	4	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-P						
								Weight: 20 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
OTHERS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 2=4-9-11, 4=4-9-11, 6=4-9-11
Max Horz 2=-38(LC 10)
Max Uplift 2=-41(LC 12), 4=-46(LC 13), 6=-13(LC 12)
Max Grav 2=124(LC 1), 4=124(LC 1), 6=165(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCCL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 41 lb uplift at joint 2, 46 lb uplift at joint 4 and 13 lb uplift at joint 6.
- See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 33610

Job 2845633	Truss PB01G	Truss Type GABLE	Qty 2	Ply 1	IC CONST. - SLAYMAKER RES. T24494660
----------------	----------------	---------------------	----------	----------	---

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:21 2021 Page 1
ID:LXMaVS5IAyvNZz7??htND_z2hf0-uMuqeyLAMf6ohBhTBroaaTOQxxUd3qqgMiJjVPz26pu



Scale = 1:11.7




Plate Offsets (X,Y)--		[3:0-3:0,Edge]									
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0		Plate Grip DOL	1.25	TC 0.05		Vert(LL)	0.00 4	n/r	120	MT20	244/190
TCDL 7.0		Lumber DOL	1.25	BC 0.16		Vert(CT)	0.00 5	n/r	120		
BCLL 0.0 *		Rep Stress Incr	YES	WB 0.00		Horz(CT)	0.00 4	n/a	n/a		
BCDL 10.0		Code FBC2020/TPI2014		Matrix-P						Weight: 15 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-4-2 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 2=3-7-13, 4=3-7-13
Max Horz 2=-30(LC 10)
Max Uplift 2=-39(LC 12), 4=-39(LC 13)
Max Grav 2=164(LC 1), 4=164(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- 4) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 5) Gable requires continuous bottom chord bearing.
- 6) Gable studs spaced at 2-0-0 oc.
- 7) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 8) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 9) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 39 lb uplift at joint 2 and 39 lb uplift at joint 4.
- 10) See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	IC CONST. - SLAYMAKER RES.	T24494661
2845633	T01	Common	10	1		

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:22 2021 Page 1

ID:LXMaVS5IAyvNZz7??htND_z2hf0-MZSCrHMo7yEfJLGfYJp7gxWjLiHoEcqbM3G1sz26pt



4x6 ||

Scale = 1:45.6





Plate Offsets (X,Y)-- [2:0-6-0,0-0-3]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.37	Vert(LL)	-0.09 9-15	>999	240	MT20	244/190
TCDL 7.0	Lumber DOL	1.25	BC 0.65	Vert(CT)	-0.20 9-15	>999	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.22	Horz(CT)	0.03 6	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS					Weight: 110 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-6-14 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 6=0-3-0, 2=0-3-8
Max Horz 2=160(LC 9)
Max Uplift 6=172(LC 13), 2=205(LC 12)
Max Grav 6=971(LC 20), 2=1049(LC 19)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1451/266, 3-4=-1336/286, 4-5=-1340/291, 5-6=-1456/271
BOT CHORD 2-9=-261/1322, 7-9=-88/858, 6-7=-175/1216
WEBS 4-7=-155/650, 5-7=-326/205, 4-9=-149/646, 3-9=-324/201

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TC DL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 11-6-0, Exterior(2R) 11-6-0 to 14-6-0, Interior(1) 14-6-0 to 22-11-8 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 172 lb uplift at joint 6 and 205 lb uplift at joint 2.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job 2845633	Truss T01G	Truss Type Common Structural Gable	Qty 1	Ply 1	IC CONST. - SLAYMAKER RES. T24494662
----------------	---------------	---------------------------------------	----------	----------	---

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:23 2021 Page 1

ID:LXMaVS5IAyvNzZ7??htND_z2hf0-ql0a2dNQUGMWwVrsJGq2guTe8l5NXYLzq0opZlZ26ps



Scale = 1:47.1




Plate Offsets (X,Y)--	[2:0-4-1,0-1-12], [8:0-4-1,0-1-12]
-----------------------	------------------------------------

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.52	Vert(LL)	-0.09 16-34	>999	240	MT20	244/190
TCDL 7.0	Lumber DOL	1.25	BC 0.46	Vert(CT)	-0.19 16-34	>690	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.83	Horz(CT)	0.01 2	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS					Weight: 152 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3
OTHERS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.


All bearings 12-3-8 except (jt=length) 2=0-3-8, 14=0-3-8.
(lb) - Max Horz 2=160(LC 11)
Max Uplift All uplift 100 lb or less at joint(s) 8, 10 except 2=141(LC 12), 12=234(LC 13)
Max Grav All reactions 250 lb or less at joint(s) 8, 13, 11, 10, 14, 8 except 2=608(LC 19), 12=933(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-596/139, 4-5=-482/150, 5-6=-39/395, 6-8=-55/258
BOT CHORD 2-16=-144/621
WEBS 5-12=-804/192, 6-12=-300/196, 5-16=-149/598, 4-16=-358/200

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 11-6-0, Exterior(2R) 11-6-0 to 14-6-0, Interior(1) 14-6-0 to 24-6-0 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 8, 10, 8 except (jt=lb) 2=141, 12=234.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job 2845633	Truss T01GG	Truss Type Common Supported Gable	Qty 1	Ply 1	IC CONST. - SLAYMAKER RES. T24494663
Job Reference (optional)					

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:25 2021 Page 1

ID: LXMV55IAyVNZz7??htND_z2hf0-m88KTJOgQtdDAo?EQgtWIJZ4KYsr?e7GHKHweBz26pq



Scale = 1:23.3




Plate Offsets (X,Y)--		[2:0-3-8,Edge], [8:0-3-8,Edge]	
LOADING (psf)	SPACING-	2-0-0	CSI.
TCLL 20.0	Plate Grip DOL	1.25	TC 0.15
TCDL 7.0	Lumber DOL	1.25	BC 0.08
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.05
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-S
			DEFL.
			in (loc) l/defl L/d
			Vert(LL) -0.00 9 n/r 120
			Vert(CT) -0.00 9 n/r 120
			Horz(CT) 0.00 8 n/a n/a
			PLATES GRIP
			MT20 244/190
			Weight: 54 lb FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
OTHERS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.


REACTIONS.

All bearings 11-0-0.
(lb) - Max Horz 2--83(LC 10)
Max Uplift All uplift 100 lb or less at joint(s) 2, 8, 12, 10
Max Grav All reactions 250 lb or less at joint(s) 2, 8, 11, 12, 10

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCCL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Corner(3E) -1-6-0 to 1-6-0, Exterior(2N) 1-6-0 to 5-6-0, Corner(3R) 5-6-0 to 8-6-0, Exterior(2N) 8-6-0 to 12-6-0 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Gable requires continuous bottom chord bearing.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 8, 12, 10.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job 2845633	Truss T02	Truss Type Roof Special	Qty 6	Ply 1	IC CONST. - SLAYMAKER RES. T24494664
----------------	--------------	----------------------------	----------	----------	---

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:26 2021 Page 1
ID:LXMaVS5IAyvNZZ7??htND_z2hf0-EKijhfPIBB4nyaR_OOIHW5A0y?WkyIPW_1UAdz26pp




Plate Offsets (X,Y)--		[6:0-8-15,0-0-0], [6:0-0-0,0-4-3]									
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL	20.0	Plate Grip DOL	1.25	TC	0.41	Vert(LL)	-0.11 6-9	>999	240	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.95	Vert(CT)	-0.21 6-9	>999	180		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.63	Horz(CT)	0.15 7	n/a	n/a		
BCDL	10.0	Code FBC2020/TPI2014		Matrix-MS						Weight: 141 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2 *Except*
4-7: 2x6 SP M 26
BOT CHORD 2x4 SP No.2 *Except*
4-12: 2x4 SP No.3, 6-10: 2x6 SP No.2, 6-8: 2x8 SP 2400F 2.0E
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-9-9 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing. Except:
10-0-0 oc bracing: 10-12
JOINTS 1 Brace at Jt(s): 9

REACTIONS.


(size) 7=0-3-0, 2=0-3-8
Max Horz 2=159(LC 9)
Max Uplift 7=-168(LC 13), 2=-204(LC 12)
Max Grav 7=849(LC 1), 2=932(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1342/255, 3-4=-1083/238, 4-5=-1079/241, 5-6=-1877/338, 6-16=-557/126
BOT CHORD 2-13=-249/1101, 4-10=-130/747, 9-10=-246/1673, 6-9=-246/1673
WEBS 10-13=-245/1026, 3-10=-303/163, 5-10=-891/275, 5-9=-0/369

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCCL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 11-6-0, Exterior(2R) 11-6-0 to 14-6-0, Interior(1) 14-6-0 to 22-10-0 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 7=168, 2=204.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 33610

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:27 2021 Page 1
ID: LXMV5S1AwNzZ7??htND z2hf0-iWE5u?QwvVxP68dY5v qkePCMYKTxyZlem1i3z26po




Plate Offsets (X,Y)--		[2:0-3-8,Edge]									
LOADING	(psf)	SPACING-	2-0-0	CSI.		DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL	20.0	Plate Grip DOL	1.25	TC	0.13	Vert(LL)	0.00 1	n/r	120	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.08	Vert(CT)	-0.00 1	n/r	120		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.09	Horz(CT)	0.00 13	n/a	n/a		
BCDL	10.0	Code FBC2020/TPI2014		Matrix-S						Weight: 127 lb	FT = 20%


LUMBER-		BRACING-	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
OTHERS	2x4 SP No.3		

REACTIONS. All bearings 22-11-8.
(lb) - Max Horz 2=154(LC 9)
Max Uplift All uplift 100 lb or less at joint(s) 2, 19, 21, 22, 23, 17, 16, 15, 14
Max Grav All reactions 250 lb or less at joint(s) 2, 13, 18, 19, 21, 22, 23, 17, 16, 15, 14

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCFL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Corner(3E) -1-6-0 to 1-6-0, Exterior(2N) 1-6-0 to 11-6-0, Corner(3R) 11-6-0 to 14-6-0, Exterior(2N) 14-6-0 to 22-6-8 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- 4) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 5) All plates are 2x4 MT20 unless otherwise indicated.
- 6) Gable requires continuous bottom chord bearing.
- 7) Gable studs spaced at 2-0-0 oc.
- 8) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 9) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 10) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 19, 21, 22, 23, 17, 16, 15, 14.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28, 2021

 WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personnel injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Code**

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	IC CONST. - SLAYMAKER RES.	T24494666
2845633	T03	Common	2	1	Job Reference (optional)	

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:29 2021 Page 1

ID: LXMaVS5IAyvNZz7??htND_z2hf0-fvNrJhSBT67feQI?fWxSv9jdrA4DxHmsCyF8nyz26pm



4x6 =

Scale = 1:55.8




Plate Offsets (X,Y)--		[4:0-4-0,0-3-0], [5:0-2-8,Edge]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES GRIP	
TCLL	20.0	Plate Grip DOL 1.25		TC	0.69	Vert(LL)	-0.22	8-9	>999	240	MT20 244/190
TCDL	7.0	Lumber DOL 1.25		BC	0.75	Vert(CT)	-0.37	8-9	>789	180	
BCLL	0.0 *	Rep Stress Incr YES		WB	0.71	Horz(CT)	0.03	5	n/a	n/a	
BCDL	10.0	Code FBC2020/TPI2014		Matrix-MS						Weight: 138 lb FT = 20%	

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-1-7 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 4-8

REACTIONS.


(size) 9=Mechanical, 5=0-3-8
Max Horz 9=-217(LC 13)
Max Uplift 9=-170(LC 13), 5=-186(LC 13)
Max Grav 9=1010(LC 20), 5=1019(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-815/215, 3-4=-828/199, 4-5=-1502/279
BOT CHORD 8-9=-86/514, 6-8=-154/1240, 5-6=-154/1239
WEBS 2-8=-48/380, 3-8=-62/456, 4-8=-794/298, 4-6=0/318, 2-9=-888/200

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-1-12 to 2-11-12, Interior(1) 2-11-12 to 8-7-9, Exterior(2R) 8-7-9 to 11-7-9, Interior(1) 11-7-9 to 24-2-14 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 9=170, 5=186.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:30 2021 Page 1
ID: LXMV5S1AvvNZz7??htND_z2hf0-75xDW1SpEOFWGatCDethSMGxtZavgtx?Rc?hJQz26o




Plate Offsets (X,Y)--		[14:0-3-8,Edge]																	
LOADING (psf)		SPACING-		2-0-0		CSI.		DEFL.		in (loc)		l/defl		L/d		PLATES		GRIP	
TCLL	20.0	Plate Grip DOL		1.25		TC	0.10	Vert(LL)		n/a		-		n/a		999		MT20	244/190
TCDL	7.0	Lumber DOL		1.25		BC	0.09	Vert(CT)		n/a		-		n/a		999			
BCLL	0.0 *	Rep Stress Incr		YES		WB	0.14	Horz(CT)		0.01		14		n/a		n/a			
BCDL	10.0	Code FBC2020/TPI2014				Matrix-S												Weight: 179 lb	FT = 20%

LUMBER-

TOP CHORD	2x4 SP No.2
BOT CHORD	2x4 SP No.2
WEBS	2x4 SP No.3
OTHERS	2x4 SP No.3

BRACING-

TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS	1 Row at midpt 5-22


REACTIONS.

ONS. All bearings 24-2-14.
(lb) - Max Horz 27=-207(LC 13)
Max Uplift All uplift 100 lb or less at joint(s) 23, 24, 26, 21, 19, 18, 17, 16, 15 except 27=-108(LC 8),
25=-163(LC 12)
Max Grav All reactions 250 lb or less at joint(s) 27, 22, 23, 24, 26, 21, 19, 18, 17, 16, 14 except 25=260(LC 19), 15=250(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDF=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpI=-0.18; MWFRS (envelope) gable end zone and C-C Corner(3E) 0-1-12 to 3-1-12, Exterior(2N) 3-1-12 to 8-7-9, Corner(3R) 8-7-9 to 11-7-9, Exterior(2N) 11-7-9 to 24-2-14 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- 4) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 5) All plates are 2x4 MT20 unless otherwise indicated.
- 6) Gable requires continuous bottom chord bearing.
- 7) Gable studs spaced at 2'-0" oc.
- 8) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 9) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-6" tall by 2'-0" wide will fit between the bottom chord and any other members.
- 10) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 23, 24, 26, 21, 19, 18, 17, 16, 15 except (it=lb) 27=108, 25=163.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28, 2021

 WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building C**

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	IC CONST. - SLAYMAKER RES.	T24494668
2845633	T04	Piggyback Base	4	1		





Plate Offsets (X,Y)--	[3:0-5-8,0-2-0], [4:0-3-8,0-2-0]						
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d
TCLL 20.0	Plate Grip DOL	1.25	TC 0.57	Vert(LL)	-0.07 10-12	>999	240
TCDL 7.0	Lumber DOL	1.25	BC 0.46	Vert(CT)	-0.11 10-12	>999	180
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.52	Horz(CT)	0.03 8	n/a	n/a
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-MS				
						Weight: 241 lb	FT = 20%

LUMBER-	BRACING-	
TOP CHORD 2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 5'-4" oc purlins, except end verticals, and 2'-0" oc purlins: 3'-4.
BOT CHORD 2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 10'-0" oc bracing.
WEBS 2x4 SP No.3 *Except*	WEBS	1 Row at midpt 2-12, 3-10
3-10: 2x4 SP No.2, 6-8: 2x6 SP No.2		

REACTIONS.	(size) 14=Mechanical, 8=0-3-0
	Max Horz 14=274(LC 11)
	Max Uplift 14=-229(LC 12), 8=-257(LC 13)
	Max Grav 14=1274(LC 2), 8=1356(LC 2)

FORCES.	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	1-2=-1046/214, 2-3=-1057/281, 3-4=-825/268, 4-5=-1023/259, 5-6=-936/188, 1-14=-1182/244, 6-8=-1275/270
BOT CHORD	13-14=-268/254, 12-13=-217/973, 10-12=-173/905, 9-10=-126/756
WEBS	2-13=-357/119, 3-12=-66/362, 4-10=-48/268, 5-9=-433/120, 1-13=-135/1006, 6-9=-124/980

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-1-12 to 3-2-9, Interior(1) 3-2-9 to 12-5-14, Exterior(2R) 12-5-14 to 16-9-15, Interior(1) 16-9-15 to 18-11-14, Exterior(2R) 18-11-14 to 23-3-15, Interior(1) 23-3-15 to 32-2-14 zone; end vertical right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-6" tall by 2'-0" wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
 - Refer to girder(s) for truss to truss connections.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 14=229, 8=257.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:


June 28,2021

Job 2845633	Truss T04D	Truss Type PIGGYBACK BASE	Qty 3	Ply 1	IC CONST. - SLAYMAKER RES. T24494669
----------------	---------------	------------------------------	----------	----------	---

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:33 2021 Page 1

ID: LXMavS5IAyvNZZ7??htND_z2hf0-XgdM92VhXLd571cnuM004?uK9nVit7OR7aDLwjz26pi



Scale = 1:68.1

Plate Offsets (X,Y)-- [3:0-5-8,0-2-0], [4:0-3-8,0-2-0]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES GRIP		
TCLL	20.0	Plate Grip DOL 1.25		TC	0.61	Vert(LL)	-0.07	9-11	>999	240	MT20	244/190
TCDL	7.0	Lumber DOL 1.25		BC	0.46	Vert(CT)	-0.11	9-11	>999	180		
BCLL	0.0 *	Rep Stress Incr YES		WB	0.54	Horz(CT)	0.03	7	n/a	n/a		
BCDL	10.0	Code FBC2020/TPI2014		Matrix-MS							Weight: 241 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3 *Except*
3-9,6-7: 2x4 SP No.2
OTHERS 2x6 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-4-1 oc purlins, except end verticals, and 2-0-0 oc purlins: 3-4.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 2-11, 3-9

REACTIONS.

(size) 13=Mechanical, 7=0-3-0
Max Horz 13=269(LC 11)
Max Uplift 13=226(LC 12), 7=-214(LC 13)
Max Grav 13=1270(LC 2), 7=1260(LC 2)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-1042/212, 2-3=-1053/278, 3-4=-818/258, 4-5=-1016/254, 5-6=-911/178,
1-13=-1178/241, 6-7=-1185/229
BOT CHORD 12-13=-263/239, 11-12=-228/960, 9-11=-184/891, 8-9=-149/744
WEBS 2-12=-356/117, 3-11=-67/363, 4-9=-46/265, 5-8=-446/141, 1-12=-133/1002,
6-8=-147/940

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-1-12 to 3-2-9, Interior(1) 3-2-9 to 12-5-14, Exterior(2R) 12-5-14 to 16-9-15, Interior(1) 16-9-15 to 18-11-14, Exterior(2R) 18-11-14 to 23-3-15, Interior(1) 23-3-15 to 30-1-2 zone; end vertical right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 13=226, 7=214.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 33610

Job 2845633	Truss T04G	Truss Type GABLE	Qty 1	Ply 1	IC CONST. - SLAYMAKER RES. T24494670
Job Reference (optional)					

Builders FirstSource (Lake City,FL),

Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:35 2021 Page 1

ID: LXMVSS5AyvNZz7??htND_z2hf0-T3k6akWy3ypMLm90n2s9QzhlaBjL4_katiS?cz26pg

6-4-0	13-0-13	18-4-15	25-0-0	30-8-6	32-2-14
6-4-0	6-8-13	5-4-2	6-7-1	5-8-6	1-6-8

Scale = 1:75.5




Plate Offsets (X,Y)--	[2:0-7-0,Edge], [4:0-5-8,0-2-0], [5:0-3-8,0-2-0], [8:0-4-8,0-1-8], [34:0-2-0,0-0-12]
-----------------------	--

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.57	Vert(LL)	-0.07 17-18	>999	240	MT20	244/190
TCDL 7.0	Lumber DOL	1.25	BC 0.49	Vert(CT)	-0.13 17-18	>999	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.34	Horz(CT)	0.01 10	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS					Weight: 382 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
 BOT CHORD 2x4 SP No.2
 WEBS 2x4 SP No.3 *Except*
 4-15: 2x4 SP No.2, 8-10: 2x6 SP No.2
 OTHERS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 4-5.
 BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.
 WEBS 1 Row at midpt 2-17, 4-15, 5-15, 6-12

REACTIONS.


All bearings 6-9-0 except (jt=length) 19=Mechanical, 14=0-3-8.
 (lb) - Max Horz 19=271(LC 11)
 Max Uplift All uplift 100 lb or less at joint(s) 10 except 19=190(LC 12), 12=275(LC 13), 13=664(LC 18)
 Max Grav All reactions 250 lb or less at joint(s) 11 except 19=1030(LC 19), 12=1417(LC 2), 10=291(LC 24), 14=522(LC 18)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-831/180, 2-4=-736/224, 4-5=-442/196, 5-6=-592/191, 1-19=-942/204, 8-10=-280/54
 BOT CHORD 18-19=-265/251, 17-18=-213/820, 15-17=-160/650
 WEBS 2-18=-252/107, 2-17=-266/162, 4-17=-86/457, 4-15=-407/127, 6-15=-107/671, 6-12=-1031/274, 1-18=-111/804

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-1-12 to 3-2-9, Interior(1) 3-2-9 to 13-0-13, Exterior(2R) 13-0-13 to 17-4-15, Interior(1) 17-4-15 to 18-4-15, Exterior(2R) 18-4-15 to 22-9-1, Interior(1) 22-9-1 to 32-2-14 zone; end vertical right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 10 except (jt=lb) 19=190, 12=275, 13=664.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



Michael S. Magid PE No.53681
 MiTek USA, Inc. FL Cert 6634
 6904 Parke East Blvd. Tampa FL 33610
 Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
 Tampa, FL 33610

Scale = 1:77.6

Job	Truss	Truss Type	Qty	Ply	IC CONST. - SLAYMAKER RES.	T24494672
2845633	T05G	GABLE	1	1		


Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:40 2021 Page 1

ID: LXMavSSIAyNzZ??htND_z2hf0-q0Y?dRa4uUV5T6e7oKe1sTha2buU0J?Tk9QDgpb

1-6-0	6-0-2	10-1-12	14-6-0	21-3-0	27-2-1	33-5-8	39-5-8	41-0-0
1-6-0	6-0-2	4-1-10	4-4-4	6-9-0	5-11-1	6-3-7	6-0-0	1-6-8

Scale = 1:78.4



	6-0-2	10-1-12	14-6-0	21-3-0	27-2-1	33-5-8	34-9-8	39-5-8
	6-0-2	4-1-10	4-4-4	6-9-0	5-11-1	6-3-7	1-4-0	4-8-0
Plate Offsets (X,Y)--	[5:0-2-12,0-3-0], [6:0-6-0,0-2-4], [7:0-4-0,0-2-4], [10:0-5-4,0-1-12]							
LOADING (psf)	SPACING- 2-0-0		CSI.	DEFL. in (loc) l/defl L/d				PLATES GRIP
TCLL 20.0	Plate Grip DOL 1.25		TC 0.44	Vert(LL) -0.08 15-16	>999	240	MT20	244/190
TCDL 7.0	Lumber DOL 1.25		BC 0.45	Vert(CT) -0.14 18-19	>999	180		
BCLL 0.0 *	Rep Stress Incr YES		WB 0.48	Horz(CT) 0.02 12	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS				Weight: 355 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
 BOT CHORD 2x4 SP No.2
 WEBS 2x4 SP No.3 *Except*
 10-12: 2x6 SP No.2
 OTHERS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-5-7 oc purlins, except end verticals, and 2-0-0 oc purlins: 6-7.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 9-11-1 oc bracing: 2-22
 6-0-0 oc bracing: 19-21.
 WEBS 1 Row at midpt 6-18, 6-16, 8-16

REACTIONS.


All bearings 0-3-8 except (jt=length) 12=4-11-8, 13=4-11-8.
 (lb) - Max Horz 2=288(LC 11)
 Max Uplift All uplift 100 lb or less at joint(s) 13, 14 except 2=221(LC 8), 21=352(LC 12), 12=227(LC 13)
 Max Grav All reactions 250 lb or less at joint(s) 13, 14 except 2=346(LC 23), 21=1775(LC 2), 12=1102(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-284/307, 3-4=-358/429, 4-5=-706/135, 5-6=-914/307, 6-7=-747/342, 7-8=-938/331,
 8-10=-909/259, 10-12=-1061/329
 BOT CHORD 2-22=-308/234, 21-22=-281/221, 19-21=-369/348, 18-19=-114/664, 16-18=-114/772,
 15-16=-135/727
 WEBS 3-22=-293/229, 3-21=-565/604, 4-21=-1471/549, 4-19=-394/1186, 5-19=-571/312,
 5-18=-93/278, 8-15=-393/151, 10-15=-123/821

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 2-5-6, Interior(1) 2-5-6 to 21-3-0, Exterior(2R) 21-3-0 to 25-2-6, Interior(1) 25-2-6 to 27-2-1, Exterior(2R) 27-2-1 to 31-1-7, Interior(1) 31-1-7 to 41-0-0 zone; end vertical right exposed; porch left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 13, 14 except (jt=lb) 2=221, 21=352, 12=227.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



Michael S. Magid PE No.53681
 MiTek USA, Inc. FL Cert 6634
 6904 Parke East Blvd. Tampa FL 33610
 Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
 Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	IC CONST. - SLAYMAKER RES.	T24494673
2845633	T06	Piggyback Base	2	1		

Builders FirstSource (Lake City,FL),
Lake City, FL - 32055,

8.430 s Jun 2 2021
MiTek Industries, Inc.
Sun Jun 27 10:00:41 2021
Page 1

ID:LXMaVS5IAyvNZz7??htND_z2hf0-ID6Oqnbifoey4GDJM19GOhDjK?Fmlkbpz9mCFz26pa

-1-6-0
1-6-0

6-0-2
6-0-2

10-3-8
4-3-6

14-6-0
4-2-8

19-7-12
5-1-12

21-3-0
1-7-4

27-9-0
6-6-0


29-0-0
1-3-0

33-9-2
4-9-2

39-5-8
5-8-6

41-0-0
1-6-8

Scale = 1:73.0




LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.53	Vert(LL)	-0.10 17-18	>999	240	MT20	244/190
TCDL 7.0	Lumber DOL	1.25	BC 0.39	Vert(CT)	-0.21 17-18	>999	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.59	Horz(CT)	0.10 13	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS					Weight: 295 lb	FT = 20%

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 4-8-13 oc purlins, except end verticals, and 2-0-0 oc purlins: 7-8.
BOT CHORD 2x4 SP No.2 *Except* 17-18,15-17: 2x6 SP No.2	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 2-19,18-19.
WEBS 2x4 SP No.3 *Except* 11-13: 2x6 SP No.2	WEBS 1 Row at midpt 5-18, 7-16, 9-15, 10-15

REACTIONS.	(size) 2=0-3-8, 18=0-3-8, 13=0-3-0
	Max Horz 2=291(LC 11)
	Max Uplift 2=-244(LC 8), 18=-380(LC 12), 13=-224(LC 13)
	Max Grav 2=232(LC 23), 18=1786(LC 1), 13=1079(LC 1)

FORCES.	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	2-3=-152/495, 3-4=-455/758, 4-5=-372/771, 5-6=-1336/286, 6-7=-1282/376, 7-8=-675/340, 8-9=-779/375, 9-10=-811/339, 10-11=-805/278, 11-13=-1028/350
BOT CHORD	2-19=-297/39, 18-19=-302/37, 17-18=-162/554, 16-17=-207/1023, 15-16=-106/760, 14-15=-133/631
WEBS	3-19=-306/218, 3-18=-372/601, 5-18=-1776/582, 5-17=-149/783, 7-17=-152/884, 7-16=-440/179, 9-16=-155/322, 9-15=-360/86, 10-14=-304/112, 11-14=-134/737

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 2-5-6, Interior(1) 2-5-6 to 21-3-0, Exterior(2R) 21-3-0 to 25-2-6, Interior(1) 25-2-6 to 27-9-0, Exterior(2R) 27-9-0 to 31-8-6, Interior(1) 31-8-6 to 41-0-0 zone; end vertical right exposed; porch left exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=244, 18=380, 13=224.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

Job	Truss	Truss Type	Qty	Ply	IC CONST. - SLAYMAKER RES.	T24494674
2845633	T06D	PIGGYBACK BASE	6	1	Job Reference (optional)	

Builders FirstSource, Lake City, FL 32055

8.430 s May 12 2021 MiTek Industries, Inc. Mon Jun 28 14:55:32 2021 Page 1
ID: LXMVSSIAyNz7??htND_z2hf0-Nti7I3ZBsJV?0ejQtMfX?Civ2Xh?SgE0qkPqm8z1kHP




Plate Offsets (X,Y)--	[5:0-3-0,0-3-0], [7:0-4-0,0-2-4], [8:0-4-0,0-2-4], [14:0-6-0,0-2-8], [17:0-5-8,0-2-4]
-----------------------	---

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.53	Vert(LL)	-0.10 16-17	>999	240	MT20	244/190
TCDL 7.0	Lumber DOL	1.25	BC 0.39	Vert(CT)	-0.21 16-17	>999	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.59	Horz(CT)	0.10 12	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS					Weight: 293 lb	FT = 20%

LUMBER-			BRACING-	
TOP CHORD	2x4 SP No.2		TOP CHORD	Structural wood sheathing directly applied or 4-8-15 oc purlins, except end verticals, and 2-0-0 oc purlins: 7-8.
BOT CHORD	2x4 SP No.2 *Except*		BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing, Except:
WEBS	2x4 SP No.3		WEBS	6-0-0 oc bracing: 2-18,17-18.
OTHERS	2x6 SP No.2			1 Row at midpt 5-17, 7-15, 9-14, 10-14


REACTIONS. (size) 2=0-3-8, 17=0-3-8, 12=0-3-0
Max Horz 2=286(LC 11)
Max Uplift 2=-240(LC 8), 17=-383(LC 12), 12=-178(LC 13)
Max Grav 2=234(LC 23), 17=1779(LC 1), 12=964(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-23=-163/440, 3-23=-160/478, 3-4=-503/753, 4-5=-420/766, 5-24=-1328/312, 6-24=-1249/323, 6-7=-1274/412, 7-25=-667/332, 25-26=-667/332, 8-26=-667/332, 8-9=-768/365, 9-27=-729/327, 10-27=-801/309, 10-28=-649/257, 11-28=-773/245, 12-19=-917/258, 11-19=-916/258
BOT CHORD 2-29=-292/35, 18-29=-292/35, 17-18=-297/33, 16-17=-175/542, 15-16=-223/1015, 14-15=-161/749, 13-14=-177/615
WEBS 3-18=-306/218, 3-17=-374/591, 5-17=-1765/646, 5-16=-189/777, 7-16=-165/872, 7-15=-434/188, 9-15=-161/326, 9-14=-363/92, 10-13=-327/140, 11-13=-169/712

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 2-5-6, Interior(1) 2-5-6 to 21-3-0, Exterior(2R) 21-3-0 to 25-2-6, Interior(1) 25-2-6 to 27-9-0, Exterior(2R) 27-9-0 to 31-8-6, Interior(1) 31-8-6 to 38-10-4 zone; end vertical right exposed; porch left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=240, 17=383, 12=178.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

LOAD CASE(S) Standard



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see



Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	IC CONST. - SLAYMAKER RES.	T24494675
2845633	T07	Roof Special	2	1	Job Reference (optional)	




LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.54	Vert(LL)	-0.08 14-16	>999	240	MT20	244/190
TCDL 7.0	Lumber DOL	1.25	BC 0.71	Vert(CT)	-0.18 14-16	>999	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.65	Horz(CT)	0.06 9	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS					Weight: 188 lb	FT = 20%

LUMBER-		BRACING-	
TOP CHORD 2x4 SP No.2		TOP CHORD	Structural wood sheathing directly applied or 4-3-13 oc purlins.
BOT CHORD 2x4 SP No.2 *Except*		BOT CHORD	Rigid ceiling directly applied or 6-0-0 oc bracing. Except:
7-10: 2x4 SP No.3			10-0-0 oc bracing: 10-12
WEBS 2x4 SP No.3		WEBS	1 Row at midpt 6-14

REACTIONS.	(size) 2=0-3-7, 9=0-3-8, 16=0-3-8
	Max Horz 2=211(LC 11)
	Max Uplift 2=215(LC 8), 9=196(LC 13), 16=320(LC 12)
	Max Grav 2=301(LC 23), 9=817(LC 1), 16=1581(LC 1)

FORCES.	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	2-3=-78/325, 3-4=-365/697, 4-5=-581/218, 5-6=-582/189, 6-7=-1193/306, 7-8=-1821/429, 8-9=-1378/343
BOT CHORD	2-17=-318/167, 16-17=-320/165, 14-16=-198/288, 13-14=-122/1005, 12-13=-298/1611, 10-12=-165/826, 7-12=-78/454, 9-10=-257/1155
WEBS	3-17=-304/191, 3-16=-455/592, 4-16=-1372/556, 4-14=-199/714, 5-14=-74/271, 6-14=-728/286, 6-13=-43/435, 7-13=-664/193, 8-12=-272/1438, 8-10=-1238/290



- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCdL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-1 to 1-11-6, Interior(1) 1-11-6 to 18-1-11, Exterior(2R) 18-1-11 to 21-7-1, Interior(1) 21-7-1 to 34-6-0 zone; porch left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=215, 9=196, 16=320.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

Job	Truss	Truss Type	Qty	Ply	IC CONST. - SLAYMAKER RES.	T24494676
2845633	T08	Roof Special	2	1	Job Reference (optional)	




LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.54	Vert(LL)	-0.08 15-17	>999	240	MT20	244/190
TCDL 7.0	Lumber DOL	1.25	BC 0.68	Vert(CT)	-0.18 15-17	>999	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.65	Horz(CT)	0.06 9	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS					Weight: 190 lb	FT = 20%

LUMBER-		BRACING-	
TOP CHORD 2x4 SP No.2		TOP CHORD	Structural wood sheathing directly applied or 4-3-13 oc purlins.
BOT CHORD 2x4 SP No.2 *Except*		BOT CHORD	Rigid ceiling directly applied or 6-0-0 oc bracing. Except:
7-11: 2x4 SP No.3			10-0-0 oc bracing: 11-13
WEBS 2x4 SP No.3		WEBS	1 Row at midpt 6-15

REACTIONS.	(size) 2=0-3-7, 9=0-3-8, 17=0-3-8
	Max Horz 2=218(LC 11)
	Max Uplift 2=-217(LC 8), 9=-232(LC 13), 17=-316(LC 12)
	Max Grav 2=301(LC 23), 9=901(LC 1), 17=1577(LC 1)

FORCES.	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	2-3=-80/329, 3-4=-332/693, 4-5=-580/220, 5-6=-580/192, 6-7=-1197/303, 7-8=-1796/410, 8-9=-1347/332
BOT CHORD	2-18=-318/171, 17-18=-318/170, 15-17=-200/302, 14-15=-94/998, 13-14=-255/1589, 11-13=-139/803, 7-13=-61/434, 9-11=-218/1122
WEBS	3-18=-304/191, 3-17=-455/604, 4-17=-1367/535, 4-15=-189/710, 5-15=-76/271, 6-15=-721/280, 6-14=-37/433, 7-14=-647/177, 8-13=-239/1430, 8-11=-1211/253

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCdL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-1 to 1-11-6, Interior(1) 1-11-6 to 18-1-11, Exterior(2R) 18-1-11 to 21-7-1, Interior(1) 21-7-1 to 36-0-0 zone; porch left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=217, 9=232, 17=316.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021


Job 2845633	Truss T09	Truss Type Common	Qty 2	Ply 1	IC CONST. - SLAYMAKER RES. T24494677
----------------	--------------	----------------------	----------	----------	---

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:47 2021 Page 1

ID:LXMaVS5lAyyvNZz7??htND_z2hf0-7NTf5rgTEeO6oBgTjlGgeyTnWQCcy9Y3VLic5Qvz26pU

Job Reference (optional)



4x4 =

Scale = 1:38.6




Plate Offsets (X,Y)--	[2:0-1-8,0-1-8], [6:0-1-8,0-1-8], [8:0-4-0,0-3-0]
-----------------------	---

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.36	Vert(LL)	-0.12 8-11	>999	240	MT20	244/190
TCDL 7.0	Lumber DOL	1.25	BC 0.79	Vert(CT)	-0.26 8-11	>870	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.21	Horz(CT)	0.02 6	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS					Weight: 88 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-7-3 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 2=0-3-8, 6=0-3-8
Max Horz 2=-139(LC 10)
Max Uplift 2=-173(LC 12), 6=-173(LC 13)
Max Grav 2=772(LC 1), 6=772(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1001/210, 3-4=-775/180, 4-5=-775/180, 5-6=-1001/211
BOT CHORD 2-8=-187/834, 6-8=-110/834
WEBS 4-8=-89/540, 5-8=-293/173, 3-8=-293/173

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 9-4-0, Exterior(2R) 9-4-0 to 12-4-0, Interior(1) 12-4-0 to 20-2-0 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=173, 6=173.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job 2845633	Truss T09G	Truss Type Common Supported Gable	Qty 1	Ply 1	IC CONST. - SLAYMAKER RES. T24494678
----------------	---------------	--------------------------------------	----------	----------	---

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:48 2021 Page 1

ID:LXMaVSSIAyvNZz??htND_z2hf0-bZ11Iag6?yWzQLFfG0nvA90?uqjNu2dfaPMeyLz26pT



Scale = 1:37.4




Plate Offsets (X,Y)--		[2:0-3-8,Edge], [12:0-3-8,Edge], [17:0-3-0,0-3-0]							
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc) l/defl L/d	PLATES	GRIP
TCLL 20.0		Plate Grip DOL	1.25	TC 0.13		Vert(LL)	-0.00 13 n/r 120	MT20	244/190
TCDL 7.0		Lumber DOL	1.25	BC 0.07		Vert(CT)	-0.01 13 n/r 120		
BCLL 0.0 *		Rep Stress Incr	YES	WB 0.06		Horz(CT)	0.00 12 n/a n/a		
BCDL 10.0		Code FBC2020/TPI2014		Matrix-S				Weight: 101 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
OTHERS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.

All bearings 18-8-0.

(lb) - Max Horz 2=132(LC 10)


Max Uplift All uplift 100 lb or less at joint(s) 2, 12, 18, 19, 20, 16, 15, 14

Max Grav All reactions 250 lb or less at joint(s) 2, 12, 17, 18, 19, 20, 16, 15, 14

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCCL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Corner(3E) -1-6-0 to 1-6-0, Exterior(2N) 1-6-0 to 9-4-0, Corner(3R) 9-4-0 to 12-4-0, Exterior(2N) 12-4-0 to 20-2-0 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 12, 18, 19, 20, 16, 15, 14.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job 2845633	Truss T10	Truss Type Common	Qty 4	Ply 1	IC CONST. - SLAYMAKER RES. T24494679
----------------	--------------	----------------------	----------	----------	---

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:49 2021 Page 1

ID:LXMaVSSIAyvNZz??htND_z2hf0-3lbPWWHkmFep2UqrqjI8jNY7gEuMdSYop35BUoz26pS



4x4 =

Scale = 1:37.8





Plate Offsets (X,Y)--		[2:0-8-0,0-0-7], [6:0-8-0,0-0-7], [7:0-4-0,0-3-0]																	
LOADING (psf)		SPACING-		2-0-0		CSI.		DEFL.		in (loc)		l/defl		L/d		PLATES		GRIP	
TCLL 20.0		Plate Grip DOL		1.25		TC 0.38		Vert(LL)		-0.12 7-10		>999		240		MT20		244/190	
TCDL 7.0		Lumber DOL		1.25		BC 0.79		Vert(CT)		-0.26 7-10		>853		180					
BCLL 0.0 *		Rep Stress Incr		YES		WB 0.21		Horz(CT)		0.02 6		n/a		n/a					
BCDL 10.0		Code		FBC2020/TPI2014		Matrix-MS										Weight: 85 lb		FT = 20%	

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-4-10 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 6=0-3-8, 2=0-3-8
Max Horz 2=133(LC 9)
Max Uplift 6=139(LC 13), 2=173(LC 12)
Max Grav 6=687(LC 1), 2=775(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1009/216, 3-4=-782/182, 4-5=-783/188, 5-6=-1015/222
BOT CHORD 2-7=-201/840, 6-7=-140/849
WEBS 4-7=-97/542, 5-7=-304/179, 3-7=-292/173

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 9-4-0, Exterior(2R) 9-4-0 to 12-4-0, Interior(1) 12-4-0 to 18-8-0 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 6=139, 2=173.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 33610

Job 2845633	Truss T11	Truss Type Common Girder	Qty 1	Ply 2	IC CONST. - SLAYMAKER RES. Job Reference (optional)	T24494680
----------------	--------------	-----------------------------	----------	----------	--	-----------

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:51 2021 Page 1
ID:LXMaVS5IAyvNZ7??htND_z2hf0-?8iAxCj_ltuXHo_Ey8LcooeQu1f?5EQ5GNalZgz26pQ



4x6 ||

Scale = 1:34.8




Plate Offsets (X,Y)--		[1:0-2-6,Edge], [5:0-2-6,Edge], [7:0-5-4,0-1-8], [8:0-6-0,0-6-0], [9:0-5-4,0-1-8]															
LOADING (psf)		SPACING-		2-0-0		CSI.		DEFL.				in (loc) l/defl L/d		PLATES		GRIP	
TCLL	20.0	Plate Grip DOL		1.25		TC 0.53		Vert(LL)		-0.12 7-8		>999 240		MT20		244/190	
TCDL	7.0	Lumber DOL		1.25		BC 0.39		Vert(CT)		-0.20 7-8		>999 180					
BCLL	0.0 *	Rep Stress Incr		NO		WB 0.69		Horz(CT)		0.04 5		n/a n/a					
BCDL	10.0	Code FBC2020/TPI2014				Matrix-MS								Weight: 250 lb		FT = 20%	

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x8 SP 2400F 2.0E
WEBS 2x4 SP No.3 *Except*
3-8: 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-9-3 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 1=0-3-8, 5=(0-3-8 + bearing block) (req. 0-3-12)
Max Horz 1=118(LC 24)
Max Uplift 1=1015(LC 8), 5=1212(LC 9)
Max Grav 1=5303(LC 2), 5=6338(LC 2)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-2=-8787/1683, 2-3=-6353/1249, 3-4=-6354/1250, 4-5=-9252/1771
BOT CHORD 1-9=-1472/7560, 8-9=-1472/7560, 7-8=-1469/7968, 5-7=-1469/7968
WEBS 3-8=-1163/6156, 4-8=-3011/667, 4-7=-518/2929, 2-8=-2523/575, 2-9=-425/2437

NOTES-

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-9-0 oc.
Bottom chords connected as follows: 2x8 - 2 rows staggered at 0-4-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- 2x8 SP 2400F 2.0E bearing block 12" long at jt. 5 attached to one face with 3 rows of 10d (0.131"x3") nails spaced 3" o.c. 8 Total fasteners per block. Bearing is assumed to be SP No.2. Block to be attached to face opposite of supported loads.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=1015, 5=1212.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 974 lb down and 190 lb up at 2-0-12, 974 lb down and 190 lb up at 4-0-12, 1004 lb down and 210 lb up at 5-8-12, 1254 lb down and 249 lb up at 7-8-12, 1250 lb down and 246 lb up at 9-8-12, 1250 lb down and 246 lb up at 11-8-12, 1250 lb down and 246 lb up at 13-8-12, and 1254 lb down and 249 lb up at 15-8-12, and 1254 lb down and 248 lb up at 17-8-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

Continued on page 2

LOAD CASE(S) Standard

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	IC CONST. - SLAYMAKER RES.	T24494680
2845633	T11	Common Girder	1	2	Job Reference (optional)	

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:51 2021 Page 2
ID:LXMaVS5IAyvNZz7??htND_z2hf0-?8iAxCj_ltuXHo_Ey8LcooeQu1f?5EQ5GNalZgz26pQ

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
- Uniform Loads (plf)
 - Vert: 1-3=-54, 3-5=-54, 1-5=-20
- Concentrated Loads (lb)
 - Vert: 7=-1097(F) 6=-1100(F) 14=-871(F) 15=-871(F) 16=-888(F) 17=-1099(F) 18=-1097(F) 19=-1097(F) 20=-1099(F)



Job 2845633	Truss T12	Truss Type Half Hip Girder	Qty 1	Ply 1	IC CONST. - SLAYMAKER RES. T24494681
Job Reference (optional)					


Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:53 2021 Page 1

ID:LXMaVSSIAyVNZz7??htND_z2hf0-yWqWLUkEqU8FX68d3ZN4tDjpKrKuZA?Ojh3PdZz26pO



Scale: 1/2"=1'



VERTICAL LEGS ARE NOT DESIGNED FOR LATERAL LOADS IMPOSED BY SUPPORTS (BEARINGS).

	5-0-0	8-8-12	12-5-8
	5-0-0	3-8-12	3-8-12

Plate Offsets (X,Y)--	[2:0-3-6,0-0-9]								
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.34	Vert(LL)	0.08 7-8	>999	240	MT20	244/190
TCDL 7.0	Lumber DOL	1.25	BC 0.50	Vert(CT)	-0.12 7-8	>999	180		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.56	Horz(CT)	0.05 9	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS					Weight: 66 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x6 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-2-1 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 7-8-0 oc bracing.

REACTIONS.

(size) 2=0-3-8, 9=0-3-8
Max Horz 2=61(LC 4)
Max Uplift 2=-372(LC 4), 9=-372(LC 4)
Max Grav 2=711(LC 1), 9=729(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.


TOP CHORD 2-3=-1829/915, 3-4=-1513/774, 4-5=-1513/774, 6-9=-729/372, 5-6=-610/312
BOT CHORD 2-8=-899/1760, 7-8=-915/1791
WEBS 3-8=-131/326, 3-7=-292/148, 4-7=-321/163, 5-7=-752/1471

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; porch left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Bearing at joint(s) 9 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=372, 9=372.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 75 lb down and 63 lb up at 5-0-0, 56 lb down and 63 lb up at 7-0-12, and 56 lb down and 58 lb up at 9-0-12, and 56 lb down and 63 lb up at 11-0-12 on top chord, and 110 lb down and 113 lb up at 5-0-0, 45 lb down and 45 lb up at 7-0-12, and 45 lb down and 45 lb up at 9-0-12, and 45 lb down and 45 lb up at 11-0-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-3=-54, 3-5=-54, 2-6=-20



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	IC CONST. - SLAYMAKER RES.	T24494681
2845633	T12	Half Hip Girder	1	1	Job Reference (optional)	

LOAD CASE(S) Standard
 Concentrated Loads (lb)
 Vert: 3=-56(B) 8=-102(B) 12=-56(B) 13=-56(B) 14=-56(B) 15=-40(B) 16=-40(B) 17=-40(B)



Job 2845633	Truss T13	Truss Type Half Hip Girder	Qty 1	Ply 1	IC CONST. - SLAYMAKER RES. T24494682
Builders FirstSource (Lake City,FL), Lake City, FL - 32055,					
Job Reference (optional)					

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:54 2021 Page 1
ID: LXMV5S1AyyvNZz7??htND_z2hf0-QjOIZElsoG68GjpdGuJQQG0vFh9IfaXyLpy9?z26pN



Scale = 1:21.3




Plate Offsets (X,Y)--	[2:0-3-6,0-0-9]								
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.22	Vert(LL)	0.05 8	>999	240	MT20	244/190
TCDL 7.0	Lumber DOL	1.25	BC 0.43	Vert(CT)	-0.08 8-11	>999	180		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.41	Horz(CT)	0.03 9	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS					Weight: 58 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x6 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-8-7 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 8-7-8 oc bracing.

REACTIONS.

(size) 2=0-3-8, 9=0-3-8
Max Horz 2=61(LC 4)
Max Uplift 2=-326(LC 4), 9=-312(LC 4)
Max Grav 2=619(LC 1), 9=613(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.


TOP CHORD 2-3=-1449/720, 3-4=-1070/547, 4-5=-1070/547, 6-9=-613/312, 5-6=-524/267
BOT CHORD 2-8=-710/1390, 7-8=-725/1419
WEBS 3-8=-124/305, 3-7=-378/192, 5-7=-553/1081

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TC DL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; porch left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Bearing at joint(s) 9 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=326, 9=312.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 75 lb down and 63 lb up at 5-0-0, and 56 lb down and 62 lb up at 7-0-12, and 56 lb down and 63 lb up at 9-0-12 on top chord, and 110 lb down and 113 lb up at 5-0-0, and 45 lb down and 45 lb up at 7-0-12, and 45 lb down and 45 lb up at 9-0-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-3=-54, 3-5=-54, 2-6=-20



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	IC CONST. - SLAYMAKER RES.	T24494682
2845633	T13	Half Hip Girder	1	1	Job Reference (optional)	

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:54 2021 Page 2
ID:LXMaVS5IAyvNZz7??htND_z2hf0-QjOIZEIsboG68GjpdGuJQQG0vFh9IfaXyLpy9?z26pN


LOAD CASE(S) Standard
Concentrated Loads (lb)
Vert: 3=-56(F) 8=-102(F) 12=-56(F) 13=-56(F) 14=-40(F) 15=-40(F)

Job 2845633	Truss T14	Truss Type MONO TRUSS	Qty 16	Ply 1	IC CONST. - SLAYMAKER RES. T24494683
----------------	--------------	--------------------------	-----------	----------	---

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:55 2021 Page 1

ID: LXMV55IAyVNZz7??htND_z2hf0-uvygmamVM5OzmPH?B_PyZeo8Ze4D18BhB?YWiRz26pM



Scale = 1:13.9




Plate Offsets (X,Y)--		[2:0-1-14,Edge], [4:Edge,0-1-8]	
LOADING (psf)		SPACING-	2-0-0
TCLL 20.0		Plate Grip DOL	1.25
TCDL 7.0		Lumber DOL	1.25
BCLL 0.0 *		Rep Stress Incr	YES
BCDL 10.0		Code	FBC2020/TPI2014
		CSI.	
		TC	0.42
		BC	0.25
		WB	0.26
		Matrix-MR	
		DEFL.	
		in (loc)	l/defl L/d
		Vert(LL)	0.04 4-8 >999 240
		Vert(CT)	0.04 4-8 >999 180
		Horz(CT)	-0.00 2 n/a n/a
		PLATES	GRIP
		MT20	244/190
		Weight: 22 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3
OTHERS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-8-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 2=0-3-8, 9=0-3-0
Max Horz 2=62(LC 8)
Max Uplift 2=-159(LC 8), 9=-88(LC 8)
Max Grav 2=296(LC 1), 9=172(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-204/273
BOT CHORD 2-4=-306/183

NOTES-

- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 5-2-12 zone; porch left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Bearing at joint(s) 9 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 9 except (jt=lb) 2=159.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job 2845633	Truss T15	Truss Type KINGPOST	Qty 9	Ply 1	IC CONST. - SLAYMAKER RES. T24494684
----------------	--------------	------------------------	----------	----------	---


Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:56 2021 Page 1

ID:LXMaVS5IAyvNZz7??htND_z2hf0-M5W2_vm76PWqOZsCkhwnVrLOs2SAmftqQfl3Euz26pL



Scale = 1:13.2



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.07	Vert(LL)	-0.00	9	>999	240	MT20
BCDL 7.0	Lumber DOL	1.25	BC 0.07	Vert(CT)	-0.00	6	>999	180	244/190
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.04	Horz(CT)	0.00	4	n/a	n/a	
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MP						
								Weight: 22 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 2=0-3-8, 4=0-3-8
Max Horz 2=-45(LC 10)
Max Uplift 2=-60(LC 12), 4=-60(LC 13)
Max Grav 2=239(LC 1), 4=239(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCCL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-0-0 to 2-0-0, Interior(1) 2-0-0 to 2-6-0, Exterior(2R) 2-6-0 to 5-6-0, Interior(1) 5-6-0 to 6-0-0 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 4.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job 2845633	Truss V01	Truss Type Valley	Qty 1	Ply 1	IC CONST. - SLAYMAKER RES. T24494685
----------------	--------------	----------------------	----------	----------	---

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:57 2021 Page 1
ID: LXMVVS5IAyVNZz7??htND_z2hf0-ql3RBFnljfh?jROIPS023uY9Sm_V3MzeJ1dmKz26pK



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.16	Vert(LL)	n/a	-	n/a	999	MT20
TCDL 7.0	Lumber DOL	1.25	BC 0.17	Vert(CT)	n/a	-	n/a	999	244/190
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.22	Horz(CT)	0.01	11	n/a	n/a	
BCDL 10.0	Code FBC2020/TP12014		Matrix-S						
								Weight: 131 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
OTHERS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

All bearings 28-10-0.
(lb) - Max Horz 1=179(LC 9)
Max Uplift All uplift 100 lb or less at joint(s) 1, 11 except 17=-137(LC 12), 18=-128(LC 12), 19=-109(LC 12), 14=-137(LC 13), 13=-128(LC 13), 12=-109(LC 13)
Max Grav All reactions 250 lb or less at joint(s) 1, 11 except 15=371(LC 22), 17=443(LC 19), 18=394(LC 19), 19=307(LC 19), 14=443(LC 20), 13=394(LC 20), 12=307(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-6-8 to 3-6-8, Interior(1) 3-6-8 to 14-5-7, Exterior(2R) 14-5-7 to 17-5-7, Interior(1) 17-5-7 to 28-4-6 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 4) All plates are 2x4 MT20 unless otherwise indicated.
- 5) Gable requires continuous bottom chord bearing.
- 6) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 7) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 11 except (jt=lb) 17=137, 18=128, 19=109, 14=137, 13=128, 12=109.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see


Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job 2845633	Truss V02	Truss Type Valley	Qty 1	Ply 1	IC CONST. - SLAYMAKER RES. T24494686
Builders FirstSource (Lake City,FL), Lake City, FL - 32055,					

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:00:58 2021 Page 1
ID: LXMavSSIAyVNZz??htND_z2hf0-lUdpPboNeOnYdt0as6zFaGQIws60EXZ7tznAJmz26pJ



Scale = 1:47.5

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.16	Vert(LL)	n/a	-	n/a	MT20	244/190
BCDL 7.0	Lumber DOL	1.25	BC 0.18	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.16	Horz(CT)	0.00	7	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-S					Weight: 107 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
OTHERS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6'-0" oc purlins.
BOT CHORD Rigid ceiling directly applied or 10'-0" oc bracing.


REACTIONS.

All bearings 24-10-0.
(lb) - Max Horz 1=-153(LC 8)
Max Uplift All uplift 100 lb or less at joint(s) 1, 7 except 12=-134(LC 12), 13=-139(LC 12), 9=-134(LC 13), 8=-139(LC 13)
Max Grav All reactions 250 lb or less at joint(s) 1, 7 except 10=371(LC 22), 12=400(LC 19), 13=401(LC 19), 9=400(LC 20), 8=402(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCCL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-6-8 to 3-6-8, Interior(1) 3-6-8 to 12-5-7, Exterior(2R) 12-5-7 to 15-5-7, Interior(1) 15-5-7 to 24-4-6 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-6" tall by 2'-0" wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 7 except (jt=lb) 12=134, 13=139, 9=134, 8=139.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 33610

Job 2845633	Truss V03	Truss Type Valley	Qty 1	Ply 1	IC CONST. - SLAYMAKER RES. T24494687
----------------	--------------	----------------------	----------	----------	---

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,


8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:01:00 2021 Page 1

ID:LXMaVS5IAyVNZz7?htND_z2hf0-FtlZpHqDAe1GsBAzzX?jghW2EfoeiSqQKGGHNfz26pH



4x4 =

Scale = 1:39.9



0-0-7
0-0-7

20-10-14
20-10-7

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.17	Vert(LL)	n/a	-	n/a	999	MT20
TCDL 7.0	Lumber DOL	1.25	BC 0.17	Vert(CT)	n/a	-	n/a	999	244/190
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.11	Horz(CT)	0.00	7	n/a	n/a	
BCDL 10.0	Code FBC2020/TPI2014		Matrix-S						
								Weight: 85 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
OTHERS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 20-10-0.

(lb) - Max Horz 1=-127(LC 10)

Max Uplift All uplift 100 lb or less at joint(s) 1, 7 except 12=-142(LC 12), 13=-104(LC 12), 9=-142(LC 13), 8=-104(LC 13)


Max Grav All reactions 250 lb or less at joint(s) 1, 7 except 10=356(LC 19), 12=415(LC 19), 13=300(LC 19), 9=415(LC 20), 8=300(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

WEBS 3-12=-250/167

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-6-8 to 3-6-8, Interior(1) 3-6-8 to 10-5-7, Exterior(2R) 10-5-7 to 13-5-7, Interior(1) 13-5-7 to 20-4-6 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 7 except (jt=lb) 12=142, 13=104, 9=142, 8=104.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job 2845633	Truss V04	Truss Type GABLE	Qty 1	Ply 1	IC CONST. - SLAYMAKER RES. T24494688
----------------	--------------	---------------------	----------	----------	---

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:01:01 2021 Page 1

ID: LXM aVS5IAyvNZz7??htND_z2hf0-j3Jx1dqFxx97UKI9XEWyCv2DT39uRw2ZZw?qv5z26pG




Plate Offsets (X,Y)-- [2:0-0-0,0-0-0]										
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES	GRIP	
TCLL	20.0	Plate Grip DOL	1.25	TC	0.14	Vert(LL)	n/a - n/a	999	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.10	Vert(CT)	n/a - n/a	999		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.04	Horz(CT)	0.00 6 n/a	n/a		
BCDL	10.0	Code FBC2020/TPI2014		Matrix-S					Weight: 68 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
OTHERS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

All bearings 16-10-14.
(lb) - Max Horz 1=-87(LC 10)
Max Uplift All uplift 100 lb or less at joint(s) 1, 6, 8, 9 except 7=-129(LC 13), 11=-129(LC 12)
Max Grav All reactions 250 lb or less at joint(s) 1, 6, 8, 9 except 7=311(LC 20), 11=311(LC 19)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-6-8 to 3-6-8, Interior(1) 3-6-8 to 7-3-2, Exterior(2E) 7-3-2 to 9-7-12, Exterior(2R) 9-7-12 to 13-10-11, Interior(1) 13-10-11 to 16-4-6 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 6, 8, 9 except (jt=lb) 7=129, 11=129.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 33610

Job 2845633	Truss V05	Truss Type GABLE	Qty 1	Ply 1	IC CONST. - SLAYMAKER RES. T24494689
----------------	--------------	---------------------	----------	----------	---

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Jun 2 2021 MiTek Industries, Inc. Sun Jun 27 10:01:02 2021 Page 1

ID:LXMaVS5IAyvNZZ??htND_z2hf0-BFtKEzruiFH6UKL5y1Bl6bPuTVIANyioalNSXz26pF



Scale = 1:21.0




Plate Offsets (X,Y)--		[2:0-3-0,0-1-12], [6:0-3-0,0-1-12]	
LOADING (psf)	SPACING-	2-0-0	CSI.
TCLL 20.0	Plate Grip DOL	1.25	TC 0.09
TCDL 7.0	Lumber DOL	1.25	BC 0.09
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.03
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-S
			DEFL.
			in (loc) l/defl L/d
			Vert(LL) n/a - n/a 999
			Vert(CT) n/a - n/a 999
			Horz(CT) 0.00 7 n/a n/a
			PLATES GRIP
			MT20 244/190
			Weight: 44 lb FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
OTHERS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

All bearings 12-10-14.
(lb) - Max Horz 1=35(LC 8)
Max Uplift All uplift 100 lb or less at joint(s) 1, 7, 9, 8, 10
Max Grav All reactions 250 lb or less at joint(s) 1, 7, 9, 8, 10

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-6-8 to 3-3-2, Exterior(2R) 3-3-2 to 7-6-0, Interior(1) 7-6-0 to 9-7-12, Exterior(2E) 9-7-12 to 12-4-6 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 7, 9, 8, 10.



Michael S. Magid PE No.53681
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

June 28,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see


Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.
Tampa, FL 36610

Symbols

PLATE LOCATION AND ORIENTATION



Center plate on joint unless X, Y offsets are indicated. Dimensions are in ft-in-sixteenths. Apply plates to both sides of truss and fully embed teeth.

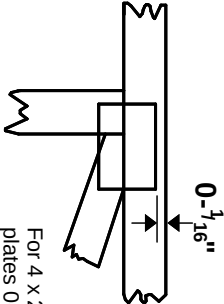

For 4 x 2 orientation, locate plates 0- $\frac{3}{16}$ " from outside edge of truss.

— This symbol indicates the required direction of slots in connector plates.

*** Plate location details available in MITek 20120 software or upon request.**

PLATE SIZE

4 X 4


The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T or I bracing if indicated.

BEARING




Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number where bearings occur. Min size shown is for crushing only.

Industry Standards:

ANSI/TP1.1: National Design Specification for Metal Plate Connected Wood Truss Construction.
DSB-89: Building Component Safety Information, Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses.

Numbering System

6-4-8 dimensions shown in ft-in-sixteenths (Drawings not to scale)



JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

PRODUCT CODE APPROVALS

ICC-ES Reports:

ESR-1311, ESR-1352, ESR1988
ER-3907, ESR-2362, ESR-1397, ESR-3282

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.

Lumber design values are in accordance with ANSI/TP1 1 section 6.3 These truss designs rely on lumber values established by others.

© 2012 MITek® All Rights Reserved



Mitek Engineering Reference Sheet: MII-7473 rev. 5/19/2020



General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative T or I bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TP1 1.
7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TP1 1.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with ANSI/TP1 1 Quality Criteria.
21. The design does not take into account any dynamic or other loads other than those expressly stated.