


EXXON US 90 WEST RENOVATION

SITE PLAN FOR:

CHARLIE WALK
993 SW JAFUS AVE
LAKE CITY, FL 32024

PHONE: 386.755.4773

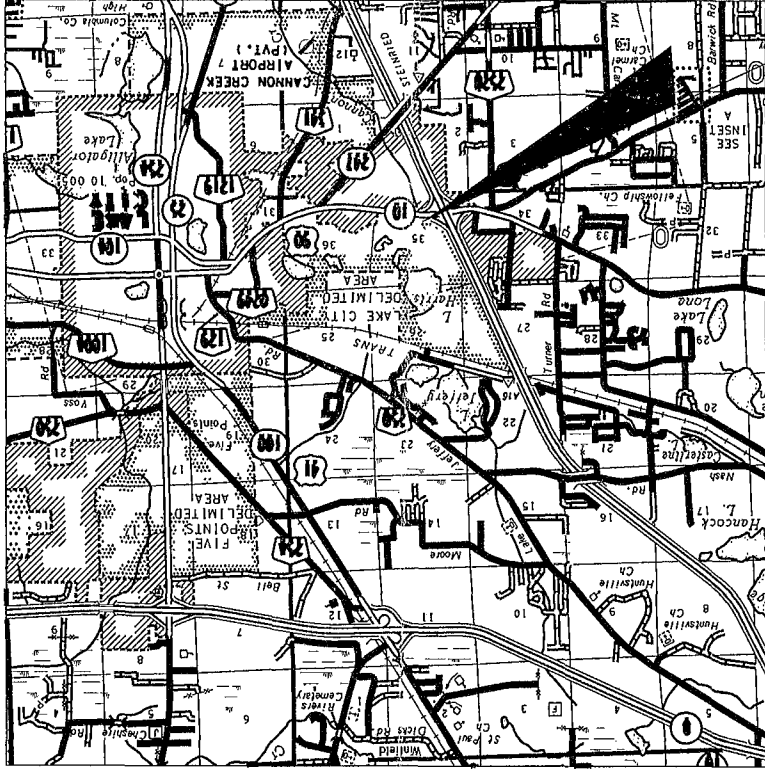

PROJECT LOCATION

LOCATION MAP

SECTION 35, TOWNSHIP 3 SOUTH, RANGE 16 EAST
LAKE CITY, FLORIDA

PARCEL # 35-3S-16-02558-000

CES PROJECT ID:
2014-011

CERTIFICATE OF AUTHORIZATION: NO. 28022


www.crewsengineering.com

P.O. BOX 970
LAKE CITY, FL 32056
PHONE: 386.754.4085

Crews Engineering Services, LLC

CES

INDEX OF SHEETS
DET1 GENERAL NOTES
SIT1 SITE PLAN

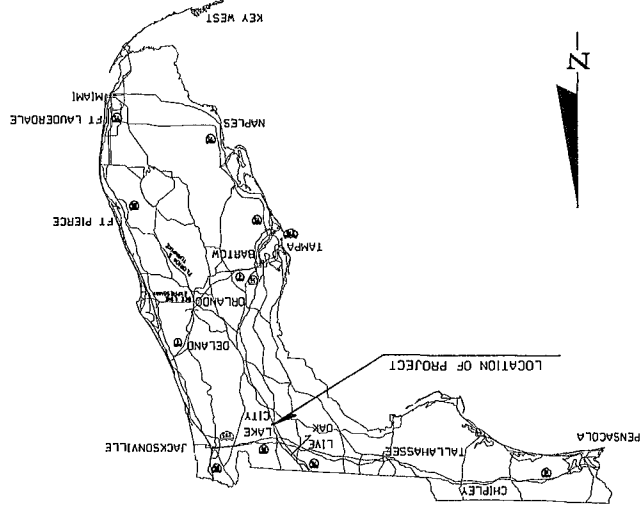

BRETT A. CREWS, P.E. 65592

5-24-2014

DATE		BY	DESCRIPTION	DATE	BY	DESCRIPTION
REVISIONS						
GENERAL NOTES						
1 THE CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS AT THE JOB SITE TO INSURE THAT ALL NEW WORK WILL FIT IN THE MANNER INTENDED ON THE PLANS. THE CONTRACTOR SHALL NOTIFY THE ENGINEER OF SUCH DIFFERENCES IMMEDIATELY & PRIOR TO PROCEEDING WITH THE WORK						
2 THE CONTRACTOR SHALL MAINTAIN THE CONSTRUCTION SITE AT ALL TIMES IN A SECURE MANNER. ALL OPEN TRENCHES AND EXCAVATED AREAS SHALL BE PROTECTED FROM ACCESS BY THE GENERAL PUBLIC						
3 ANY PUBLIC LAND CORNER WITHIN THE LIMITS OF CONSTRUCTION IS TO BE PROTECTED. IF A CORNER MONUMENT IS IN DANGER OF BEING DESTROYED AND HAS NOT BEEN PROPERLY REFERENCED, THE CONTRACTOR SHOULD NOTIFY THE ENGINEER WITH SRWMD RULES AND REGULATIONS (CH 40B-4 F A C)						
4 THE SURFACE WATER MANAGEMENT SYSTEM SHALL BE CONSTRUCTED IN ACCORDANCE WITH SRWMD RULES AND REGULATIONS (CH 40B-4 F A C)						
5 EXISTING DRAINAGE STRUCTURES WITHIN THE CONSTRUCTION LIMITS SHALL BE REMOVED, UNLESS OTHERWISE SPECIFIED IN THE PLANS						
6 THE CONTRACTOR SHALL WASTE ALL EXCESS EARTH ON SITE AS DIRECTED BY THE ENGINEER						
7 ALL SITE CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE COLUMBIA COUNTY LAND DEVELOPMENT REGULATIONS						
8 THE CONTRACTOR SHALL COORDINATE ALL WORK WITH OTHER CONTRACTORS WITHIN PROJECT LIMITS						
9 ALL PROPOSED CONSTRUCTION SHALL CONFORM TO CURRENT FDOT DESIGN STANDARDS AND FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION						
10 ALL STORM PIPES SHALL HAVE A MINIMUM COVER OF 9" UNLESS OTHERWISE SHOWN IN THESE PLANS. LIMESTONE BACKFILL SHALL BE USED IF PIPE UNDER PAVEMENT HAS LESS THAN 12" COVER						
11 ALL SWALES, DEPRESSION AREAS AND RETENTION PONDS SHALL BE INSPECTED MONTHLY FOR SINKHOLE OCCURRENCE. SHOULD A SINKHOLE OCCUR, THE AREA SHOULD BE REPAIRED AS SOON AS POSSIBLE. IF A SOLUTION PIPE SINKHOLE FORMS WITHIN THE STORM WATER SYSTEM, THE SINKHOLE SHALL BE REPAIRED BY BACKFILLING WITH A LOW PERMEABILITY MATERIAL. A 2-FOOT CAP THAT EXTENDS 2 FEET BEYOND THE PERIMETER OF THE SINKHOLE SHALL BE CONSTRUCTED WITH CLAYEY SOILS. THE CLAYEY SOIL SHOULD HAVE AT LEAST 20% PASSING THE NUMBER 200 SIEVE, COMPACTED TO 95% OF STANDARD PROCTOR, AND COMPACTED IN A WET CONDITION WITH MOISTURE 2%-4% ABOVE OPTIMUM. THE CLAY SOIL CAP SHALL BE RE-GRADED TO PREVENT PONDING AND RE-VEGETATED						
12 ALL NEW TRAFFIC SIGNAGE AND PAVEMENT MARKINGS SHALL CONFORM TO THE CURRENT MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES AND THE CURRENT FDOT DESIGN STANDARDS						
13 MAINTENANCE OF TRAFFIC SHALL BE IN ACCORDANCE WITH CURRENT FDOT DESIGN STANDARDS. THE CONTRACTOR SHALL MEET ON SITE WITH FDOT FOR APPROVAL OF A MAINTENANCE OF TRAFFIC PLAN. PRIOR TO BEGINNING WORK WITHIN FDOT RIGHT OF WAY						
14 CONTRACTOR SHALL CONTACT COLUMBIA COUNTY BUILDING AND ZONING DEPARTMENT TO PERFORM THE FOLLOWING SITE INSPECTIONS A) EROSION AND SEDIMENT CONTROL - ONCE IN PLACE PRIOR TO BEGINNING CONSTRUCTION B) CLEARING AND GRUBBING - VISUAL INSPECTION C) SITE COMPLIANCE - ONCE BUILDING FOUNDATION IS POURED AND IMPROVEMENTS ARE STAKED OUT D) FINAL SITE COMPLIANCE - ONCE ALL IMPROVEMENTS ARE FINALIZED						
15 CONTRACTOR SHALL CONTACT SRWMD AND ENGINEER OF RECORD 48 HOURS PRIOR TO BEGINNING CONSTRUCTION						
16 ANY UNSUITABLE MATERIAL (SPOTIC, CLAY, OTHER IMPERMEABLE SOILS) SHALL BE REMOVED FROM THE SURFACE WATER MANAGEMENT FACILITIES. THIS UNSUITABLE MATERIAL SHALL NOT BE USED AS FILL MATERIAL IN CONSTRUCTION OF THE BERMS. CONTRACTOR SHALL MEET WITH ENGINEER ON SITE PRIOR TO CONSTRUCTION OF SURFACE WATER MANAGEMENT FACILITY						
EROSION CONTROL NOTES						
1 CONTRACTORS SHALL ADHERE TO THE STORM WATER POLLUTION PREVENTION PLAN, EROSION AND SEDIMENT CONTROL REGULATIONS AS SET BY SRWMD AND OTHER GOVERNING AUTHORITIES AND USE (AS A MINIMUM) THE MEASURES DESCRIBED IN THESE PLANS						
2 ALL EROSION CONTROL MEASURES SHALL BE IMPLEMENTED AND WATER MANAGEMENT FACILITIES SHALL BE INSTALLED PRIOR TO ANY OTHER CONSTRUCTION						
3 CONTRACTOR IS RESPONSIBLE FOR IMPLEMENTING ADDITIONAL MEASURES AS REQUIRED FOR PROPER EROSION AND SEDIMENT CONTROL. THE CONTRACTOR SHOULD USE BMP'S IN THE FLORIDA EROSION AND SEDIMENT CONTROL INSPECTOR'S MANUAL TO IMPLEMENT A PLAN THAT WILL WORK AND MEET ACTUAL FIELD CONDITIONS						
4 SEDIMENT AND EROSION CONTROL MEASURES SHALL NOT BE REMOVED UNTIL ALL CONSTRUCTION IS COMPLETE AND UNTIL A PERMANENT GROUND COVER HAS BEEN ESTABLISHED						
5 ALL OPEN DRAINAGE SWALES SHALL BE GRASSED IMMEDIATELY AS REQUIRED TO CONTROL EROSION						
6 SILT FENCES SHALL BE LOCATED ON SITE TO PREVENT SEDIMENT AND EROSION FROM LEAVING PROJECT LIMITS. SILT FENCE SHALL BE CLEANED OR REPLACED WHEN SILT BUILDS UP TO WITHIN ONE FOOT OF TOP OF SILT FENCE						
7 DURING CONSTRUCTION AND AFTER CONSTRUCTION IS COMPLETE, ALL STRUCTURES SHALL BE CLEANED OF ALL DEBRIS AND EXCESS SEDIMENT						
8 ALL DISTURBED AREAS SHALL BE STABILIZED IMMEDIATELY TO PREVENT EROSION. SLOPES GREATER THAN 1V 4H SHALL BE STABILIZED WITH SOD. STAPLE SOD SHALL BE USED ON SLOPES GREATER THAN 1V 2H. ALL DISTURBED AREAS NOT SODED SHALL BE SEEDED WITH A MIXTURE OF LONG-TERM VEGETATION AND QUICK-GROWING SHORT-TERM VEGETATION FOR THE FOLLOWING CONDITIONS FOR THE MONTHS FROM SEPTEMBER THROUGH MARCH, THE MIX SHALL CONSIST OF 70 POUNDS PER ACRE OF LONG-TERM SEED AND 20 POUNDS PER ACRE OF WINTER RYE FOR THE MONTHS OF APRIL THROUGH AUGUST. THE MIX SHALL CONSIST OF 70 POUNDS PER ACRE OF LONG-TERM SEED AND 20 POUNDS PER ACRE OF MILLET						
9 ALL STABILIZATION PRACTICES SHALL BE INITIATED AS SOON AS PRACTICABLE IN AREAS OF THE JOB WHERE CONSTRUCTION ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY STOPPED, BUT IN NO CASE SHALL THE DISTURBED AREA BE LEFT UNPROTECTED FOR MORE THAN THREE (3) DAYS						
10 LOADED HAUL TRUCKS SHALL BE COVERED WITH TARPS AND EXCESS DIRT REMOVED DAILY						
11 THIS PROJECT SHALL COMPLY WITH ALL APPLICABLE WATER QUALITY STANDARDS						
12 QUALIFIED PERSONNEL SHALL INSPECT THE STOCKPILE AREAS, SILT FENCE CONSTRUCTION ENTRANCE, AND ALL DISTURBED AREAS THAT HAVE NOT BEEN FINALLY STABILIZED, AT LEAST ONCE EVERY SEVEN (7) CALENDAR DAYS AND WITHIN 24 HOURS AFTER A STORM OF 0.5 INCHES OR GREATER. CORRECTIVE ACTIONS SHALL BE TAKEN IMMEDIATELY						
13 CONTRACTOR IS RESPONSIBLE FOR THE CONSTRUCTION AND MAINTENANCE OF ALL EROSION AND SEDIMENT CONTROLS DURING PROPOSED CONSTRUCTION						
14 SHOULD THIS SITE REQUIRE SEVERAL LOADS OF MATERIAL BE TRUCKED IN OR AWAY, THE CONTRACTOR SHALL INSTALL A "SOIL TRACKING PREVENTION DEVICE" AS FOUND IN THE STATE OF FLORIDA EROSION AND SEDIMENT CONTROL DESIGNER AND REVIEW MANUAL						
GENERAL NOTES						
1 THE CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS AT THE JOB SITE TO INSURE THAT ALL NEW WORK WILL FIT IN THE MANNER INTENDED ON THE PLANS. THE CONTRACTOR SHALL NOTIFY THE ENGINEER OF SUCH DIFFERENCES IMMEDIATELY & PRIOR TO PROCEEDING WITH THE WORK						
2 THE CONTRACTOR SHALL MAINTAIN THE CONSTRUCTION SITE AT ALL TIMES IN A SECURE MANNER. ALL OPEN TRENCHES AND EXCAVATED AREAS SHALL BE PROTECTED FROM ACCESS BY THE GENERAL PUBLIC						
3 ANY PUBLIC LAND CORNER WITHIN THE LIMITS OF CONSTRUCTION IS TO BE PROTECTED. IF A CORNER MONUMENT IS IN DANGER OF BEING DESTROYED AND HAS NOT BEEN PROPERLY REFERENCED, THE CONTRACTOR SHOULD NOTIFY THE ENGINEER WITH SRWMD RULES AND REGULATIONS (CH 40B-4 F A C)						
4 THE SURFACE WATER MANAGEMENT SYSTEM SHALL BE CONSTRUCTED IN ACCORDANCE WITH SRWMD RULES AND REGULATIONS (CH 40B-4 F A C)						
5 EXISTING DRAINAGE STRUCTURES WITHIN THE CONSTRUCTION LIMITS SHALL BE REMOVED, UNLESS OTHERWISE SPECIFIED IN THE PLANS						
6 THE CONTRACTOR SHALL WASTE ALL EXCESS EARTH ON SITE AS DIRECTED BY THE ENGINEER						
7 ALL SITE CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE COLUMBIA COUNTY LAND DEVELOPMENT REGULATIONS						
8 THE CONTRACTOR SHALL COORDINATE ALL WORK WITH OTHER CONTRACTORS WITHIN PROJECT LIMITS						
9 ALL PROPOSED CONSTRUCTION SHALL CONFORM TO CURRENT FDOT DESIGN STANDARDS AND FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION						
10 ALL STORM PIPES SHALL HAVE A MINIMUM COVER OF 9" UNLESS OTHERWISE SHOWN IN THESE PLANS. LIMESTONE BACKFILL SHALL BE USED IF PIPE UNDER PAVEMENT HAS LESS THAN 12" COVER						
11 ALL SWALES, DEPRESSION AREAS AND RETENTION PONDS SHALL BE INSPECTED MONTHLY FOR SINKHOLE OCCURRENCE. SHOULD A SINKHOLE OCCUR, THE AREA SHOULD BE REPAIRED AS SOON AS POSSIBLE. IF A SOLUTION PIPE SINKHOLE FORMS WITHIN THE STORM WATER SYSTEM, THE SINKHOLE SHALL BE REPAIRED BY BACKFILLING WITH A LOW PERMEABILITY MATERIAL. A 2-FOOT CAP THAT EXTENDS 2 FEET BEYOND THE PERIMETER OF THE SINKHOLE SHALL BE CONSTRUCTED WITH CLAYEY SOILS. THE CLAYEY SOIL SHOULD HAVE AT LEAST 20% PASSING THE NUMBER 200 SIEVE, COMPACTED TO 95% OF STANDARD PROCTOR, AND COMPACTED IN A WET CONDITION WITH MOISTURE 2%-4% ABOVE OPTIMUM. THE CLAY SOIL CAP SHALL BE RE-GRADED TO PREVENT PONDING AND RE-VEGETATED						
12 ALL NEW TRAFFIC SIGNAGE AND PAVEMENT MARKINGS SHALL CONFORM TO THE CURRENT MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES AND THE CURRENT FDOT DESIGN STANDARDS						
13 MAINTENANCE OF TRAFFIC SHALL BE IN ACCORDANCE WITH CURRENT FDOT DESIGN STANDARDS. THE CONTRACTOR SHALL MEET ON SITE WITH FDOT FOR APPROVAL OF A MAINTENANCE OF TRAFFIC PLAN. PRIOR TO BEGINNING WORK WITHIN FDOT RIGHT OF WAY						
14 CONTRACTOR SHALL CONTACT COLUMBIA COUNTY BUILDING AND ZONING DEPARTMENT TO PERFORM THE FOLLOWING SITE INSPECTIONS A) EROSION AND SEDIMENT CONTROL - ONCE IN PLACE PRIOR TO BEGINNING CONSTRUCTION B) CLEARING AND GRUBBING - VISUAL INSPECTION C) SITE COMPLIANCE - ONCE BUILDING FOUNDATION IS POURED AND IMPROVEMENTS ARE STAKED OUT D) FINAL SITE COMPLIANCE - ONCE ALL IMPROVEMENTS ARE FINALIZED						
15 CONTRACTOR SHALL CONTACT SRWMD AND ENGINEER OF RECORD 48 HOURS PRIOR TO BEGINNING CONSTRUCTION						
16 ANY UNSUITABLE MATERIAL (SPOTIC, CLAY, OTHER IMPERMEABLE SOILS) SHALL BE REMOVED FROM THE SURFACE WATER MANAGEMENT FACILITIES. THIS UNSUITABLE MATERIAL SHALL NOT BE USED AS FILL MATERIAL IN CONSTRUCTION OF THE BERMS. CONTRACTOR SHALL MEET WITH ENGINEER ON SITE PRIOR TO CONSTRUCTION OF SURFACE WATER MANAGEMENT FACILITY						
EROSION CONTROL NOTES						
1 CONTRACTORS SHALL ADHERE TO THE STORM WATER POLLUTION PREVENTION PLAN, EROSION AND SEDIMENT CONTROL REGULATIONS AS SET BY SRWMD AND OTHER GOVERNING AUTHORITIES AND USE (AS A MINIMUM) THE MEASURES DESCRIBED IN THESE PLANS						
2 ALL EROSION CONTROL MEASURES SHALL BE IMPLEMENTED AND WATER MANAGEMENT FACILITIES SHALL BE INSTALLED PRIOR TO ANY OTHER CONSTRUCTION						
3 CONTRACTOR IS RESPONSIBLE FOR IMPLEMENTING ADDITIONAL MEASURES AS REQUIRED FOR PROPER EROSION AND SEDIMENT CONTROL. THE CONTRACTOR SHOULD USE BMP'S IN THE FLORIDA EROSION AND SEDIMENT CONTROL INSPECTOR'S MANUAL TO IMPLEMENT A PLAN THAT WILL WORK AND MEET ACTUAL FIELD CONDITIONS						
4 SEDIMENT AND EROSION CONTROL MEASURES SHALL NOT BE REMOVED UNTIL ALL CONSTRUCTION IS COMPLETE AND UNTIL A PERMANENT GROUND COVER HAS BEEN ESTABLISHED						
5 ALL OPEN DRAINAGE SWALES SHALL BE GRASSED IMMEDIATELY AS REQUIRED TO CONTROL EROSION						
6 SILT FENCES SHALL BE LOCATED ON SITE TO PREVENT SEDIMENT AND EROSION FROM LEAVING PROJECT LIMITS. SILT FENCE SHALL BE CLEANED OR REPLACED WHEN SILT BUILDS UP TO WITHIN ONE FOOT OF TOP OF SILT FENCE						
7 DURING CONSTRUCTION AND AFTER CONSTRUCTION IS COMPLETE, ALL STRUCTURES SHALL BE CLEANED OF ALL DEBRIS AND EXCESS SEDIMENT						
8 ALL DISTURBED AREAS SHALL BE STABILIZED IMMEDIATELY TO PREVENT EROSION. SLOPES GREATER THAN 1V 4H SHALL BE STABILIZED WITH SOD. STAPLE SOD SHALL BE USED ON SLOPES GREATER THAN 1V 2H. ALL DISTURBED AREAS NOT SODED SHALL BE SEEDED WITH A MIXTURE OF LONG-TERM VEGETATION AND QUICK-GROWING SHORT-TERM VEGETATION FOR THE FOLLOWING CONDITIONS FOR THE MONTHS FROM SEPTEMBER THROUGH MARCH, THE MIX SHALL CONSIST OF 70 POUNDS PER ACRE OF LONG-TERM SEED AND 20 POUNDS PER ACRE OF WINTER RYE FOR THE MONTHS OF APRIL THROUGH AUGUST. THE MIX SHALL CONSIST OF 70 POUNDS PER ACRE OF LONG-TERM SEED AND 20 POUNDS PER ACRE OF MILLET						
9 ALL STABILIZATION PRACTICES SHALL BE INITIATED AS SOON AS PRACTICABLE IN AREAS OF THE JOB WHERE CONSTRUCTION ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY STOPPED, BUT IN NO CASE SHALL THE DISTURBED AREA BE LEFT UNPROTECTED FOR MORE THAN THREE (3) DAYS						
10 LOADED HAUL TRUCKS SHALL BE COVERED WITH TARPS AND						

DATE		BY	DESCRIPTION	DATE	BY	DESCRIPTION
REVISIONS						
Crows Engineering Services, LLC						
P. O. BOX 970 LAKE CITY, FL 32056 PHONE 386.754.4085						
BREIT A CROWS, P.E. 65592 4-24-2014						
DRAWN BY		BC	APPROVED BY		BC	SITE PLAN
CES PROJECT NO		2014-011		SHEET		SIT1
EXXON US 90 WEST RENOVATION						

