

PERMIT APPLICATION / MANUFACTURED HOME INSTALLATION APPLICATION

For Office Use Only (Revised 1-10-08)		Zoning Official <u>aps 1/15/09</u>	Building Official <u>me 1-19-09</u>
AP# <u>0901-14</u>	Date Received <u>1-13-09</u>	By <u>LS</u>	Permit # <u>27588</u>
Flood Zone <u>X</u>	Development Permit <u>—</u>	Zoning <u>RR</u>	Land Use Plan Map Category <u>RVL1</u>
Comments _____			
FEMA Map# _____	Elevation <u>08-2271-</u>	Finished Floor _____	River _____ In Floodway _____
☒ Site Plan with Setbacks Shown	☒ EH # <u>08-2271-</u>	☐ EH Release	☐ Well letter ☒ Existing well
☒ Recorded Deed or Affidavit from land owner	☒ Letter of Auth. from installer	☐ State Road Access	
☐ Parent Parcel # _____	☐ STUP-MH _____	☐ F W Comp. letter	
IMPACT FEES: EMS <u>29.88</u>	Fire <u>78.63</u>	Corr <u>442.89</u>	Road/Code <u>1046.00/210</u>
School <u>1500.00</u>	= TOTAL <u>3097.40</u>		

Property ID # 22-45-16-03090-305 Subdivision Blaine Estates Lots

- New Mobile Home ☒ Used Mobile Home _____ MH Size 32x80 Year 09
- Applicant Wendy Grennell / Dale Burd / Rodney Ford Phone # 386-497-2311
- Address PO Box 39 Ft White FL 32038
- Name of Property Owner Robert + Irene McCool Phone# 561-685-1062
- 911 Address 232 SW Mason Lane Lake City FL 32024
- Circle the correct power company - FL Power & Light - Clay Electric
 (Circle One) - Suwannee Valley Electric - Progress Energy
- Name of Owner of Mobile Home Robert + Irene McCool Phone # 561-685-1062
 Address 6312 Emerald Sky Lane Greenacres FL 33463
- Relationship to Property Owner same
- Current Number of Dwellings on Property 0
- Lot Size _____ Total Acreage 1
- Do you : Have Existing Drive or Private Drive or need Culvert Permit or Culvert Waiver (Circle one)
(Currently using) (Blue Road Sign) (Putting in a Culvert) (Not existing but do not need a Culvert)
- Is this Mobile Home Replacing an Existing Mobile Home No
- Driving Directions to the Property Hwy 90 West to CR 247 turn
(L) to CR 242 turn (L) to Friendship way turn (L)
to Buchanan turn (R) follow to SW Mason turn
(R) last lot on (R)
- Name of Licensed Dealer/Installer Wendell Crews Phone # 352-351-6100
- Installers Address 465D NE 35th St. Ocala FL 34479
- License Number IH0000629 Installation Decal # 297386


*Spoke to Dale
1/15/09*

STATE OF FLORIDA
DEPARTMENT OF HEALTH
APPLICATION FOR ONSITE SEWAGE DISPOSAL SYSTEM CONSTRUCTION PERMIT

Permit Application Number _____

----- PART II - SITEPLAN -----

Scale: 1 inch = 50 feet.

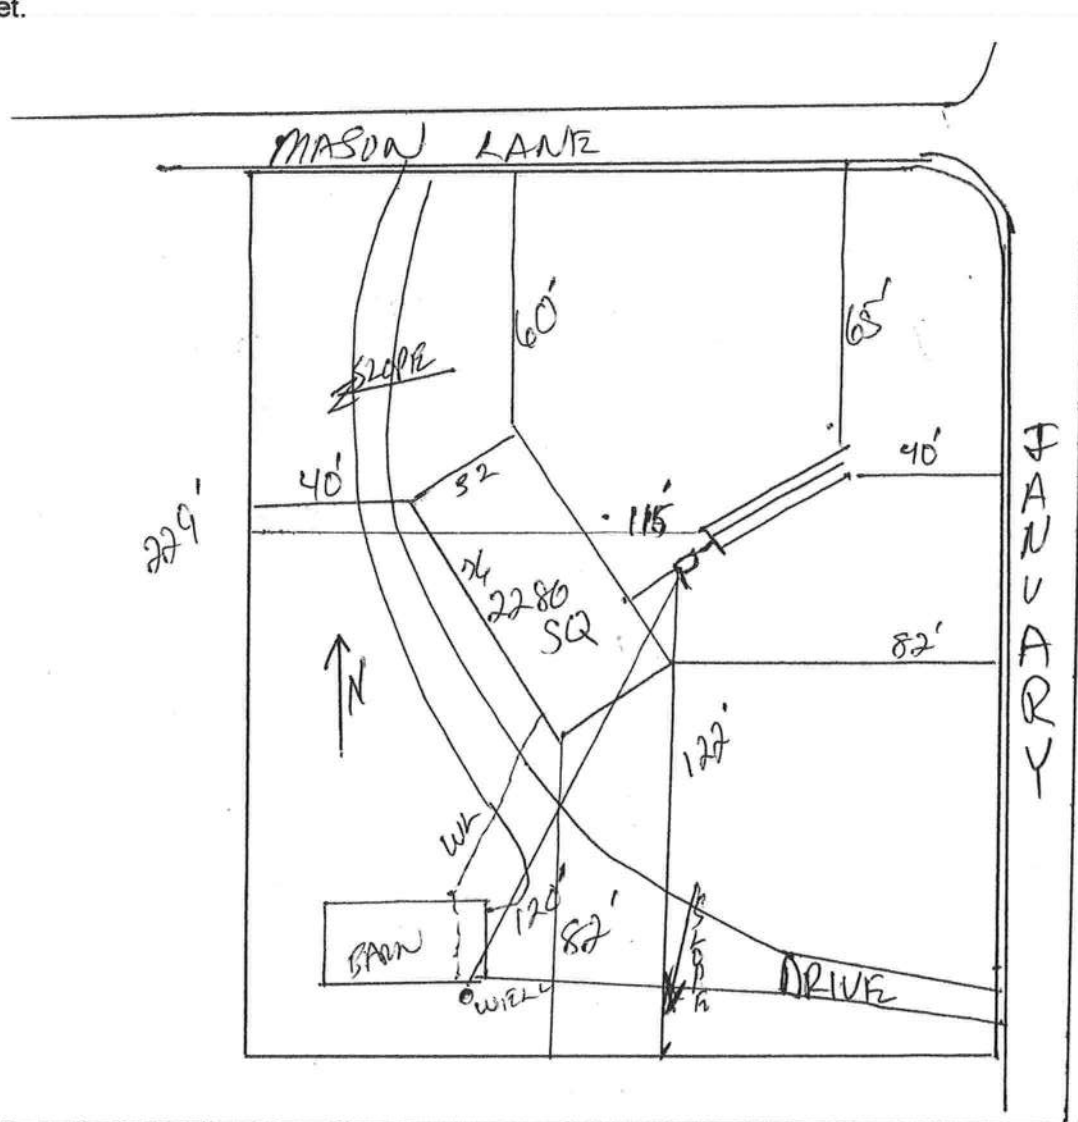

Notes: _____

Site Plan submitted by: Rock D Z
Plan Approved _____ Not Approved _____
By _____

MASTER CONTRACTOR

Date _____

County Health Department

ALL CHANGES MUST BE APPROVED BY THE COUNTY HEALTH DEPARTMENT

PERMIT WORKSHEET

PERMIT NUMBER

Case: Wendell Crows License # 7H0000629

Address of home: 332 SW Mason Lane


City: Lake City FL 32024

County: Deer Valley length x width 32 x 26

NOTE: If home is a single wide unit, put one half of the blocking plan in front of the unit. If home is a triple or quad wide sketch the remainder of home.

Manufacturer: Longitudinal Lateral Arm Systems cannot be used on any frame (new or used) if the side wall has exceeded 5 ft of height.

Installer's Initials: WC

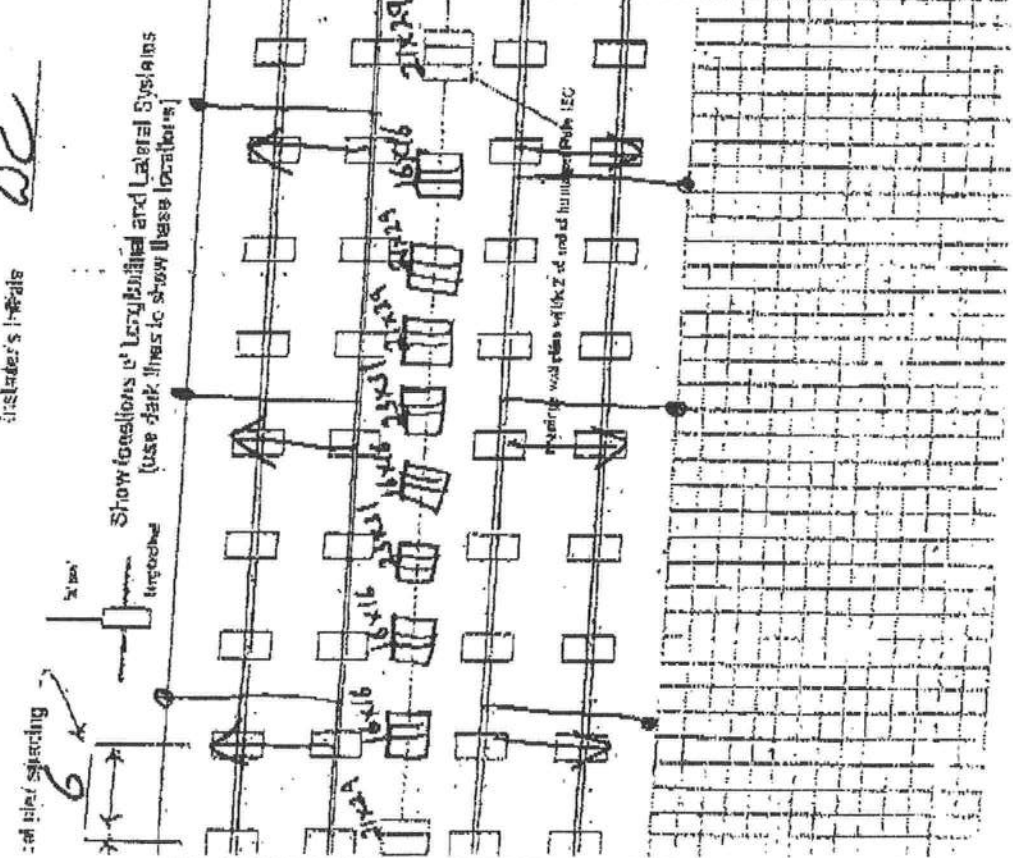

New Home ☒ Used Home ☐
 Home installed in the Manufacturer's Installation Manual ☒
 Home is installed in accordance with Rule 15-C ☒
 Single wide ☐ Width Zone II ☒ Width Zone III ☐
 Double wide ☒ Interlocking Deck ☒ 297386
 Triple/Quad ☐ Serial # 10903350

PIER SPACING TABLE FOR USED HOMES

Load bearing capacity	Footer size (sq ft)	16" x 16" (256)	16" x 12" x 16" (384)	20" x 20" (400)	22" x 22" (484)	24" x 24" (576)	20" x 26" (520)
1000 lbs	4'	8'	8'	8'	8'	8'	8'
1500 lbs	4'	8'	8'	8'	8'	8'	8'
2000 lbs	4'	8'	8'	8'	8'	8'	8'
2500 lbs	4'	8'	8'	8'	8'	8'	8'
3000 lbs	4'	8'	8'	8'	8'	8'	8'
3500 lbs	4'	8'	8'	8'	8'	8'	8'

PIER PAD SIZES

Use same pier pad size 23x31
 Perimeter pier pad size 16x16 8'6"
 Other pier pad sizes required by the code 16x16
Doors

Draw the approximate locations of marriage wall openings 4 foot or greater. Use this symbol to show the piers.

List all marriage wall openings greater than 4 foot and their pier pad sizes below.

Opening 18' Pier pad size 23x31
7' 21x29

PIEDOWN COMPONENTS

Longitudinal Stabilizing Device (LSD) Manufacturer OCB 11019
 Longitudinal Stabilizing Device w/ Lateral Arms Manufacturer

POPULAR PAD SIZES

Pad Size	Sq Ft
16" x 16"	256
16" x 18"	288
18" x 18"	324
16" x 22"	352
17" x 22"	374
13" x 24" x 26" (174)	348
20" x 20"	400
17" x 24" x 26" (174)	400
17" x 24" x 26" (174)	400
24" x 24"	576
26" x 26"	676

ANCHORS

1R ☒ 5R

FRAME TIES

within 2' of end of home spaced at 5' o.c.

OTHER TIES

Side wall Yes
 Longitudinal Marriage wall Yes
Ends

May 16 06 12:05p

Hamilton County Building 3867923080

P. 3

PERMIT WORKSHEET

page 1 of 2

POCKET PENETROMETER TEST

The pocket penetrometer tests are conducted down to 18" or check here to declare 1000 lb. soil without testing.

X ☐ without testing. X ☒

POCKET PENETROMETER TESTING METHOD

1. Test the penetrometer of the forms at 6 locations.
2. Take the reading at the depth of the footer.
3. Using 500 lb increments, take the lowest reading and read down to that increment.

X ☐ X ☐ X ☐ X ☐ X ☐

TORQUE PROBE TEST

The results of the torque probe test is _____ inch pounds or check here if you are declaring 5' anchors without testing. A test showing 275 inch pounds or less will require 4 foot anchors.

Note: A state approved lateral arm system is being used and 4 ft. anchors are allowed at the sidewall locations. I understand 6 ft. anchors are required at all centerline locations where the torque test reading is 275 or less and where the mobile home manufacturer may require anchors with 4000 lb. holding capacity.

Installer's initials

ALL TESTS MUST BE PERFORMED BY A LICENSED INSTALLER

Installer Name

Wendell Crews

Date Tested

Electric

Power electrical conductors between mobile home and to the main power are. This includes the bonding wire between mobile home and

Plumbing

Check if sewer drains to an existing sewer later or septic tank. Pg. 78

Check if mobile home supply piping to existing water heater, water tap or other extended water supply system. Pg. 79

Site Preparation

Delist old utilities materials removed

Water drainage. Mats: Scale Post Other

Fastening method wide angle

Foot: Type Fastener: Length: 3/8" x 5" Spacing: 16" Type Fastener: Length: 1/2" x 4" Spacing: 16" Roof: Type Fastener: Length: 1/2" x 4" Spacing: 16" For used between a min. 30 gauge, 4" wide, galvanized metal slip will be centered over the peak of the roof and fastened with galv. roofing nails at 2' on center on both sides of the centerline.

Desktop fastening: pulling up/down

I understand a properly installed gasket is a requirement of all new and used homes and that condensation, mildew, mold and buckled moisture walls are a result of a poorly installed or no gasket being installed. I understand a slip of tape will not serve as a gasket.

Installer's initials

WC

Type gasket

Pg. 29

Installed:

Between Floors Yes

Between Walls Yes

Bottom of ridgebeam Yes

Waterproofing

The bottomboard will be repaired and/or taped. Yes Pg. 39
Sliding on units is installed to manufacturer's specifications. Yes
Fireplace chimney installed as is not to allow diffusion of rain water. Yes

Installation

Shifting to be installed. Yes

Dryer vent installed outside of building. Yes

Range downflow vent installed outside of building. Yes

Drain lines supported at 4 foot intervals. Yes

Electrical crossovers protected. Yes

Other: N/A


Installer certifies all information given with this permit worksheet is accurate and true based on the

Manufacturer's installation instructions and code 1901.1 & 4

Installer Signature

Wendell Crews

Date: 1-8-09

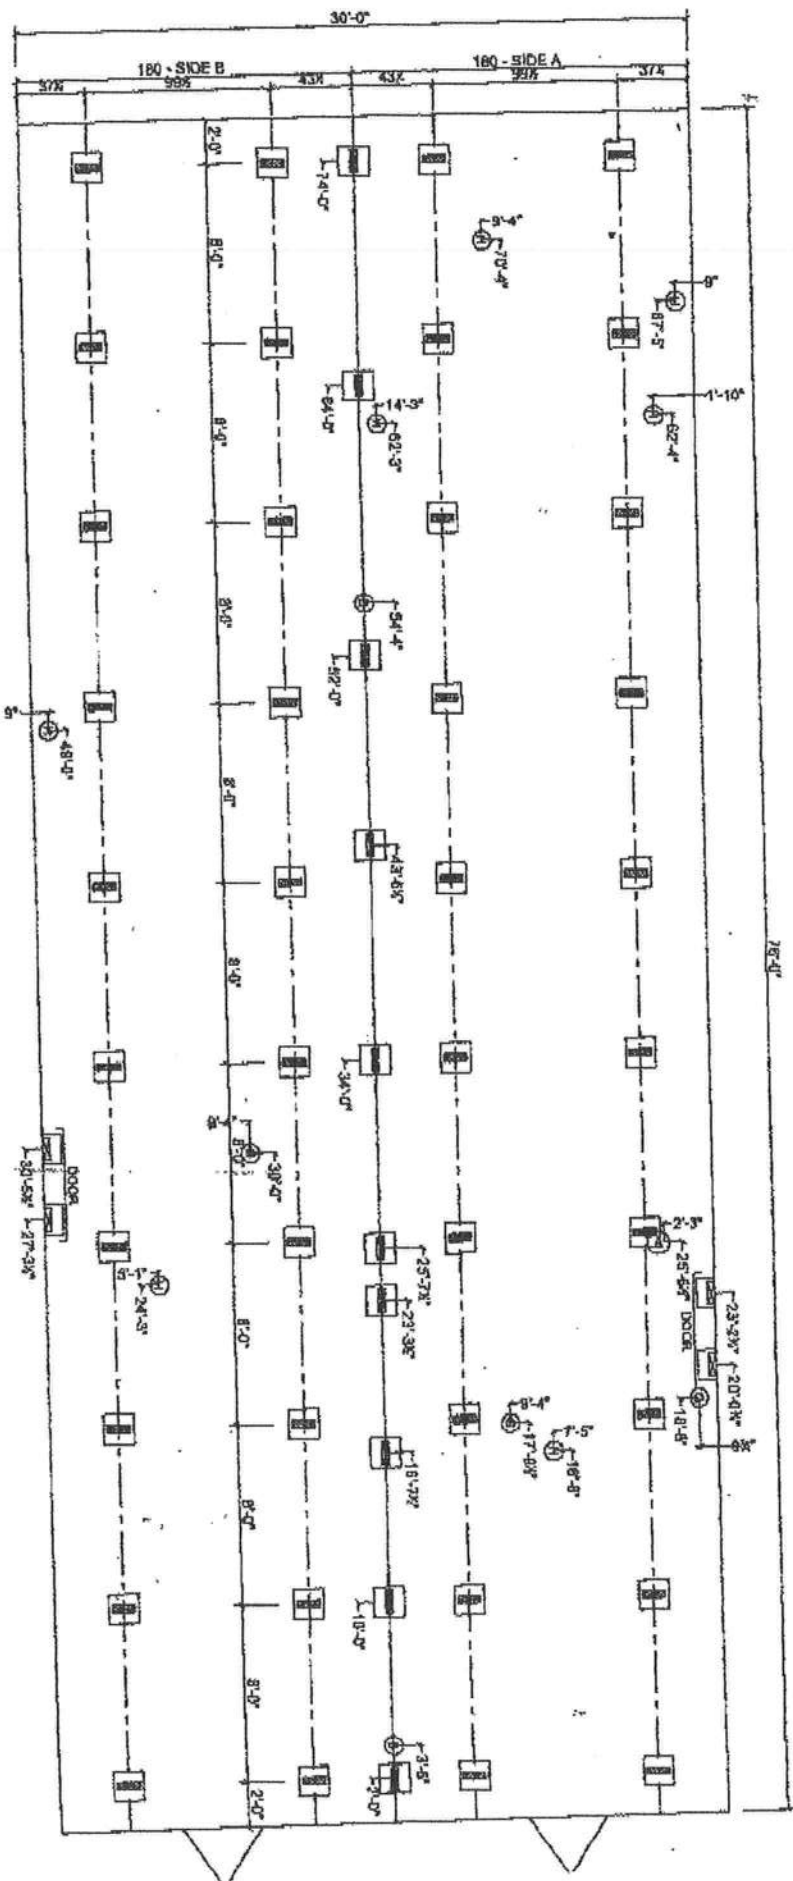

WARRAGE WALL AND PERIMETER BLOCKING RETAINED 12" ON CENTER
MARRIAGE LINE OPENING SUFFICIENT PRIORITY, LOADING
SUPPORT PRIORITY, LOADING
FOUNDATION NOTES:
RE RESEARCH HAVE BEEN LAYING MANUAL FOR OPTIONAL OVER SPACING
FOR RESEARCH HAVE BEEN LAYING MANUAL FOR OPTIONAL OVER SPACING
SINCE A TYPICAL PIERCE FROM THE NORTH CORNER OF THE BUILDING
ALL BUILDINGS ARE FROM THE NORTH CORNER OF THE BUILDING NOTED

- ① MAIN ELECTRICAL
 ② ELECTRICAL CROSSOVER
 ③ WATER INLET
 ④ WATER CROSSOVER
 ⑤ GAS INLET
 ⑥ GAS CROSSOVER (IF ANY)
 ⑦ DUCT CROSSOVER
 ⑧ SEWER DISCHG
 ⑨ RETURN AIR (INTOPT.) HEAT PUMP OR DUCT
 ⑩ SUPPLY AIR (INTOPT.) HEAT PUMP OR DUCT



DEER VALLEY HOMEBUILDERS
MODEL: DV-8012
3-BEDROOM / 2-BATH
32 x 80 - Approx. 2280 Sq. Ft.

OLIVER TECHNOLOGIES, INC.
FLORIDA INSTALLATION INSTRUCTIONS FOR THE
MODEL 1101 "V" SERIES ALL STEEL FOUNDATION SYSTEM
MODEL 1101 "V" (STEPS 1-15)
LONGITUDINAL ONLY: FOLLOW STEPS 1-8
FOR ADDING LATERAL ARM: Follow Steps 10-15
FOR CONCRETE APPLICATIONS: Follow Steps 16-19

ENGINEERS STAMP

ENGINEERS STAMP

1. SPECIAL CIRCUMSTANCES: If the following conditions occur - STOP! Contact Oliver Technologies at 1-800-284-7437:
- a) Pier height exceeds 48" b) Length of home exceeds 76' c) Roof eaves exceed 16" d) Sidewall height exceed 96"
 - e) Location is within 1500 feet of coast

INSTALLATION OF GROUND PAN

2. Remove weeds and debris in an approximate two foot square to expose firm soil for each ground pan (C).
3. Place ground pan (C) directly below chassis I-beam. Press or drive pan firmly into soil until flush with or below soil.
- SPECIAL NOTE:** The longitudinal "V" brace system serves as a pier under the home and should be loaded as any other pier. It is recommended that after leveling piers, and one-third inch (1/3") before home is lowered completely on to piers, complete steps 4 through 9 below then remove jacks.

INSTALLATION OF LONGITUDINAL "V" BRACE SYSTEM

NOTE: WHEN INSTALLING THE LONGITUDINAL SYSTEM ONLY, A MINIMUM OF 2 SYSTEMS PER FLOOR SECTION IS REQUIRED. SOIL TEST PROBE SHOULD BE USED TO DETERMINE CORRECT TYPE OF ANCHOR PER SOIL CLASSIFICATION. IF PROBE TEST READINGS ARE BETWEEN 175 & 275 A 5 FOOT ANCHOR MUST BE USED. IF PROBE TEST READINGS ARE BETWEEN 276 & 350 A 4 FOOT ANCHOR MAY BE USED. USE GROUND ANCHORS WITH DIAGONAL TIES AND STABILIZER PLATES EVERY 5'4". VERTICAL TIES ARE ALSO REQUIRED ON HOMES SUPPLIED WITH VERTICAL TIE CONNECTION POINTS (PER FLORIDA REG.).

4. Select the correct square tube brace (E) length for set-up (pier) height at support location. (The 18" tube is always used as the bottom part of the longitudinal arm). Note: Either tube can be used by itself, cut and drilled to length as long as a 40 to 45 degree angle is maintained.

PIER HEIGHT
(Approx. 45 degrees Max.)

1.25" ADJUSTABLE
Tube Length

1.50" ADJUSTABLE
Tube Length

7 3/4" to 25"	22"	18"
24 3/4" to 32 1/4"	32"	18"
33" to 41"	44"	18"
40" to 48"	54"	18"

5. Install (2) of the 1.50" square tubes (E (18" tube)) into the "U" bracket (J), insert carriage bolt and leave nut loose for final adjustment.
6. Place I-beam connector (F) loosely on the bottom flange of the I-beam.
7. Slide the selected 1.25" tube (E) into a 1.50" tube (E) and attach to I-beam connectors (F) and fasten loosely with bolt and nut.
8. Repeat steps 6 through 7 to create the "V" pattern of the square tubes loosely in place. The angle is not to exceed 45 degree and not below 40 degrees.
9. After all bolts are tightened, secure 1.25" and 1.50" tubes using four(4) 1/4"-14 x 3/4" self-tapping screws in pre-drilled holes.

INSTALLATION OF LATERAL TELESCOPING TRANSVERSE ARM SYSTEM

THE MODEL 1101 "V" (LONGITUDINAL & LATERAL PROTECTION) ELIMINATES THE NEED FOR MOST STABILIZER PLATES & FRAME TIES.

NOTE: THE USE OF THIS SYSTEM REQUIRES VERTICAL TIES SPACED AT 5'4".

FOUR FOOT (4') GROUND ANCHOR MAY BE USED EXCEPT WHERE THE HOME MANUFACTURER SPECIFIES DIFFERENT.

10. Install remaining vertical tie-down straps and 4' ground anchors per home manufacturer's instructions. **NOTE:** Centertine anchors to be sized according to soil torque condition. Any manufacturer's specifications for sidewall anchor loads in excess of 4,000 lbs. require a 6' anchor per Florida Code.
11. **NOTE:** Each system is required to have a frame tie and stabilizer attached at each lateral arm stabilizing location. This frame tie & stabilizer plate needs to be located within 18" from of center ground pan.
12. Select the correct square tube brace (H) length for set-up lateral transverse at support location. The lengths come in either 60" or 72" lengths. (With the 1.50" tube as the bottom tube, and the 1.25" tube as the inserted tube.)
13. Install the 1.50 transverse brace (H) to the ground pan connector (D) with bolt and nut.
14. Slide 1.25" transverse brace into the 1.50" brace and attach to adjacent I-beam connector (I) with bolt and nut.
15. Secure 1.50" transverse arm to 1.25" transverse arm using four (4) 1/4" - 14 x 3/4" self-tapping screws in pre-drilled holes.



OLIVER TECHNOLOGIES, INC.
1-800-284-7437

Telephone: 931-796-4555
Fax: 931-796-8611
www.olivertechnologies.com

284

INSTALLATION USING CONCRETE RUNNER / FOOTER

16. A concrete runner, footer or slab may be used in place of the steel ground pan.

- a) The concrete shall be minimum 2500 psi mix
- b) A concrete runner may be either longitudinal or transverse, and must be a minimum of 8" deep with a minimum width of 16 inches longitudinally or 18 inches transverse to allow proper distance between the concrete bolt and the edge of the concrete (see below).
- c) Footers must have minimum surface area of 441 sq. in. (i.e. 21" square), and must be a minimum of 8" deep.
- d) If a full slab is used, the depth must be a 4" minimum.

Special inspection of the system bracket installation is not required. Footers must allow for at least 4" from the concrete bolt to the edge of the concrete.

NOTE: The bottom of all footings, pads, slabs and runners must be per local jurisdiction.

LONGITUDINAL: (Model 1101 LC "V")

17. When using Part # 1101-W-CPCA (wetset), simply install the bracket in runner/footer OR When installing in cured concrete use Part # 101-D-CPCA (dryset). The 1101 (dryset) CA bracket is attached to the concrete using (2) 5/8"x3" concrete wedge bolts (Simpson part # S162300H 5/8" X 3" or Powers equivalent). Place the CA bracket in desired location. Mark bolt hole locations, then using a 5/8" diameter masonry bit, drill a hole to a minimum depth of 3". Make sure all dust and concrete is blown out of the holes. Place wedge bolts into drilled holes, then place 1101 (dry set) CA bracket onto wedge bolts and start wedge bolt nuts. Take a hammer and lightly drive the wedge bolts down by hitting the nut (making sure not to hit the top of threads on bolt). The sleeve of concrete wedge bolt needs to be at or below the top of concrete. Complete by tightening nuts.

LATERAL: (Model 1101 TC "V")


18. For wet set (part # 1101-W-TACA) installation simply install the anchor bolt into runner/footer. For dry set installation (part # 1101-D-TACA) mark bolt hole locations, then using a 5/8" diam. masonry bit, drill a hole to a minimum depth of 3". Make sure all dust and concrete is blown out of the hole. Place wedge bolts (Simpson part #S162300H 5/8" X 3" or Powers equivalent) into (D) concrete dry transverse connector and into drilled hole. If needed, take a hammer and lightly drive the wedge bolts down by hitting the nut (making sure not to hit the top of threads on bolt). Then remove the nut. The sleeve of concrete wedge bolt needs to be at or below the top of concrete.

19. When using part # 1101 CVW (wetset) or 1101 CVD (dryset), install per steps 17 & 18.

Notes:

1. LENGTH OF HOUSE IS THE ACTUAL BOX SIZE
2. • = STABILIZER PLATE AND FRAME TIE LOCATION (needs to be located within 18 inches of center of ground pan or concrete)
3.  = LOCATION OF LONGITUDINAL BRACING ONLY
4.  = TRANSVERSE & LONGITUDINAL LOCATIONS


REQUIRED NUMBER AND LOCATION OF MODEL 1101 "V" OR 1101 C "V" BRACES FOR UP TO 4/12 ROOF PITCH

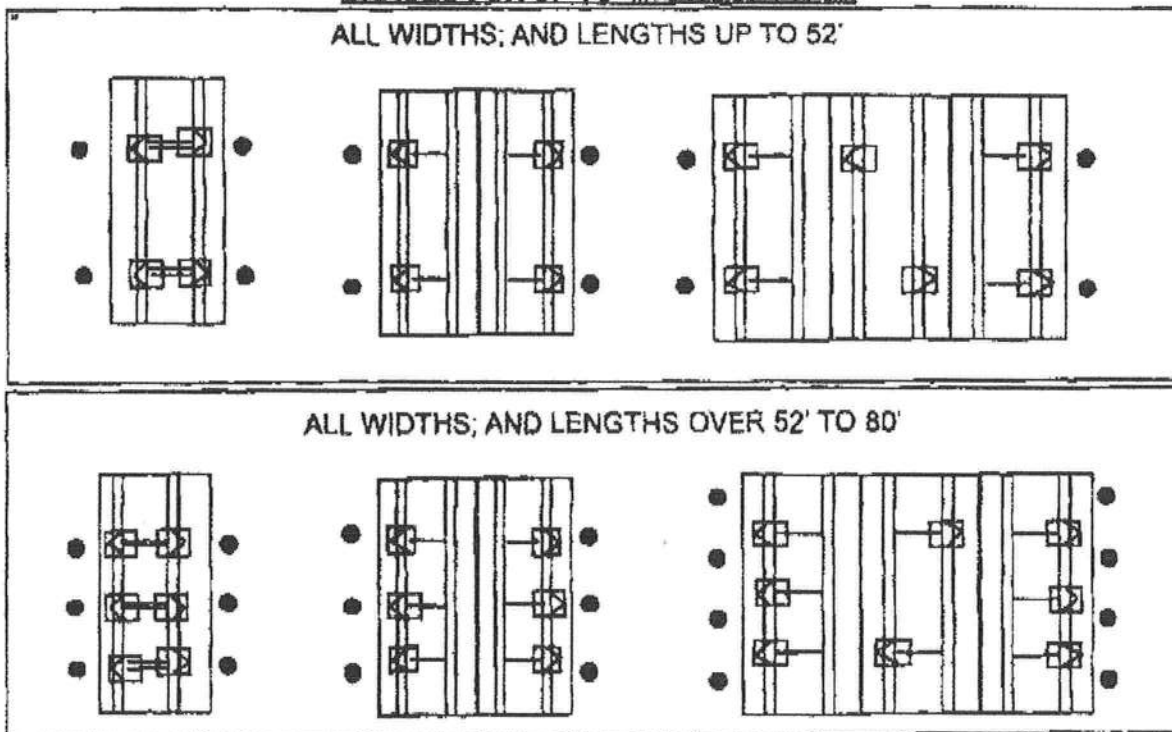

HOMES WITH 5/12 ROOF PITCH REQUIRE: PER FLORIDA REGULATIONS



6 systems for home lengths up to 52' and 8 systems for homes over 52' and up to 80'. One stabilizer plate and frame tie required at each lateral bracing system.

3-084

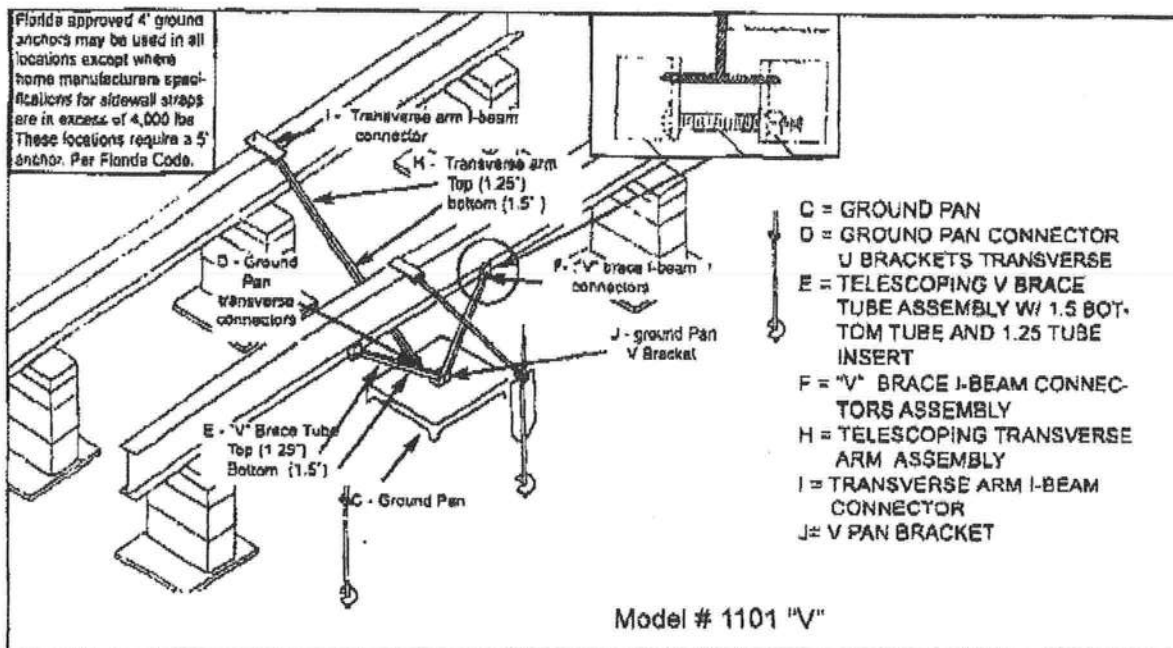


Longitude dry
concrete bracket
part # 1101 D-CPCA

Wet bracket part #
1101 W-CPCA not
shown

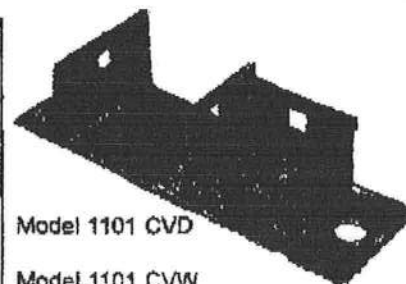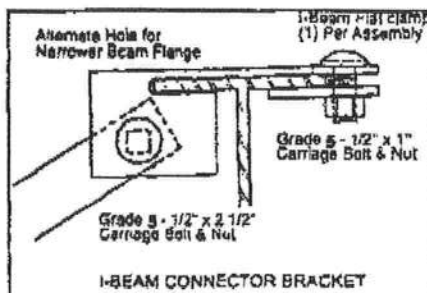

Model 1101 CVD

Model 1101 CVW
not shown

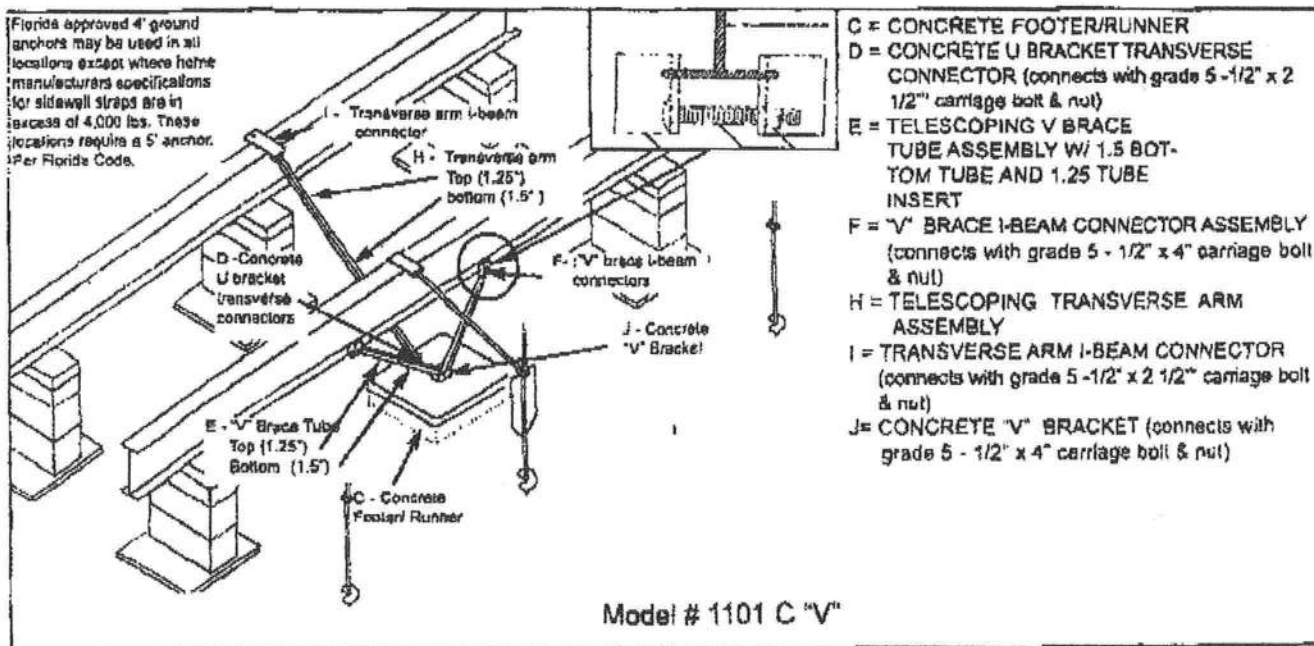

OLIVER TECHNOLOGIES, INC.
1-800-284-7437

Telephone: 931-796-4556
Fax: 931-796-8811
www.olivertechnologies.com

484

Columbia County Property Appraiser

DB Last Updated: 1/12/2009

2008 Tax Year

Tax Record

Property Card

Interactive GIS Map

Print

Parcel: 22-4S-16-03090-305

Search Result: 1 of 1

Owner & Property Info

Owner's Name	MCCOOL ROBERT P SR & IRENE		
Site Address			
Mailing Address	6312 EMERALD SKY LANE GREENACRES, FL 33463		
Use Desc. (code)	VACANT (000000)		
Neighborhood	22416.00	Tax District	3
UD Codes	MKTA06	Market Area	06
Total Land Area	1.000 ACRES		
Description	LOT 5 BLAINE ESTATES PHASE 3. WD 1122-2302		

GIS Aerial**Property & Assessment Values**

Mkt Land Value	cnt: (2)	\$29,225.00
Ag Land Value	cnt: (0)	\$0.00
Building Value	cnt: (0)	\$0.00
XFOB Value	cnt: (1)	\$6,720.00
Total Appraised Value		\$35,945.00

Just Value	\$35,945.00
Class Value	\$0.00
Assessed Value	\$35,945.00
Exempt Value	\$0.00
Total Taxable Value	\$35,945.00

Sales History

Sale Date	Book/Page	Inst. Type	Sale VImp	Sale Qual	Sale RCode	Sale Price
6/20/2007	1122/2302	WD	V	Q		\$42,500.00


0901-19

STATE OF FLORIDA
DEPARTMENT OF HEALTH
APPLICATION FOR ONSITE SEWAGE DISPOSAL SYSTEM CONSTRUCTION PERMIT

Permit Application Number _____

PART II - SITEPLAN

Scale: 1 inch = 50 feet.

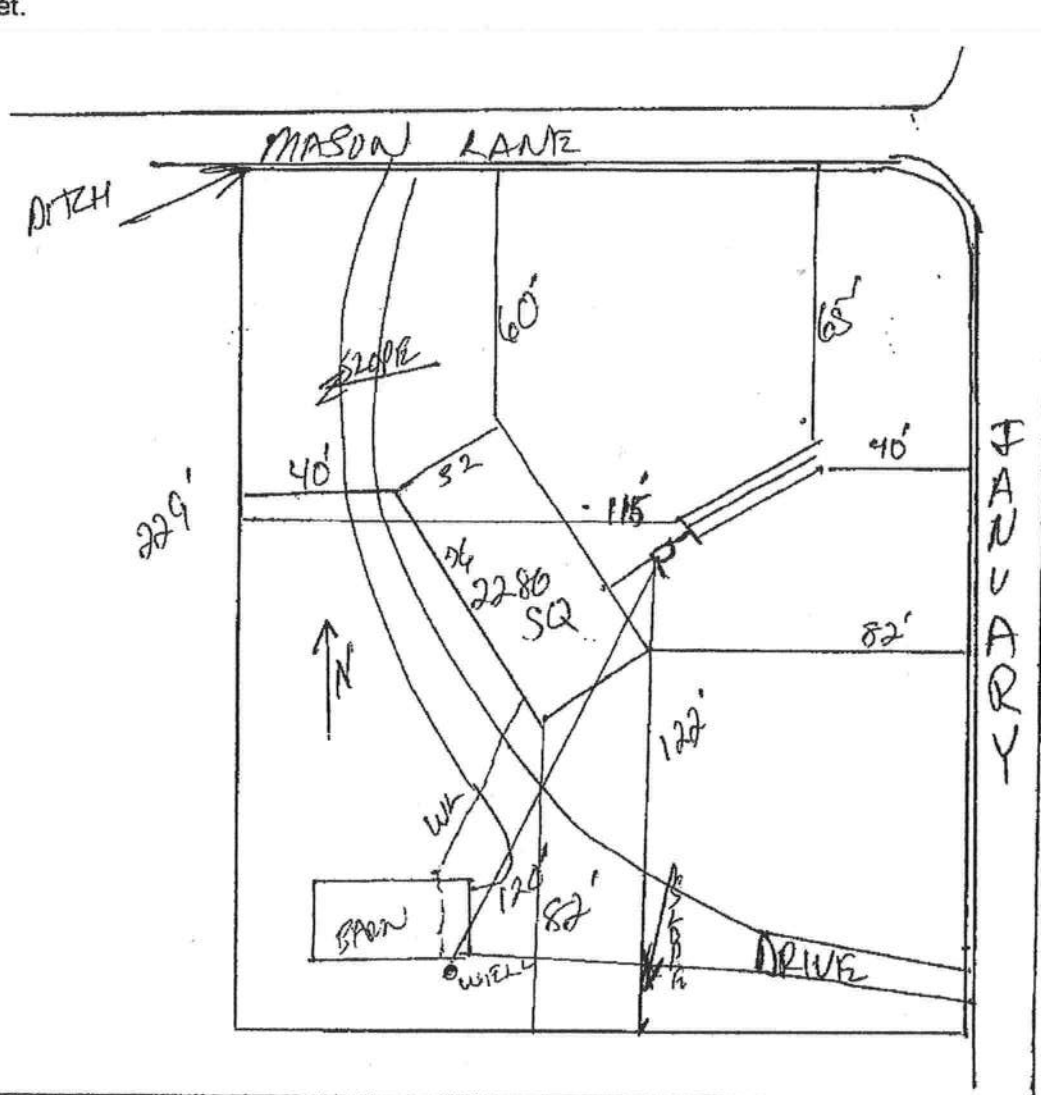

Notes:

Site Plan submitted by:

Plan Approved

Not Approved

MASTER CONTRACTOR

Date 1-21-09

By

County Health Department

ALL CHANGES MUST BE APPROVED BY THE COUNTY HEALTH DEPARTMENT



STATE OF FLORIDA
DEPARTMENT OF HEALTH
ONSITE SEWAGE TREATMENT AND DISPOSAL
SYSTEM
APPLICATION FOR CONSTRUCTION PERMIT

SDV
0901-14

09-0030 E

PERMIT NO. 907725
DATE PAID: 1/13/09
FEE PAID: 110.00
RECEIPT #: 12870-1087342

APPLICATION FOR:

[] New System [X] Existing System [] Holding Tank [] Innovative
[] Repair [] Abandonment [] Temporary []

APPLICANT: McCool, Robert & Irene

AGENT: ROCKY FORD, A & B CONSTRUCTION

TELEPHONE: 386-497-2311

MAILING ADDRESS: P.O. BOX 39 FT. WHITE, FL, 32038

TO BE COMPLETED BY APPLICANT OR APPLICANT'S AUTHORIZED AGENT. SYSTEMS MUST BE CONSTRUCTED BY A PERSON LICENSED PURSUANT TO 489.105(3)(m) OR 489.552, FLORIDA STATUTES. IT IS THE APPLICANT'S RESPONSIBILITY TO PROVIDE DOCUMENTATION OF THE DATE THE LOT WAS CREATED OR PLATTED (MM/DD/YY) IF REQUESTING CONSIDERATION OF STATUTORY GRANDFATHER PROVISIONS.

PROPERTY INFORMATION

LOT: 5 BLOCK: na SUB: Blaine Estates Ph 3 PLATTED: 2003

PROPERTY ID #: 22-4S-16-03090-305 ZONING: SFR I/M OR EQUIVALENT: [Y] (N)

PROPERTY SIZE: 1 ACRES WATER SUPPLY: [X] PRIVATE PUBLIC [] <=2000GPD [] >2000GPD

IS SEWER AVAILABLE AS PER 381.0065, FS? [Y] (N) DISTANCE TO SEWER: FT

PROPERTY ADDRESS: 232 SW Mason Lane, Lake City, FL, 32024

DIRECTIONS TO PROPERTY: 247 South, TL on CR 242, TL on Friendship (Blaine Est)
TR on Buchanan, TR on Mason, Lat lot on right

BUILDING INFORMATION

[X] RESIDENTIAL [] COMMERCIAL

Unit No	Type of Establishment	No. of Bedrooms	Building Area Sqft	Commercial/Institutional System Design Table 1, Chapter 64E-6, FAC
---------	-----------------------	-----------------	--------------------	--

1	DW Mobile Home	3	2280	Original Attached
2				
3				

[N] Floor/Equipment Drains [N] Other (Specify)

SIGNATURE: Rocky Ford

DATE: 1/13/2009

Assignment of Authority

I, Wardell Crews, License # TH000629 do hereby

Authorize DAVID RALPH FENDLEWORTH CREWS II to act on my behalf in all

Aspects of pulling a move on permit.

Sworn and Subscribed before me this 8th day of January,
2009. County of Columbia, State of Florida.

Signature Wardell Crews Date 1-8-09

Notary William P. Crews Commission Expires 8/8/11



WILLIAM P. CREWS
MY COMMISSION # DD 703248
EXPIRES: August 8, 2011
Bonded Thru Budget Notary Services

COLUMBIA COUNTY OFFICE OF THE CLERK OF THE COURT

M/H OCCUPANCY

COLUMBIA COUNTY, FLORIDA

Department of Building and Zoning Inspection

This Certificate of Occupancy is issued to the below named permit holder for the building and premises at the below named location, and certifies that the work has been completed in accordance with the Columbia County Building Code.

Parcel Number 22-4S-16-03090-305

Building permit No. 000027588

Permit Holder WENDELL CREWS

Owner of Building ROBERT & IRENE MCCOOL

Location: 232 SW MASON LANE, LAKE CITY, FL

Date: 02/11/2009



Fanny Bieker

Building Inspector

POST IN A CONSPICUOUS PLACE
(Business Places Only)