

DATE 05/07/2010

Columbia County Building Permit

PERMIT

This Permit Must Be Prominently Posted on Premises During Construction

000028548

APPLICANT ROBERT PUCKETT PHONE 352 351-8153
ADDRESS 1748 NW 58 AVE Ocala FL 34475
OWNER RUSSELL BLANKENSHIP PHONE 386 497-4007
ADDRESS 151 SW NIBLACK AVE FT. WHITE FL 32038
CONTRACTOR ROBERT PUCKETT PHONE 352 351-8153
LOCATION OF PROPERTY 441S, TR 47S, TL SR 27, TL CR 18, TR NIBLACK AVE.,
1ST DRIVE ON LEFT
TYPE DEVELOPMENT MH,UTILITY ESTIMATED COST OF CONSTRUCTION 0.00
HEATED FLOOR AREA TOTAL AREA HEIGHT STORIES
FOUNDATION WALLS ROOF PITCH FLOOR
LAND USE & ZONING A-3 MAX. HEIGHT
Minimum Set Back Requirments: STREET-FRONT 30.00 REAR 25.00 SIDE 25.00
NO. EX.D.U. 0 FLOOD ZONE X DEVELOPMENT PERMIT NO.

PARCEL ID 36-6S-16-04076-139 SUBDIVISION PARKER WOODS
LOT 39 BLOCK PHASE UNIT TOTAL ACRES 7.00

IH0000707
Culvert Permit No. Culvert Waiver Contractor's License Number Applicant/Owner/Contractor
EXISTING 10-216 BK HD N
Driveway Connection Septic Tank Number LU & Zoning checked by Approved for Issuance New Resident

COMMENTS: ONE FOOT ABOVE THE ROAD, REPLACING EXISTING MH

Check # or Cash 4490

FOR BUILDING & ZONING DEPARTMENT ONLY

(footer/Slab)

Temporary Power date/app. by Foundation date/app. by Monolithic date/app. by
Under slab rough-in plumbing date/app. by Slab date/app. by Sheathing/Nailing date/app. by
Framing date/app. by Insulation date/app. by
Rough-in plumbing above slab and below wood floor date/app. by Electrical rough-in date/app. by
Heat & Air Duct date/app. by Peri. beam (Lintel) date/app. by Pool date/app. by
Permanent power date/app. by C.O. Final date/app. by Culvert date/app. by
Pump pole date/app. by Utility Pole date/app. by M/H tie downs, blocking, electricity and plumbing date/app. by
Reconnection date/app. by RV date/app. by Re-roof date/app. by

BUILDING PERMIT FEE \$ 0.00 CERTIFICATION FEE \$ 0.00 SURCHARGE FEE \$ 0.00
MISC. FEES \$ 300.00 ZONING CERT. FEE \$ 50.00 FIRE FEE \$ 0.00 WASTE FEE \$
FLOOD DEVELOPMENT FEE \$ FLOOD ZONE FEE \$ 25.00 CULVERT FEE \$ TOTAL FEE 375.00

INSPECTORS OFFICE CLERKS OFFICE

NOTICE: IN ADDITION TO THE REQUIREMENTS OF THIS PERMIT, THERE MAY BE ADDITIONAL RESTRICTIONS APPLICABLE TO THIS PROPERTY THAT MAY BE FOUND IN THE PUBLIC RECORDS OF THIS COUNTY. AND THERE MAY BE ADDITIONAL PERMITS REQUIRED FROM OTHER GOVERNMENTAL ENTITIES SUCH AS WATER MANAGEMENT DISTRICTS, STATE AGENCIES, OR FEDERAL AGENCIES.

"WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT."

EVERY PERMIT ISSUED SHALL BECOME INVALID UNLESS THE WORK AUTHORIZED BY SUCH PERMIT IS COMMENCED WITHIN 180 DAYS AFTER ITS ISSUANCE, OR IF THE WORK AUTHORIZED BY SUCH PERMIT IS SUSPENDED OR ABANDONED FOR A PERIOD OF 180 DAYS AFTER THE TIME THE WORK IS COMMENCED. A VALID PERMIT RECIEVES AN APPROVED INSPECTION EVERY 180 DAYS. WORK SHALL BE CONSIDERED NOT SUSPENDED, ABANDONED OR INVALID WHEN THE PERMIT HAS RECIEVED AN APPROVED INSPECTION WITHIN 180 DAYS OT THE PREVIOUS INSPECTION.

The Issuance of this Permit Does Not Waive Compliance by Permittee with Deed Restrictions.

PERMIT APPLICATION / MANUFACTURED HOME INSTALLATION APPLICATION

4490

For Office Use Only

(Revised 1-10-08)

Zoning Official

BLK 04.05.10

Building Official

ND 5.4.10

AP#

1004-50

Date Received

4/27

By

JW

Permit #

28548

Flood Zone

X

Development Permit

N/A

Zoning

A-3

Land Use Plan Map Category

A-3

Comments

Replacing Existing MH

FEMA Map#

N/A

Elevation

N/A

Finished Floor

River

N/A

In Floodway

N/A

Site Plan with Setbacks Shown ☒ EH #

N/A EH Release

Well letter

Existing well

Recorded Deed or Affidavit from land owner

Letter of Auth. from installer

State Road Access

Parent Parcel #

STUP-MH

F W Comp. letter

IMPACT FEES: EMS

Fire

Corr

Road/Code

School

= TOTAL

SUSPENDED

LIABILITY

VF

Property ID # 36-68-16-04076-139

Subdivision

Parker Woods

LOT 39

- New Mobile Home Jacobson Used Mobile Home _____ MH Size 32x60 Year 2010
- Applicant Buddy PUCKETT Phone # 352-351-8153
- Address 1748 NW 58 AVENUE, OCALA, FL 34475
- Name of Property Owner Russell & Deann Blankenship Phone# 386-497-4002
- 911 Address 151 SW Niblack Ave Fort White FL 32038
- Circle the correct power company - FL Power & Light - Clay Electric
(Circle One) - Suwannee Valley Electric - Progress Energy
- Name of Owner of Mobile Home Russell & Deann Blankenship Phone # 386-497-4002
Address 151 SW Niblack Ave Fort White FL 32038
- Relationship to Property Owner AGENT
- Current Number of Dwellings on Property 1
- Lot Size _____ Total Acreage 7.00
- Do you : Have Existing Drive or Private Drive or need Culvert Permit or Culvert Waiver (Circle one)
(Currently using) (Blue Road Sign) (Putting in a Culvert) (Not existing but do not need a Culvert)
- Is this Mobile Home Replacing an Existing Mobile Home Yes (pd)
- Driving Directions to the Property Lake City 441 South to 477 T.R. to U.S. 27 T.L. to 18 T.L. to Niblack Ave T.R. to property on left
- Name of Licensed Dealer/Installer Robert Puckett Phone # 352-351-8153
- Installers Address 1748 NW 58 Ave Ocala FL 34475
- License Number PH0000707 Installation Decal # 100

JW spoke w/ Robert 5.4.10

\$375.00

page 1 of 2

Installer Robert Pachett License # J11000707


Address of home
being installed

Manufacturer	Jacobs	Length x width
--------------	--------	----------------

NOTE: if home is a single wide fill out one half of the blocking plan
if home is a triple or quad wide sketch in remainder of home

I understand Lateral Arm Systems cannot be used on any home (new or used) where the sidewall ties exceed 5 ft 4 in.

Installer's initials



Show locations of Longitudinal and Lateral Systems
(use dark lines to show these locations)

Diagram illustrating the layout of reinforcement bars (piers) for a bridge deck. The deck is divided into three sections by a dashed line labeled "See drawings". The left section shows a grid of reinforcement bars. The middle section shows a grid of reinforcement bars with a dashed line labeled "See drawings". The right section shows a grid of reinforcement bars. A note indicates "marriage wall piers within 2' of end of home per Rule 15C".

PIER SPACING TABLE FOR USED HOMES

Load bearing capacity	Footer size (sq in)	16" x 16" (256)	18 1/2" x 18 1/2" (342)	20" x 20" (400)	22" x 22" (484)*	24" X 24" (576)*	26" x 26" (676)
1000 psf		3'	4'	5'	6'	7'	8'
1500 psf		4' 6"	6'	7'	8'	8'	8'
2000 psf		6'	8'	8'	8'	8'	8'
2500 psf		7' 6"	8'	8'	8'	8'	8'
3000 psf		8'	8'	8'	8'	8'	8'
3500 psf		8'	8'	8'	8'	8'	8'

* interpolated from Rule 15C-1 pier spacing table.

POPULAR PAD SIZES

l-beam pier pad size 23.25 x 31.25

Perimeter pier pad size
16 x 16 ABS

Other pier pad sizes
(required by the mfg.)

 Draw the approximate locations of marriage wall openings 4 foot or greater. Use this symbol to show the piers.

List all marriage wall openings greater than 4 foot and their pier pad sizes below.

Pad Size	Sq In
16 x 16	256
16 x 18	288
18.5 x 18.5	342
16 x 22.5	360
17 x 22	374
13 1/4 x 26 1/4	348
20 x 20	400
17 3/16 x 25 3/16	441
17 1/2 x 25 1/2	446
24 x 24	576
26 x 26	676

ANCHORS

Opening	Pier pad size
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

4 ft

FRAME TIES

within 2' of end of home
spaced at 5' 4" oc

TIEDOWN COMPONENTS

Longitudinal Stabilizing Device (LSD)
Manufacturer
Longitudinal Stabilizing Device w/ Lateral Arms
Manufacturer *Orinco Tech.*

OTHER TIES

	Number
Sidewall	12
Longitudinal	0
Marriage wall	5
Shearwall	

PERMIT NUMBER

POCKET PENETROMETER TEST

The pocket penetrometer tests are rounded down to _____ psf or check here to declare 1000 lb. soil without testing.

X/1000 X/1000 X/1000

POCKET PENETROMETER TESTING METHOD

1. Test the perimeter of the home at 6 locations.
2. Take the reading at the depth of the footer.
3. Using 500 lb. increments, take the lowest reading and round down to that increment.

X/1000 X/1000 X/1000

TORQUE PROBE TEST

The results of the torque probe test is 176 inch pounds or check here if you are declaring 5' anchors without testing. A test showing 275 inch pounds or less will require 4 foot anchors.

Note: A state approved lateral arm system is being used and 4 ft. anchors are allowed at the sidewall locations. I understand 5 ft anchors are required at all centerline tie points where the torque test reading is 275 or less and where the mobile home manufacturer may requires anchors with 4000 lb holding capacity.

RP Installer's initials

ALL TESTS MUST BE PERFORMED BY A LICENSED INSTALLER

Installer Name Robert Pachoff
Date Tested 4-20-10

Electrical

Connect electrical conductors between multi-wide units, but not to the main power source. This includes the bonding wire between multi-wide units. Pg. 39

Plumbing

Connect all sewer drains to an existing sewer tap or septic tank. Pg. 40

Connect all potable water supply piping to an existing water meter, water tap, or other independent water supply systems. Pg. 41

Site Preparation

Debris and organic material removed Yes
Water drainage: Natural Swale Pad X Other

Fastening multi wide units

Floor: Type Fastener: 3/8" lag Length: 3.5" Spacing: 19"
Walls: Type Fastener: 16d nails Length: 8" Spacing: 8"
Roof: Type Fastener: 3/8" lag Length: 5" Spacing: 19"
For used homes a min. 30 gauge, 8" wide, galvanized metal strip will be centered over the peak of the roof and fastened with galv. roofing nails at 2" on center on both sides of the centerline.

Gasket (weatherproofing requirement)

I understand a properly installed gasket is a requirement of all new and used homes and that condensation, mold, mildew and buckled marriage walls are a result of a poorly installed or no gasket being installed. I understand a strip of tape will not serve as a gasket.

Installer's initials RP

Type gasket four seals
Pg. Installed:
Between Floors Yes
Between Walls Yes
Bottom of ridgebeam Yes

Weatherproofing

The bottomboard will be repaired and/or taped. Yes X Pg.
Siding on units is installed to manufacturer's specifications. Yes X
Fireplace chimney installed so as not to allow intrusion of rain water. Yes X

Miscellaneous


Skirting to be installed. Yes X No N/A
Dryer vent installed outside of skirting. Yes X No N/A
Range downflow vent installed outside of skirting. Yes X
Drain lines supported at 4 foot intervals. Yes X
Electrical crossovers protected. Yes X
Other: N/A

Installer verifies all information given with this permit worksheet is accurate and true based on the

Installer Signature Robert Pachoff Date 4-20-10

BLANKENSHIP

Old N. Black Ave

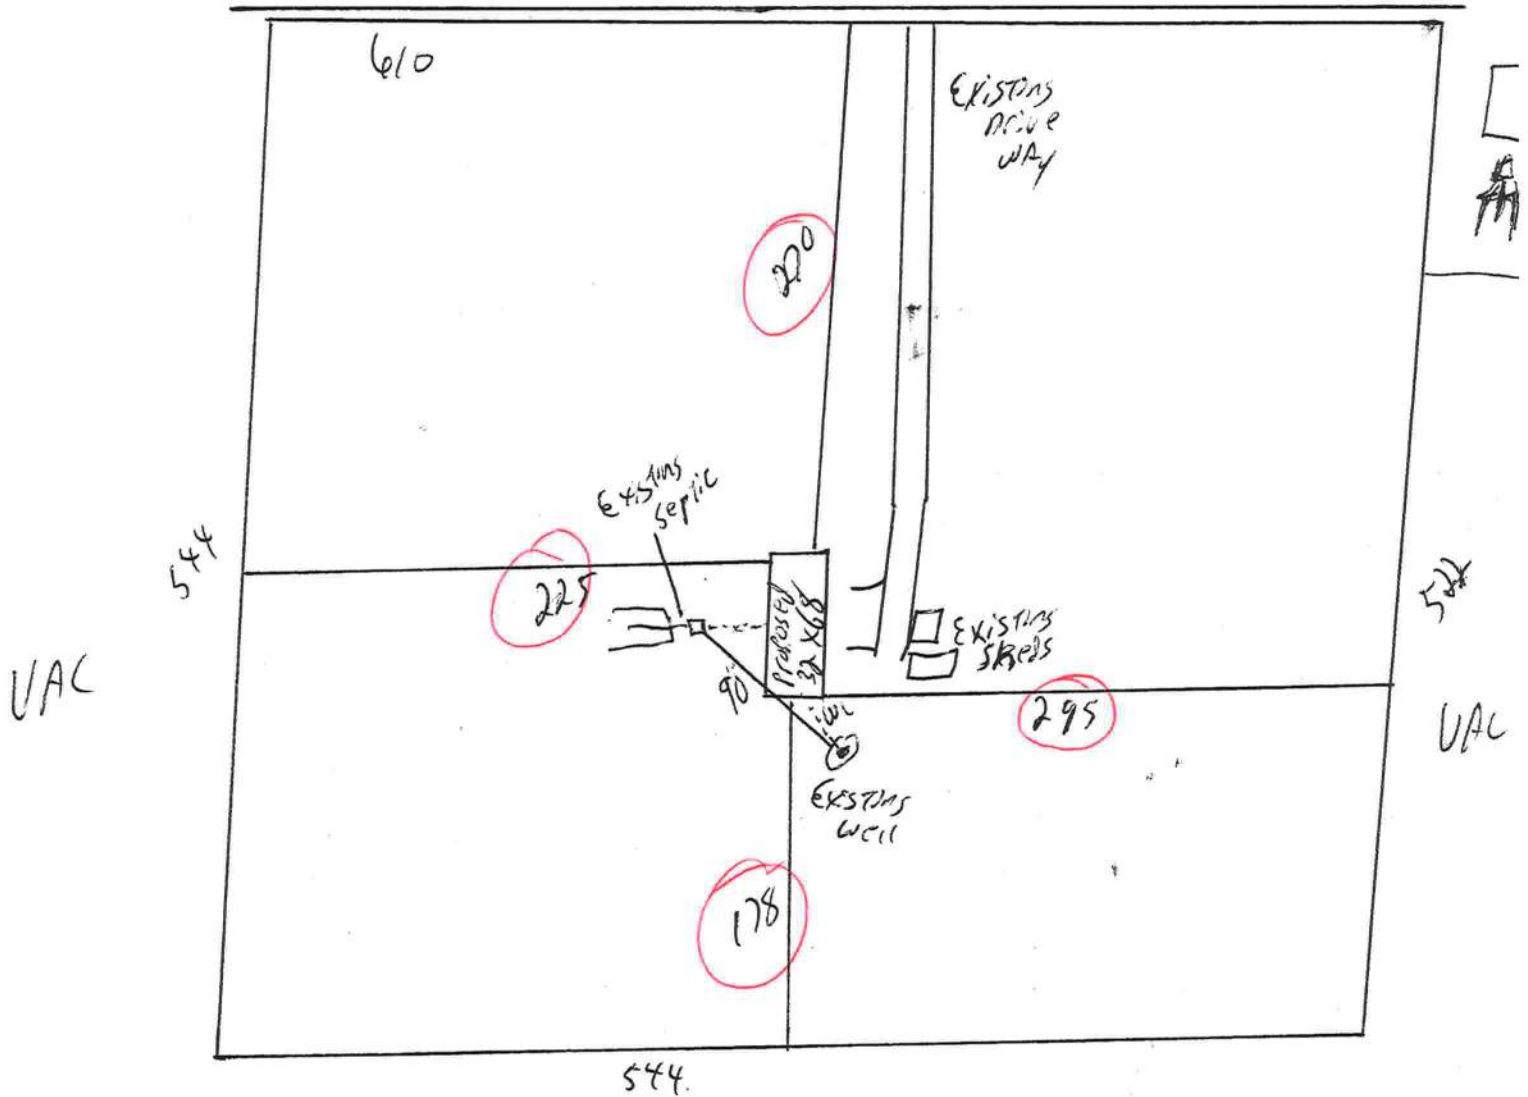

Property ID#
36-65-16-04076-139
7 AC

UAC

N



Prepared by
William Reddett
William Reddett

1/8"=1' 32'x68'

jacobsen homes, inc.
cl8-46014w

1000# soil
176in #torq.

16"x16" 5'4" o.c.

sidewall piers
5'4" oc except
openings

27'11 5/8" =4000#
23x31 abs

33'7 3/8" =4000#
23x31 abs

53'3 5/8" =4295#
23x31 abs


=4295#
23x31 abs

31.25"x23.25" ABS on
7'4" O.C. on
I-beams

4' anchors on 5'4"


16"x16"ABS for door piers
clearly marked on house
and fire place

longitudinal & lateral pad
stabilization 3 per half 6
total may be moved due to
obstruction on house

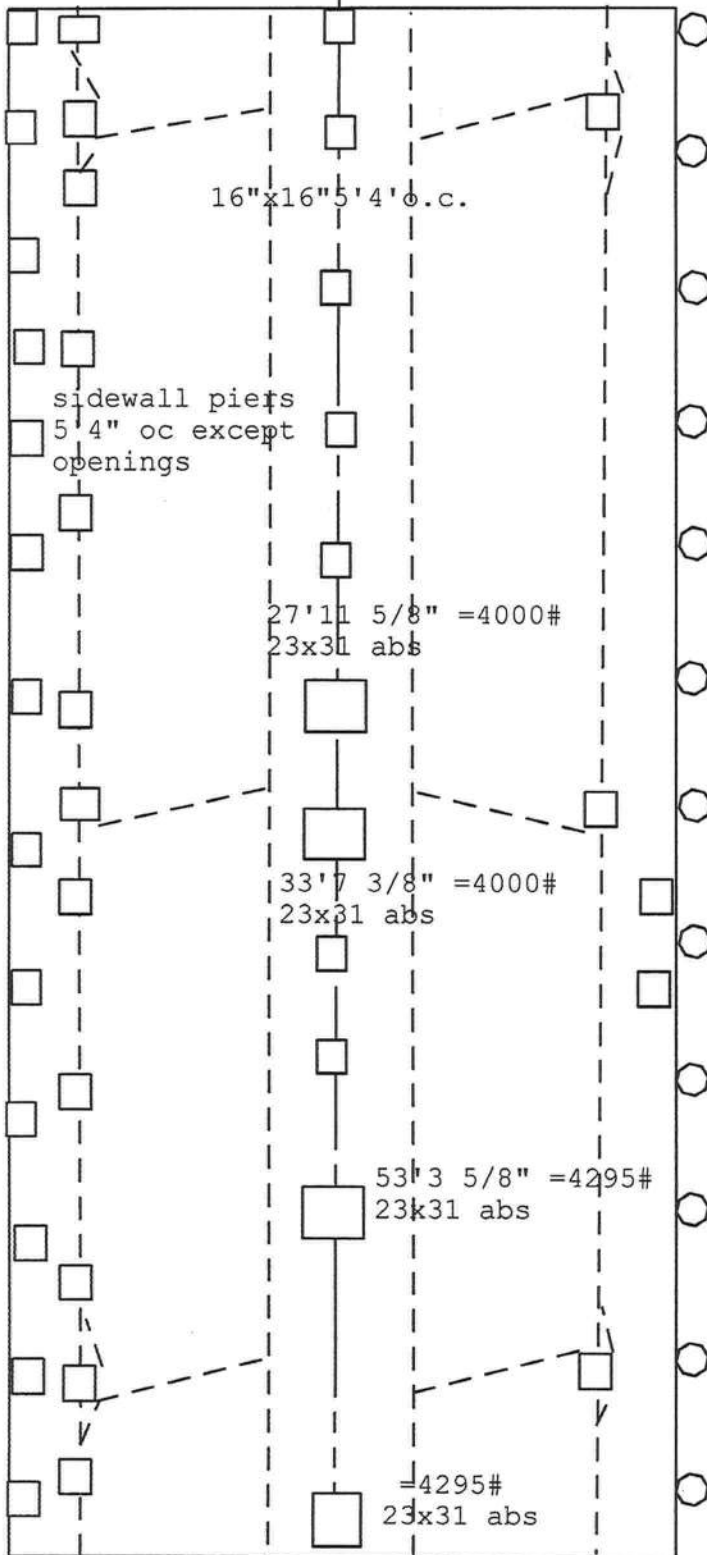

SEE SET-UP MANUAL
AND ADDENDUM FOR FULL
INSTALLATION INSTRUCTIONS.

TNR-29.974AC
(2)
BL29974

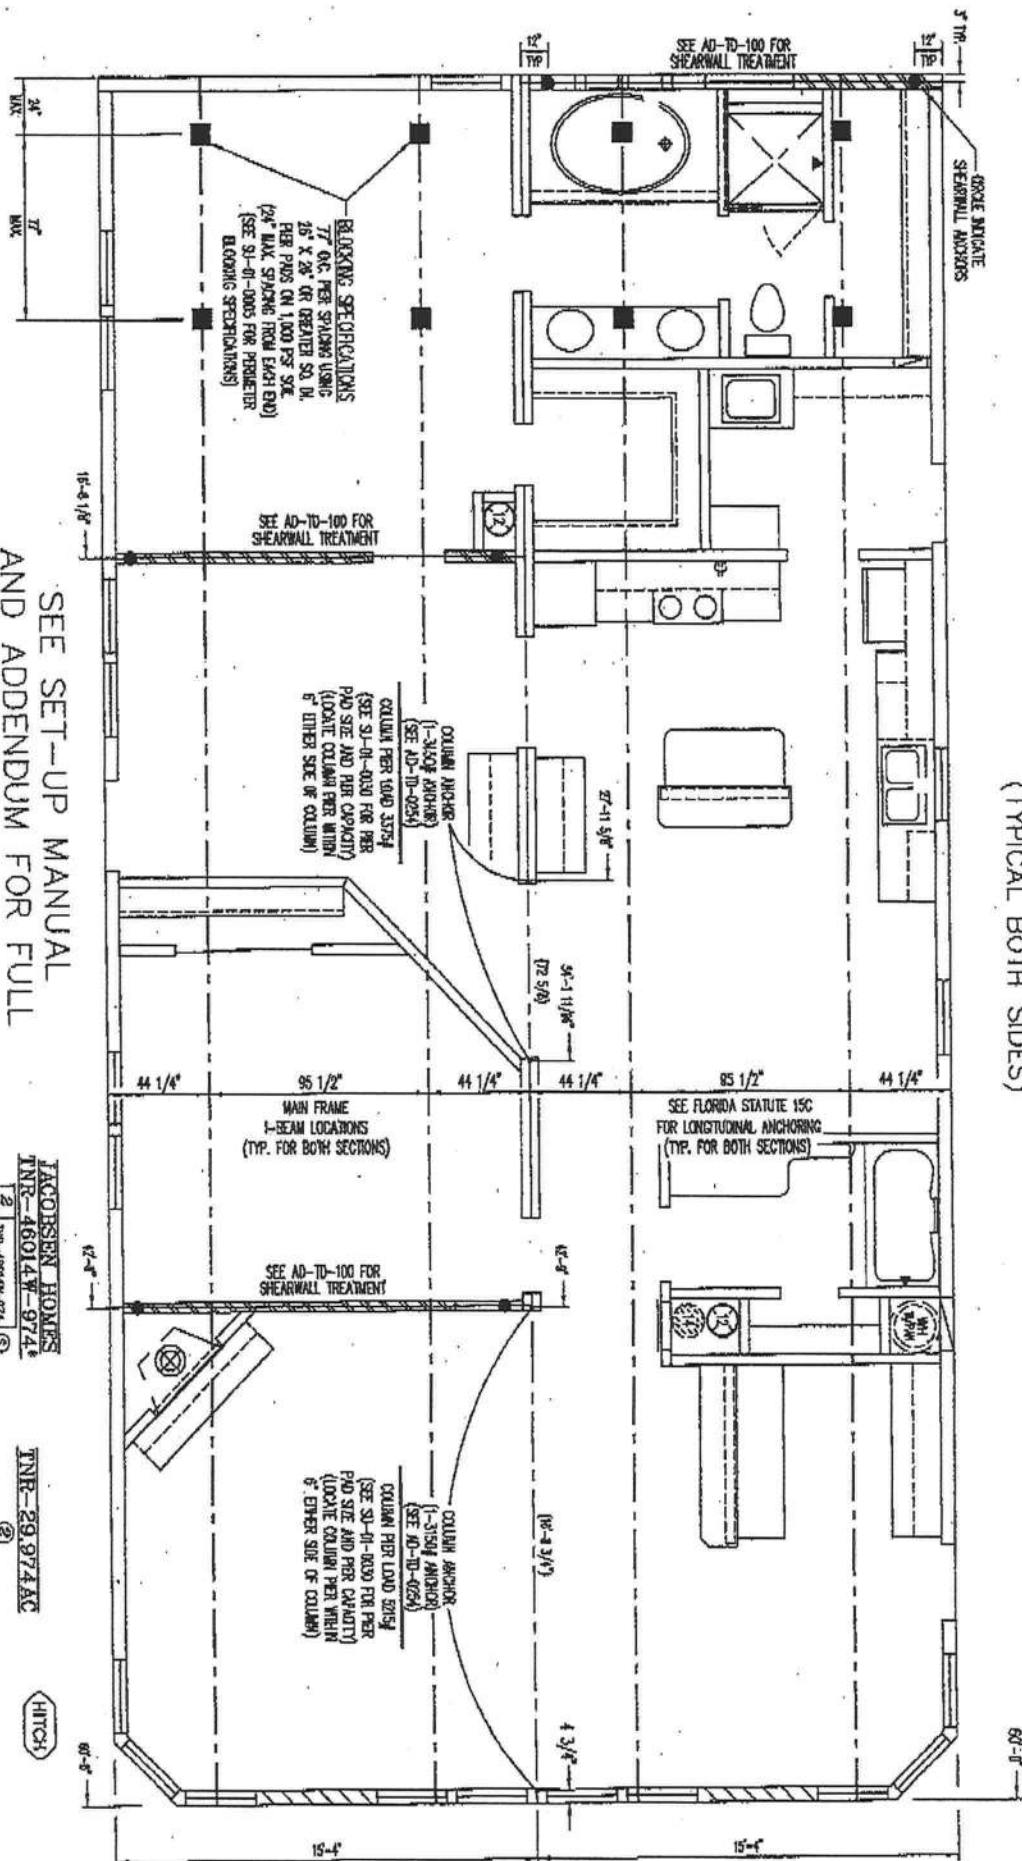

26" X 26" PIER FOOTER SPACINGS*
(MIN: 676 SQ.IN)

MAXIMUM I-BEAM PIER SPACING


FLOOR WIDTH	MAXIMUM PIER SPACING (SOIL BEARING CAPACITY)					
	1000 (PSF)	1500 (PSF)	2000 (PSF)	2500 (PSF)	3000 (PSF)	3500 (PSF)
120" WIDE FLOOR**	113 1/2"	SEE NOTE #4	SEE NOTE #4	SEE NOTE #4	SEE NOTE #4	SEE NOTE #4
144" WIDE FLOOR**	96 1/2"	SEE NOTE #4	SEE NOTE #4	SEE NOTE #4	SEE NOTE #4	SEE NOTE #4
160" WIDE FLOOR**	87 1/2"	SEE NOTE #4	SEE NOTE #4	SEE NOTE #4	SEE NOTE #4	SEE NOTE #4
184" WIDE FLOOR**	77"	119 1/2"	SEE NOTE #4	SEE NOTE #4	SEE NOTE #4	SEE NOTE #4
MIN. PIER CAPACITY	4694 LBS.	7042 LBS.	9389 LBS.	11,736 LBS.	14,083 LBS.	16,431

NOTE: UNIT WIDTHS WITH ** INCLUDES A 6" OVERHANG ON BOTH SIDES MAXIMUM.

FOR TYPICAL PIERS SEE PAGE SU-01-0021

NOTES:

1. PRE-FABRICATED PIER PADS MAY BE USED AS AN ALTERNATE TO THE CONCRETE FOOTINGS SPECIFIED IN THE JACOBSEN HOMES SET-UP MANUAL.
2. THE PRE-FABRICATED PIER PADS ARE TO BE INSTALLED PER THE MANUFACTURERS INSTALLATION INSTRUCTIONS AND MEET THE MINIMUM PIER CAPACITIES SHOWN ABOVE.
3. ALL OTHER REQUIREMENTS ARE TO BE ADHERED TO AS SPECIFIED IN THE JACOBSEN HOMES INSTALLATION INSTRUCTIONS.
4. MAX. PIER SPACING 8' FOR UNITS WITH 8" I-BEAMS / 10' FOR UNITS WITH 10" OR 12" I-BEAMS (24" MAX. FROM ENDS).




DAPIA APPROVAL:
SEE CALL PG.
C-TV-14.09

APPROVED BY

NIA INC.
FEDERAL MANUFACTURED HOMES
DATE OF DISTRIBUTION AND SALE: 09-22-01

OCT 11 2001



JACOBSEN HOMES

P.O. BOX 368
SAFETY HARBOR, FLORIDA 34895
PHONE (813) 726-1138

NOTICE:

THESE SPECIFICATIONS AND DRAWINGS ARE ORIGINAL, PROPRIETARY, AND CONFIDENTIAL MATERIALS OF JACOBSEN MANUFACTURING INC. SUCH MATERIALS ARE PROVIDED TO THE RECIPIENT FOR SPECIFIC PURPOSES AND MUST BE KEPT CONFIDENTIAL AND SECRET FROM OTHERS.


DRAWN BY: D.M.T.

DRAWING TITLE: PRE-FAB. 26" PIER PAD SPACING

DRAWING NUMBER: SU-01-0026

ADDITIONAL PERIMETER BLOCKING

(THIS BLOCKING IS IN ADDITION TO BLOCKING REQUIRED IN THIS MANUAL)

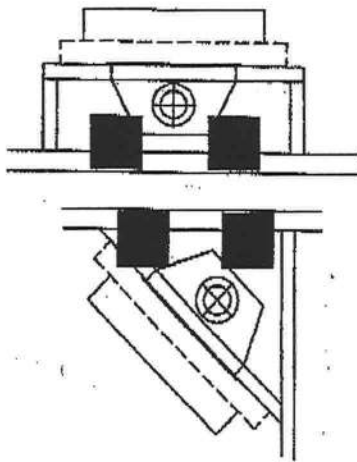


TYP. FIREPLACES ON SIDEWALL OR MARRIAGE WALL

HOST BEAM NOTE

PERIMETER BLOCKING REQUIRED AT 48" O.C. MAX.



UNDER EACH SIDE OF ALL EXTERIOR DOORS LOCATED ON SIDEWALLS

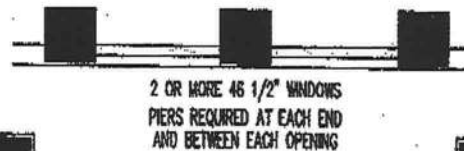


2 OR MORE 48 1/2" WINDOWS
PIERS REQUIRED AT EACH END
AND BETWEEN EACH OPENING




RECESSED AREAS REQUIRE PIERS SPACED 64" O.C. MAX.
(18" OR LESS IN DEPTH)

EACH END OF RECESSED AREAS




RECESSED AREAS W/SIDE BAY REQUIRE PIERS SPACED 64" O.C. MAX.



THIS ALSO APPLIES TO ALL ENDWALL BAY WINDOWS
UNLESS SUPPORTED BY A FRAME MEMBER



54" OR 60" TUB AT SIDEWALL OR MARRIAGE WALL



GARDEN TUB AT SIDEWALL OR MARRIAGE WALL



CABINETS ALONG SIDEWALL OR MARRIAGE WALL
(APPLIES TO BATH CABINETS 80" OR GREATER IN LENGTH)
(SAME BLOCKING MAY BE USED FOR MULTIPLE 48 1/2" WINDOWS)


SPECIAL BLOCKING NOTE FOR 15'-4" (184") WIDE FLOOR SECTIONS

PERIMETER BLOCKING IS REQUIRED (MARRIAGE AND SIDEWALLS) 64" ON CENTER MAX. SPACING

NOTE: LEVEL FLOOR SYSTEM FIRST (SIDEWALL TO SIDEWALL OR MARRIAGE WALL) BEFORE INSTALLING PERIMETER BLOCKS

NOTES:

1. ADDITIONAL BLOCKING REQUIRED AS INDICATED ABOVE (USE 16" X 16" PIER PADS).
2. LOCATE BLOCKING UNDER PERIMETER JOIST OR WITHIN 8" OF END OF 16" O.C. JOISTS.
3. COLUMN PIERS ARE IN ADDITION TO REQUIRED PIERS UNDER FULL-HEIGHT MATING WALLS.
4. PERIMETER BLOCKING IS REQUIRED UNDER TILE FLOORS (MARRIAGE & SIDEWALLS) 64" O.C. MAX.
5. PIERS USED FOR PERIMETER SUPPORT MUST BE INSTALLED WITH THE LONG DIMENSION PARALLEL TO THE PERIMETER RAIL.
6. WHEN PERIMETER BLOCKING IS REQUIRED ANY MATING LINE OPEN SPAN GREATER THAN 10', MUST HAVE INTERMEDIATE PIERS PLACED AT MAX. 10' O.C. EXCEPT 15'-4" WIDE, SEE SPECIAL NOTE.



JACOBSEN HOMES

P.O. BOX 368
SAFETY HARBOR, FLORIDA 34685
PHONE (813) 726-1138

NOTICE:

THESE SPECIFICATIONS AND DRAWINGS ARE ORIGINAL, PROPRIETARY, AND CONFIDENTIAL MATERIALS OF JACOBSEN MANUFACTURING, INC. SUCH MATERIALS ARE PROVIDED TO THE RECIPIENT FOR SPECIFIC PURPOSES AND MUST BE KEPT CONFIDENTIAL AND SECRET FROM OTHERS.

DRAWN BY:

O.A.

DATE:

4-12-00

REV. LETTER:

C

DRAWING TITLE:

ADDITIONAL BLOCKING

DRAWING NUMBER:

SU-01-0005

(09-30-08)



State of Florida
DEPARTMENT OF
HIGHWAY SAFETY AND MOTOR VEHICLES
TALLAHASSEE, FLORIDA 32399-0500

FRED O. DICKINSON, III
Executive Director

May 19, 2000

Mr. Chuck Mackervish
The Down Engineering, Incorporated
5901 Alhambra Drive
Atlanta, Georgia 30336

Dear Mr. Macke: ch

We wish to acknowledge receipt of your specifications and test results certifying that your ABS Plastic Stabilizing Device listed below, complies with the rules and regulations set by the Department of Highway Safety and Motor Vehicles, Chapter 15-C1, 0103.

Based on the information submitted to this bureau, the following products are listed for use in Florida using Type I and Type II anchors, when the installation instructions are provided:


MODEL #	DESCRIPTION	DESCRIPTION
592931	Plastic Stabilizer Post	8" x 24" x 1.375 at top

If you have any questions, I can be reached at (850) 413-7600.

Sincerely,

Phil Bergelt, Program Manager
Bureau of Mobile Home and
Recreational Vehicle Construction
Division of Motor Vehicles

PR:bsa

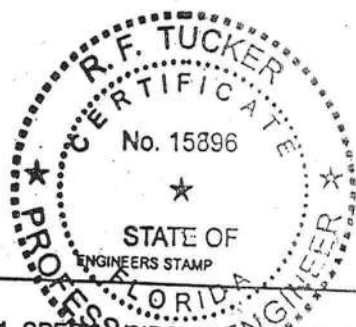

OLIVER TECHNOLOGIES, INC.
FLORIDA INSTALLATION INSTRUCTIONS FOR THE
MODEL 1101 "V" SERIES ALL STEEL FOUNDATION SYSTEM
MODEL 1101 "V" (STEPS 1-16)
MODEL 1101-L "V" LONGITUDINAL ONLY:
FOLLOW STEPS 1-9
FOR ADDING LATERAL ARM:
Follow Steps 10-15

ENGINEERS STAMP

1. SPECIAL CIRCUMSTANCES: If the following conditions occur - STOP! Contact Oliver Technologies at 1-800-284-7437:
- a) Pier height exceeds 48" b) Length of home exceeds 75' c) Roof eaves exceed 16" d) Sidewall height exceed 96"
 - e) Location is within 1500 feet of coast

INSTALLATION OF GROUND PAN

2. Remove weeds and debris in an approximate two foot square to expose firm soil for each ground pan (C).
3. Place ground pan (C) directly below chassis I-beam. Press or drive pan firmly into soil until flush with or below soil.
- SPECIAL NOTE:** The longitudinal "V" brace system serves as a pier under the home and should be loaded as any other pier. It is recommended that after leveling piers, and one-half inch (1/2") before home is lowered completely on to piers, complete steps 4 through 9 below.

INSTALLATION OF LONGITUDINAL "V" BRACE SYSTEM

NOTE: WHEN INSTALLING THE MODEL 1101-L "V" LONGITUDINAL SYSTEM ONLY, A MINIMUM OF 2 SYSTEMS PER FLOOR SECTION IS REQUIRED. SOIL TEST PROBE SHOULD BE USED TO DETERMINE CORRECT TYPE OF ANCHOR PER SOIL CLASSIFICATION. IF PROBE TEST READINGS ARE BETWEEN 175 & 275 A 5 FOOT ANCHOR MUST BE USED. IF PROBE TEST READINGS ARE BETWEEN 276 & 350 A 4 FOOT ANCHOR MAY BE USED. USE GROUND ANCHORS WITH DIAGONAL TIES AND STABILIZER PLATES EVERY 5'4". VERTICAL TIES ARE ALSO REQUIRED ON HOMES SUPPLIED WITH VERTICAL TIE CONNECTION POINTS (PER FLORIDA REG.).

4. Select the correct square tube brace (E) length for set-up (pier) height at support location. (The 18" tube is always used as the bottom part of the longitudinal arm). Note: Either tube can be used by itself, cut and drilled to length as long as a 40 to 45 degree angle is maintained.

PIER HEIGHT (Approx. 45 degrees Max.)	1.25" ADJUSTABLE Tube Length	1.50" ADJUSTABLE Tube Length
7 3/4" to 25"	22"	18"
24 3/4" to 32 1/4"	32"	18"
33" to 41"	44"	18"
40" to 48"	54"	18"

5. Install (2) of the 1.50" square tubes (E {18" tube}) into the "U" bracket (J), insert carriage bolt and leave nut loose for final adjustment.
6. Place I-beam connector (F) loosely on the bottom flange of the I-beam.
7. Slide the selected 1.25" tube (E) into a 1.50" tube (E) and attach to I-beam connectors (F) and fasten loosely with bolt and nut.
8. Repeat steps 6 through 7 to create the "V" pattern of the square tubes loosely in place. The angle is not to exceed 45 degree and not below 40 degrees.
9. After all bolts are tightened, secure 1.25" and 1.50" tubes using four(4) 1/4"-14 x 3/4" self-tapping screws in pre-drilled holes.

INSTALLATION OF LATERAL TELESCOPING TRANSVERSE ARM SYSTEM

THE MODEL 1101 "V" (LONGITUDINAL & LATERAL PROTECTION) ELIMINATES THE NEED FOR MOST STABILIZER PLATES & FRAME TIES.

NOTE: THE USE OF THIS SYSTEM REQUIRES VERTICAL TIES SPACED AT 5'4".

FOUR FOOT (4') GROUND ANCHOR MAY BE USED EXCEPT WHERE THE HOME MANUFACTURER SPECIFIES DIFFERENT.


10. Install remaining vertical tie-down straps and 4' ground anchors per home manufacturer's instructions. **NOTE: Centerline anchors to be sized according to soil torque condition. Any manufacturer's specifications for sidewall anchor loads in excess of 4,000 lbs. require a 5' anchor.**
11. **NOTE:** Each system is required to have a frame tie and stabilizer attached at each lateral arm stabilizing location. This frame tie & stabilizer plate needs to be located within 18" from of center ground pan.
12. Select the correct square tube brace (H) length for set-up lateral transverse at support location. The lengths come in either 60" or 72" lengths. (With the 1.50" tube as the bottom tube, and the 1.25" tube as the inserted tube.)
13. Install the 1.50 transverse brace (H) to the ground pan connector (D) with bolt and nut.
14. Slide 1.25" transverse brace into the 1.50" brace and attach to adjacent I-beam connector (I) with bolt and nut.
15. Secure 1.50" transverse arm to 1.25" transverse arm using four (4) 1/4" - 14 x 3/4" self-tapping screws in pre-drilled holes.

MANUFACTURED HOUSING FOUNDATION SYSTEMS
A DIVISION OF OLIVER TECHNOLOGIES, INC.
1-800-284-7437


Telephone: 931-796-4555
Fax: 931-796-8811
www.olivertechnologies.com

REQUIRED NUMBER AND LOCATION OF MODEL 1101 "V" BRACES FOR UP TO 4/12 ROOF PITCH

ALL WIDTHS; AND LENGTHS UP TO 52'

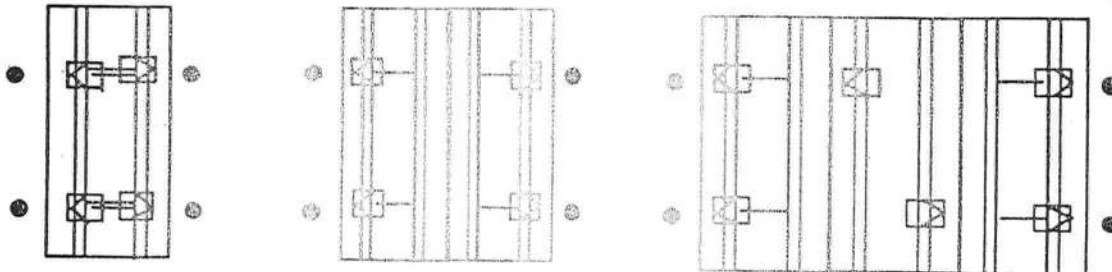


ALL WIDTHS; AND LENGTHS OVER 52' TO 80'

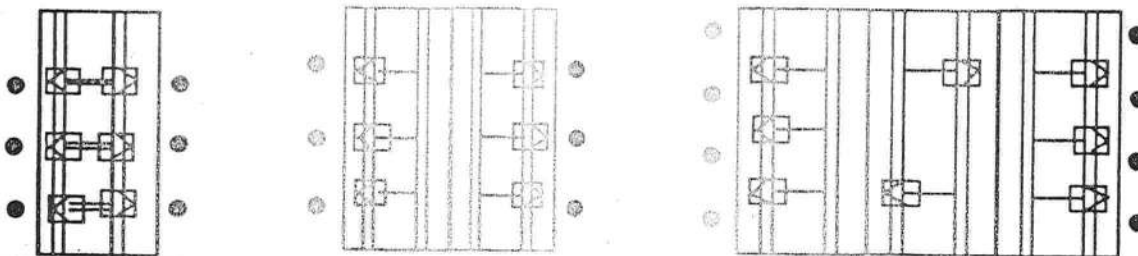


HOMES WITH 5/12 ROOF PITCH REQUIRE: PER FLORIDA REGULATIONS

6 systems for home lengths up to 52' and 8 systems for homes over 52' and up 80'. One stabilizer plate and frame tie required at each lateral bracing system.

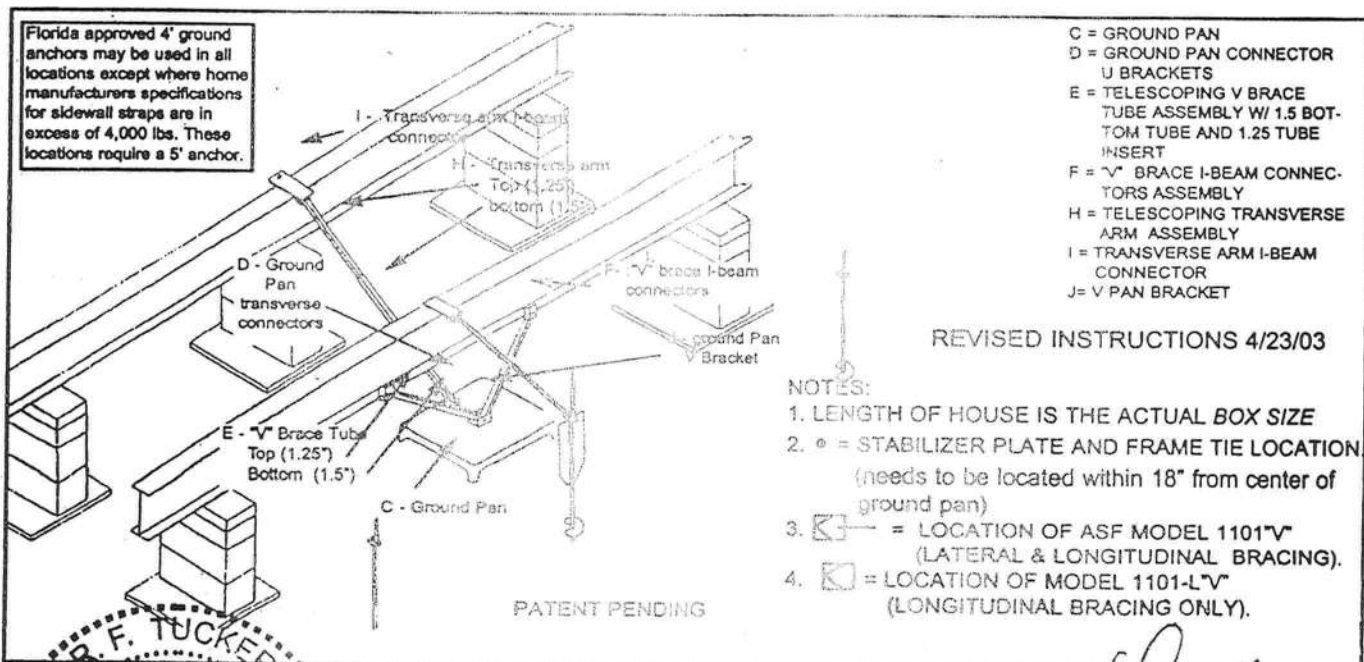

MANUFACTURED HOUSING FOUNDATION SYSTEMS
A DIVISION OF OLIVER TECHNOLOGIES, INC.
1-800-284-7437

Telephone: 931-796-4555
Fax: 931-796-8811
www.olivetech.com

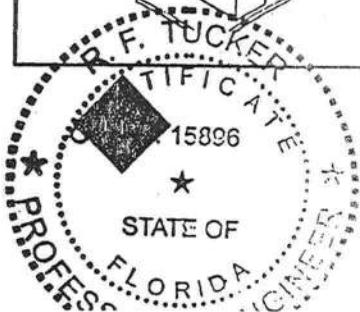

General Info

STEP DIAGRAM

2x2 PT HANDRAIL FASTENED TO 2X4 WITH #10 X 3 1/2 SCREW AT 20" • 1" PVC SPACER BETWEEN HANDRAIL AND 2X4

2X2 TOE KICKED TO 4X4 AT LANDING AND 2X4 AT LEADING STAIR RISER

2X6 PT FASTENED WITH (3) #10X3 SCREWS TO EACH 4X4 AND 16" O.C

4X4 PT FASTENED WITH (3) #10X3 1/2 EACH CORNER AT LANDING

1X2 PT FASTENED WITH (2) #8X2 SCREWS OPENING TO BE NO MORE THAN 4"

5/4 DECKING FASTENED WITH #10X2 1/2 SCREWS

34"-38"

(2) 2X6 PT FASTENED WITH #10X3 SCREWS (4) EACH SIDE OF RISER THE SUM OF 2 RISERS AND 1 TREAD MUST BE BETWEEN 24" AND 25"

5/4 PT TO REDUCE MAX. OPENING TO 4"

2X6 PT FASTENED WITH (3) #10X3 1/2 SCREWS EACH SIDE OF STAIRS

STEP HAS A LANDING MEASUREMENT OF 40" X 60"

RISER HEIGHT IS 7 1/4"

MOBILE HOME

FASTEN TOP FRONT
RAIL W/ 1" GALV. NAILS
OR 3/4" SCREWS 16" O.C.

FSI VIYNL SKIRTING
16" VIYNL PANELS
PROVIDING 4.75 SQ. IN
VENTING PER LIN. FT

FASTEN BOTTOM RAIL
W/ 3/4" SCREWS 16" O.C.
7" GAL NAILS 19" O.C.

CRAWL
SPACE

GRADE

NOTE:
AN ACCESS PANEL 16" X 24" MIN WILL
BE PROVIDED TO ACCESS CRAWL SPACE
THE ACCESS PANEL WILL BE FASTENED
W/ 1" LONG PHILLIPS HEAD SCREWS.
ANY HOME WHICH MORE THAN 36" FROM
FINISH GRADE WILL HAVE VERTICAL STUDS
48" O.C. AND A BELT RAIL

J & H Homes, Inc.

1748 NW 58th Lane
Ocala, Florida 34475

Phone: 352-351-8153

Fax: 352-351-1046

Authorization

To Whom it May Concern:

This letter shall serve as your authorization, as of the date on this letter, to allow Buddy Puckett to pull permits on behalf of J & H Homes, Ocala, Florida.

For the address of :

or

Parcel number: 36-65-16-04076-139

Robert Puckett

Robert Puckett

License #: IH0000707


State of Florida

County of Marion

Sworn to and subscribed by me this 22nd day of April, 20 10.

Mary E Vitelli

Notary Public

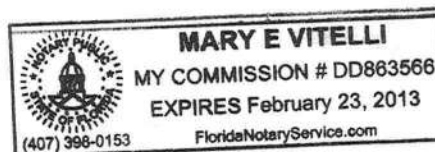

(Stamp)

Columbia County Property Appraiser

DB Last Updated: 3/29/2010

2009 Tax Roll Year

Tax Collector

Tax Estimator

Property Card

Parcel List Generator

Interactive GIS Map

Print

Parcel: 36-6S-16-04076-139


<< Next Lower Parcel

Next Higher Parcel >>

Search Result: 1 of 1

Owner & Property Info

Owner's Name	BLANKENSHIP RUSTY OR		
Mailing Address	DEANN WEAVER BLANKENSHIP 151 SW OLD NIBLACK AVE FT WHITE, FL 32038		
Site Address	151 SW OLD NIBLACK AVE		
Use Desc. (code)	MOBILE HOM (000200)		
Tax District	3 (County)	Neighborhood	36616
Land Area	7.000 ACRES	Market Area	02
Description	NOTE: This description is not to be used as the Legal Description for this parcel in any legal transaction. LOT 39 PARKER WOOS S/D. ORB 780-233, 870-2213,		

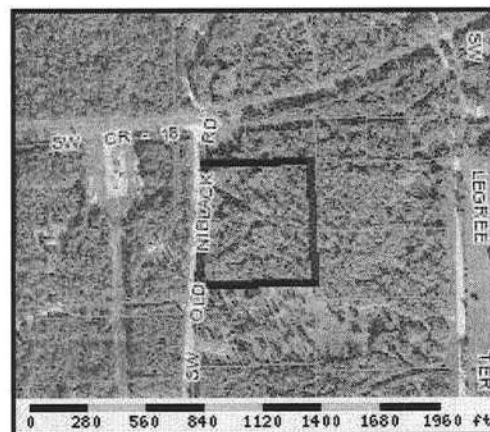

Property & Assessment Values

2009 Certified Values		
Mkt Land Value	cnt: (0)	\$42,398.00
Ag Land Value	cnt: (2)	\$0.00
Building Value	cnt: (1)	\$23,570.00
XFOB Value	cnt: (3)	\$2,680.00
Total Appraised Value		\$68,648.00
Just Value		\$68,648.00
Class Value		\$0.00
Assessed Value		\$46,628.00
Exempt Value	(code: HX)	\$25,000.00
Total Taxable Value	Cnty: \$21,628 Other: \$21,628 Schl: \$21,628	

2010 Working Values

NOTE:
2010 Working Values are NOT certified values and therefore are subject to change before being finalized for ad valorem assessment purposes.

[Show Working Values](#)

Sales History

[Show Similar Sales within 1/2 mile](#)

Sale Date	OR Book/Page	OR Code	Vacant / Improved	Qualified Sale	Sale RCode	Sale Price
9/20/1993	780/233	AG	V	U	13	\$17,995.00

Building Characteristics

Bldg Item	Bldg Desc	Year Blt	Ext. Walls	Heated S.F.	Actual S.F.	Bldg Value
1	MOBILE HME (000800)	1994	(31)	1248	1326	\$21,591.00
Note: All S.F. calculations are based on exterior building dimensions.						

Extra Features & Out Buildings

Code	Desc	Year Blt	Value	Units	Dims	Condition (% Good)
0296	SHED METAL	1993	\$400.00	0000080.000	8 x 10 x 0	(000.00)
0070	CARPORT UF	1993	\$1,080.00	0000360.000	18 x 20 x 0	(000.00)
0296	SHED METAL	1993	\$1,200.00	0000240.000	12 x 20 x 0	(000.00)

Land Breakdown

Lnd Code	Desc	Units	Adjustments	Eff Rate	Lnd Value
----------	------	-------	-------------	----------	-----------



COLUMBIA COUNTY 911 ADDRESSING / GIS DEPARTMENT

P. O. Box 1787, Lake City, FL 32056-1787
Telephone: (386) 758-1125 * Fax: (386) 758-1365 * Email: ron_croft@columbiacountyfla.com



ADDRESS ASSIGNMENT DATA

The Columbia County Board of County Commissioners has passed Ordinance 2001-9, which provides for a uniform numbering system. A copy of this ordinance is available in the Clerk of Court records, located in the courthouse. This new numbering system will increase the efficiency of POLICE, FIRE AND EMERGENCY MEDICAL vehicles responding to calls within Columbia County by immediately identifying the location of the caller.

A Residential or Other Structure(s) on Parcel Number:

36-6S-16-04076-139 (LOT 39 PARKER WOOS S/D)

Address Assignment(s):

151 SW OLD NIBLACK AVE, FORT WHITE, FL, 32038

Any questions concerning this information should be referred to the Columbia County 911 Addressing / GIS Department at the address or telephone number above.

MAY-04-2010 14:59 From:

To: 3523511046

P.1/1

05/04/2010 03:01 3523511046

JHHOMESINC

PAGE 01/01

04/27/2010 15:10 3867582150

BUILDING AND ZONING

PAGE 01/01

SUBCONTRACTOR VERIFICATION FORM

APPLICATION NUMBER 1004-50 CONTRACTOR Robert Hickett PHONE 352-351-8153

THIS FORM MUST BE SUBMITTED PRIOR TO THE ISSUANCE OF A PERMIT

In Columbia County one permit will cover all trades doing work at the permitted site. It is **REQUIRED** that we have records of the subcontractors who actually did the trade specific work under the permit. Per Florida Statute 440 and Ordinance 89-6, a contractor shall require all subcontractors to provide evidence of workers' compensation or exemption, general liability insurance and a valid Certificate of Competency license in Columbia County.

Any changes, the permitted contractor is responsible for the corrected form being submitted to this office prior to the start of that subcontractor beginning any work. Violations will result in stop work orders and/or fines.

ELECTRICAL	Print Name <u>James Brandon</u>	Signature <u>[Signature]</u>	Phone # <u>352 625 5100</u>
MECHANICAL/A/C	Print Name <u>James Brandon</u>	Signature <u>[Signature]</u>	Phone # <u>352 625 5100</u>
PLUMBING/GAS	Print Name <u>Robert Hickett</u>	Signature <u>[Signature]</u>	Phone # <u>352-351-8153</u>
ROOFING	Print Name _____	Signature _____	Phone # _____
SHEET METAL	Print Name _____	Signature _____	Phone # _____
FIRE SYSTEM/SPRINKLER	Print Name _____	Signature _____	Phone # _____
SOLAR	Print Name _____	Signature _____	Phone # _____

Specialty License	Contract Number	Subcontractor's Printed Name	Subcontractor's Signature
MASON			
CONCRETE FINISHER			
FRAMING			
INSULATION			
STUCCO			
DRYWALL			
PLASTER			
CABINET INSTALLER			
PAINTING			
ACOUSTICAL CEILING			
GLASS			
CERAMIC TILE			
FLOOR COVERING			
ALUM/VINYL SIDING			
GARAGE DOOR			
METAL BLDG ERECTOR			

F. S. 440.103 Building permits; Identification of minimum premium policy.—Every employer shall, as a condition to applying for and receiving a building permit, show proof and certify to the permit issuer that it has secured

... and shall be represented each



STATE OF FLORIDA
DEPARTMENT OF HEALTH


APPLICATION FOR ONSITE SEWAGE DISPOSAL SYSTEM CONSTRUCTION PERMIT

Permit Application Number 10-0216E

Blankenship

PART II - SITE PLAN

Scale: Each block represents 5 feet and 1 inch = 50 feet.

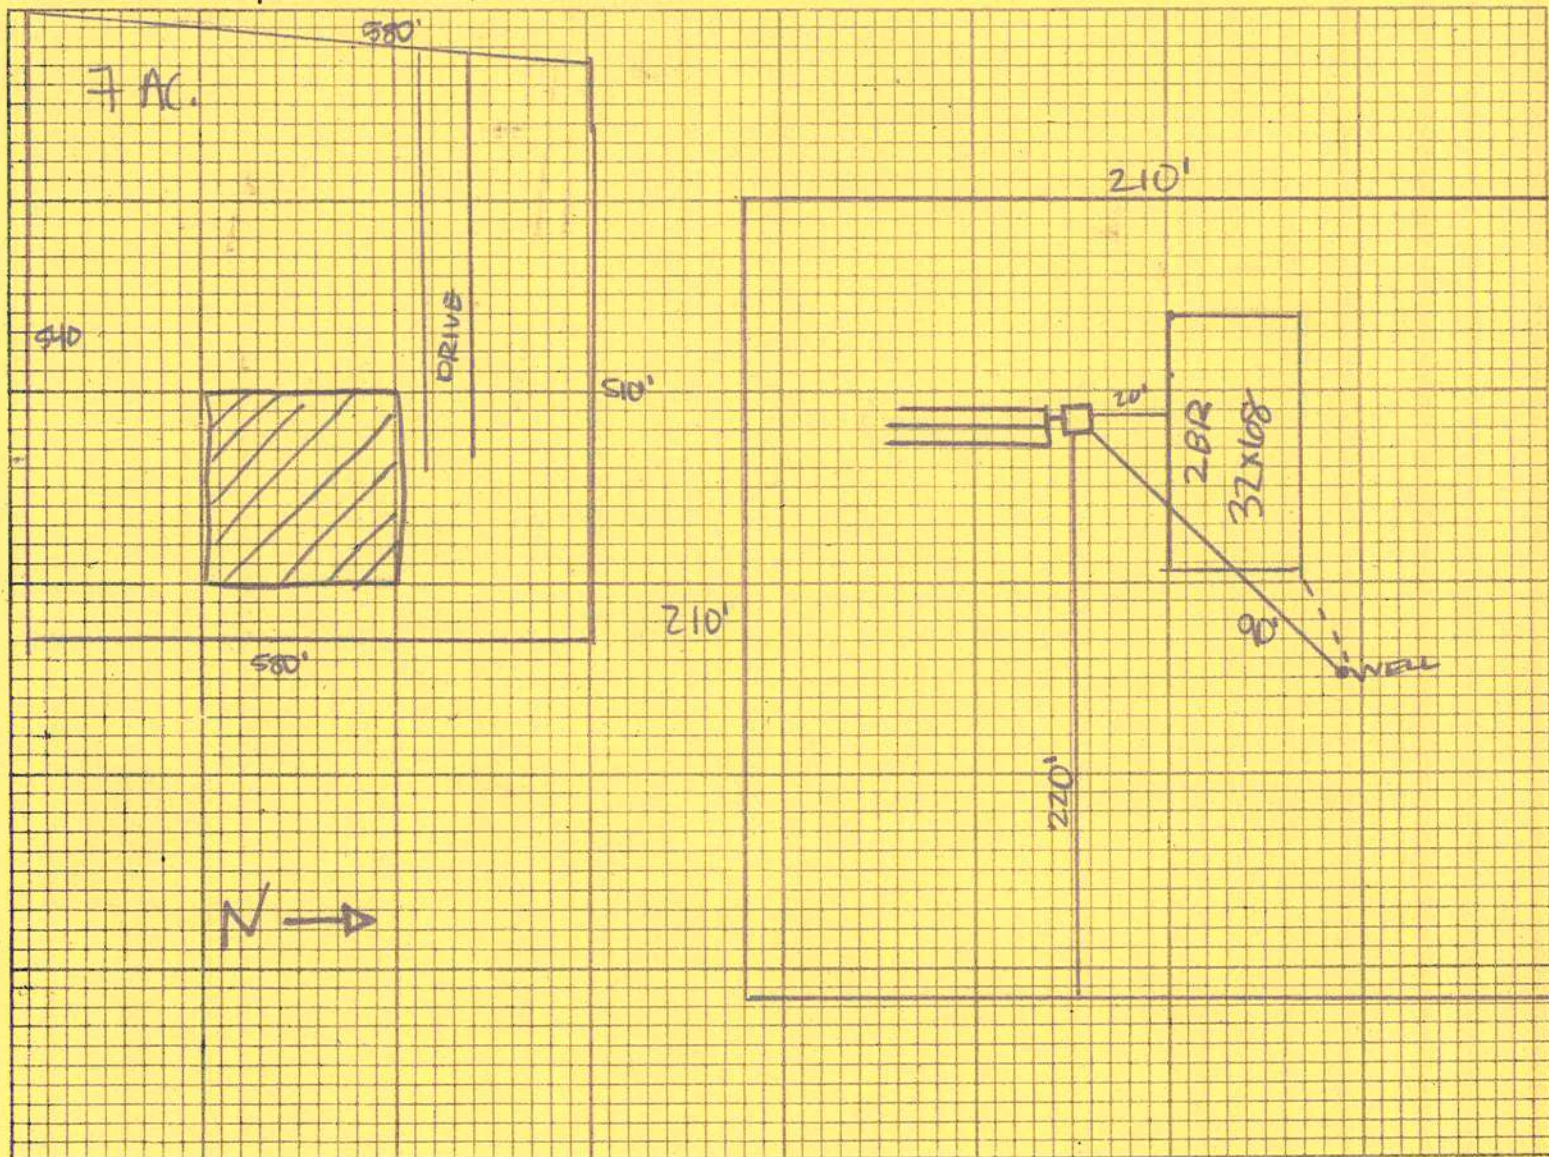

Notes: X

Robert Pickett

Site Plan submitted by: Jeremy Gifford

Signature

ESI

Title

Plan Approved X

Not-Approved

Date

5/6/10

By [Signature]

County Health Department

ALL CHANGES MUST BE APPROVED BY THE COUNTY HEALTH DEPARTMENT

COLUMBIA COUNTY
OFFICE
OF
PLANNING AND ZONING

M/H OCCUPANCY

COLUMBIA COUNTY, FLORIDA

Department of Building and Zoning Inspection

This Certificate of Occupancy is issued to the below named permit holder for the building and premises at the below named location, and certifies that the work has been completed in accordance with the Columbia County Building Code.

Parcel Number 36-6S-16-04076-139

Building permit No. 000028548

Permit Holder ROBERT PUCKETT

Owner of Building RUSSELL BLANKENSHIP

Location: 151 SW NIBLACK AVE, FT WHITE, FL 32038



Date: 11/23/2010

[Signature]

Building Inspector

POST IN A CONSPICUOUS PLACE
(Business Places Only)