CAROL CHADWICK, P.E.

Civil Engineer
1208 S.W. Fairfax Glen
Lake City, FL 32025
307.680.1772
ccpewyo@gmail.com
www.carolchadwickpe.com

March 25, 2020

Mr. Don Little
Don Little Construction \$ Roofing, Inc.
386.697.1246
don@dlcandr.com

re: ELEVATION LETTER - PARCEL 23-35-16-02279-125, LOT 25, TURKEY CREEK UNIT 1, COLUMBIA COUNTY, FL

As requested, I inspected the building site for the proposed construction at the above referenced site. The building pad had been partially constructed at the time of the inspection. The elevation of the pad is 156.66+1 as shown in Photo 1. The surveyed elevation of the road at the front of the lot is

157.87. The minimum finished floor elevation shall be 158.12. The finished floor of the home will be less than one foot above the nearest adjacent street. The site will be graded to direct runoff to the swale in front of the home adjacent to the road.

I certify that the minimum finished floor elevation listed above will protect the structure against water damage from a base flood event, as defined in Article 8 of the Land Development Regulations.

Should you have any questions, please don't hesitate to contact me.


Respectfully,

Carol Chadwick, P.E.

CC Job #FL20058



П

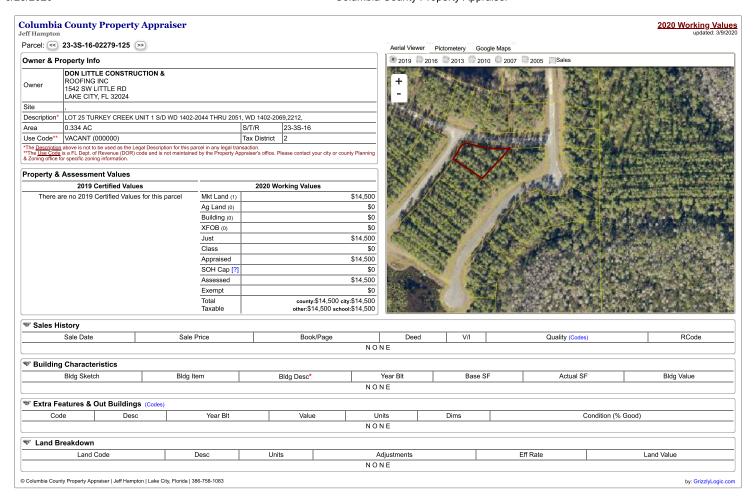

columbia.floridapa.com/gis/

