

DATE 04/02/2008

Columbia County Building Permit

PERMIT  
000026896

This Permit Must Be Prominently Posted on Premises During Construction

APPLICANT BARBARA JOHNSTON PHONE 386-365-0898  
ADDRESS 2009 SW BOUNDARY WAY FORT WHITE FL 32038  
OWNER GARY & PATRICIA HUDDLESTUN PHONE 755-4015  
ADDRESS 143 SW KESSLER GLN LAKE CITY FL 32024  
CONTRACTOR LEWIS WALKER PHONE 497-1419  
LOCATION OF PROPERTY 47 S, R KING RD, L KESSLER, 2ND DRIVE ON LEFT BEHIND THE  
2NC LOT ON THE LEFT  
TYPE DEVELOPMENT RE-ROOF SFD ESTIMATED COST OF CONSTRUCTION 6120.00  
HEATED FLOOR AREA TOTAL AREA HEIGHT STORIES 1  
FOUNDATION WALLS ROOF PITCH 3/12 FLOOR  
LAND USE & ZONING MAX. HEIGHT 35  
Minimum Set Back Requirments: STREET-FRONT REAR SIDE  
NO. EX.D.U. 1 FLOOD ZONE NA DEVELOPMENT PERMIT NO.

PARCEL ID 34-4S-16-03274-051 SUBDIVISION OAK FOREST S/D UNREC PARTS OF 25 &  
LOT 26 BLOCK PHASE UNIT TOTAL ACRES 0.92

RC0067442  
Culvert Permit No. Culvert Waiver Contractor's License Number Applicant/Owner/Contractor  
EXISTING X08-104 LH LH N  
Driveway Connection Septic Tank Number LU & Zoning checked by Approved for Issuance New Resident

COMMENTS: NOC ON FILE, EXISTING SFD

Check # or Cash CASH

FOR BUILDING & ZONING DEPARTMENT ONLY

(footer/Slab)

Temporary Power date/app. by Foundation date/app. by Monolithic date/app. by  
Under slab rough-in plumbing date/app. by Slab date/app. by Sheathing/Nailing date/app. by  
Framing date/app. by Rough-in plumbing above slab and below wood floor date/app. by  
Electrical rough-in date/app. by Heat & Air Duct date/app. by Peri. beam (Lintel) date/app. by  
Permanent power date/app. by C.O. Final date/app. by Culvert date/app. by  
M/H tie downs, blocking, electricity and plumbing date/app. by Pool date/app. by  
Reconnection date/app. by Pump pole date/app. by Utility Pole date/app. by  
M/H Pole date/app. by Travel Trailer date/app. by Re-roof date/app. by

BUILDING PERMIT FEE \$ 35.00 CERTIFICATION FEE \$ 0.00 SURCHARGE FEE \$ 0.00  
MISC. FEES \$ 0.00 ZONING CERT. FEE \$ FIRE FEE \$ 0.00 WASTE FEE \$  
FLOOD DEVELOPMENT FEE \$ FLOOD ZONE FEE \$ CULVERT FEE \$ TOTAL FEE 35.00  
INSPECTORS OFFICE Z. Wed CLERKS OFFICE CN

NOTICE: IN ADDITION TO THE REQUIREMENTS OF THIS PERMIT, THERE MAY BE ADDITIONAL RESTRICTIONS APPLICABLE TO THIS PROPERTY THAT MAY BE FOUND IN THE PUBLIC RECORDS OF THIS COUNTY. AND THERE MAY BE ADDITIONAL PERMITS REQUIRED FROM OTHER GOVERNMENTAL ENTITIES SUCH AS WATER MANAGEMENT DISTRICTS, STATE AGENCIES, OR FEDERAL AGENCIES.

"WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT."

EVERY PERMIT ISSUED SHALL BECOME INVALID UNLESS THE WORK AUTHORIZED BY SUCH PERMIT IS COMMENCED WITHIN 180 DAYS AFTER ITS ISSUANCE, OR IF THE WORK AUTHORIZED BY SUCH PERMIT IS SUSPENDED OR ABANDONED FOR A PERIOD OF 180 DAYS AFTER THE TIME THE WORK IS COMMENCED. A VALID PERMIT RECIEVES AN APPROVED INSPECTION EVERY 180 DAYS. WORK SHALL BE CONSIDERED TO BE IN ACTIVE PROGRESS WHEN THE PERMIT HAS RECIEVED AN APPROVED INSPECTION WITHIN 180 DAYS.

The Issuance of this Permit Does Not Waive Compliance by Permittee with Deed Restrictions.

**Columbia County Building Permit Application**

35.0

<b>For Office Use Only</b>		Application # <u>6804-07</u>	Date Received <u>4/2/08</u>	By <u>UH</u>	Permit # <u>26896</u>
Zoning Official _____	Date _____	Flood Zone _____	FEMA Map # _____	Zoning _____	
Land Use _____	Elevation _____	MFE _____	River _____	Plans Examiner _____	Date _____
Comments _____					
<input type="checkbox"/> NOC <input type="checkbox"/> EH <input checked="" type="checkbox"/> Deed or PA <input type="checkbox"/> Site Plan <input type="checkbox"/> State Road Info <input type="checkbox"/> Parent Parcel # _____					
<input type="checkbox"/> Dev Permit # _____ <input type="checkbox"/> In Floodway <input type="checkbox"/> Letter of Authorization from Contractor					
<input type="checkbox"/> Unincorporated area <input type="checkbox"/> Incorporated area <input type="checkbox"/> Town of Fort White <input type="checkbox"/> Town of Fort White Compliance letter					

Septic Permit No. X 08-104 Fax 386-497-1452

Name Authorized Person Signing Permit Barbara Johnston Phone 386-365-0898

Address 209 SW Boundary Wy Ft white FL 32038

Owners Name Gary + Patricia Huddleston Phone 386-255-4015

911 Address 143 SW Kessler Bln. Lake City FL 32024

Contractors Name Lewis Walker Roofing, Inc Phone 386-497-1419

Address PO Box 82 Ft white, FL 32038

Fee Simple Owner Name & Address N/A

Bonding Co. Name & Address N/A

Architect/Engineer Name & Address N/A

Mortgage Lenders Name & Address N/A

Circle the correct power company - FL Power & Light - Clay Elec. - Suwannee Valley Elec. - Progress Energy

Property ID Number 34-4S-16-03274-051HX Estimated Cost of Construction 6120.<sup>00</sup>

Subdivision Name Oak Forest Lot 25+ Block \_\_\_\_\_ Unit \_\_\_\_\_ Phase \_\_\_\_\_

Driving Directions 41 to 47 toward Ft white 1 mile past I95 R on Kings Rd  
3 miles L on Kessler house on left

Number of Existing Dwellings on Property 1

Construction of Re-roof mobile Home Total Acreage .920 Lot Size \_\_\_\_\_

Do you need a - Culvert Permit or Culvert Waiver or Have an Existing Drive Total Building Height \_\_\_\_\_

Actual Distance of Structure from Property Lines - Front \_\_\_\_\_ Side \_\_\_\_\_ Side \_\_\_\_\_ Rear \_\_\_\_\_

Number of Stories 1 Heated Floor Area 1512 Total Floor Area 11672 Roof Pitch 3/12

Application is hereby made to obtain a permit to do work and installations as indicated. I certify that no work or installation has commenced prior to the issuance of a permit and that all work be performed to meet the standards of all laws regulating construction in this jurisdiction.

**WARNING TO OWNER:** YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOU PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. A NOTICE OF COMMENCEMENT MUST BE RECORDED AND POSTED ON THE JOB SITE BEFORE THE FIRST INSPECTION. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT.


**FLORIDA'S CONSTRUCTION LIEN LAW: Protect Yourself and Your Investment**

According to Florida Law, those who work on your property or provide materials, and are not paid-in-full, have a right to enforce their claim for payment against your property. This claim is known as a construction lien. If your contractor fails to pay subcontractors or material suppliers or neglects to make other legally required payments, the people who are owed money may look to your property for payment, even if you have paid your contractor in full. This means if a lien is filed against your property, it could be sold against your will to pay for labor, materials or other services which your contractor may have failed to pay.

**NOTICE OF RESPONSIBILITY TO BUILDING PERMITEE:**

**YOU ARE HEREBY NOTIFIED** as the recipient of a building permit from Columbia County, Florida, you will be held responsible to the County for any damage to sidewalks and/or road curbs and gutters, concrete features and structures, together with damage to drainage facilities, removal of sod, major changes to lot grades that result in ponding of water, or other damage to roadway and other public infrastructure facilities caused by you or your contractor, subcontractors, agents or representatives in the construction and/or improvement of the building and lot for which this permit is issued. No certificate of occupancy will be issued until all corrective work to these public infrastructures and facilities has been corrected.

**OWNERS CERTIFICATION:** I hereby certify that all the foregoing information is accurate and all work will be done in compliance with all applicable laws and regulating construction and zoning. I further understand the above written responsibilities in Columbia County for obtaining this Building Permit.



Owners Signature

**CONTRACTORS AFFIDAVIT:** By my signature I understand and agree that I have informed and provided this written statement to the owner of all the above written responsibilities in Columbia County for obtaining this Building Permit.



Contractor's Signature (Permitee)

Contractor's License Number

RC 0067442


Columbia County

Competency Card Number

5883


Affirmed under penalty of perjury to by the Contractor and subscribed before me this 31 day of March 2008

Personally known ☒ or Produced Identification \_\_\_\_\_



State of Florida Notary Signature (For the Contractor)

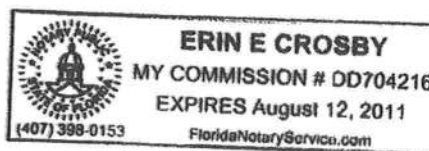SEAL:





&gt;&gt; Print as PDF &lt;&lt;

COMM SW COR, RUN N 725.53 FT,  
E 30 FT TO INTERS E R/W OF  
MAULDIN RD WITH N R/W MERRILL  
LANE, RUN N 368.94 FT, E

HUDDLESTON GARY E & PATRICIA G 34-4S-16-03274-051  
143 SW KESSLER GLN  
LAKE CITY, FL 32024

Columbia County 2008 R  
CARD 001 of 001  
BY JEFF

PRINTED 3/10/2008 8:51  
APPR 2/13/2003 DF

BUSE 000200 SFR MANUF	AE? Y	1512 HTD AREA	114.000 INDEX	34416.02 OAK FOREST	PUSE 000200 MOBILE HOME
MOD 2 MOBILE HME BATH	2.00	1560 EFF AREA	35.340 E-RATE	100.000 INDX	STR 34- 4S-16E
EXW 31 VINYL SID	FIXT	55130 RCN		1997 AYB	MKT AREA 01
% N/A	BDRM	79.00 %GOOD	43,552 B BLDG VAL	1997 EYB	(PUD1
RSTR 03 GABLE/HIP	RMS				AC
RCVR 03 COMP SHNGL	UNTS				.920
% N/A	C-W%				0 AG
INTW 05 DRYWALL	HGHT				0 MKAG
% N/A	PMTR				68,056 JUST
FLOR 14 CARPET	STYS				0 CLAS
% N/A	ECON				
HTTP 04 AIR DUCTED	FUNC				0 SOHD
A/C 03 CENTRAL	SPCD				0 ASSD
QUAL 05 05	DEPR 09				0 EXPT
FNDN N/A	UD-1 N/A				0 COTXBL
SIZE N/A	UD-2 N/A				
CEIL N/A	UD-3 N/A				
ARCH N/A	UD-4 N/A				
FRME 01 NONE	UD-5 N/A				
KTCH 01 01	UD-6 N/A				
WINDO N/A	UD-7 N/A				
CLAS N/A	UD-8 N/A				
OCC N/A	UD-9 N/A				
COND 03 03	% N/A				
SUB A-AREA % E-AREA	SUB VALUE				
BAS98 1512 100 1512	42212				
FOP98 80 35 28	782				
UOP98 80 25 20	558				

TOTAL 1672 1560 43552

EXTRA FEATURES										FIELD CK:										
AE BN	CODE	DESC	LEN	WID	HGHT	QTY	QL	YR	ADJ	UNITS	UT	PRICE	ADJ	UT	PR	SPCD	%	%GOOD	XFOB	VALUE
Y	0296	SHED METAL	12	14		1		1998	1.00	168.000	SF	5.000				5.000	AP	40.00	60.00	504

LAND DESC										FIELD CK:										
AE	CODE	ZONE	ROAD	{UD1	{UD3	FRONT	DEPTH	ADJUSTMENTS			UNITS	UT	PRICE	ADJ	UT	PR	LAND VALUE			
Y	000200	MBL HM	A-1	0002				1.00	1.00	1.00	1.00	1.000	LT	22000.000		22000.00	22,000			
Y	009945	WELL/SEPT	00	0002				1.00	1.00	1.00	1.00	1.000	UT	2000.000		2000.00	2,000			



2008

# TUFF-RIB 29 GA. LOAD TABLE OVER 1x4 WOOD PURLINS
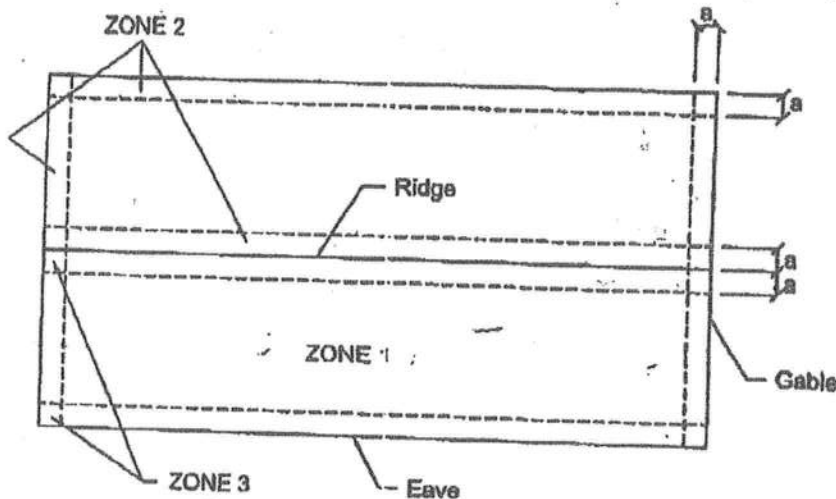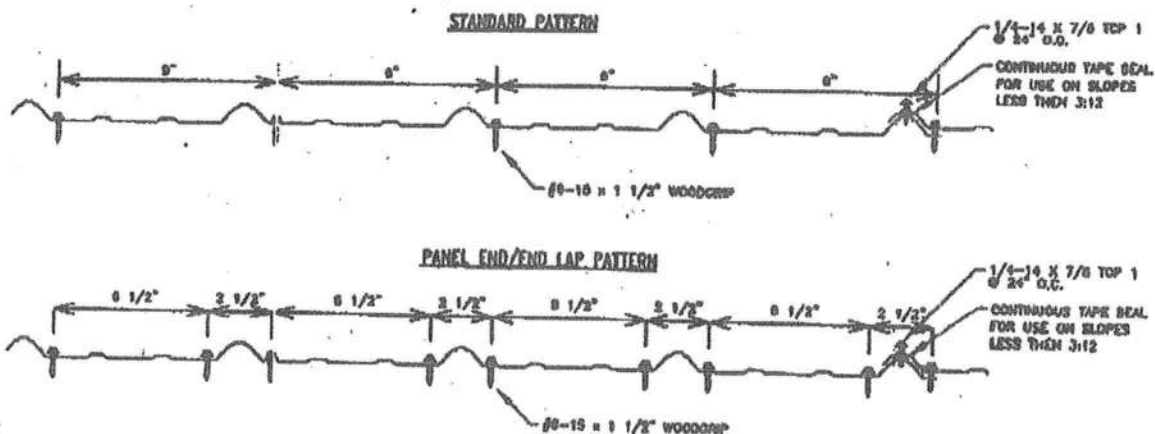
# GULF COAST

Buildings having a Roof Mean Height  $\leq 20'-0"$ ; Roof Slope:  $2"/12"$  -  $12"/12"$   
Wind Speeds 110-140 mph, Exp C, I = 1.0, based on FLORIDA BUILDING CODE 2004

TUFF-RIB 29 GA. FASTENER SPACING						
ZONE	FASTENER	SUBSTRATE	WIND SPEED ZONE			
			110	120	130	140
			ON CENTER SPACING	ON CENTER SPACING	ON CENTER SPACING	ON CENTER SPACING
ZONE 1	#8-15 x 1-1/2"	1x4 WOOD PURLINS	24"	24"	24"	24"
ZONE 2	#8-15 x 1-1/2"	1x4 WOOD PURLINS	24"	24"	24"	12"
ZONE 3	#8-15 x 1-1/2"	1x4 WOOD PURLINS	24"	12"	12"	12"



Note: Dimension (a) is defined as 10% of the minimum width of the building or 40% of the mean height of the roof, whichever is smaller, however, (a) cannot be less than either 4% of the minimum width of the building or 3 feet.

FL#7073.4



JUN 28 2005

# Residential Trim

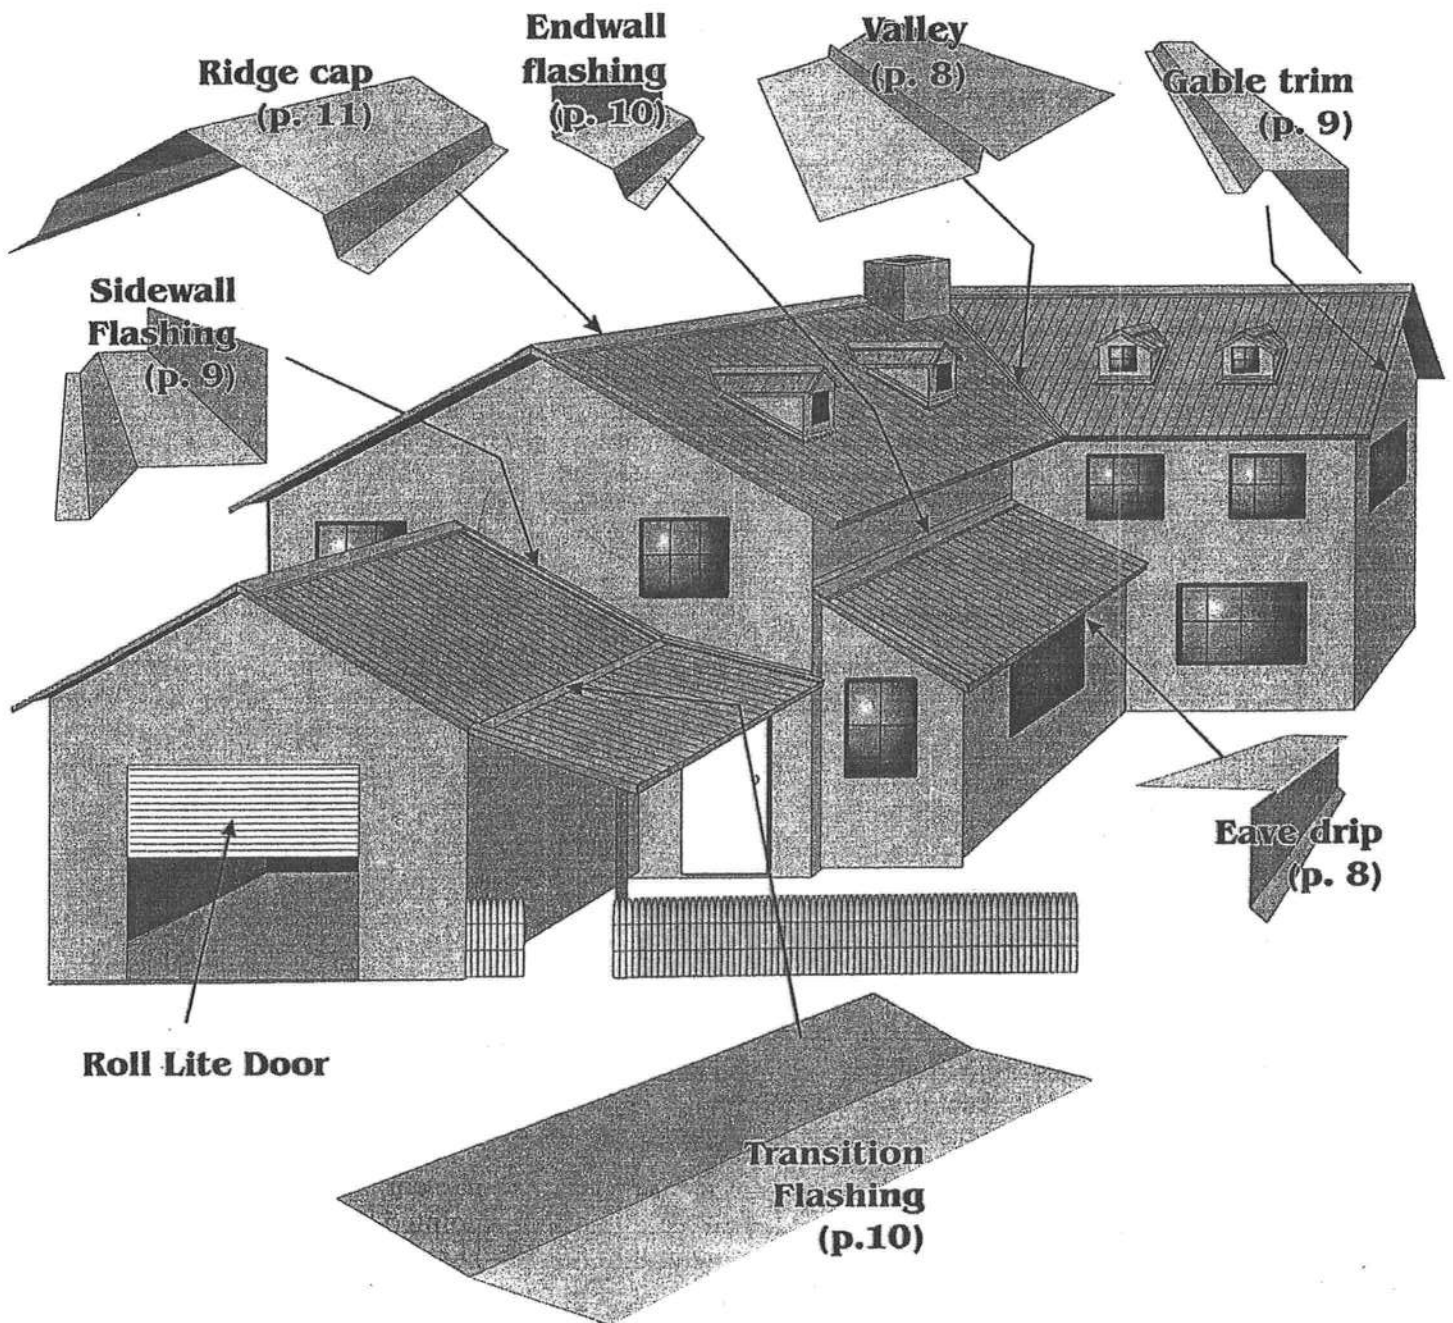


Figure 4 Roofing trims and flashings are named by the location or function of that particular piece on the building.

## Ordering Roof Panels and Screws

Care should be taken to order panels of the correct length to avoid having to make corrective measures after purchase. Panel lengths should fall 2 to 3 inches short of the ridge *when a vented ridge is desired*, and should extend 2 to 3 inches past the eave to allow a sufficient drip edge (except as noted on pg. 3 concerning gutters). The Gulf Coast sales personnel are ready to assist customers with information specific to their particular roof.

Specially-washed screws applied through the flat of the metal is the most recommended method used to attach roofing panels. 1-inch screws can be used if penetration of only  $\frac{3}{4}$  inch is either necessary or desired; otherwise, 1½ inch screws are usually recommended. 2½ inch screws are also available, and are often used by those who adhere to through-the-rib fastening, and for ridge-cap application. See page 6 for more information on screw spacing and ordering.

## Ordering and Applying Trim

The most common flashing for metal roofing is the *ridge cap*, which is used at the peak of roof where two opposing roof slopes join. Other flashings include *transition flashing*, *end wall* and *sidewall flashings*, and *valleys* (see diagram on right for application). Eave flashings include *gable flashing* and *eave drip*, either of which are often applied above *fascia* trim. When roof pitch exceeds 5/12 (a 5 inch rise in 12 inches), the slope of the roof should be mentioned when ordering ridge caps, endwalls, and eave drip. When a steeper roof slope meets a lesser slope, both slopes should be mentioned when ordering transition flashing.

At the gable edge the use of gable trim adds to the appearance of the structure and protects the fly-rafter, and sidewall flashing is used where the *side* of a panel butts up against an adjacent wall. In either case, the installer should be careful to seal between the gable rake or sidewall and panel with butyl sealant tape, and to fasten the rake every 6" to 12" up the slope of the roof with the appropriate screws. If eave drip is used on the gable, the number of 90 degree eave drip should be specified separately from that used on the drip edge when ordering.

To prevent penetration of water, insects, and debris at the ridge, outside closures may be inserted between the ridge cap and the top end of the panel\*. Screws are applied through the ridge cap, closure, and rib in at least every other rib of the panels. At least a 1½" (and up to a 2½") screw should be used for attaching ridge caps. Self-drilling lap screws can also be used to attach ridge caps.

## Keep Materials Dry!

Paint and finishes of Gulf Coast panels and trim are designed to withstand severe rain and wet weather conditions. Neither paint, galvanized, or Galvalume finishes, however, are designed to be in continuous contact with water for long periods of time. ***Damage will result if uninstalled panels or trim are allowed to remain wet in storage.*** Be sure to store material that will not be installed immediately in a dry location. Wet material should be air-dried and re-stacked if installation is not planned right away.



linear feet of panels in your order	Screw (purlin) Spacing			
	12 inch	18 inch	24 inch	30 inch
50	270	180	135	108
100	540	360	270	216
200	1080	720	540	432
300	1620	1080	810	648
400	2160	1440	1080	864
500	2700	1800	1350	1080
600	3240	2160	1620	1296
700	3780	2520	1890	1512
800	4320	2880	2160	1728
900	4860	3240	2430	1944
1000	5400	3600	2700	2160
1100	5940	3960	2970	2376
1200	6480	4320	3240	2592

Figure 6 Tuff-rib panel screw calculation chart

### Panel lap detail

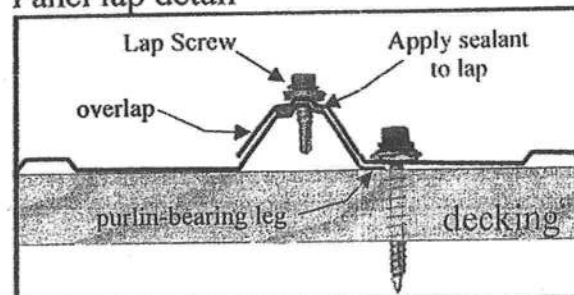


Figure 7 On low-pitched roofs butyl tape or caulk should be applied at the panel lap to keep water from overflowing the lap. Note that the underlap side of the panel has a short purlin-bearing leg that rests on the roof decking.

### How to figure screws:

For 2-foot spacing between rows of screws, multiply the total linear feet of metal times 2.7

*Example:* your order is 1250 feet of Tuff-rib roofing.  $1250 \times 2.7 = 3375$  screws

See table above for other spacings, or contact your Gulf Coast representative for a free estimate.

Gulf Coast Supply carries screws in 3 different lengths: 1 inch, 1½ inch, and 2 ½ inch. 1-inch screws will barely penetrate a 1x4, but the 1½ inch are the best all-purpose size. 1½- or 2½-inch screws are necessary for attaching ridge caps.

If care is taken, metal roofing application can be aided by pre-drilling panels, allowing screws to go quickly and accurately into the desired spacing. Pre-drilling will work provided that pilot holes are placed accurately in the proper locations on panels. Purlin spacing must be uniform and carefully measured.

To apply metal roofing over existing shingles, we recommend first overlaying the shingles with properly attached 1x4 purlins. If pressure treated purlins are used, felt paper should be applied over them in strips to prevent chemical interaction with the roofing panels. For solid decking, at least ½-inch plywood or its equivalent is required. For minimum penetration (such as might be desired over porches), 1-inch screws are recommended.


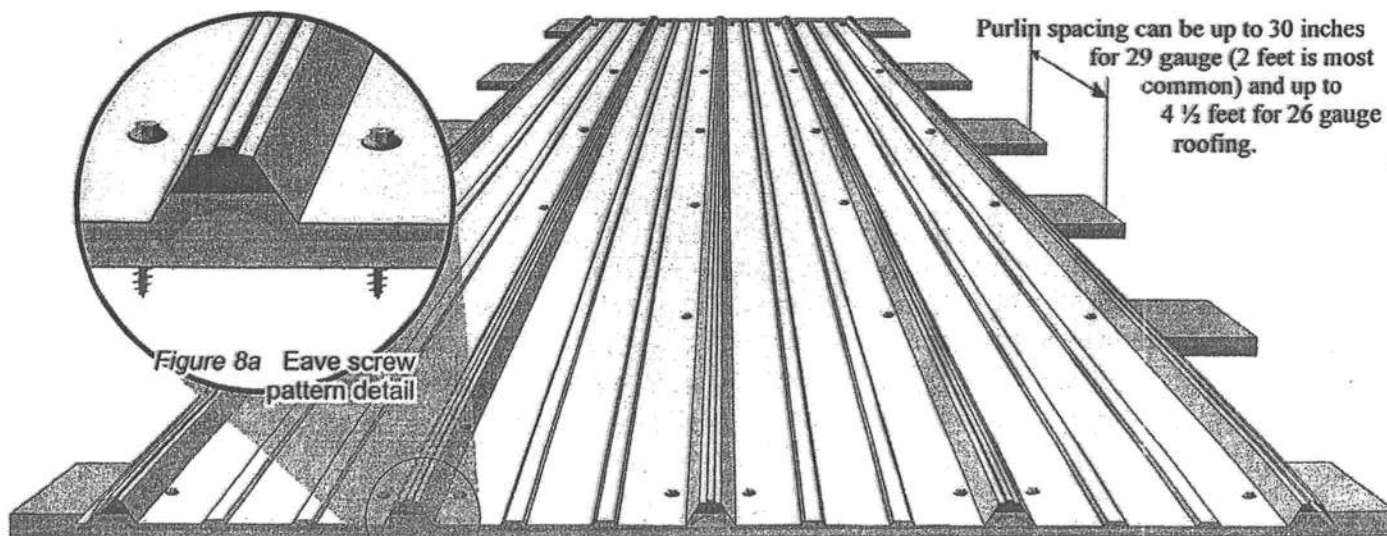


Figure 8a Eave screw pattern detail

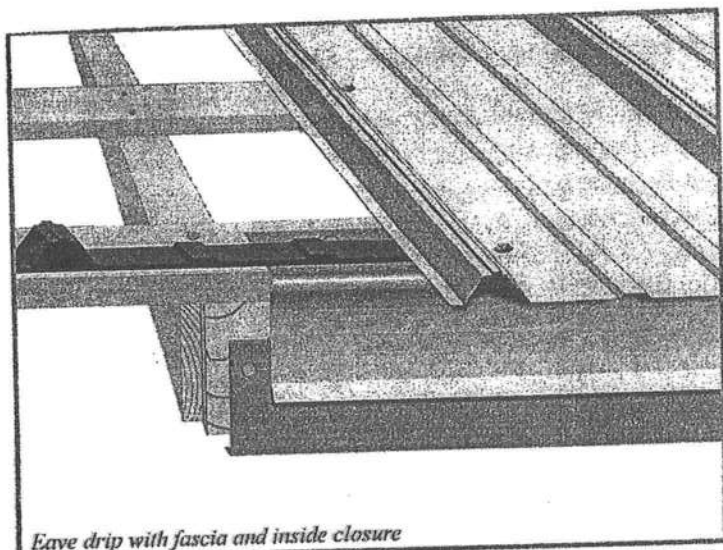Figure 8 Screws should be placed on both sides of the ribs on the eave







*Eave drip with fascia and inside closure*

Figure 9 Eave drip and fascia give a finished look along the drip eave of the house, as well as providing protection for the materials they cover. The eave drip should completely cover the top edge of the fascia. Inside closures, which seal off the open ribs of the panels, are optional.



## ◀ Eave Drip & Fascia

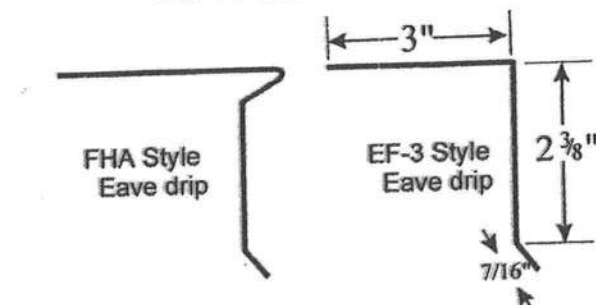

For custom eave drip, specify the amount of the eave that will be covered (dimension "a"), and, for steeper roofs, specify pitch. If fascia is desired, be sure that the dimension you order will be hidden by the eave drip.



## Preformed Valley ▶

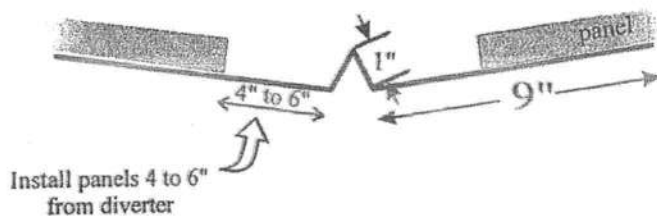

Two basic styles of valley are available. For custom valleys, specify dimension "a"

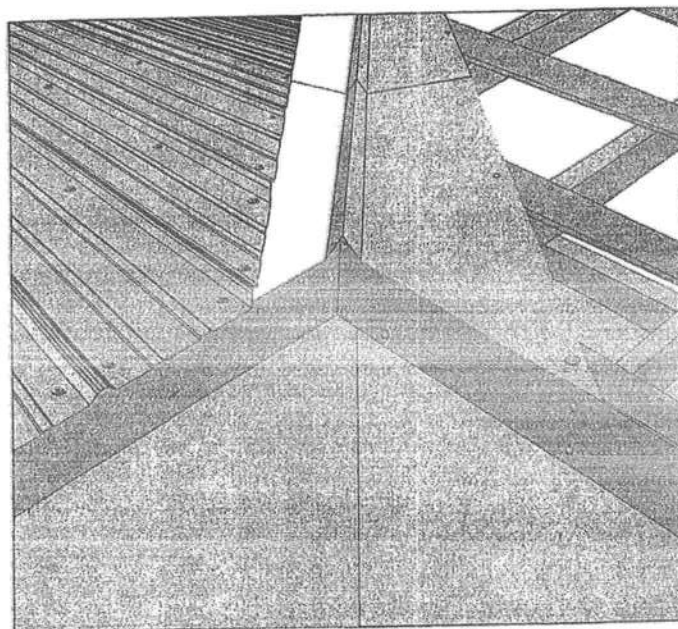
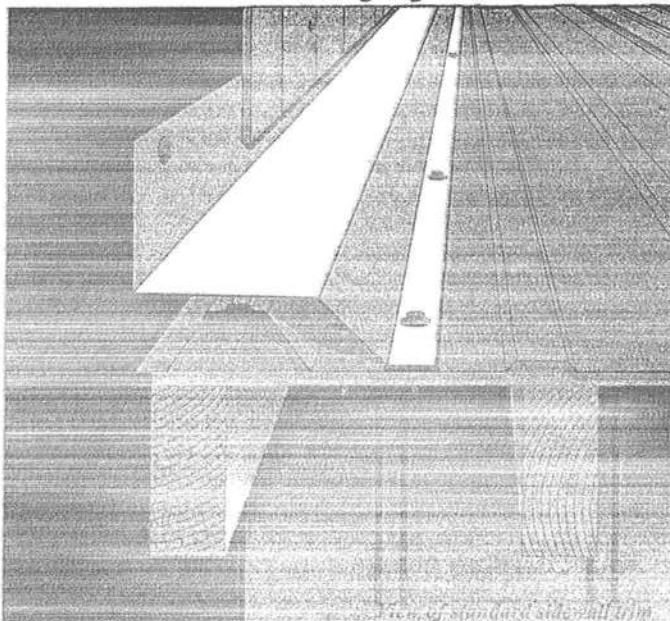
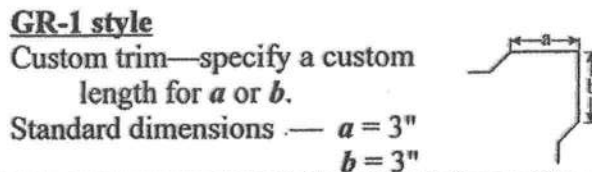
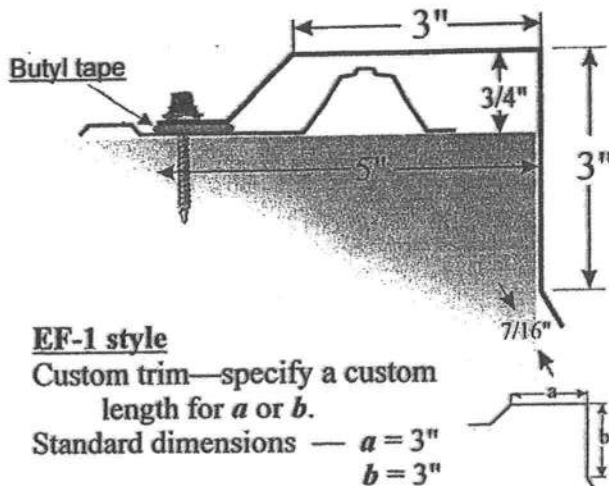
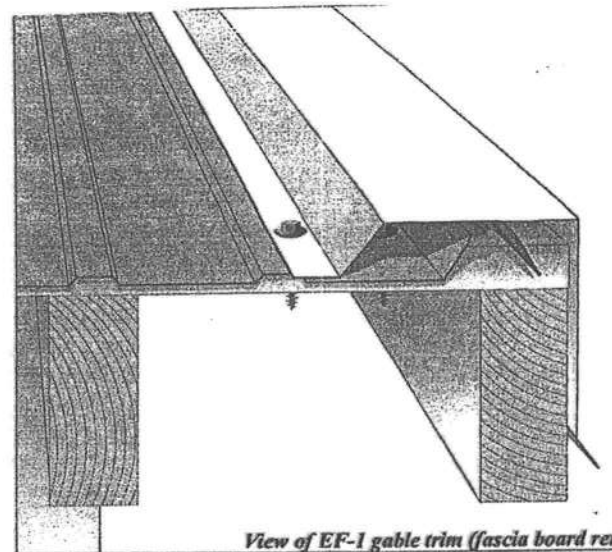


Figure 10 Pre-formed valleys use a diverter to prevent water from rushing under panels on the opposite side while channeling water off the roof. Expanding foam closures are often used to assure a good seal.

## Gable Flashing

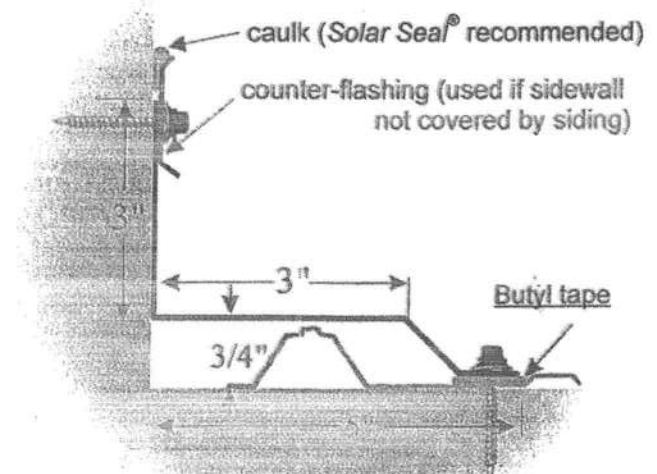


**Figure 12** Sidewall flashing is applied when the side of the roof butts up against an adjacent wall. The wall-side of the flashing can either be covered over with siding or sealed with counterflashing. Butyl tape should be applied where the "foot" of the flashing attaches to the roof, and, if used, along the top edge of the counterflashing.




**Figure 11** Gable flashing is used to trim the edge of the roofing panel at the gable end of the roof. It should match the eave drip that extends along the drip edge of the roof. The panel is allowed to hang over the gable end, eave drip can be used instead. Butyl tape between the trim and panel eliminates leaks.

## Side-wall Flashing



**SW-1**  
Custom trim—specify a custom length for  $a$  or  $b$ .  
Standard dimensions —  $a = 3"$   
 $b = 3"$




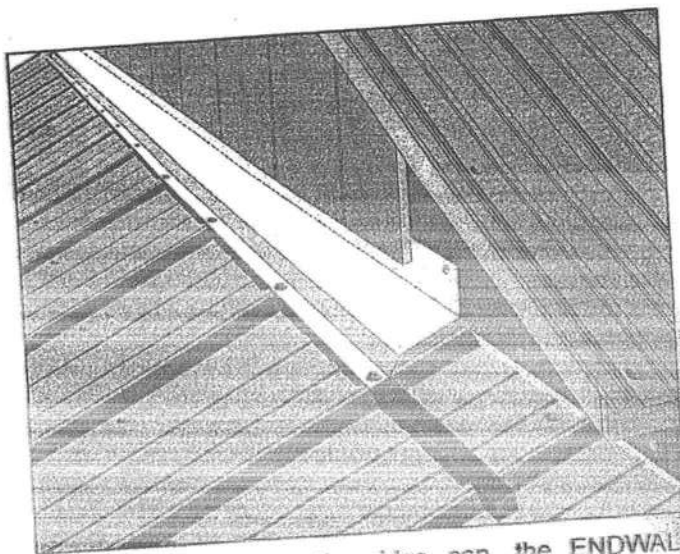



Figure 13 As with the ridge cap, the ENDWALL FLASHING above can be sealed using outside closures.

## End-wall Flashing

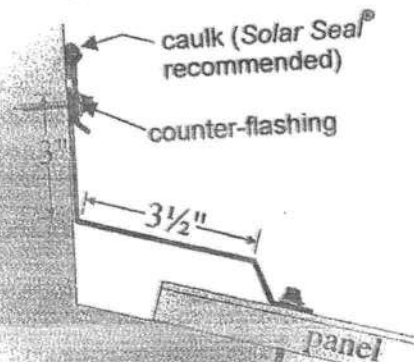End-wall flashing is applied where the upward slope of a roof meets a wall. The wall side of the flashing can be covered with siding or counter-flashing, and outside closures are used to seal between the flashing and the panel. Roof slope should be mentioned if roof exceeds 5/12 pitch.




For custom end-walls, specify roof pitch and dimensions "a" and "b".



## Transition Flashing

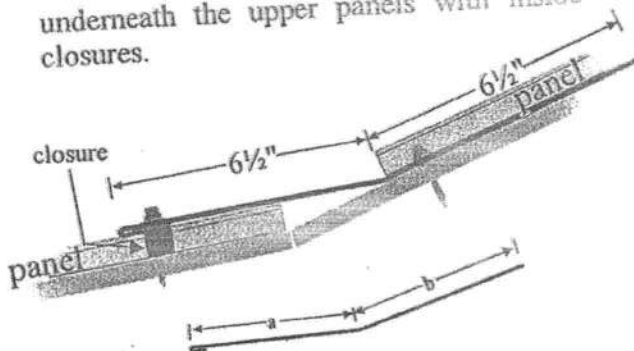TRANSITION FLASHING prevents leakage at the point where two different roof pitches meet. It is sealed on the lower side with outside closures, and can be sealed underneath the upper panels with inside closures.



For custom transition flashing specify the pitches of the two roof slopes and, if necessary, dimensions "a" and "b".

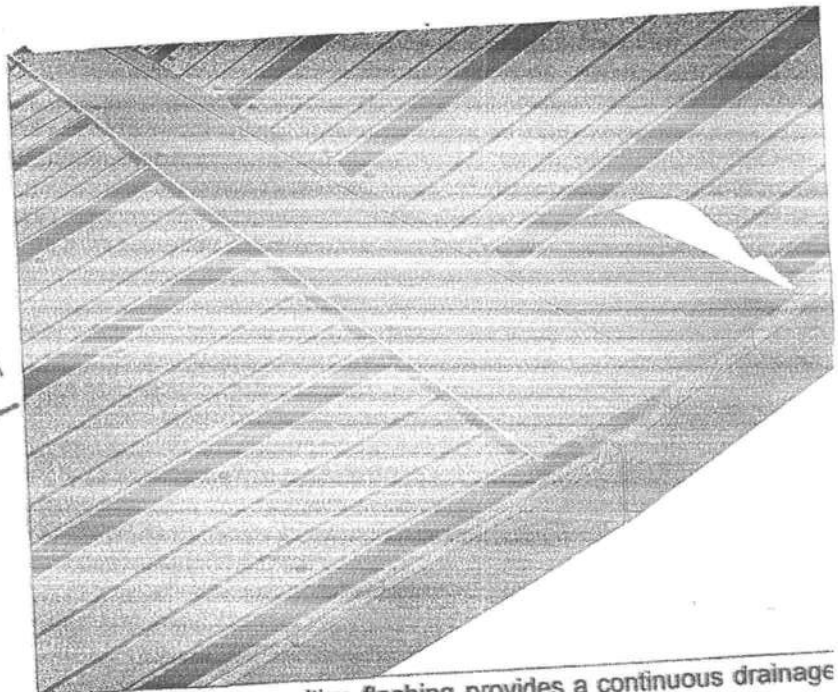


Figure 14 The transition flashing provides a continuous drainage where two slopes meet.

## Ridge Cap

The Ridge Cap is used to seal the point at which two upward slopes meet. This can be both along the ridge of the roof as well as for a hip. Either wood or metal self-drilling lap TEK screws are applied through the ribs of the metal.

Debris, insects, and blowing rain can find easy access under the ridge cap, so closures are often used to either completely or partially seal the opening. Closures under ridge caps come in 3 types: solid, vented, and hip tape. Solid closures ("Outside Closures") are the same width as the panels. They lock together in a row placed directly under the screws that attach the ridge cap, and form a solid, water-tight, air-tight barrier. (see Figure 14 on opposite page).

Profile Vent comes in 50 foot rolls, is 3 inches wide, and forms a water-retardant, insect resistant barrier that allows hot air to escape from the attic, and is superior to many more elaborate and expensive vent systems. Any length may be ordered.

Hip closure tape (*Peel and Seal*®) is a sticky, adhesive-backed metallic tape that seals the hip roof. It is 6 inches wide and comes in 33½ foot rolls. Because it must be conformed to the rise and fall of the panel ridges, approximately 10% extra may be needed beyond the length of the hip being covered.

### Standard 12-inch Ridge Caps

are economical and adequate for most of your roofing needs

### Over-sized Ridge Caps

are available in 18-inch widths (hem to hem), or as a custom trim item in other widths

Available in total widths (2 times "a") of 14-, 16-, 18-, 20-, 22-, and 24-inch

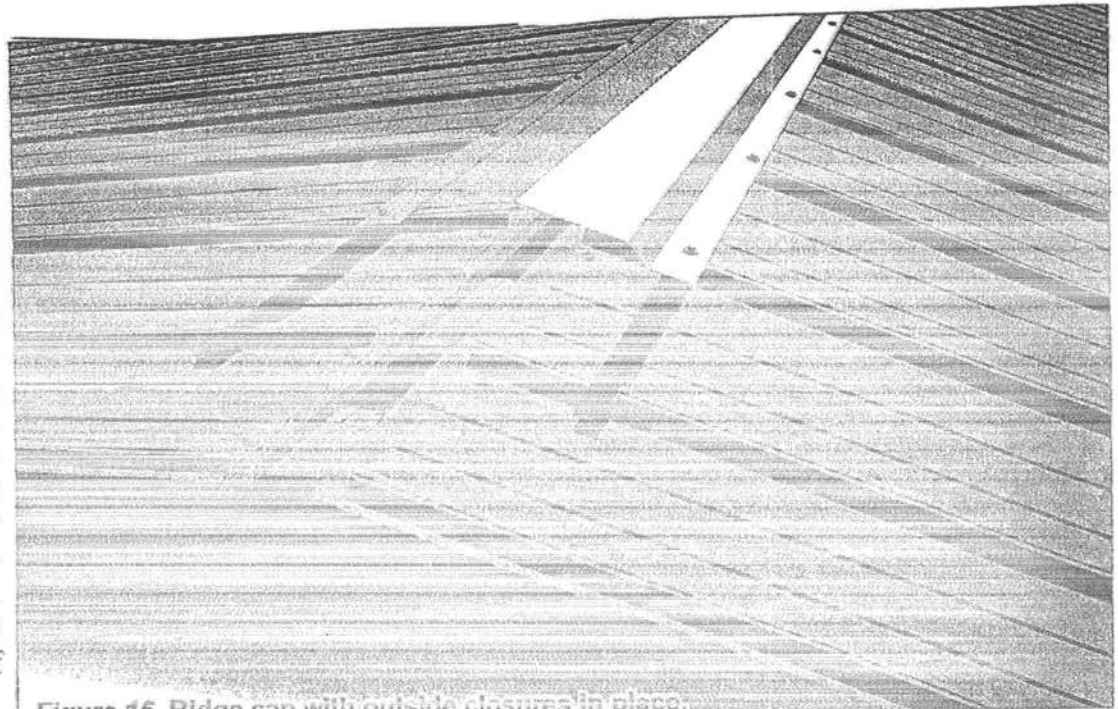


























Figure 15 Ridge cap with outside closures in place.



Figure 16 Pipe Boots provide a water-tight seal around roof vents and come in a variety of sizes. They seal with caulk and conform to the shape of the panel ribs.



					
RC-2 Ridge cap (pg. 11)	FHA eave drip (pg. 8)	PV-1 valley (pg. 8)	EF-1 Gable rake (pg. 9)	SW-1 Sidewall (pg. 9)	EW-1 Endwall (pg. 10)
					
TF-1 Transition flashing (pg. 10)	EF-3 eave drip (pg. 8)	GF-1 Gambrel flashing	GR-1 Gable rake (pg. 9)	Pipe Boot (pg. 11)	Electrical Boot
					
Outside Closures	Inside Closures	Profile Vent®	Universal Closure material	Peel and Seal®	Touch-up Paint
					
Butyl Tape	Solar Seal®	Low E® Insulation	Woodgrip® Screws	TEK screws	ZAC® screws

## Guide to Misc. Accessories

item	application
pipe boot	Fits over vent and heat pipes. Available also in heat-resistant boots.
electrical boot	Fits around pipes with inaccessible tops (such as weatherheads).
outside closures	Seals under ridge caps and transition and endwall flashings.
inside closures	Seals under panels, particularly on the eave.
Profile Vent®	Vented closure material surpassing many other venting systems.
universal foam	Seals irregular contact points (such as valleys).
Peel and Seal®	Seals hips under hip caps. Also, a general purpose sealing tape.
touch-up paint	Hides scratches and mars encountered in installation.
butyl tape	General purpose low-cost sealant, used on panel laps and under trim.
Solar Seal®	A superior general purpose caulk for all joints. Matches panel colors.
Low E® insulation	Greatly reduces radiant heat when installed under panels.
Woodgrip® screws	Used in all applications attaching metal to wood. 1", 1½", 2½" sizes.
TEK screws	Self-drilling TEK screws for metal purlins. Lap TEK screws draw together joints and attach trim.
ZAC® screws	Heavy duty coated screws; available in woodgrip and self-drilling.

LETTER OF AUTHORIZATION

Date: 03/31/08

Columbia County Building Department  
P.O. Drawer 1529  
Lake City, FL 32056

I Lewis Walker, License No. RC00067442 do hereby  
Authorize Barbara Johnston to pull and sign permits on my  
behalf.

Sincerely,

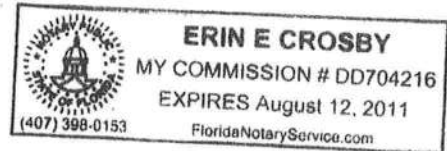
Sworn to and subscribed before me this 31 day of March, 2008

Notary Public: Erin E. Crosby

My commission expires: August 12, 2011

Personally Known ☒

Produced Valid Identification: \_\_\_\_\_



Revised: 3/2006

Aug. 22 2007 01:49PM Pd

FROM: COLUMBIA CO BUILDING + ZONING FAX NO.: 386-758-2160



# Gulf Coast Supply

& Mfg. Inc.

352-498-0778

888-393-0335

FAX 352-498-7852

www.gulfcoastsupply.com

Enter panel sizes below

Number Feet Inches

42 14 3

Name: Huddleston

Address: \_\_\_\_\_

City, St.: \_\_\_\_\_

Phone: \_\_\_\_\_ cell: \_\_\_\_\_

Fax: \_\_\_\_\_

For questions on special orders and all your metal roofing needs, contact your friendly Gulf Coast sales representative, M-F, 8 a.m. to 5 p.m.

Panel style  
(circle 1)

Tuff-Rib	PBR	5-v	Gulf-Lok	Gulf Seam	Mechanical seam
----------	-----	-----	----------	-----------	-----------------

Panel color: Gallery Blue Panel gauge: 29 26 24 (circle one)

job name: \_\_\_\_\_

	quantity	code
Ridge caps	7	
Eave Drip	13	
Gable rakes	67	
Valleys		
Sidewalls		
End walls		
Transition flashing		
other		
other		
misc. trims		
other		
other		
other		
1x4's	85	
Touchup paint	2	
Solar Seal	2	

	quantity	code
Profile vent		
Outside closures	40	
Inside closures		
Peel & Seal		
Expanding foam		
Butyl tape		
underlayment		
Insulation	4	
Boots #3	4	
#5		
#6		
#7		
#8		
#9		
Electrical boot		

	Standard (Wood-grip)	Premium (ZAC)
Stocked Screws		
1"		
1-1/2"	2250	
2-1/2"		
Pancake		

	standard	ZAC
Tek		
Lap Tek		
Rivets		

Gulf Coast Supply  
& Mfg. Inc.

4020 SW 449th St  
Horseshoe Beach, FL 32648

NOTICE OF COMMENCEMENT FORM  
COLUMBIA COUNTY, FLORIDA

THE UNDERSIGNED hereby gives notice that improvement will be made to certain real property, and in accordance with Chapter 713, Florida Statutes, the following information is provided in this Notice of Commencement.

Tax Parcel ID Number 34-45-16-03274-051-HX

1. Description of property: (legal description of the property and street address or 911 address)  
Comm SW Cor, Run N. 125.53 ft, E 30 ft to Inters E R/W of  
Mauldin Rd with N R/W Merrill Ln, Run N 368.94 Ft E 179.62 Ft for  
POB, Cont. E 179.61 Ft, S 193.94 Ft, W 150 Ft, S 175 ft to N R/W  
Merrill Lane, W 30 ft, N. 368.34 ft to POB. Part of Lots 25 + 26  
Oak Forrest S/D Unrec. ORB 851-951, WD 1125-1034
2. General description of improvement: Re-roof
3. Owner Name & Address Gary & Patricia Huddleston 143 SW Kessler  
bln Lake City FL 32024 Interest in Property owner
4. Name & Address of Fee Simple Owner (if other than owner): N/A
5. Contractor Name Lewis Walker Roofing Inc Phone Number 386 497-1419  
Address PO Box 82 Ft White FL 32038
6. Surety Holders Name N/A Phone Number N/A  
Address N/A  
Amount of Bond N/A  
Inst: 200812006489 Date: 4/2/2008 Time: 10:31 AM  
DC, P. DeWitt Cason, Columbia County Page 1 of 1 B: 1147 P: 308
7. Lender Name N/A Phone Number N/A  
Address N/A
8. Persons within the State of Florida designated by the Owner upon whom notices or other documents may be served as provided by section 718.13 (1)(a) 7; Florida Statutes:  
Name N/A Phone Number N/A  
Address N/A
9. In addition to himself/herself the owner designates N/A of  
N/A to receive a copy of the Lienor's Notice as provided in Section 713.13 (1) -  
(a) 7. Phone Number of the designee N/A
10. Expiration date of the Notice of Commencement (the expiration date is 1 (one) year from the date of recording,  
(Unless a different date is specified) N/A

**NOTICE AS PER CHAPTER 713, Florida Statutes:**

The owner must sign the notice of commencement and no one else may be permitted to sign in his/her stead.

Gary Huddleston  
Signature of Owner

Sworn to (or affirmed) and subscribed before  
day of 02 April, 2008

NOTARY STAMP/SEAL



Barbara A. Johnston  
Signature of Notary