

GENERAL NOTES

1. DESIGN IS FOR MAXIMUM 30'-0" WIDE X 20'-0" EAVE HEIGHT FULLY ENCLOSED STRUCTURES.
2. APPLICABLE CODES, REGULATIONS, & STANDARDS:

A. 2023 FLORIDA BUILDING CODE (8TH EDITION)

B. 2024 INTERNATIONAL BUILDING CODE

C. ASCE 7-22: MINIMUM DESIGN LOADS ON BUILDINGS AND OTHER STRUCTURES

D. AISC STEEL CONSTRUCTION MANUAL (15TH EDITION)

E. ACI 318-19: BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE

F. TMS 402-16: BUILDING CODE REQUIREMENTS FOR MASONRY STRUCTURES

G. AWS D1.1: STRUCTURAL WELDING
3. RISK CATEGORY: I
4. EXPOSURE CATEGORY: C
5. LOW ULTIMATE WIND SPEED 105 TO 150 MPH (NOMINAL WIND SPEED 81 TO 116 MPH): MAXIMUM RAFTER/POST AND END POST SPACING = 5.0 FEET.

HIGH ULTIMATE WIND SPEED 151 TO 180 MPH (NOMINAL WIND SPEED 117 TO 139 MPH): MAXIMUM RAFTER/POST AND END POST SPACING = 4.0 FEET.
6. DEAD LOAD = 5 PSF
7. ROOF LIVE LOAD = 12 PSF
8. SPECIFICATIONS APPLICABLE TO 29/26 GAUGE METAL PANELS FASTENED DIRECTLY TO 2 1/2" x 2 1/2" - 14 GAUGE TUBE STEEL (TS) FRAMING MEMBERS FOR VERTICAL PANELS, 29/26 GAUGE METAL PANELS SHALL BE FASTENED TO 18 GAUGE HAT CHANNELS (UNLESS OTHERWISE NOTED).
9. OPTIONAL BASE RAIL ANCHORAGE MAY BE USED FOR LOW AND MUST BE USED FOR HIGH WIND SPEEDS.
10. FASTENERS CONSIST OF #12-14 x 3/4" SELF DRILLING FASTENER (SDF), USE CONTROL SEAL WASHER WITH EXTERIOR FASTENERS SPECIFICATIONS APPLICABLE ONLY FOR MEAN ROOF HEIGHT OF 20 FEET OR LESS, AND ROOF SLOPES OF 14° (3:12 PITCH) OR LESS SPACING REQUIREMENTS FOR OTHER ROOF HEIGHTS AND/OR SLOPES MAY VARY.
11. AVERAGE FASTENER SPACING ON-CENTERS ALONG RAFTERS OR PURLINS, AND POSTS, INTERIOR = 9" OR END = 6", (MAX.). THIS CONNECTION PATTERN SHALL BE SUPERCEDED BY THE PANEL MANUFACTURER'S INSTALLATION INSTRUCTIONS.
12. WIND FORCES GOVERN OVER SEISMIC FORCES. SEISMIC PARAMETERS ANALYZED ARE:

SOIL SITE CLASS = D

R = 3.25      Ie = 1.0

Sds = 0.087 g      V = CsW

Sdi = 0.084 g
13. GROUND ANCHORS SHALL BE INSTALLED THROUGH BASE RAIL WITHIN 6" OF EACH RAFTER COLUMN ALONG SIDES.
14. GROUND ANCHOR (SOIL NAILS) CONSIST OF #5 REBAR W/ WELDED NUT X 30" LONG IN SUITABLE SOIL CONDITIONS MAY BE USED FOR LOW (≤ 108 MPH NOMINAL) WIND SPEEDS ONLY. OPTIONAL ANCHORAGE MAY BE USED IN SUITABLE SOILS AND MUST BE USE IN UNSUITABLE SOILS AS NOTED.
15. MIN. LAP REQUIREMENT FOR REBAR IN FOOTER IS 25".
16. SOIL TO BE COMPACTED TO 95% OF ITS MAXIMUM DRY DENSITY, AT OPTIMUM MOISTURE CONTENT, IN ACCORDANCE WITH ASTM D1557-93
17. PRIOR TO PLACING CONCRETE, TREAT THE ENTIRE SUBSURFACE AREA FOR TERMITES IN COMPLIANCE WITH THE FBC.
18. A LANDING OF MIN. 36" WIDTH IN THE DIRECTION OF TRAVEL SHALL BE PROVIDED AT THE EXTERIOR DOORS. SLOPE OF LANDING NOT TO EXCEED 1/4"-1'. LANDING LEVEL NOT TO BE LOWER THAN 1-1/2" (FOR EGRESS DOORS) & 7-3/4" (FOR OTHER EXTERIOR DOORS) BELOW THE TOP OF THRESHOLD.
19. CONTRACTOR TO PROVIDE APPROVED PRODUCTS THAT MEET OR EXCEED WIND DESIGN PRESSURES.
20. CONSTRUCTION IN SPECIAL FLOOD HAZARD AREAS:

CONTRACTOR TO VERIFY THAT THE FINISHED FLOOR ELEVATION FOR THE PROPOSED STRUCTURE IS AT OR ABOVE THE GREATER OF THE FOLLOWING ELEVATIONS:

I) BFE (BASE FLOOD ELEVATION) + 2'-0"


II) DFE (DESIGN FLOOD ELEVATION)

III) THE MINIMUM ELEVATION MANDATED BY THE BUILDING CODES ADOPTED BY THE AUTHORITY HAVING JURISDICTION.

DRAWING INDEX

| PAGE NO. | DESCRIPTION                                             |
|----------|---------------------------------------------------------|
| 1        | NOTES AND SPECIFICATIONS                                |
| 2        | BOX EAVE FRAME RAFTER ENCLOSED BUILDING                 |
| 3        | BOW EAVE FRAME RAFTER ENCLOSED BUILDING                 |
| 4        | BASE RAIL AND FOUNDATION ANCHORAGE                      |
| 5        | BOX/BOW EAVE VERTICAL ROOF/SIDING OPTION                |
| 6        | BOX/BOW EAVE RAFTER LEAN-TO OPTIONS                     |
| 7        | BOX EAVE RAFTER END WALL, SIDE WALL AND OPENING FRAMING |
| 8        | VENT AND CMU STEM WALL DETAIL                           |
| 9        | OPTIONAL CONCRETE STRIP FOOTING                         |

ENCLOSED METAL BUILDING DESIGN  
MAXIMUM 30'-0" WIDE X 20'-0" EAVE HEIGHT  
BOX/BOW EAVE FRAME

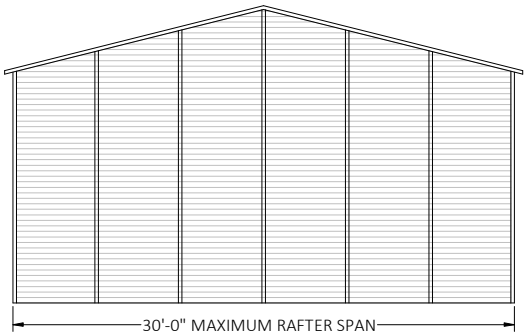


TYPICAL END ELEVATION - HORIZONTAL ROOF




TYPICAL SIDE ELEVATION - HORIZONTAL ROOF

BOX EAVE FRAME RAFTER ENCLOSED BUILDING

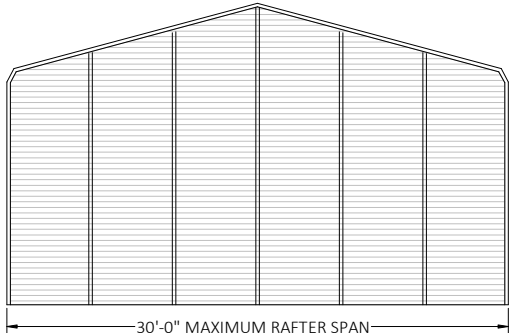

TYPICAL END ELEVATION

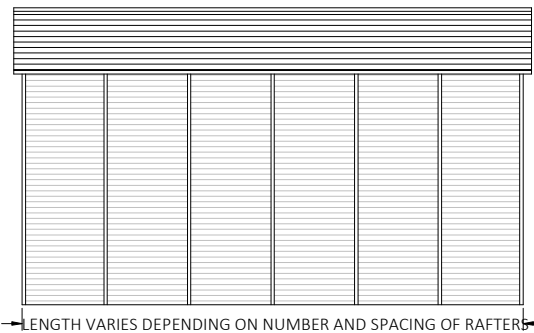


TYPICAL SIDE ELEVATION

BOW FRAME RAFTER ENCLOSEDBUILDING

FLORIDA ENGINEERING LLC PROJECT NO. 2504211-30-E  
SIGNED AND SEALED DATED 03/27/2025 REVISES AND  
SUPERSEDES FLORIDA ENGINEERING LLC PROJECT NO.  
2322771-30-E SIGNED AND SEALED DATED 03/04/2024.


DIGITAL CERTIFICATION NOTES:  
1. THIS DOCUMENT HAS BEEN DIGITALLY SIGNED AND SHALL REMAIN IN DIGITAL FORMAT, SHALL BE VERIFIED BY ELECTRONIC MEANS & PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED.  
2. THIS DOCUMENT HAS BEEN CREATED BY FLORIDA ENGINEERING LLC FOR TUBULAR BUILDING SYSTEMS ONLY. IT SHALL NOT BE REPRODUCED IN WHOLE OR PART WITHOUT THE WRITTEN CONSENT OF FLORIDA ENGINEERING LLC AND TUBULAR BUILDING SYSTEMS.  
3. ALTERATIONS, ADDITIONS OR OTHER MARKINGS TO THIS DOCUMENT ARE NOT PERMITTED AND INVALIDATE FLORIDA ENGINEERING LLC'S CERTIFICATION.  
4. THESE PLANS ARE GENERIC AND DO NOT PROVIDE INFORMATION FOR A SITE-SPECIFIC PROJECT WHERE THE SITE CONDITIONS DEVIATE FROM WHAT HAS BEEN CALLED OUT ON THESE PLANS.  
5. CONTRACTOR MUST NOT DEVIATE FROM THE CONDITIONS DETAILED ON THESE PLANS.  
6. CONSTRUCTION SAFETY AT THE SITE IS THE CONTRACTOR'S RESPONSIBILITY.

This item has been digitally signed and sealed by Richard E. Walker, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

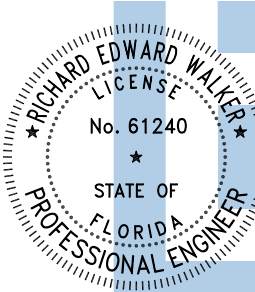

Digitally signed  
by Richard E Walker  
Date:  
2025.03.27  
13:07:41-04'00'

FLORIDA ENGINEERING LLC  
4161 TAMiami TRAIL, UNIT 101  
PORT CHARLOTTE, FLORIDA 33952

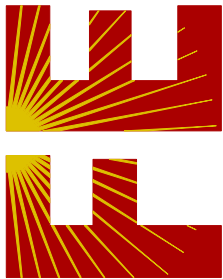

(941) 391-5980

FLeng.com

Orders@FLeng.com

CA CERT. #30782

PROJECT NO. 2504211-30-E





















CONTRACTOR:

TUBULAR BUILDING SYSTEMS  
631 SE INDUSTRIAL CIRCLE,  
LAKE CITY, FL 32025


PROJECT DESCRIPTION:

30' WIDE X 20' HIGH  
ENCLOSED STRUCTURE

|              |            |                    |
|--------------|------------|--------------------|
| DESIGN DATE: | 03/27/2025 |                    |
| REVISION 1:  | DATE       | PAGE :<br><b>1</b> |
| REVISION 2:  | DATE       |                    |
| SCALE:       | NTS        |                    |

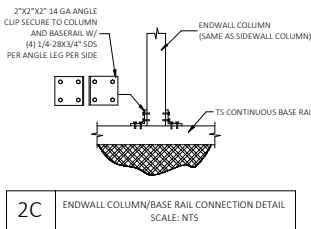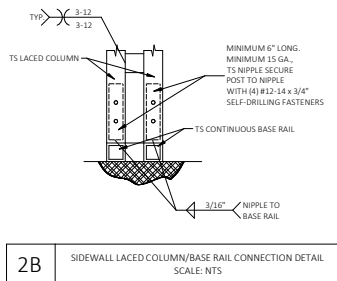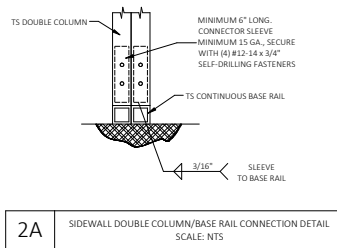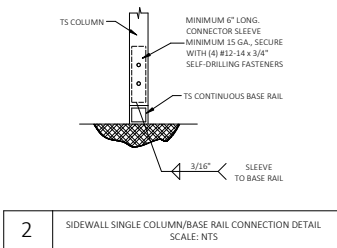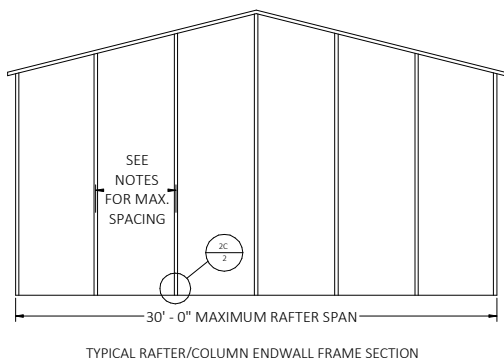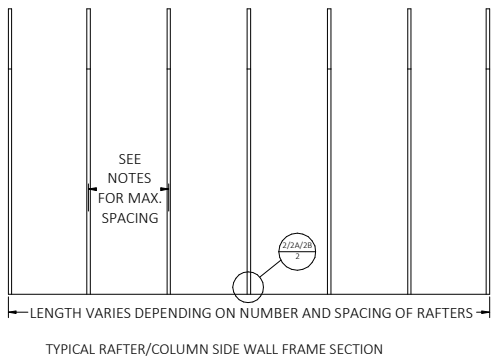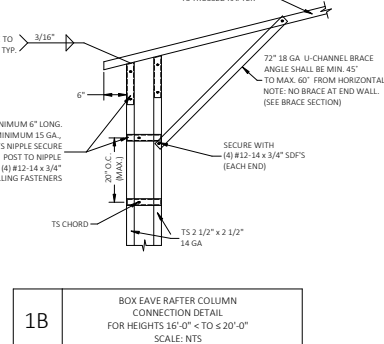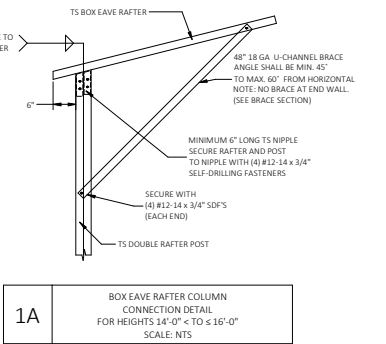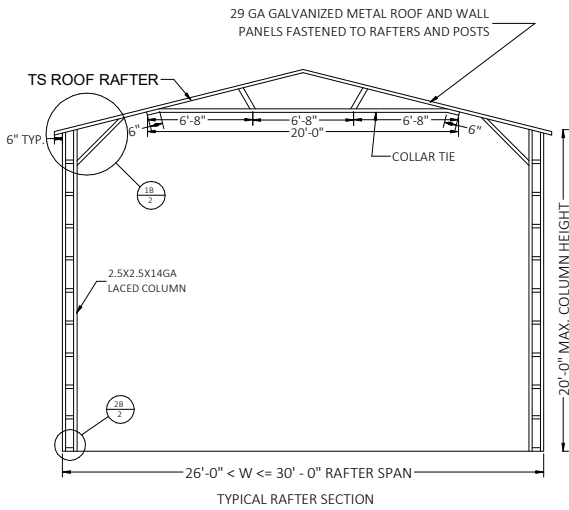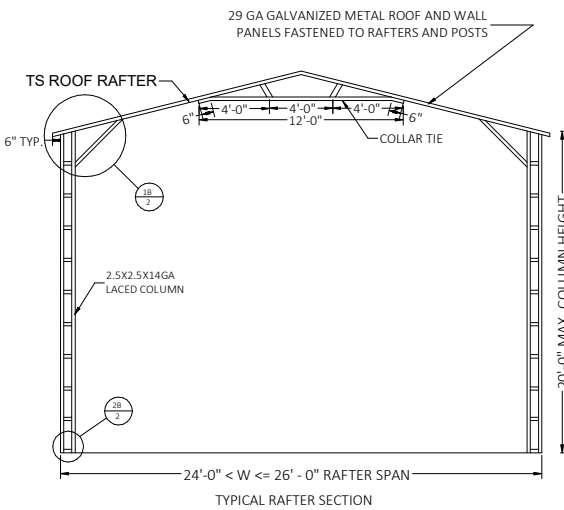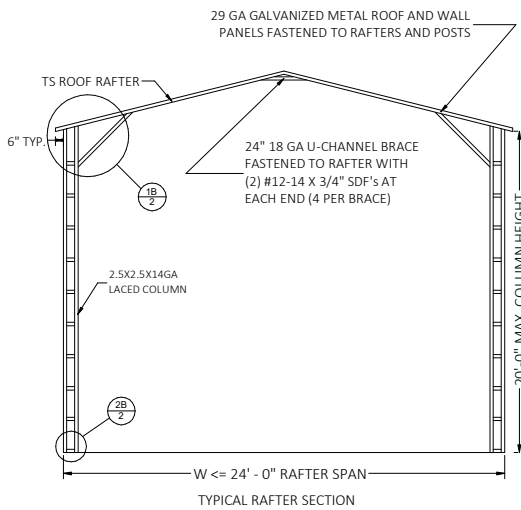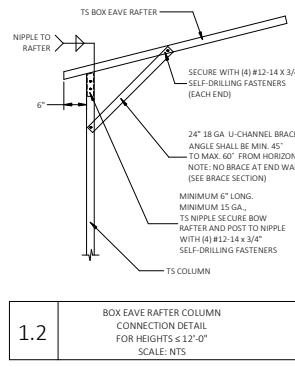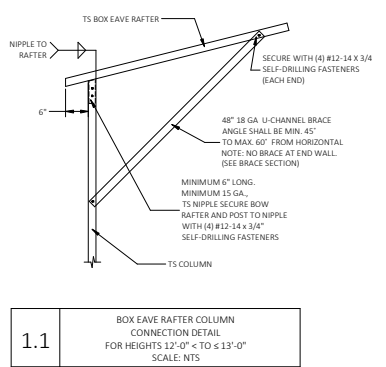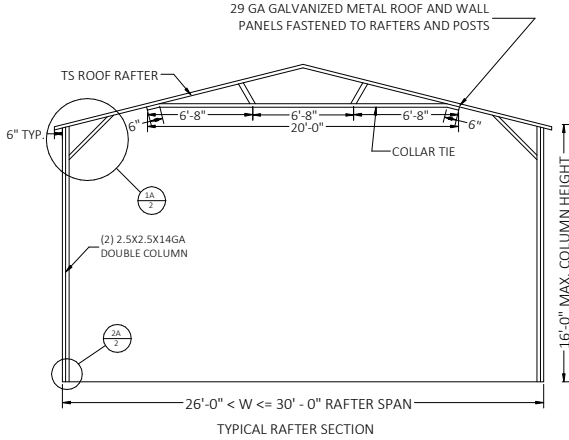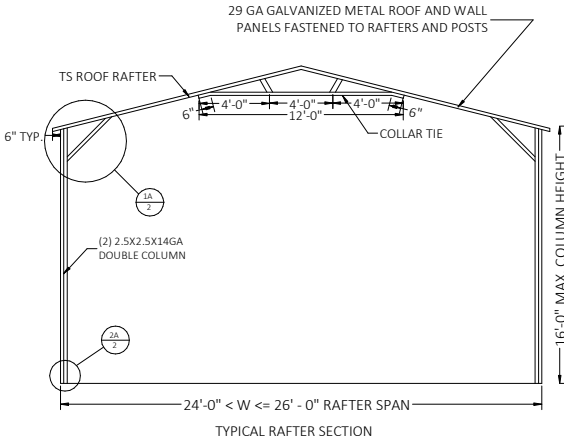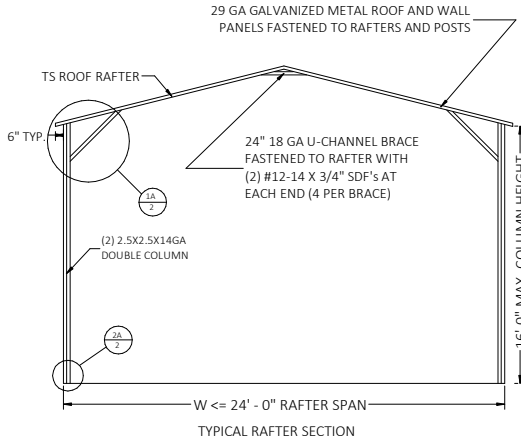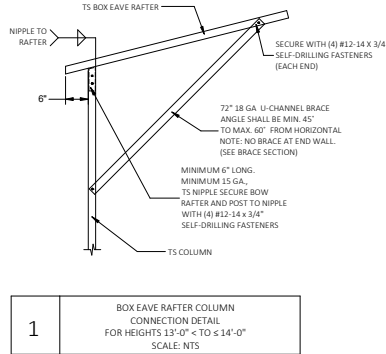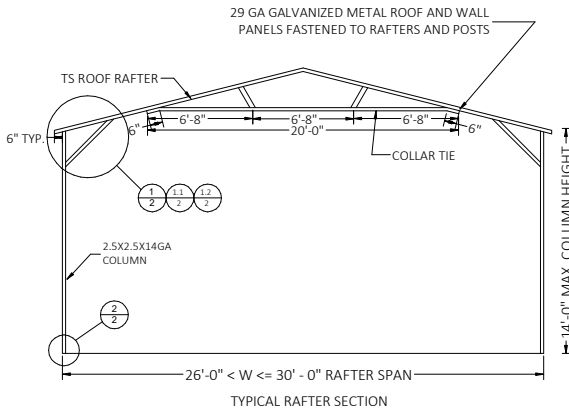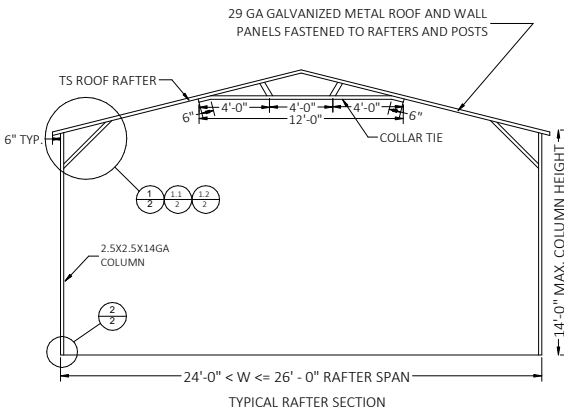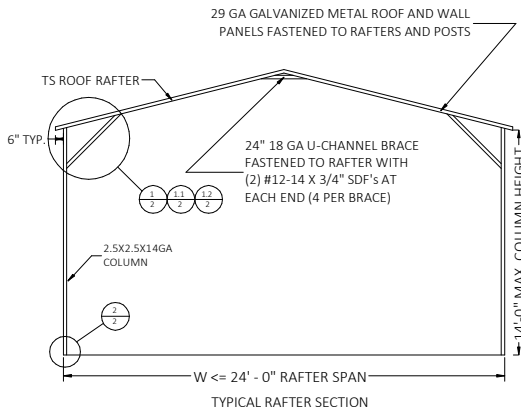


This item has been digitally signed and sealed by Richard E. Walker, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

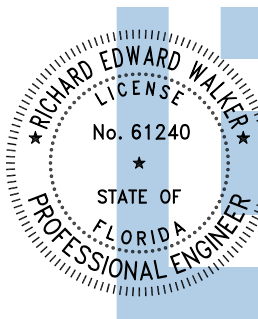

Digitally signed by Richard E Walker  
Date: 2025.03.27 13:07:42-04'00'

FLORIDA ENGINEERING LLC  
4161 TAMiami TRAIL, UNIT 101  
PORT CHARLOTTE, FLORIDA 33952  
(941) 391-5980  
FLEng.com  
Orders@FLEng.com

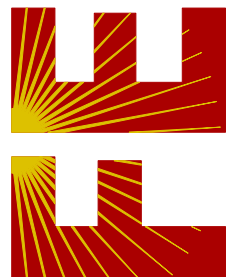





















CONTRACTOR:  
TUBULAR BUILDING SYSTEMS  
631 SE INDUSTRIAL CIRCLE,  
LAKE CITY, FL 32025

PROJECT DESCRIPTION:


30' WIDE X 20' HIGH  
ENCLOSED STRUCTURE

DESIGN DATE: 03/27/2025  
REVISION 1: DATE  
REVISION 2: DATE  
SCALE: NTS

PROJECT NO. 2504211-30-E  
CA CERT. #30782

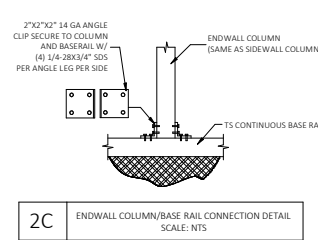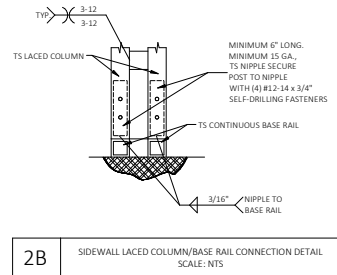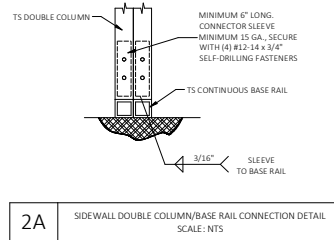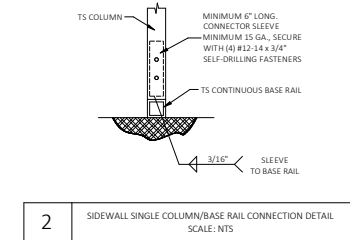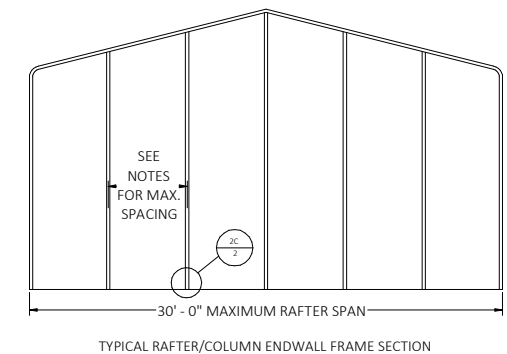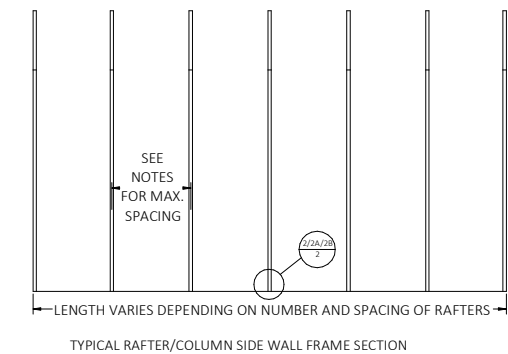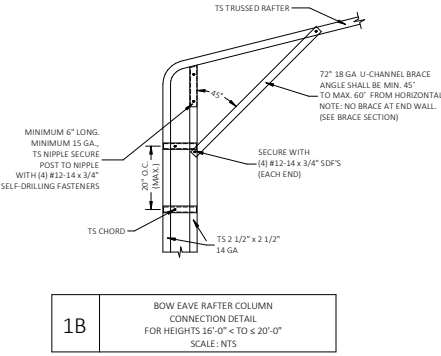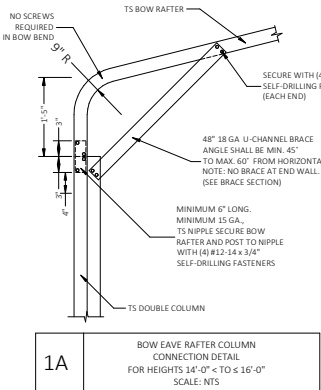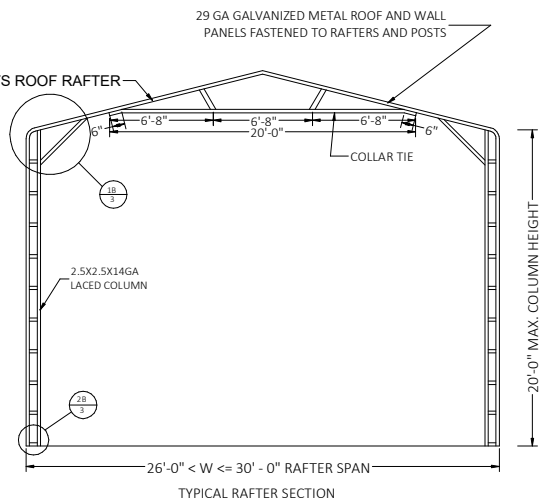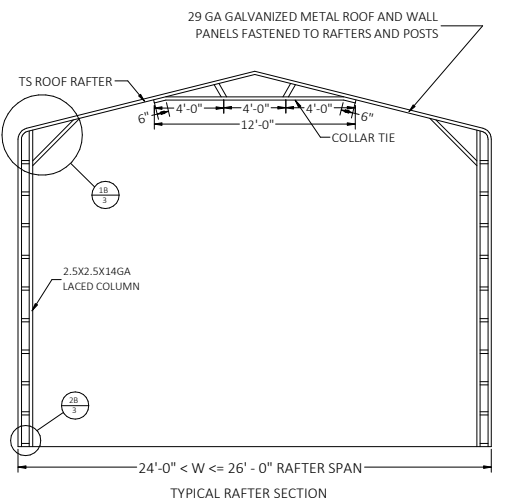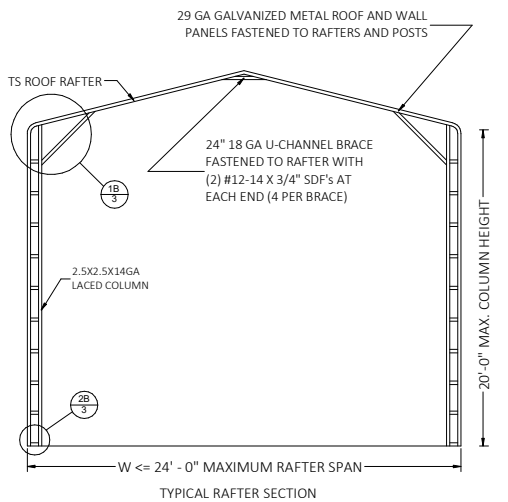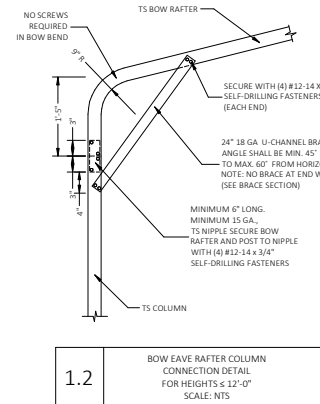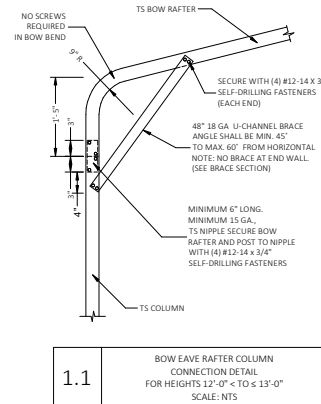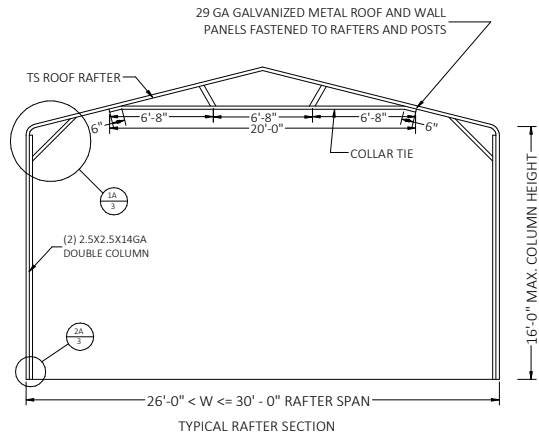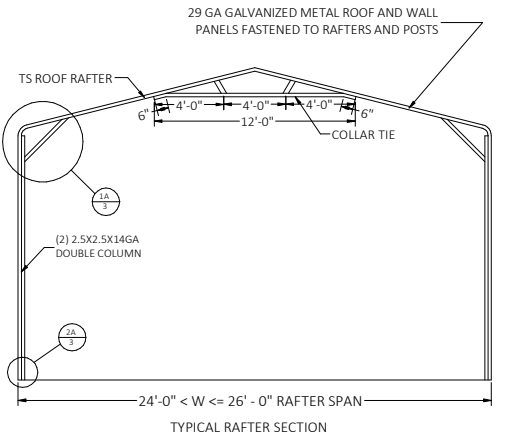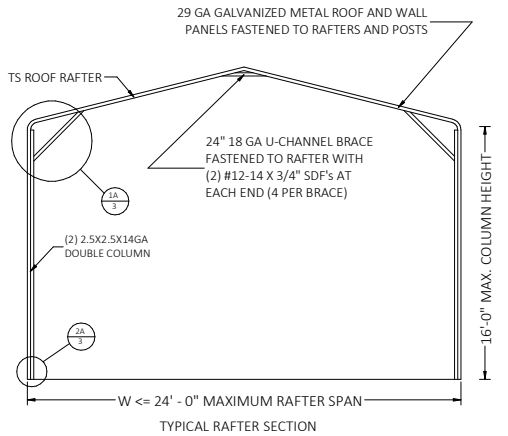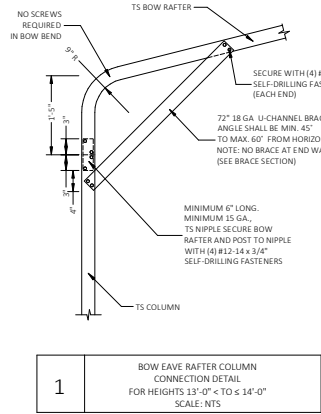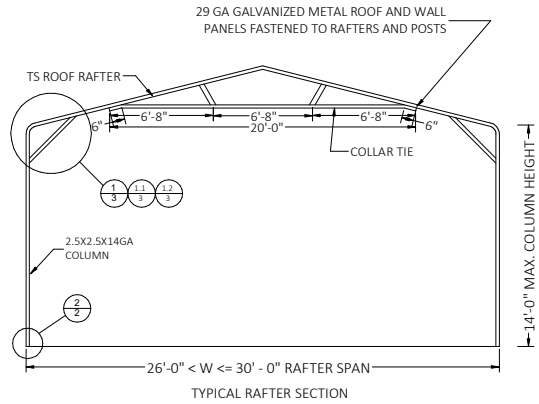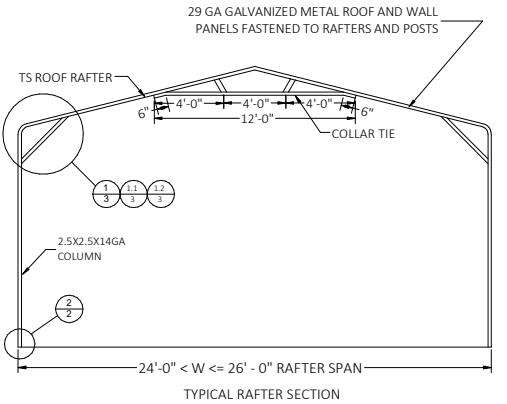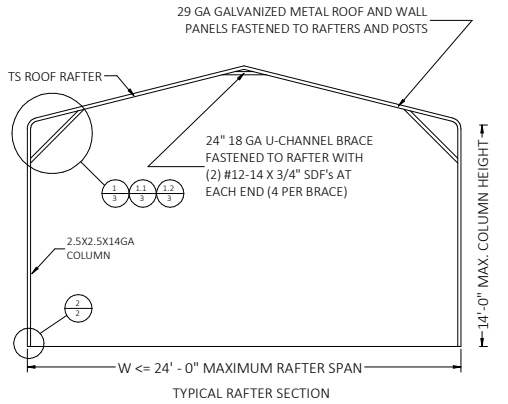

This item has been digitally signed and sealed by Richard E. Walker, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

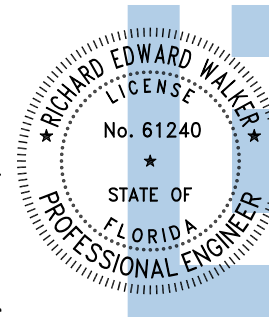

Digitally signed by Richard E Walker  
Date: 2025.03.27 13:07:43-04'00'

**FLORIDA ENGINEERING LLC**  
4161 TAMiami TRAIL, UNIT 101  
PORT CHARLOTTE, FLORIDA 33952  
(941) 391-5980  
FLeng.com  
Orders@FLeng.com

CA CERT. #30782

PROJECT NO. 2504211-30-E

CONTRACTOR:  
**TUBULAR BUILDING SYSTEMS**  
631 SE INDUSTRIAL CIRCLE,  
LAKE CITY, FL 32025

PROJECT DESCRIPTION:  
**30' WIDE X 20' HIGH  
ENCLOSED STRUCTURE**

DESIGN DATE: 03/27/2025

REVISION 1: DATE  
REVISION 2: DATE  
SCALE: NTS

PAGE :  
**3**

BASE RAIL ANCHORAGE OPTIONS FOR LOW AND HIGH WIND SPEED

GENERAL NOTES

- CONCRETE:
1. CONCRETE SHALL HAVE A MINIMUM SPECIFIED COMPRESSIVE STRENGTH OF 3000 PSI AT 28 DAYS.
  2. PRIOR TO PLACING CONCRETE, TREAT THE ENTIRE SUBSURFACE AREA FOR TERMITES IN COMPLIANCE WITH THE FBC.
  3. MINIMUM SOIL BEARING CAPACITY OF COMPACTED GRADE= 2000 PSF

COVERAGE OF THE REINFORCED STEEL:

FOR FOUNDATIONS, MINIMUM CONCRETE COVER OVER REINFORCING BARS SHALL BE PER ACI-318: 3 INCHES WHERE THE CONCRETE IS POURED AGAINST AND TEMPORARY IN CONTACT WITH THE EARTH OR UNPROTECTED FROM THE EARTH OR WEATHER, OTHERWISE 1-1/2 INCHES.

REINFORCING STEEL:


THE TURNDOWN REINFORCING STEEL SHALL BE ASTM A615 GRADE 60. THE SLAB REINFORCEMENT SHALL BE WELDED WIRE FABRIC MEETING ASTM A185 OR FIBERGLASS FIBER REINFORCEMENT.

REINFORCEMENT MAY BE BENT IN THE FIELD OR SHOP AS LONG AS:


1. IT IS BENT COLD;
2. REINFORCEMENT PARTIALLY EMBEDDED IN CONCRETE SHALL NOT BE FIELD BENT;
3. THE DIAMETER OF THE BEND, MEASURED ON THE INSIDE OF THE BAR, IS NOT LESS THAN SIX-BAR DIAMETERS.
4. MINIMUM REQUIRED LAP LENGTH SHALL NOT BE LESS THAN 57-BAR DIAMETERS.

HELIX ANCHOR NOTES


1. FOR VERY DENSE AND/OR CEMENTED SANDS, COARSE GRAVEL AND COBBLES, CALICHE, PRELOADED SILTS AND CLAYS USE MINIMUM (2) 4" HELICES WITH MINIMUM 30 INCH EMBEDMENT.
2. FOR CORAL USE MINIMUM (2) 4" HELICES WITH MINIMUM 30 INCH EMBEDMENT.
3. FOR MEDIUM DENSE COARSE SANDS, SANDY GRAVELS, VERY STIFF SILTS AND CLAYS USE MINIMUM (2) 4" HELICES WITH MINIMUM 30 INCH EMBEDMENT.
4. FOR LOOSE TO MEDIUM DENSE COARSE SANDS, FIRM TO STIFF CLAYS AND SILTS ALLUVIAL FILL USE MINIMUM (2) 6" HELICES WITH MINIMUM 50 INCH EMBEDMENT.
5. FOR VERY LOSE TO MEDIUM DENSE SANDS, FIRM TO STIFFER CLAYS AND SILTS, ALLUVIAL FILL USE MINIMUM (2) 8" HELICES WITH MINIMUM 60 INCH EMBEDMENT.

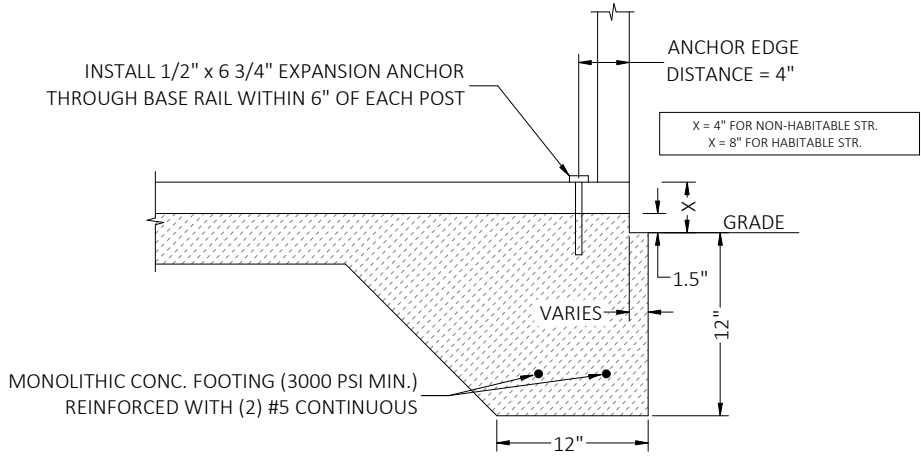


3A1 CONCRETE MONOLITHIC SLAB BASE RAIL ANCHORAGE  
SCALE: NTS

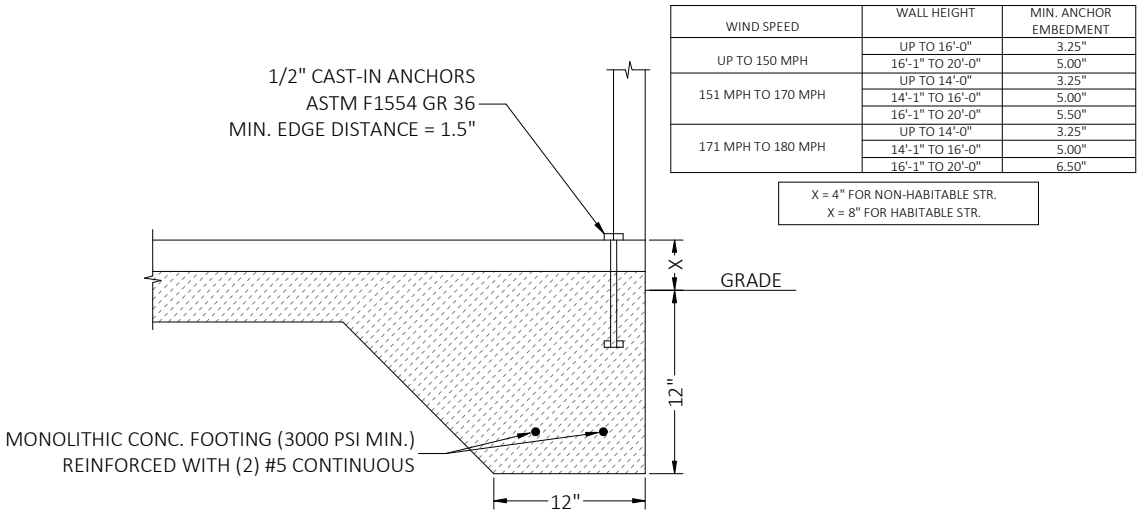


3A2 CONCRETE MONOLITHIC SLAB BASE RAIL ANCHORAGE  
SCALE: NTS

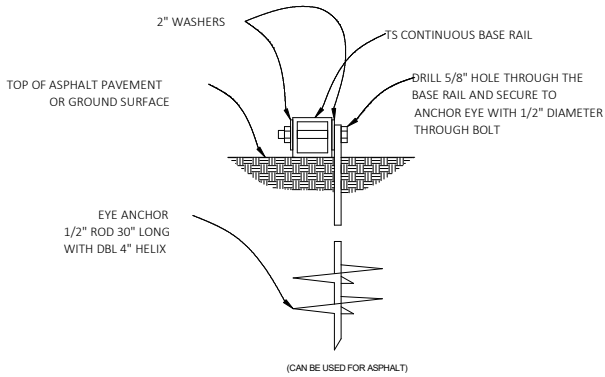

3B GROUND BASE HELIX ANCHORAGE  
SCALE: NTS

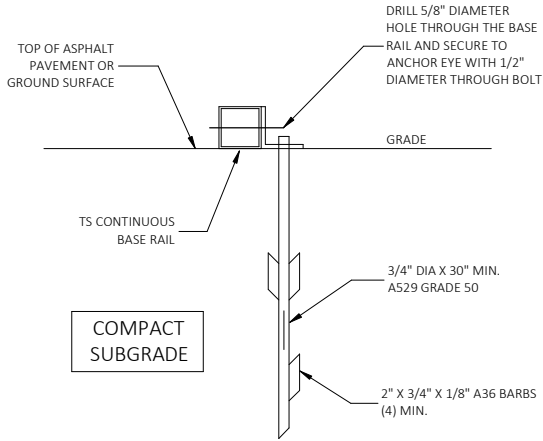


3C ASPHALT BASE ANCHORAGE (HP 9 BARBED DRIVE ANCHOR)  
SCALE: NTS

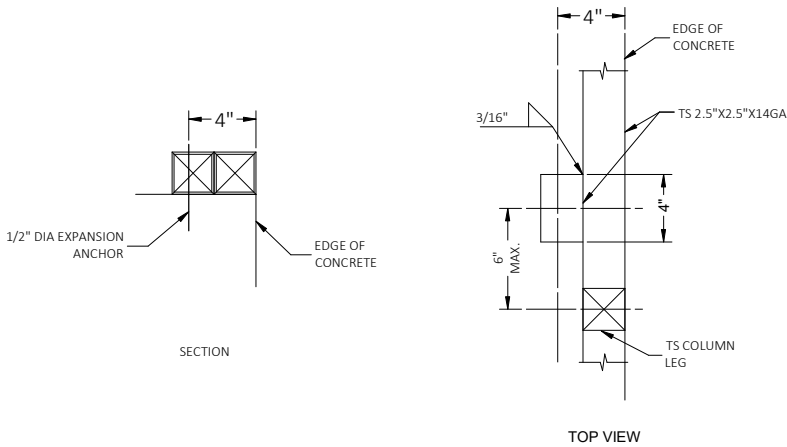


3D TYPICAL ANCHOR DETAIL WHEN BASE  
RAIL IS NEAR EDGE OF CONCRETE  
SCALE: NTS

This item has been digitally signed and sealed by Richard E. Walker, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

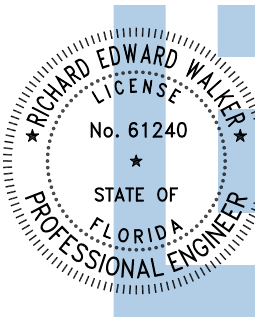

Digitally signed  
by Richard E  
Walker  
Date:  
2025.03.27  
13:07:44-04'00'

FLORIDA ENGINEERING LLC  
4161 TAMiami TRAIL, UNIT 101  
PORT CHARLOTTE, FLORIDA 33952

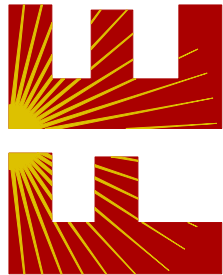

CONTRACTOR:  
TUBULAR BUILDING SYSTEMS  
631 SE INDUSTRIAL CIRCLE,  
LAKE CITY, FL 32025


PROJECT DESCRIPTION:  
30' WIDE X 20' HIGH  
ENCLOSED STRUCTURE

DESIGN DATE: 03/27/2025  
REVISION 1: DATE  
REVISION 2: DATE  
SCALE: NTS


Orders@FLEng.com

CA CERT. #30782


PROJECT NO. 2504211-30-E

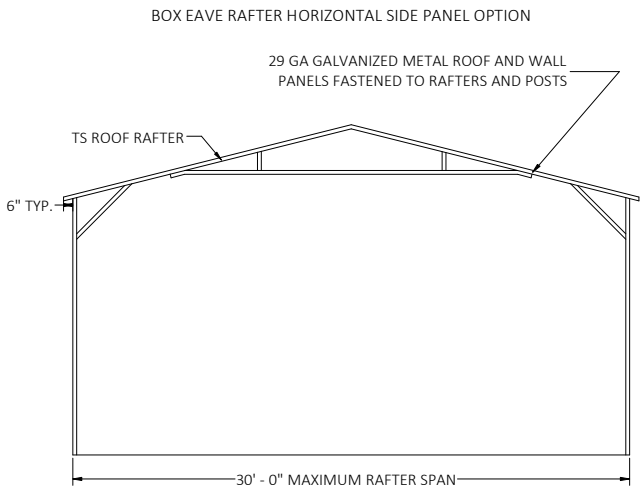


TYPICAL RAFTER/POST FRAME  
SECTION EXTRA SIDE PANELS

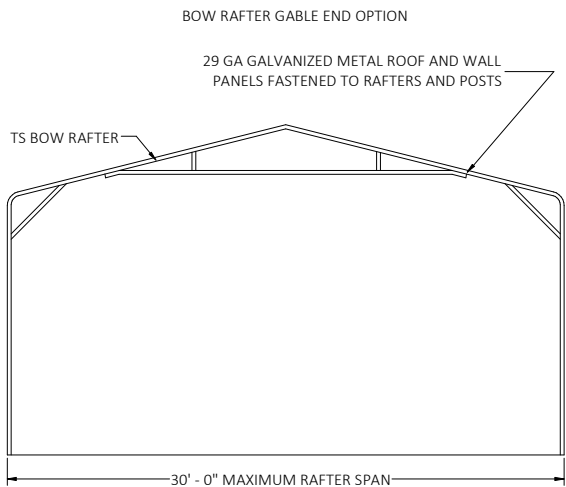


TYPICAL RAFTER/POST FRAME  
SECTION EXTRA SIDE PANELS

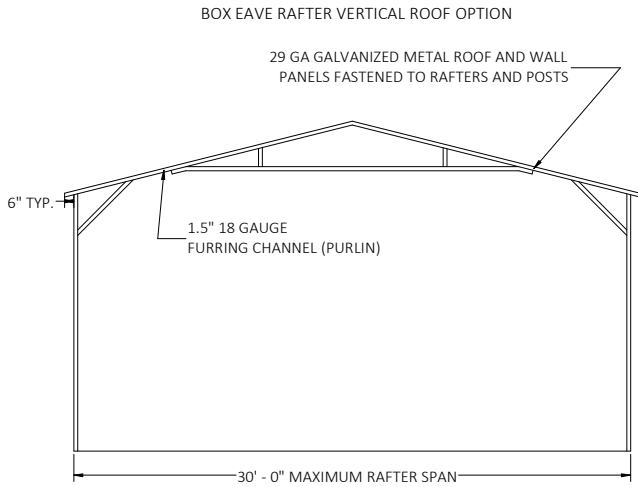


TYPICAL SECTION VERTICAL  
ROOF/SIDING OPTION

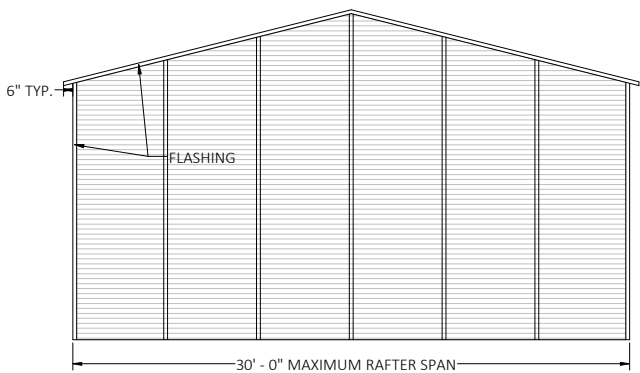


TYPICAL END ELEVATION  
EXTRA SIDE PANELS

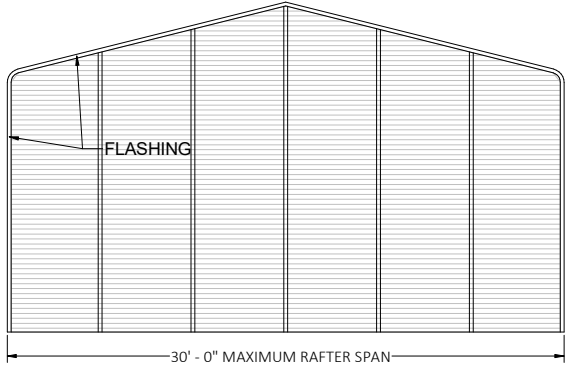


TYPICAL END ELEVATION  
EXTRA SIDE PANELS

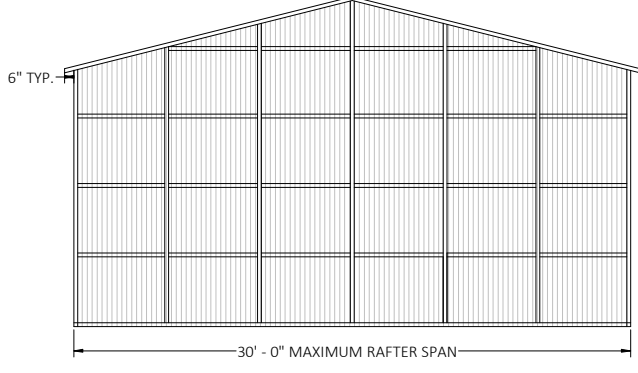


TYPICAL END ELEVATION  
VERTICAL ROOF/SIDING OPTION

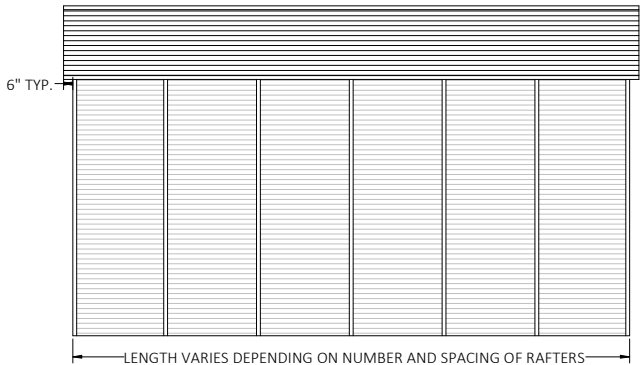



TYPICAL SIDE ELEVATION - EXTRA SIDE PANELS

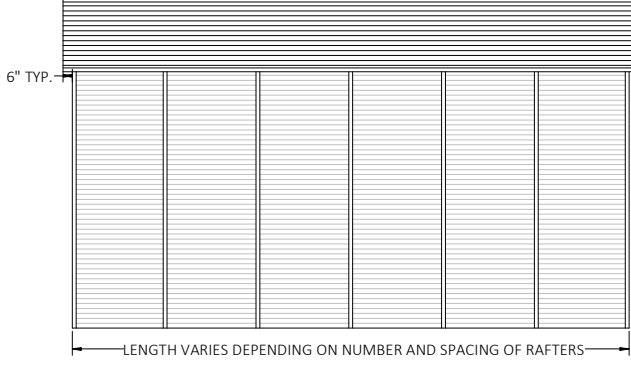


TYPICAL SIDE ELEVATION - EXTRA SIDE PANELS

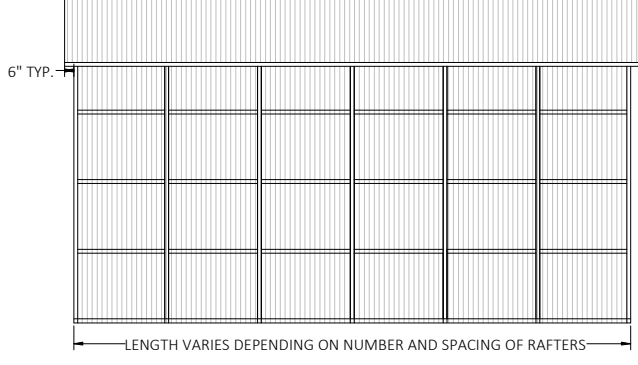

TYPICAL SIDE ELEVATION - VERTICAL ROOF/SIDING OPTION

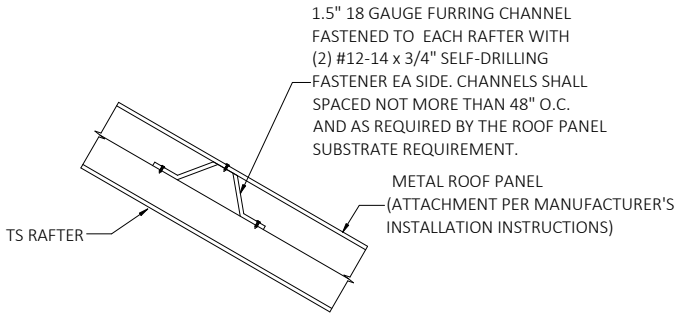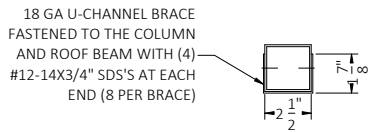


1.5" 18 GAUGE FURRING CHANNEL FASTENED TO EACH RAFTER WITH (2) #12-14 x 3/4" SELF-DRILLING FASTENER EA SIDE. CHANNELS SHALL SPACED NOT MORE THAN 48" O.C. AND AS REQUIRED BY THE ROOF PANEL SUBSTRATE REQUIREMENT.

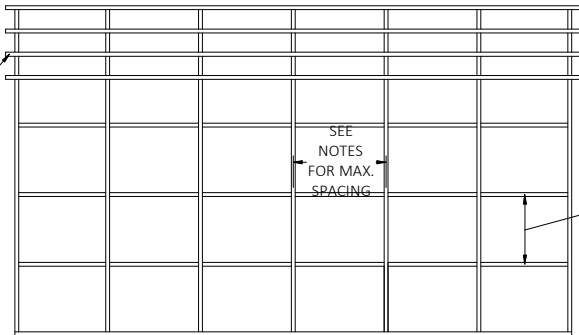

TYPICAL FRAMING SECTION - VERTICAL ROOF/SIDING OPTION


1.5" 18 GAUGE FURRING CHANNEL FASTENED TO EACH POST WITH (2) #12-14 x 3/4" SELF-DRILLING FASTENER EA SIDE. CHANNELS SHALL SPACED NOT MORE THAN 48" O.C. AND AS REQUIRED BY THE WALL PANEL SUBSTRATE REQUIREMENT.

This item has been digitally signed and sealed by Richard E. Walker, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

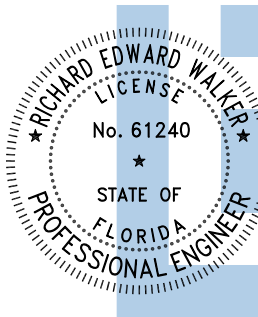

Digitally signed  
by Richard E  
Walker  
Date:  
2025.03.27  
13:07:44-04'00'

FLORIDA ENGINEERING LLC  
4161 TAMiami TRAIL, UNIT 101  
PORT CHARLOTTE, FLORIDA 33952  
(941) 391-5980  
FLEng.com  
Orders@FLEng.com

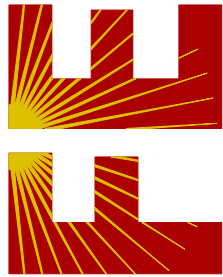

CA CERT. #30782

PROJECT NO. 2504211-30-E


CONTRACTOR:

TUBULAR BUILDING SYSTEMS  
631 SE INDUSTRIAL CIRCLE,  
LAKE CITY, FL 32025


PROJECT DESCRIPTION:

30' WIDE X 20' HIGH  
ENCLOSED STRUCTURE

|              |            |
|--------------|------------|
| DESIGN DATE: | 03/27/2025 |
| REVISION 1:  | DATE       |
| REVISION 2:  | DATE       |
| SCALE:       | NTS        |

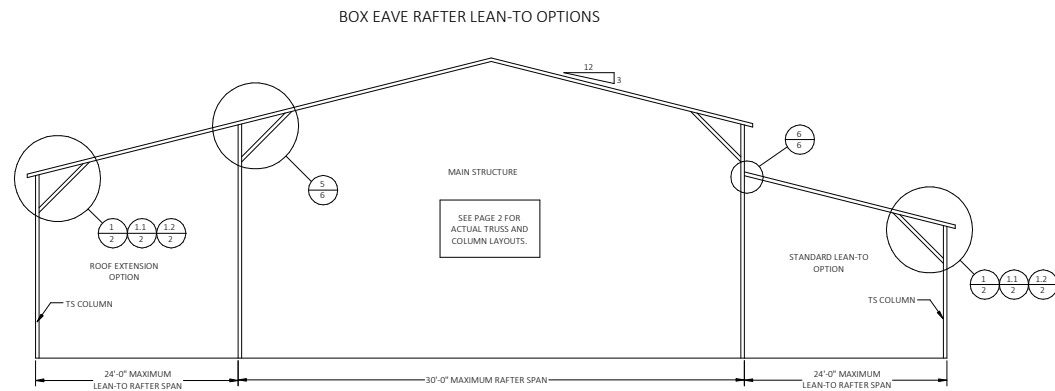


TYPICAL BOX EAVE RAFTER LEAN-TO OPTIONS FRAMING SECTION (BOTH OPTIONS SHOWN)


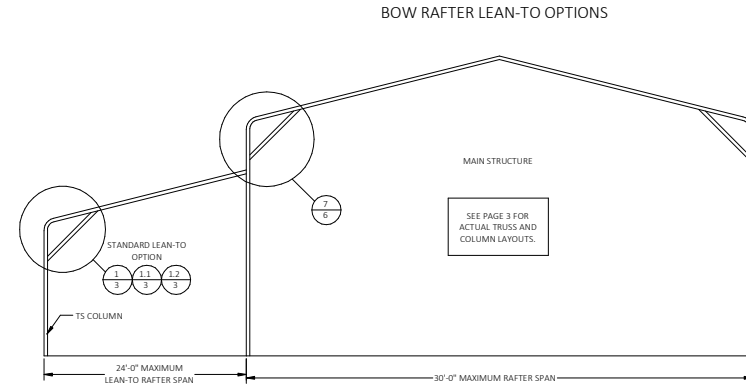


TYPICAL BOW RAFTER LEAN-TO OPTIONS FRAMING SECTION

This item has been digitally signed and sealed by Richard E. Walker, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

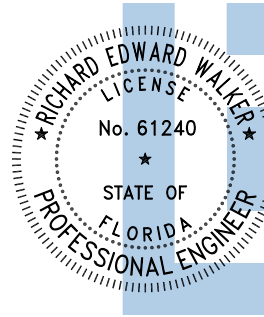



Digitally signed  
by Richard E  
Walker  
Date:  
2025.03.27  
13:07:45-04'00'

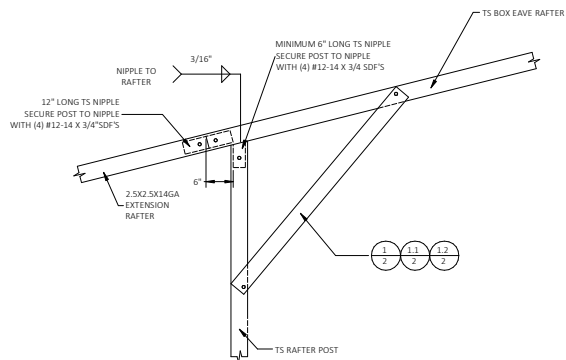

5A

FOR EXTENSION RAFTER SPANS  $W' \leq 12'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1.2/2.  
 FOR EXTENSION RAFTER SPANS  $W' \leq 13'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1.1/2.  
 FOR EXTENSION RAFTER SPANS  $W' \leq 15'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1/2.

SCALE: NTS

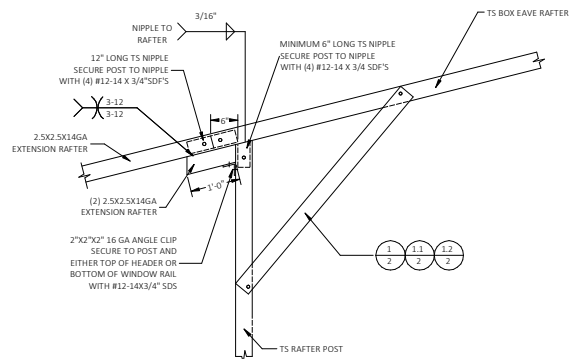

6A


LEARN-TO-RAFTER TO RAFTER COLUMN CONNECTION DETAIL

FOR LEAN-TO RAFTER SPANS  $W' < 12'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1.2/2 OR 1.2/3.

FOR LEAN-TO RAFTER SPANS  $W' < 13'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1.1/2 OR 1.1/3.


FOR LEAN-TO RAFTER SPANS  $W' < 15'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1/2 OR 1/3.

SCALE: NTS

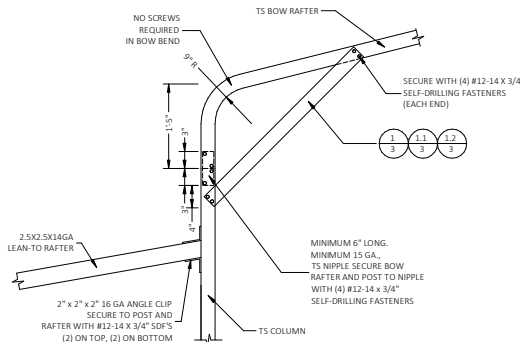



7A

SIDE EXTENSION RAFTER/COLUMN DETAIL  
 FOR EXTENSION RAFTER SPANS  $W' \leq 12'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1.2/3  
 FOR EXTENSION RAFTER SPANS  $W' \leq 13'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1.1/3  
 FOR EXTENSION RAFTER SPANS  $W' \leq 15'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1/3.  
 SCALE: NTS

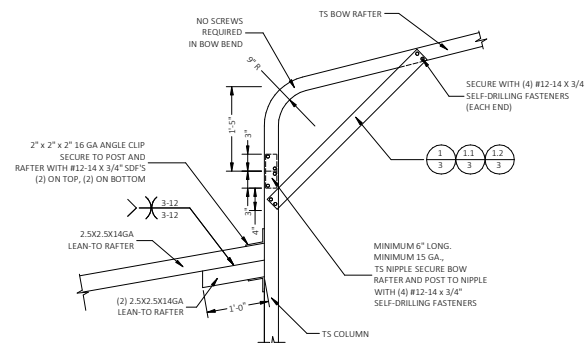

7B

SIDE EXTENSION RAFTER/COLUMN DETAIL  
 FOR EXTENSION RAFTER SPANS  $12'-0" < W < 16'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1/2/3.  
 FOR EXTENSION RAFTER SPANS  $13'-0" < W < 18'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1/1/3.  
 FOR EXTENSION RAFTER SPANS  $15'-0" < W < 19'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1/3.  
 SCALE: NTS

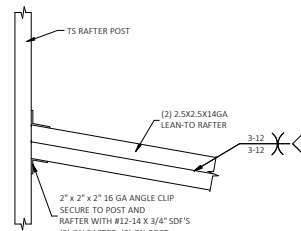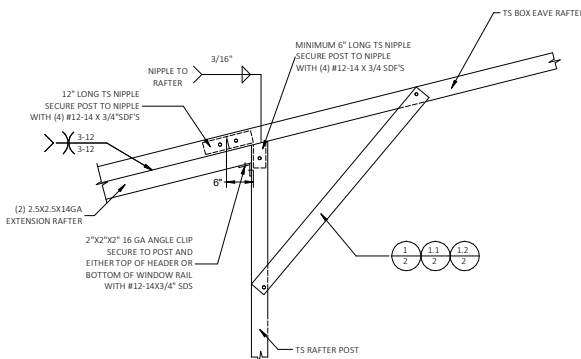

5C


24" EXTENSION RAFTER/COLUMN DETAIL

FOR EXTENSION RAFTER SPANS  $16'-0" < W' < 24'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1/2/2.

FOR EXTENSION RAFTER SPANS  $18'-0" < W' < 24'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1/1/2.

FOR EXTENSION RAFTER SPANS  $19'-0" < W' < 24'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1/2.

SCALE: N.T.S.

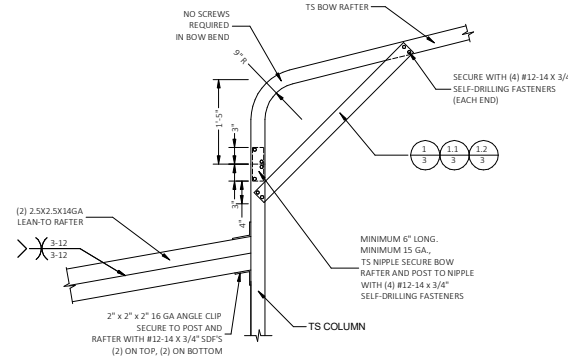

7C

EXTENSION RAFTER/COLUMN DETAIL


FOR EXTENSION RAFTER SPANS  $16'-0" < W' < 24'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1.2/3.

FOR EXTENSION RAFTER SPANS  $18'-0" < W' < 24'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1.1/3.

FOR EXTENSION RAFTER SPANS  $19'-0" < W' < 24'-0"$ , IF THE KNEE BRACE ON THE OTHER END OF THE RAFTER IS PER DETAIL 1/3.

S&I F. NTS.

FLORIDA ENGINEERING LLC  
4161 TAMiami TRAIL, UNIT 101  
PORT CHARLOTTE, FLORIDA 33952  
(941) 391-5980  
FLEng.com  
Orders@FLEng.com

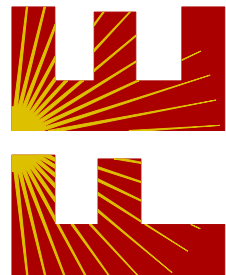

TRACTOR: TUBULAR BUILDING SYSTEMS  
631 SE INDUSTRIAL CIRCLE,  
LAKE CITY, FL 32025

**PROJECT DESCRIPTION:**

30' WIDE X 20' HIGH  
ENCLOSED STRUCTURE

PROJECT NO. 2504211-30-E

CA CERT. #30782

|              |            |
|--------------|------------|
| DESIGN DATE: | 03/27/2025 |
|--------------|------------|


|             |      |    |
|-------------|------|----|
| REVISION 1: | DATE | PA |
|-------------|------|----|

|             |      |
|-------------|------|
| REVISION 2: | DATE |
|-------------|------|

SCALE: NTS


PAGE ·

6

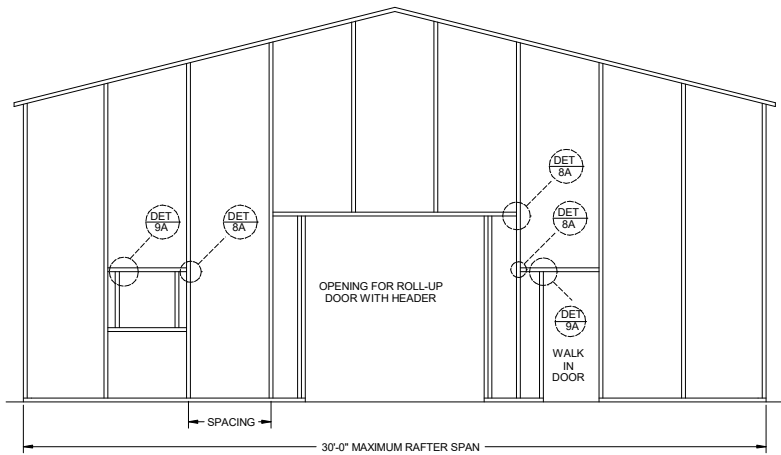


SPACING = 5'-0" FOR WIND SPEEDS BETWEEN 110 MPH AND 150 MPH  
SPACING = 4'-0" FOR WIND SPEEDS BETWEEN 150 MPH AND 180 MPH

TYPICAL BOX EAVE RAFTER END WALL FRAMING SECTION

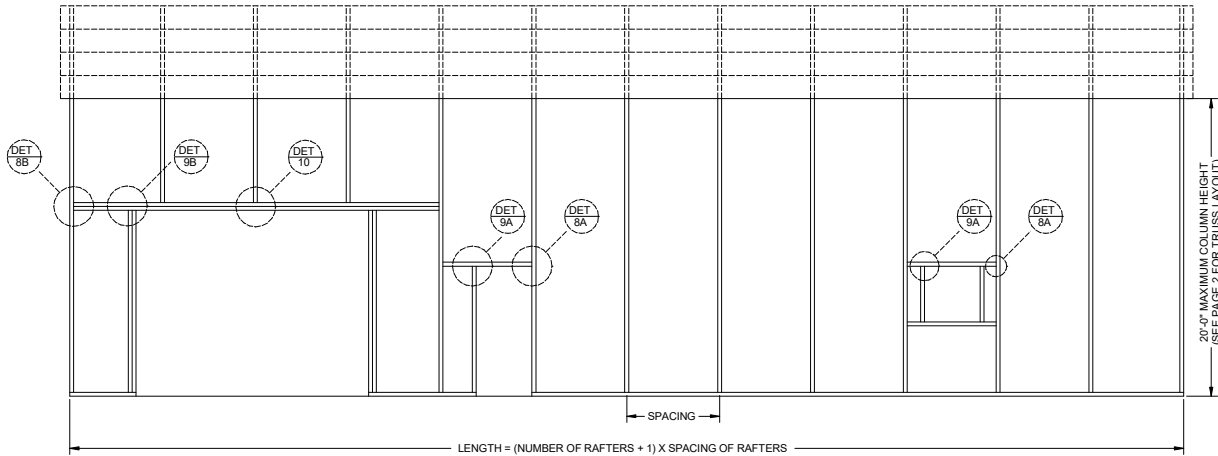








SPACING = 5'-0" FOR WIND SPEEDS BETWEEN 110 MPH AND 150 MPH  
SPACING = 4'-0" FOR WIND SPEEDS BETWEEN 150 MPH AND 180 MPH

TYPICAL BOX EAVE RAFTER SIDE WALL FRAMING SECTION

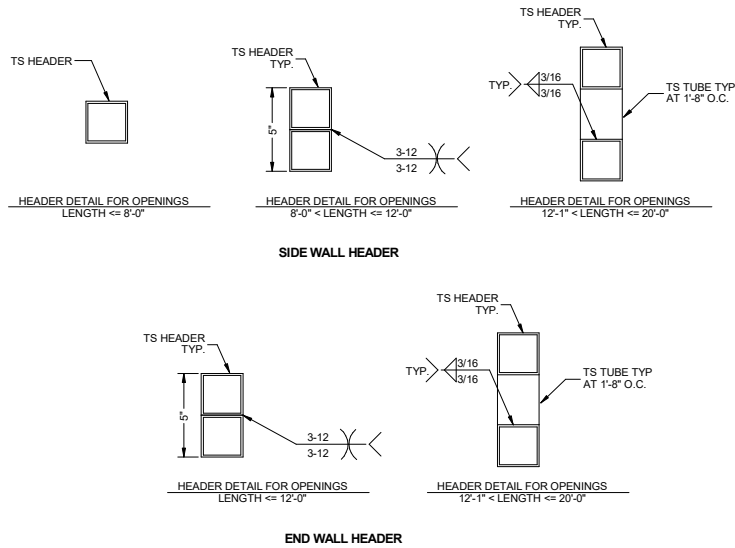


SIDE WALL HEADER

END WALL HEADER

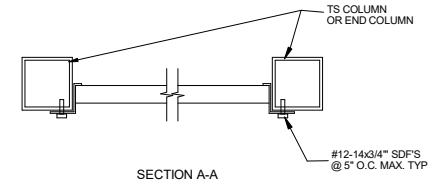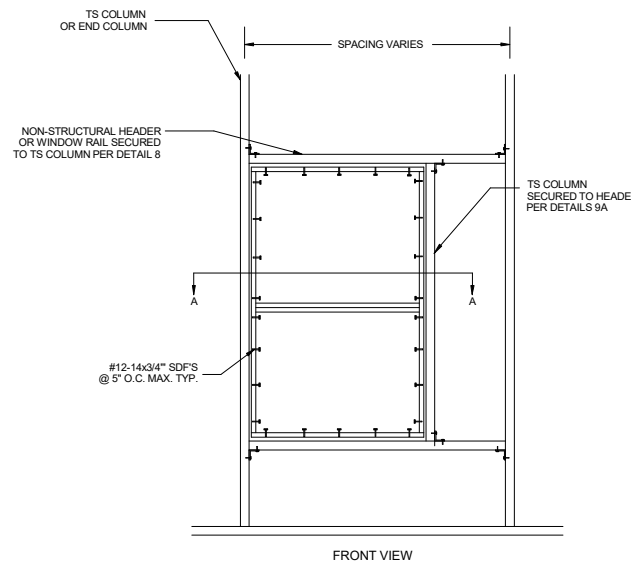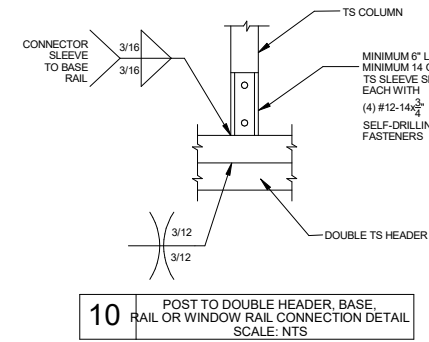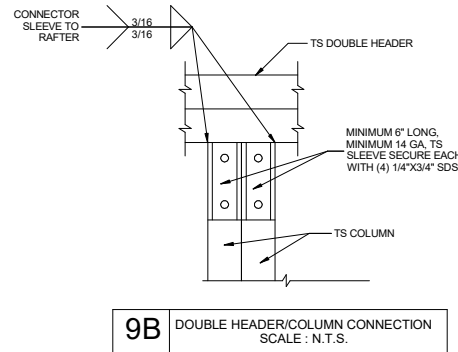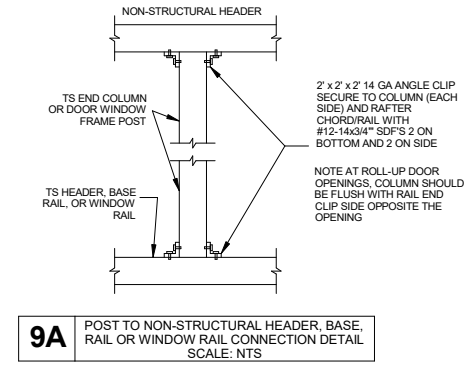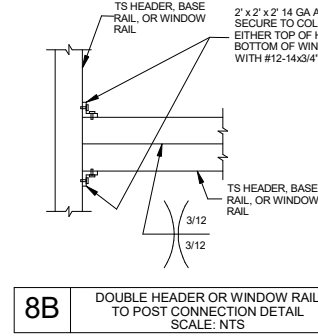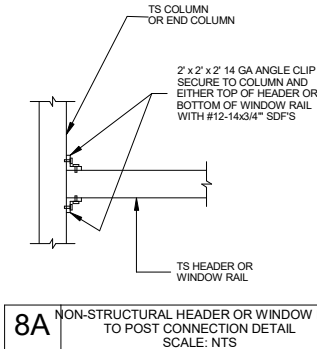


11 WINDOW INSTALLATION DETAILS  
N.T.S.

This item has been digitally signed and sealed by Richard E. Walker, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

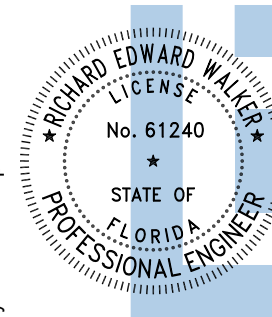

Digitally signed  
by Richard E  
Walker  
Date:  
2025.03.27  
13:07:45-04'00'

FLORIDA ENGINEERING LLC  
4161 TAMiami TRAIL, UNIT 101  
PORT CHARLOTTE, FLORIDA 33952  
(941) 391-5980  
FLEng.com  
Orders@FLEng.com

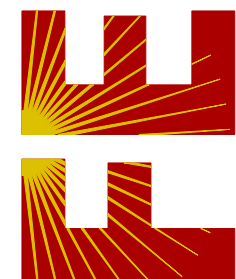

CA CERT. #30782


PROJECT NO. 2504211-30-E

CONTRACTOR:  
TUBULAR BUILDING SYSTEMS  
631 SE INDUSTRIAL CIRCLE,  
LAKE CITY, FL 32025

PROJECT DESCRIPTION:  
30' WIDE X 20' HIGH  
ENCLOSED STRUCTURE

DESIGN DATE: 03/27/2025  
REVISION 1: DATE  
REVISION 2: DATE  
SCALE: NTS

PAGE :  
7

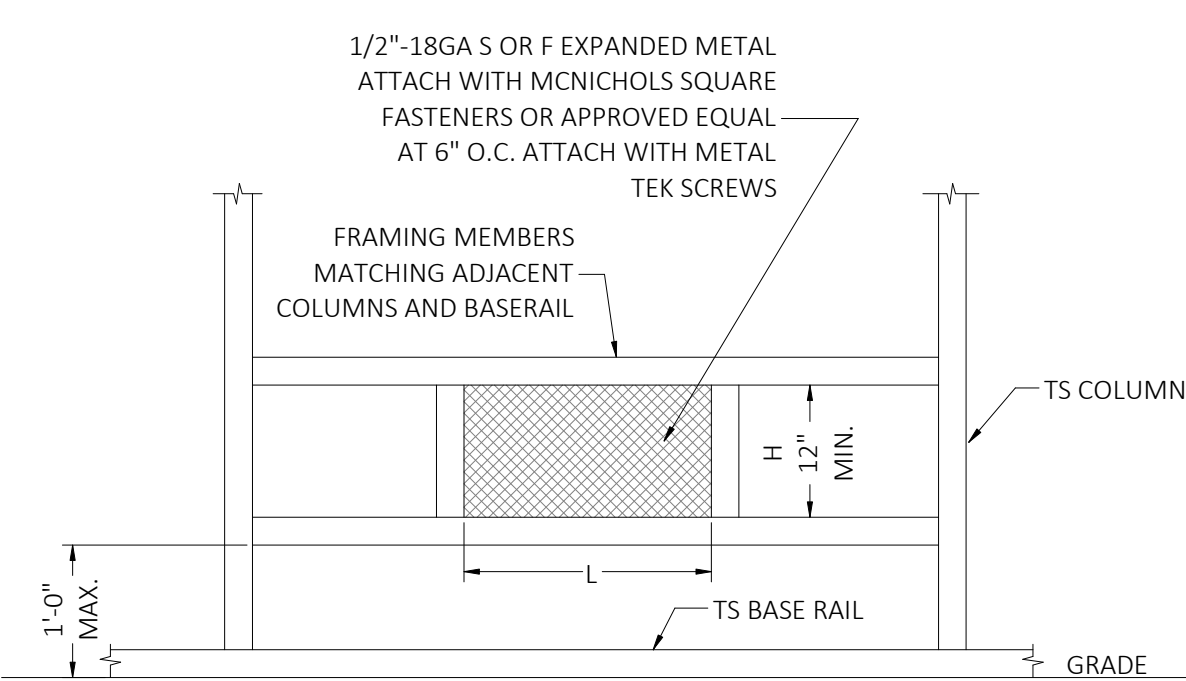


TYPICAL FLOOD VENT DETAIL


CONSTRUCTION IN SPECIAL FLOOD HAZARD AREAS:  
CONTRACTOR TO VERIFY THAT THE FINISHED FLOOR ELEVATION FOR THE PROPOSED STRUCTURE IS AT OR ABOVE THE GREATER OF THE FOLLOWING ELEVATIONS:  
I) BFE (BASE FLOOD ELEVATION) + 2'-0"  
II) DFE (DESIGN FLOOD ELEVATION)  
III) THE MINIMUM ELEVATION MANDATED BY THE BUILDING CODES ADOPTED BY THE AUTHORITY HAVING JURISDICTION.

- FLOOD VENT INSTALLATION NOTES:
- 1. MINIMUM VENT SPACE REQUIRED = 1 SQ. IN. OF OPEN VENT AREA PER SQ. FT. OF ENCLOSED AREA.
  - 2. PROVIDE A MINIMUM OF TWO OPENINGS ON DIFFERENT SIDES OF EACH ENCLOSED AREA.
  - 3. APPLY A 1.3 FACTOR WHEN CALCULATING TOTAL OPEN AREA WHEN USING 1/2"-18GA S OR F EXPANDED METAL.
  - 4. TOTAL OPEN AREA OF VENT = L X H (MIN. 12").
  - 5. FLOOD VENT DETAIL COMPLIES WITH FEMA/NFIP.
  - 6. PREFABRICATED FLOOD VENTS MEETING THE REQUIREMENTS OF FEMA/NFIP MAY BE INSTALLED.

| FLOOD SOLUTIONS STATIC FLOOD VENTS FL #17588.1-R4 |                                                                     |                                                 |                                        |                            |
|---------------------------------------------------|---------------------------------------------------------------------|-------------------------------------------------|----------------------------------------|----------------------------|
| VENT MODEL                                        | VENT SIZE<br>(WIDHT x HEIGHT)<br>(in.)                              | ROUGH OPENING<br>SIZE<br>(Width x Height) (in.) | ENCLSOED<br>AREA COVERAGE<br>(sq. ft.) | NET FREE AREA<br>(sq. in.) |
| FS-1608                                           | 18 <sup>1</sup> / <sub>2</sub> " X 10 <sup>1</sup> / <sub>2</sub> " | 16 X 8                                          | 97                                     | 80.7                       |
| FS-1616                                           | 18 <sup>1</sup> / <sub>2</sub> " X 18 <sup>1</sup> / <sub>2</sub> " | 16 X 16                                         | 191                                    | 158.2                      |
| FS-1412                                           | 17 <sup>1</sup> / <sub>2</sub> " X 14 <sup>1</sup> / <sub>2</sub> " | 14 <sup>1</sup> / <sub>2</sub> " X 12"          | 129                                    | 106.7                      |
| FS-1608-HEX                                       | 18 <sup>1</sup> / <sub>2</sub> " X 10 <sup>1</sup> / <sub>2</sub> " | 16 X 8                                          | 110                                    | 91.4                       |

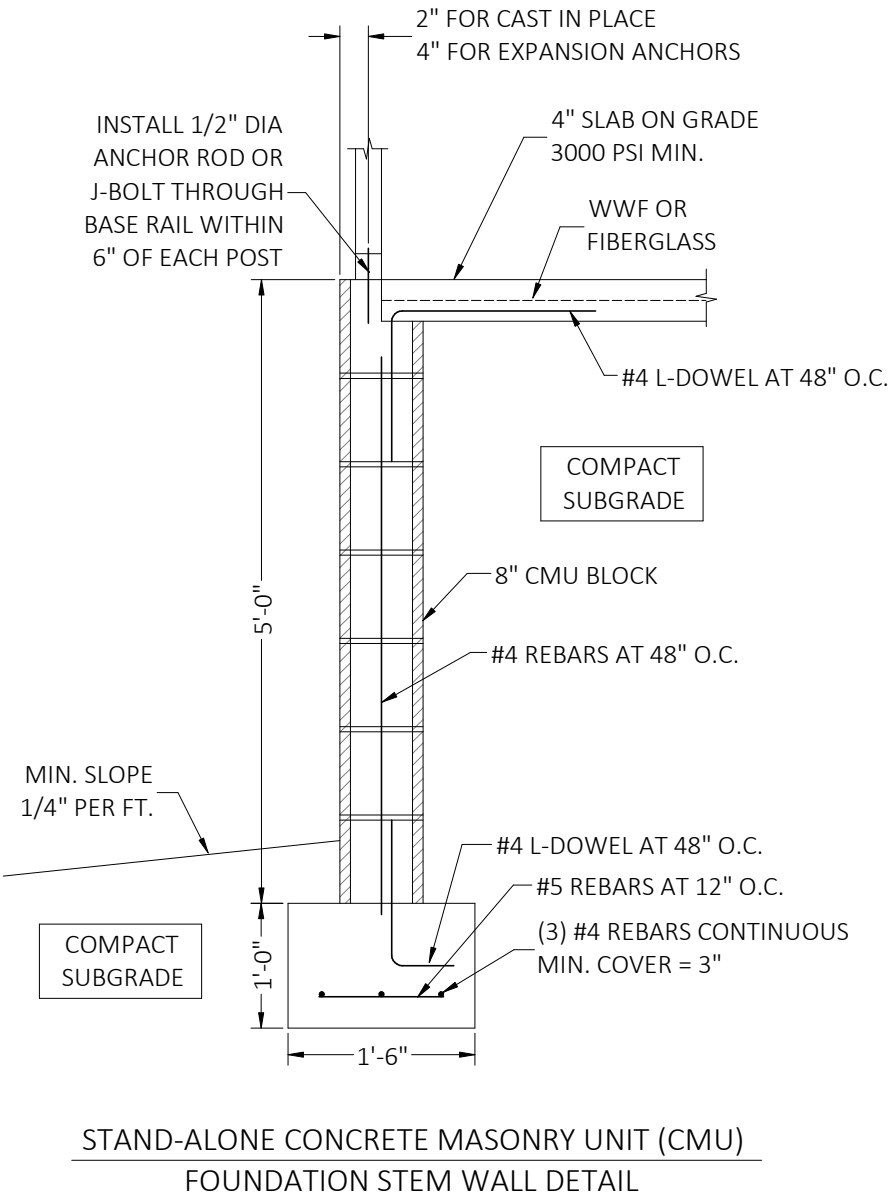


This item has been digitally signed and sealed by Richard E. Walker, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

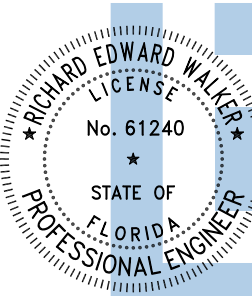

Digitally signed  
by Richard E Walker  
Date:  
2025.03.27  
13:07:46-04'00'

FLORIDA ENGINEERING LLC  
4161 TAMiami TRAIL, UNIT 101  
PORT CHARLOTTE, FLORIDA 33952  
(941) 391-5980  
FLEng.com  
Orders@FLEng.com

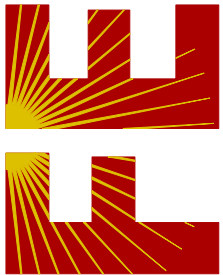

CA CERT. #30782


PROJECT NO. 2504211-30-E

|                                                                                             |                                                                   |            |
|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------|------------|
| CONTRACTOR:<br>TUBULAR BUILDING SYSTEMS<br>631 SE INDUSTRIAL CIRCLE,<br>LAKE CITY, FL 32025 | PROJECT DESCRIPTION:<br>30' WIDE X 20' HIGH<br>ENCLOSED STRUCTURE |            |
|                                                                                             | DESIGN DATE:                                                      | 03/27/2025 |
|                                                                                             | REVISION 1: DATE                                                  | PAGE :     |
|                                                                                             | REVISION 2: DATE                                                  | 8          |
| SCALE: NTS                                                                                  |                                                                   |            |


GENERAL NOTES  
CONCRETE MONOLITHIC SLAB DESIGN IS BASED ON A MINIMUM SOIL BEARING CAPACITY OF 1500 PSF.

CONCRETE  
MINIMUM 28-DAY SPECIFIED COMPRESSIVE STRENGTH = 3000 PSI

- REINFORCING STEEL
1. TURNDOWN REINFORCING STEEL = ASTM A615 GRADE 60
  2. SLAB REINFORCEMENT = WELDED WIRE FABRIC PER ASTM A185 OR FIBERGLASS FIBER REINFORCEMENT
  3. REINFORCING STEEL COVER = 3" WHERE CASE AGAINST AND PERMENTENTLY EXPOSED TO SOIL OR WATER, 1.5" EVERYWHERE ELSE.
  4. REINFORCEMENT IS BENT COLD.
  5. MINIMUM INSIDE DIAMETER OF BEND = (6) BAR DIAMETERS
  6. REINFORCEMENT PARTIALLY EMBEDDED IN CONCRETE SHALL NOT BE FIELD BENT.

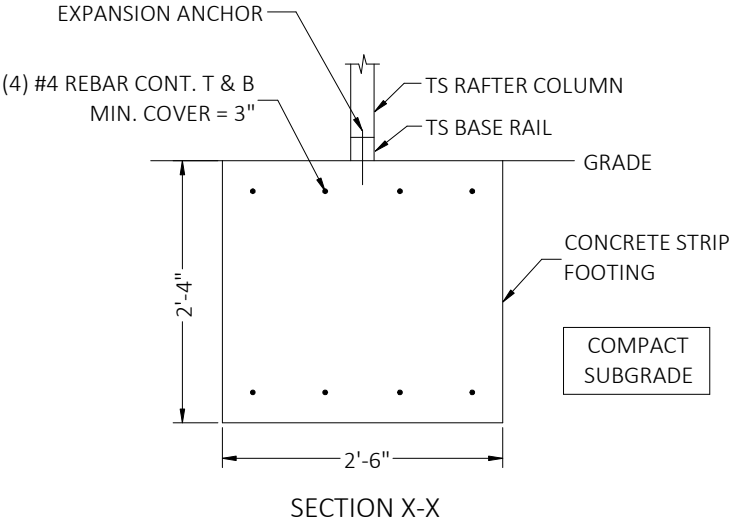


OPTIONAL CONCRETE STRIP FOOTING

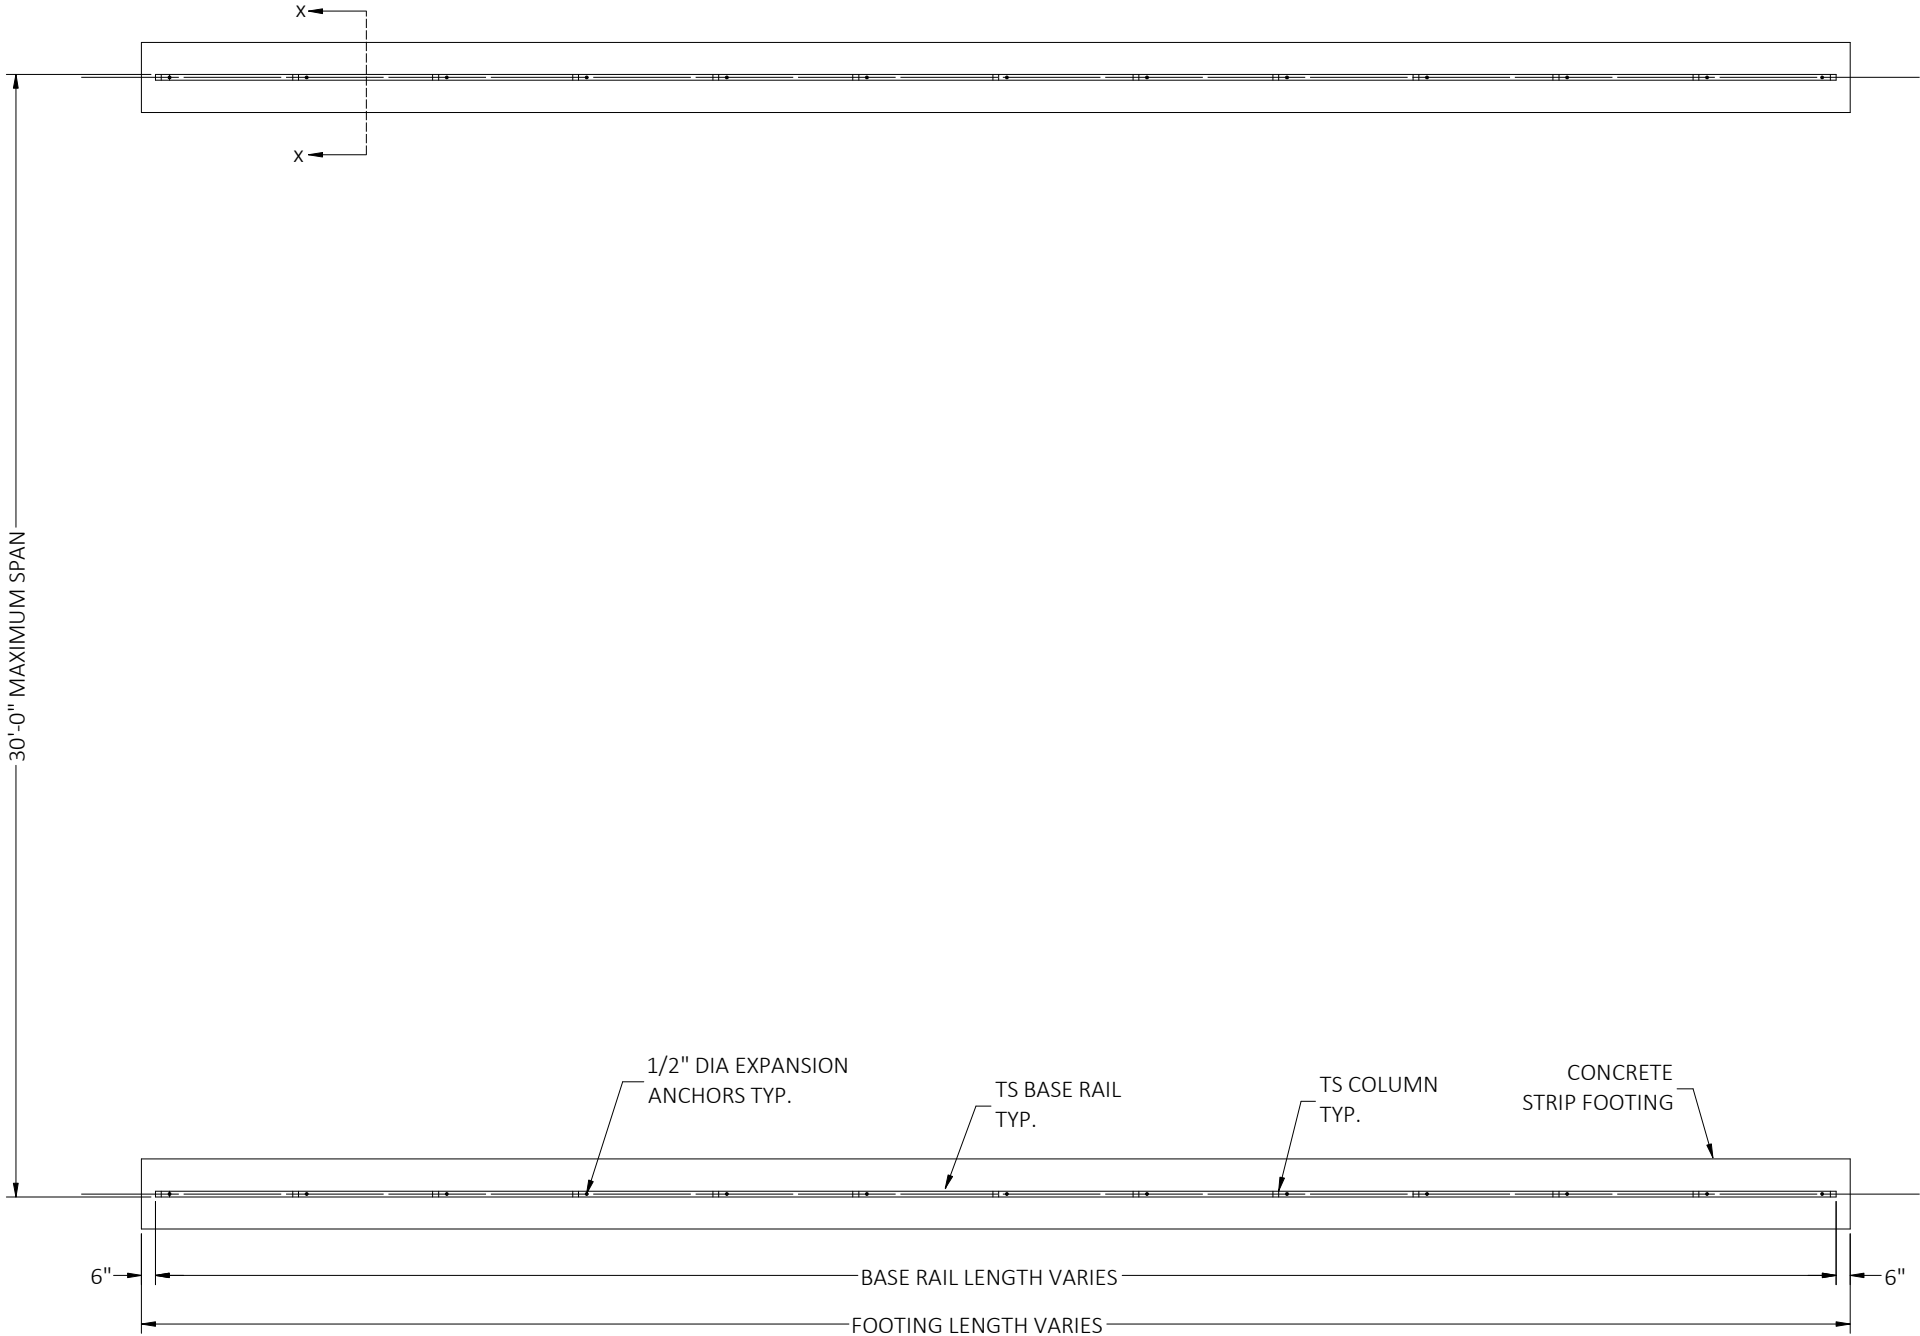


CONCRETE STRIP FOOTING PLAN

This item has been digitally signed and sealed by Richard E. Walker, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

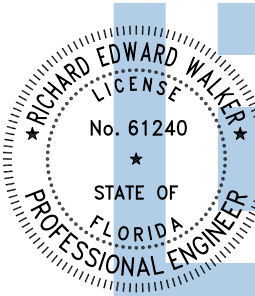

Digitally signed  
by Richard E Walker  
Date:  
2025.03.27  
13:07:46-04'00'

FLORIDA ENGINEERING LLC  
4161 TAMiami TRAIL, UNIT 101  
PORT CHARLOTTE, FLORIDA 33952  
(941) 391-5980  
FLEng.com  
Orders@FLEng.com

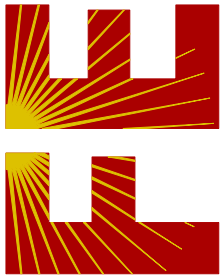

CA CERT. #30782

PROJECT NO. 2504211-30-E

|                                                                                             |      |                                                                       |   |
|---------------------------------------------------------------------------------------------|------|-----------------------------------------------------------------------|---|
| CONTRACTOR:<br>TUBULAR BUILDING SYSTEMS<br>631 SE INDUSTRIAL CIRCLE,<br>LAKE CITY, FL 32025 |      | PROJECT DESCRIPTION:<br><br>30' WIDE X 20' HIGH<br>ENCLOSED STRUCTURE |   |
| DESIGN DATE:                                                                                |      | 03/27/2025                                                            |   |
| REVISION 1:                                                                                 | DATE | PAGE :                                                                | 9 |
| REVISION 2:                                                                                 | DATE |                                                                       |   |
| SCALE:                                                                                      | NTS  |                                                                       |   |