

Columbia County Building Permit Application

Revised 9-23-00

000007024

Office Use Only Application # 060306 Date Received 3/2/06 By G Permit # 24278
 Application Approved by - Zoning Official RLK Date 3.03.06 Plans Examiner OK JTH Date 3-13-06
 Flood Zone X Plate Development Permit N/A Zoning RSF-2 Land Use Plan Map Category RES. Low D.E.
 Comments MFE 96.0 Elevation Letter Required
888 / 1000 / 1000

Applicants Name Concept Construction of North Florida, Inc. FAX 755-1919
 Address 2109 W US 90 Ste 170-144 Lake City FL 32055 Phone 755-888
 Owners Name Concept Construction Phone 386-755-8887
 711 Address 228 SW Melba Gl. Lake City, FL 32055
 Contractors Name Concept Const Phone 111111
 Address 11 11

Fee Simple Owner Name & Address Concept Const. 2109 W US 90 Ste 170-144
 Bonding Co. Name & Address N/A

Architect/Engineer Name & Address Mark Pizosway PO Box 868 Lake City FL 32056

Mortgage Lenders Name & Address Morantle Bank 187 SW Bay Dr Lake City FL 32025

Circle the correct power company - FL Power & Light - Clay Elec. - Suwannee Valley Elec. - Progressive Energy

Property ID Number 24-45-16-03113-151 Estimated Cost of Construction 130,000

Subdivision Name Wise Estates Lot 21 Block C Unit Phase

Driving Directions Sisters Welcome to CR 242 Turn Right on 242 Dr
Go 3/4 mi. & turn Left on wise - Then turn left
on gardner then Right on melba - house on right (1st)

Type of Construction Residential Number of Existing Dwellings on Property 0

Total Acreage 0.58 Lot Size 119071K Do you need a Culvert Permit or Culvert Waiver or Have an Existing Driv

Actual Distance of Structure from Property Lines - Front 45'0" Side 50'-5" Side 20'-0" Rear 79'1/8"

Total Building Height 19'6 1/4" Number of Stories 1 Heated Floor Area 1792.5 Roof Pitch 6/12


Application is hereby made to obtain a permit to do work and installations as indicated. I certify that no work or installation has commenced prior to the issuance of a permit and that all work be performed to meet the standards of all laws regulating construction in this jurisdiction.

OWNERS AFFIDAVIT: I hereby certify that all the foregoing information is accurate and all work will be done in compliance with all applicable laws and regulating construction and zoning.

WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOU PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT.

Owner Builder or Agent (Including Contractor)

STATE OF FLORIDA
COUNTY OF COLUMBIA

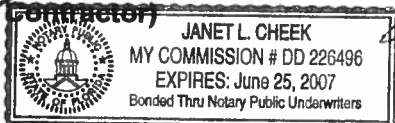

Sworn to (or affirmed) and subscribed before me

this 21st day of February 2006.

Personally known ✓ or Produced Identification

Contractor Signature

Contractors License Number CBC1251118

Competency Card Number

NOTARY STAMP/SEAL

Janet L. Cheek

Notary Signature

JW called Brian 3.13.06

Columbia County Building Department Culvert Permit

Culvert Permit No.
000001024

DATE 03/23/2006 PARCEL ID # 24-4S-16-03113-151
APPLICANT BRIAN CRAWFORD PHONE 755.8887
ADDRESS 2109 W US 90, STE 170-144 LAKE CITY FL 32055
OWNER CONCEPT CONSTRUCTION OF N. FL PHONE 755-8887
ADDRESS 228 SW MELBA GLEN LAKE CITY FL 32024
CONTRACTOR BRIAN CRAWFORD PHONE 755.8887
LOCATION OF PROPERTY 90-W TO SISTERS WELCOME RD TO C-242, TL GO TO WISE EST. ENTRANCE
TO GARDNER TERRACE, TL TO MELBA, TR 1ST. LOT ON R.

SUBDIVISION/LOT/BLOCK/PHASE/UNIT WISE ESTATES 21

SIGNATURE



INSTALLATION REQUIREMENTS



Culvert size will be 18 inches in diameter with a total length of 32 feet, leaving 24 feet of driving surface. Both ends will be mitered 4 foot with a 4 : 1 slope and poured with a 4 inch thick reinforced concrete slab.

INSTALLATION NOTE: Turnouts will be required as follows:

- a) a majority of the current and existing driveway turnouts are paved, or;
- b) the driveway to be served will be paved or formed with concrete.

Turnouts shall be concrete or paved a minimum of 12 feet wide or the width of the concrete or paved driveway, whichever is greater. The width shall conform to the current and existing paved or concreted turnouts.



Culvert installation shall conform to the approved site plan standards.



Department of Transportation Permit installation approved standards.



Other _____

ALL PROPER SAFETY REQUIREMENTS SHOULD BE FOLLOWED
DURING THE INSTALATION OF THE CULVERT.

135 NE Hernando Ave., Suite B-21
Lake City, FL 32055
Phone: 386-758-1008 Fax: 386-758-2160


Amount Paid 25.00



**Application for Onsite Sewage Disposal System
Construction Permit. Part II Site Plan**
Permit Application Number: 06-0248N

ALL CHANGES MUST BE APPROVED BY THE COUNTY HEALTH UNIT

CONCEPT CONST./CR 05-3411

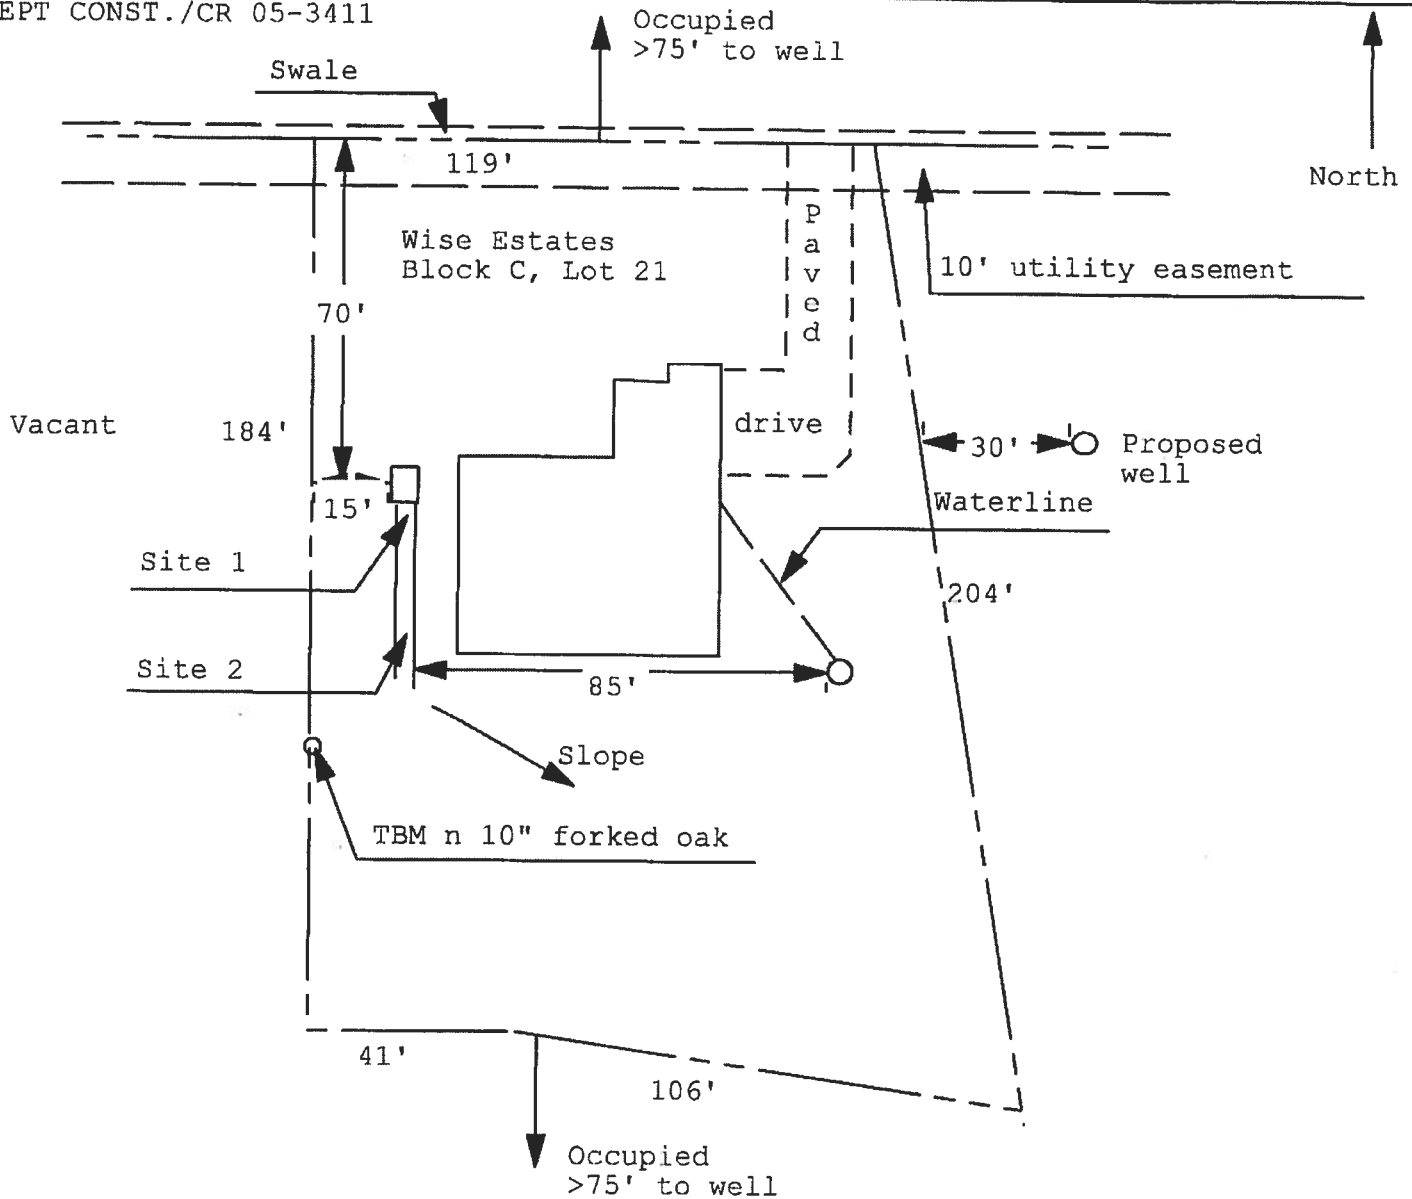

1 inch = 40 feet

Site Plan Submitted By Paul Lloyd Date 3/9/06
Plan Approved ☒ Not Approved ☐ Date 3/20/06
By Mr. S. S. Columbia CPHU

Notes: _____

Columbia County Property Appraiser

DB Last Updated: 9/16/2005

2005 Proposed Values

Parcel: 24-4S-16-03113-151

Tax Record

Property Card

Interactive GIS Map

Print

Owner & Property Info

MFE 96.0

Search Result: 1 of 1

Owner's Name	SIEVERS DONALD L & DEBORAH J
Site Address	MELBA
Mailing Address	22295 135TH CT O'BRIEN, FL 32071
Brief Legal	LOT 21 BLOCK C WISE ESTATE S/D WD 1017-499, 1037-1438.

Use Desc. (code)	VACANT (000000)
Neighborhood	24416.00
Tax District	2
UD Codes	MKTA06
Market Area	06
Total Land Area	0.580 ACRES

Property & Assessment Values

Mkt Land Value	cnt: (1)	\$20,500.00
Ag Land Value	cnt: (0)	\$0.00
Building Value	cnt: (0)	\$0.00
XFOB Value	cnt: (0)	\$0.00
Total Appraised Value		\$20,500.00

Just Value	\$20,500.00
Class Value	\$0.00
Assessed Value	\$20,500.00
Exempt Value	\$0.00
Total Taxable Value	\$20,500.00

Sales History

Sale Date	Book/Page	Inst. Type	Sale Vlmp	Sale Qual	Sale RCode	Sale Price
2/4/2005	1037/1438	WD	V	Q		\$27,500.00
5/28/2004	1017/499	WD	V	Q		\$165,800.00

Building Characteristics

Bldg Item	Bldg Desc	Year Blt	Ext. Walls	Heated S.F.	Actual S.F.	Bldg Value
NONE						

Extra Features & Out Buildings

Code	Desc	Year Blt	Value	Units	Dims	Condition (% Good)
NONE						


Land Breakdown

Lnd Code	Desc	Units	Adjustments	Eff Rate	Lnd Value
000000	VAC RES (MKT)	1.000 LT - (.580AC)	1.00/1.00/1.00/1.00	\$20,500.00	\$20,500.00

Columbia County Property Appraiser

DB Last Updated: 9/16/2005

1 of 1



Clyatt Well Drilling, Inc.
(Established in 1971)
POST OFFICE BOX 180
WORTHINGTON SPRINGS, FLORIDA 32697



Telephone Number (386)496-2488
FAX Number (386)496-4640

June 18, 2002

Columbia County Building Department
Post Office Box 1529
Lake City, Florida 32056

To Whom It May Concern:

As required by building code regulations for Columbia County in order that a building permit can be issued, the following well information is provided with regard to the above-referenced well:


Size of Pump Motor:	1-1/2 Horse Power
Size of Pressure Tank:	220 Gallon Equivalent
Cycle Stop Valve Used:	No

Should you require any additional information, please do not hesitate to contact us.

Respectfully,

CLYATT WELL DRILLING, INC.

K. Melaine "Red" Clyatt
President



Clyatt Well Drilling, Inc.
(Established in 1971)
POST OFFICE BOX 180
WORTHINGTON SPRINGS, FLORIDA 32697



Telephone Number (386)496-2488
FAX Number (386)496-4640

**PUMP AND TANK SPECIFICATIONS FOR
STANDARD 4" RESIDENTIAL WELLS**

PUMPS

1 Horse Power Submersible Pump
20 Gallons Per Minute
Voltage: 240
Phase: (Single) 1

1.5 Horse Power Submersible Pump
25 Gallons Per Minute
Voltage: 240
Phase: (Single) 1

TANK

WF-255 Captive Air Tank
Capacity 81 Gallons
Equivalent 220 Gallons
Draw Down 25 Gallons

FLORIDA ENERGY EFFICIENCY CODE FOR BUILDING CONSTRUCTION

Florida Department of Community Affairs
Residential Whole Building Performance Method A

Project Name:	CONCEPT CONST.	Builder:	CONCEPT CONST.
Address:	Wise Estates Lot 21	Permitting Office:	
City, State:	,	Permit Number:	
Owner:		Jurisdiction Number:	
Climate Zone:	North		

1. New construction or existing	New	12. Cooling systems	
2. Single family or multi-family	Single family	a. Central Unit	Cap: 34.0 kBtu/hr SEER: 13.00
3. Number of units, if multi-family	1	b. N/A	
4. Number of Bedrooms	3	c. N/A	
5. Is this a worst case?	Yes	13. Heating systems	
6. Conditioned floor area (ft²)	1792 ft²	a. Electric Heat Pump	Cap: 32.6 kBtu/hr HSPF: 9.10
7. Glass type ¹ and area: (Label reqd. by 13-104.4.5 if not default)		b. N/A	
a. U-factor:	Description Area	c. N/A	
(or Single or Double DEFAULT)	7a. (Dble Default) 300.0 ft²	14. Hot water systems	
b. SHGC:	7b. (Clear) 300.0 ft²	a. Electric Resistance	Cap: 50.0 gallons EF: 0.92
(or Clear or Tint DEFAULT)		b. N/A	
8. Floor types		c. N/A	
a. Slab-On-Grade Edge Insulation	R=4.0, 212.0(p) ft	15. HVAC credits	
b. N/A		(CF-Ceiling fan, CV-Cross ventilation, HF-Whole house fan, PT-Programmable Thermostat, MZ-C-Multizone cooling, MZ-H-Multizone heating)	
c. N/A			
9. Wall types			
a. Frame, Wood, Exterior	R=13.0, 1020.0 ft²		
b. Frame, Wood, Adjacent	R=13.0, 224.0 ft²		
c. N/A			
d. N/A			
e. N/A			
10. Ceiling types			
a. Under Attic	R=30.0, 1792.0 ft²		
b. N/A			
c. N/A			
11. Ducts			
a. Sup: Unc. Ret: Unc. AH: Garage	Sup. R=6.0, 288.0 ft		
b. N/A			

Glass/Floor Area: 0.17

Total as-built points: 23019

Total base points: 25883

PASS

I hereby certify that the plans and specifications covered by this calculation are in compliance with the Florida Energy Code.

PREPARED BY:

SUNCOAST INSULATORS
825 NW 263rd Terrace
Newberry, FL 32866
(352) 472-8886
Fax (352) 472-2833

DATE: 2/9/06

I hereby certify that this building, as designed, is in compliance with the Florida Energy Code.

OWNER/AGENT:

DATE:

Review of the plans and specifications covered by this calculation indicates compliance with the Florida Energy Code. Before construction is completed this building will be inspected for compliance with Section 553.908 Florida Statutes.

BUILDING OFFICIAL:

DATE:



¹ Predominant glass type. For actual glass type and areas, see Summer & Winter Glass output on pages 2&4.

SUMMER CALCULATIONS

Residential Whole Building Performance Method A - Details

ADDRESS: , , ,

PERMIT #:

BASE				AS-BUILT							
GLASS TYPES											
.18 X Conditioned X BSPM = Points Floor Area				Type/SC	Overhang Omt Len Hgt		Area X SPM X SOF = Points				
.18	1792.0	20.04	6464.1	Double, Clear	W	2.0	6.0	60.0	38.52	0.85	1963.3
				Double, Clear	S	2.0	6.0	64.0	35.87	0.78	1781.4
				Double, Clear	N	2.0	6.0	42.0	19.20	0.90	725.8
				Double, Clear	E	2.0	6.0	134.0	42.06	0.85	4779.9
				As-Built Total:				300.0	9250.4		
WALL TYPES Area X BSPM = Points				Type	R-Value		Area X SPM = Points				
Adjacent	224.0	0.70	156.8	Frame, Wood, Exterior	13.0		1020.0	1.50		1530.0	
Exterior	1020.0	1.70	1734.0	Frame, Wood, Adjacent	13.0		224.0	0.60		134.4	
Base Total:				As-Built Total:				1244.0	1664.4		
DOOR TYPES Area X BSPM = Points				Type	R-Value		Area X SPM = Points				
Adjacent	18.0	2.40	43.2	Exterior Insulated			20.0	4.10		82.0	
Exterior	20.0	6.10	122.0	Adjacent Insulated			18.0	1.60		28.8	
Base Total:				As-Built Total:				38.0	110.8		
CEILING TYPES Area X BSPM = Points				Type	R-Value		Area X SPM X SCM = Points				
Under Attic	1792.0	1.73	3100.2	Under Attic	30.0		1792.0	1.73 X 1.00		3100.2	
Base Total:				As-Built Total:				1792.0	3100.2		
FLOOR TYPES Area X BSPM = Points				Type	R-Value		Area X SPM = Points				
Slab	212.0(p)	-37.0	-7844.0	Slab-On-Grade Edge Insulation	4.0		212.0(p)	-36.70		-7780.4	
Raised	0.0	0.00	0.0								
Base Total:				As-Built Total:				212.0	-7780.4		
INFILTRATION Area X BSPM = Points								Area X SPM = Points			
								1792.0	10.21	18296.3	

SUMMER CALCULATIONS**Residential Whole Building Performance Method A - Details**

ADDRESS: , , ,

PERMIT #:

BASE				AS-BUILT						
Summer Base Points: 22072.6				Summer As-Built Points: 24641.7						
Total Summer Points	X System Multiplier	=	Cooling Points	Total Component (System - Points)	X Cap Ratio	X Duct Multiplier (DM x DSM x AHU)	X System Multiplier	X Credit Multiplier	=	Cooling Points
22072.6	0.4266		9416.2	<small>(sys 1: Central Unit 34000 btuh ,SEER/EFF(13.0) Ducts:Unc(S),Unc(R),Gar(AH),R6.0(INS)</small> 24642 1.00 (1.09 x 1.147 x 1.00) 0.263 1.000 8088.2 24641.7 1.00 1.250 0.263 1.000 8088.2						

WINTER CALCULATIONS

Residential Whole Building Performance Method A - Details

ADDRESS: , , ,

PERMIT #:

BASE				AS-BUILT							
GLASS TYPES											
.18 X Conditioned X BWPM = Points Floor Area				Type/SC	Overhang Omt Len Hgt		Area X WPM X WOF = Point				
.18	1792.0	12.74	4109.4	Double, Clear	W	2.0	6.0	60.0	20.73	1.04	1296.8
				Double, Clear	S	2.0	6.0	64.0	13.30	1.26	1071.0
				Double, Clear	N	2.0	6.0	42.0	24.58	1.00	1037.1
				Double, Clear	E	2.0	6.0	134.0	18.79	1.06	2670.7
				As-Built Total:				300.0	6075.7		
WALL TYPES Area X BWPM = Points				Type	R-Value		Area X WPM = Points				
Adjacent	224.0	3.60	806.4	Frame, Wood, Exterior	13.0		1020.0	3.40	3468.0		
Exterior	1020.0	3.70	3774.0	Frame, Wood, Adjacent	13.0		224.0	3.30	739.2		
Base Total: 1244.0 4580.4				As-Built Total:				1244.0	4207.2		
DOOR TYPES Area X BWPM = Points				Type			Area X WPM = Points				
Adjacent	18.0	11.50	207.0	Exterior Insulated			20.0	8.40	168.0		
Exterior	20.0	12.30	246.0	Adjacent Insulated			18.0	8.00	144.0		
Base Total: 38.0 453.0				As-Built Total:				38.0	312.0		
CEILING TYPES Area X BWPM = Points				Type	R-Value		Area X WPM X WCM = Points				
Under Attic	1792.0	2.05	3673.6	Under Attic	30.0		1792.0	2.05 X 1.00	3673.6		
Base Total: 1792.0 3673.6				As-Built Total:				1792.0	3673.6		
FLOOR TYPES Area X BWPM = Points				Type	R-Value		Area X WPM = Points				
Slab	212.0(p)	8.9	1886.8	Slab-On-Grade Edge Insulation	4.0		212.0(p)	8.45	1791.4		
Raised	0.0	0.00	0.0								
Base Total: 1886.8				As-Built Total:				212.0	1791.4		
INFILTRATION Area X BWPM = Points								Area X WPM = Points			
1792.0 -0.59 -1057.3								1792.0	-0.59	-1057.3	

WINTER CALCULATIONS

Residential Whole Building Performance Method A - Details

ADDRESS: , , ,	PERMIT #:
----------------	-----------

BASE			AS-BUILT						
Winter Base Points: 13645.9			Winter As-Built Points: 15002.6						
Total Winter Points	X System Multiplier	= Heating Points	Total Component (System - Points)	X Cap Ratio	X Duct Multiplier (DM x DSM x AHU)	X System Multiplier	X Credit Multiplier	= Heating Points	
13645.9	0.6274	8561.5	(sys 1: Electric Heat Pump 32600 btuh ,EFF(9.1) Ducts:Unc(S),Unc(R),Gar(AH),R6.0 15002.6 1.000 (1.069 x 1.169 x 1.00) 0.375 1.000 7025.4 15002.6 1.00 1.250 0.375 1.000 7025.4						

WATER HEATING & CODE COMPLIANCE STATUS

Residential Whole Building Performance Method A - Details

ADDRESS: , , , PERMIT #:

BASE				AS-BUILT					
WATER HEATING				Tank Volume	EF	Number of Bedrooms	X Tank Ratio	X Multiplier	X Credit = Total Multiplier
Number of Bedrooms	X	Multiplier	= Total						
3		2635.00	7905.0	50.0	0.92	3	1.00	2635.00	1.00 7905.0
				As-Built Total:					7905.0

CODE COMPLIANCE STATUS									
BASE					AS-BUILT				
Cooling Points	+ Heating Points	+ Hot Water Points	= Total Points		Cooling Points	+ Heating Points	+ Hot Water Points	= Total Points	
9416	8561	7905	25883		8088	7025	7905	23019	

PASS



Notice of Treatment

12106

Applicator: **Florida Pest Control & Chemical Co. (www.flapest.com)**

Address: Bayview
City: Carroll Phone: 2521703

Site Location: Subdivision Wise Est
Lot # 21 Block# 24278
Address 228 S. Main St 6th

<u>Product used</u>	<u>Active Ingredient</u>	<u>% Concentration</u>
<input type="checkbox"/> Premise	Imidacloprid	0.1%
<input type="checkbox"/> Termidor	Fipronil	0.12%
<input checked="" type="checkbox"/> Bora-Care	Disodium Octaborate Tetrahydrate	23.0%

Type treatment:

☐ Soil

☒ Wood

<u>Area Treated</u>	<u>Square feet</u>	<u>Linear feet</u>	<u>Gallons Applied</u>
<u>Dwelling</u>	<u>2515</u>	<u>710</u>	<u>4</u>
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____

As per Florida Building Code 104.2.6 – If soil chemical barrier method for termite prevention is used, final exterior treatment shall be completed prior to final building approval.

If this notice is for the final exterior treatment, initial this line _____.

8/3/06 1505 F254
Date Time Print Technician's Name

Remarks: _____

Applicator - White

Permit File - Canary

Permit Holder - Pink

10/05

©

Code Compliance Checklist

Residential Whole Building Performance Method A - Details

PERMIT #:

ADDRESS: , , ,

6A-21 INFILTRATION REDUCTION COMPLIANCE CHECKLIST

COMPONENTS	SECTION	REQUIREMENTS FOR EACH PRACTICE	CHECK
Exterior Windows & Doors	606.1.ABC.1.1	Maximum: 3 cfm/sq. ft. window area; .5 cfm/sq.ft. door area.	
Exterior & Adjacent Walls	606.1.ABC.1.2.1	Caulk, gasket, weatherstrip or seal between: windows/doors & frames, surrounding wall; foundation & wall sole or sill plate; joints between exterior wall panels at corners; utility penetrations; between wall panels & top/bottom plates; between walls and floor. EXCEPTION: Frame walls where a continuous infiltration barrier is installed that extends from, and is sealed to, the foundation to the top plate.	
Floors	606.1.ABC.1.2.2	Penetrations/openings >1/8" sealed unless backed by truss or joint members. EXCEPTION: Frame floors where a continuous infiltration barrier is installed that is sealed to the perimeter, penetrations and seams.	
Ceilings	606.1.ABC.1.2.3	Between walls & ceilings; penetrations of ceiling plane of top floor; around shafts, chases, soffits, chimneys, cabinets sealed to continuous air barrier; gaps in gyp board & top plate; attic access. EXCEPTION: Frame ceilings where a continuous infiltration barrier is installed that is sealed at the perimeter, at penetrations and seams	
Recessed Lighting Fixtures	606.1.ABC.1.2.4	Type IC rated with no penetrations, sealed; or Type IC or non-IC rated, installed inside a sealed box with 1/2" clearance & 3" from insulation; or Type IC rated with < 2.0 cfm from conditioned space, tested.	
Multi-story Houses	606.1.ABC.1.2.5	Air barrier on perimeter of floor cavity between floors.	
Additional Infiltration reqts	606.1.ABC.1.3	Exhaust fans vented to outdoors, dampers; combustion space heaters comply with NFPA, have combustion air.	

6A-22 OTHER PRESCRIPTIVE MEASURES (must be met or exceeded by all residences.)

COMPONENTS	SECTION	REQUIREMENTS	CHECK
Water Heaters	612.1	Comply with efficiency requirements in Table 612.1.ABC.3.2. Switch or clearly marked circuit breaker (electric) or cutoff (gas) must be provided. External or built-in heat trap required.	
Swimming Pools & Spas	612.1	Spas & heated pools must have covers (except solar heated). Non-commercial pools must have a pump timer. Gas spa & pool heaters must have a minimum thermal efficiency of 78%.	
Shower heads	612.1	Water flow must be restricted to no more than 2.5 gallons per minute at 80 PSIG.	
Air Distribution Systems	610.1	All ducts, fittings, mechanical equipment and plenum chambers shall be mechanically attached, sealed, insulated, and installed in accordance with the criteria of Section 610. Ducts in unconditioned attics: R-6 min. insulation.	
HVAC Controls	607.1	Separate readily accessible manual or automatic thermostat for each system.	
Insulation	604.1, 602.1	Ceilings-Min. R-19. Common walls-Frame R-11 or CBS R-3 both sides. Common ceiling & floors R-11.	

ENERGY PERFORMANCE LEVEL (EPL) DISPLAY CARD

ESTIMATED ENERGY PERFORMANCE SCORE* = 84.9

The higher the score, the more efficient the home.

1. New construction or existing	New	12. Cooling systems	Cap: 34.0 kBtu/hr
2. Single family or multi-family	Single family	a. Central Unit	SEER: 13.00
3. Number of units, if multi-family	1	b. N/A	
4. Number of Bedrooms	3	c. N/A	
5. Is this a worst case?	Yes		
6. Conditioned floor area (ft ²)	1792 ft ²	13. Heating systems	Cap: 32.6 kBtu/hr
7. Glass type ¹ and area: (Label reqd. by 13-104.4.5 if not default)		a. Electric Heat Pump	HSPF: 9.10
a. U-factor:	Description Area	b. N/A	
(or Single or Double DEFAULT) 7a. (Dble Default) 300.0 ft ²		c. N/A	
b. SHGC:		14. Hot water systems	Cap: 50.0 gallons
(or Clear or Tint DEFAULT) 7b. (Clear) 300.0 ft ²		a. Electric Resistance	EF: 0.92
8. Floor types	R=4.0, 212.0(p) ft	b. N/A	
a. Slab-On-Grade Edge Insulation		c. Conservation credits	
b. N/A		(HR-Heat recovery, Solar	
c. N/A		DHP-Dedicated heat pump)	
9. Wall types	R=13.0, 1020.0 ft ²	15. HVAC credits	
a. Frame, Wood, Exterior	R=13.0, 224.0 ft ²	(CF-Ceiling fan, CV-Cross ventilation,	
b. Frame, Wood, Adjacent		HF-Whole house fan,	
c. N/A		PT-Programmable Thermostat,	
d. N/A		MZ-C-Multizone cooling,	
e. N/A		MZ-H-Multizone heating)	
10. Ceiling types	R=30.0, 1792.0 ft ²		
a. Under Attic			
b. N/A			
c. N/A			
11. Ducts	Sup. R=6.0, 288.0 ft		
a. Sup: Unc. Ret: Unc. AH: Garage			
b. N/A			

I certify that this home has complied with the Florida Energy Efficiency Code For Building Construction through the above energy saving features which will be installed (or exceeded) in this home before final inspection. Otherwise, a new EPL Display Card will be completed based on installed Code compliant features.

Builder Signature: _____

Date: _____

Address of New Home: _____

City/FL Zip: _____



*NOTE: The home's estimated energy performance score is only available through the FLA/RES computer program. This is not a Building Energy Rating. If your score is 80 or greater (or 86 for a US EPA/DOE EnergyStarTM designation), your home may qualify for energy efficiency mortgage (EEM) incentives if you obtain a Florida Energy Gauge Rating. Contact the Energy Gauge Hotline at 321/638-1492 or see the Energy Gauge web site at www.fsec.ucf.edu for information and a list of certified Raters. For information about Florida's Energy Efficiency Code For Building Construction, contact the Department of Community Affairs at 850/487-1824.

¹ Predominant glass type. For actual glass type and areas, see Summer & Winter Glass output on pages 2&4.
EnergyGauge® (Version: FLRCSB v4.0)

From: The Columbia County Building Department
Plans Review
135 NE Hernando Av.
P. O Box 1529
Lake City Florida, 32056-1529

Reference to a building permit application Number: **0603-06**

Concept Construction Owner Concept Construction lot 21 block C of Wise Estates

On the date of March 10, 2006 application 0603-06 and plans for construction of a single family dwelling were reviewed and the following information or alteration to the plans will be required to continue processing this application. If you should have any question please contact the above address, or contact phone number (386) 758-1163 or fax any information to (386) 754-7088.

Please include application number 0603-06 when making reference to this application.

1. Please provide a recorded deed which shows ownership of lot 21 block C Wise Estates subdivision to Concept Construction.
2. Please provide a copy of a signed released site plan from the Columbia County Environmental Health Department which confirms approval of the waste water disposal system.
3. Please submit a recorded (with the Columbia County Clerk Office) notice of commencement before any inspections can be preformed by the Columbia County Building Department.
4. Please verify compliance with the FRC-2004 in relation to the garden tub 3040 window. Section R308.4 Hazardous locations: Glazing in doors and enclosures for hot tubs, whirlpools, saunas, steam rooms, bathtubs and showers. Glazing in

any part of a building wall enclosing these compartments where the bottom exposed edge of the glazing is less than 60 inches (1524 mm) measured vertically above any standing or walking surface.

- ✓ 5. Please confirm that the emergency escape window in bedroom #2 will meet the requirements of the FRC-2004 section R310.1.1 Minimum opening area: All emergency escape and rescue openings shall have a minimum net clear opening of 5.7 square feet (0.530 m²).

Exception: Grade floor openings shall have a minimum net clear opening of 5 square feet (0.465 m²): R310.1.2 Minimum opening height. The minimum net clear opening height shall be 24 inches (610 mm): R310.1.3 Minimum opening width. The minimum net clear opening width shall be 20 inches (508 mm).

- ✓ 6. The electrical service overcurrent protection device shall be installed on the exterior of structures to serve as a disconnecting means. Conductors used from the exterior disconnecting means to a panel or sub panel shall have four-wire conductors, of which one conductor shall be used as an equipment ground.
- 7. A. Please show compliance with the FRC-2004 Sections R309.1 Openings from a private garage directly into a room used for sleeping purposes shall not be permitted. Other openings between the garage and residence shall be equipped with solid wood doors not less than 13/8 inches (35 mm) in thickness, solid or honeycomb core steel doors not less than 13/8 inches (35 mm) thick, or 20-minute fire-rated doors.

B.R309.1.1 Duct penetration: Ducts in the garage and ducts penetrating the walls or ceilings separating the dwelling from the garage shall be constructed of a

minimum No. 26 gage (0.48 mm) sheet steel or other approved material and shall have no openings into the garage.

C.R309.2 Separation required: The garage shall be separated from the residence and its attic area by not less than ½-inch (12.7 mm) gypsum board applied to the garage side. Garages beneath habitable rooms shall be separated from all habitable rooms above by not less than 5/8-inch (15.9 mm) Type X gypsum board or equivalent. Where the separation is a floor-ceiling assembly, the structure supporting the separation shall also be protected by not less than ½-inch (12.7 mm) gypsum board or equivalent.

Thank you,



Joe Haltiwanger
Plan Examiner
Columbia County Building Department

SERIES 420/430/440 SLIDING GLASS DOORS

THIS FENESTRATION PRODUCT COMPLIES* WITH THE
NEW FLORIDA BUILDING CODE

FOR RESIDENTIAL BUILDINGS WITH A MEAN ROOF HEIGHT OF 30 FT. OR LESS,
EXPOSURE "B" (WHICH IS INLAND OF A LINE THAT IS 1500' FROM THE COAST),
AND WALL ZONE "5" (INSTALLED NEAR THE CORNER OF A BUILDING).

PER ASTM E1300, THE CORRECT GLASS THICKNESS, BASED ON THE NEGATIVE
DESIGN PRESSURE (DP) LISTED BELOW, HAS BEEN INSTALLED IN THIS UNIT.
THE GLASS THICKNESS IS BASED ON ITS' WIDTH, HEIGHT, AND ASPECT RATIO.

STANDARD 6'- 8" HIGH PANELS ARE NON REINFORCED

6'-8" HIGH	2'- 6" WIDE	DP +54 / -54
	3'- 0" WIDE	DP +47 / -47
	4'- 0" WIDE	DP +39 / -39
	5'- 0" WIDE	DP +35 / -35

STANDARD 8'- 0" HIGH PANELS ARE STEEL REINFORCED

8'-0" HIGH	2'- 6" WIDE	DP +57 / -57
	3'- 0" WIDE	DP +49 / -49
	4'- 0" WIDE	DP +40 / -40
	5'- 0" WIDE	DP +35 / -35

SPECIAL ORDER 6'- 8" HIGH PANELS - WITH STEEL REINFORCEMENT




BOX TO BE CHECKMARKED
AT FACTORY IF REINFORCED

2'- 6" WIDE	DP +71 / -71
3'- 0" WIDE	DP +62 / -62
4'- 0" WIDE	DP +52 / -52
5'- 0" WIDE	DP +46 / -46

THIS PRODUCT MEETS THE REQUIREMENTS FOR STRUCTURAL LOADS, WATER AND
AIR INFILTRATION PER ATTACHED AAMA PERFORMANCE LABEL. BE ADVISED THAT
IF LOADS ARE PLACED UP TO OR EXCEEDING THE TESTED LEVELS, THIS PRODUCT
MAY BE ALTERED IN SUCH A WAY THAT FUTURE PERFORMANCE WILL BE REDUCED.

* COMPLIANCE MUST INCLUDE INSTALLATION ACCORDING TO
MANUFACTURER'S INSTRUCTIONS AND FLORIDA CODE REQUIREMENTS.

MIP-687

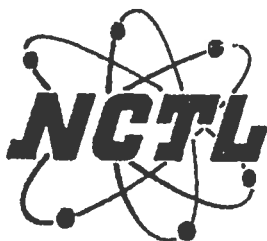

NATIONAL CERTIFIED TESTING LABORATORIES

1464 GEMINI BOULEVARD • ORLANDO, FLORIDA 32837
PHONE (407) 240-1356 • FAX (407) 240-8882

STRUCTURAL PERFORMANCE TEST REPORT

Report No: NCTL-210-2065-1
Test Date: 06-21-00
Report Date: 09-25-00
Expiration Date: 09-25-04
Revision Date: 01/31/02

Client: MI Home Products
4314 Route 209
Elizabethville, 17023-8438

Test Specimen: Better Bilt Aluminum Product's Series "420" Type OXX Aluminum Sliding Glass Door. (SGD-C35)(Single Glazed)(Steel Reinforced)(with and without sill riser).

Test Method: AAMA/NWWDA 101/I.S.2-97, "Voluntary Specifications for Aluminum, Vinyl (PVC), and Wood Windows and Glass Doors."

Revision Note: Sill leg extension was revised from 1-1/8" to 1-1/4"

TEST SPECIMEN DESCRIPTION

General: The sample tested was a three (3) panel type OXX aluminum sliding glass door measuring 15-1-3/4" wide x 8'0-1/8" high overall. The active panel measured 5'0-1/2" wide by 7'11-1/8" high; the fixed panel measured 5'0-7/8" wide by 7'11-1/8" high. Frame and panel members were not thermally broken. A plastic spacer/guide was used at each panel head/stile corner. The fixed panel was secured to the jamb with two (2) 3" long aluminum angle retainers each fastened to the jamb stile with two (2) (#8 x 3/4") pan head screws. One (1) claw type door lock assembly was located at 40" from the bottom of each active panel lock stile each with two (2) screws. One (1) adjustable metal roller assembly was used at each end of the active bottom rails. The frame was of double screw coped corner construction. Panel corners were of single screw at bottom rail and double screw at the top rail. The interior vertical sill leg employed an extruded aluminum 1-1/4" high extension; an overall height of 2.031. One (1) aluminum panel retainer was fastened at 2" from each of the active panel bottom rail. One (1) extruded aluminum female panel adapter was fastened to the fixed panel but stile with five (5) (#8 x 1 1/2") screws. One extruded aluminum screen adapter was fastened to the butt stile using five (5) (#8 x 1 1/2") screws.

Installation: The main frame was fastened to the wood test buck using forty-eight (48) (#8 x 1 1/2") FHS. (See fastener diagram.)

PROFESSIONALS IN THE SCIENCE OF TESTING



MI Home Products

2

NCTL-210-2065-1

Reinforcement: One (1) U-shaped galvanized steel reinforcing channel measuring 1-3/4" x 3/4" x 1/16" thick filled the length of the panel adapter stile. One (1) U-shaped galvanized steel reinforcing channel measuring 3/4" x 7/8" x 1/16" thick filled the length of each interlock stile.

Glazing: All panels were channel glazed using 3/16" thick clear tempered glass with a flexible vinyl glazing bead.

Weatherseal: Double strips of centerfin weatherstrip (0.270" high) were located at each jamb, stile and lock stile. A double strip of centerfin weatherstrip (0.180" high) was located at each interlock stile. A double strip of centerfin weatherstrip (0.250" high) was located at each panel top rail. A double strip of side fin weatherstrip (0.430" high) was located at each panel bottom rail. An adhesive back polypile dust plug measuring 1-3/16" x 13/16" x 0.420" was located on the head and sill at each end of the vertical stile exterior track.

Weeps: One (1) weep notch measuring 1-1/2" x leg height was located at each end of the interior sill roller leg, exterior sill roller leg and screen sill roller leg.


Interior & Exterior Surface Finish: Non-painted aluminum

Sealant: Frame and panel bottom rail corners were sealed with a small-joint sealant.

Insect Screen: Two (2) insect screens, one (1) center insect screen measuring 5'0-1/4" wide by 7'11" high; Both were of coped corner construction. The screen employed fiberglass mesh cloth with a hollow vinyl spline. One (1) roller assembly was located at each end of the bottom rails. One (1) claw type lock assembly.

TEST RESULTS

<u>Par. No.</u>	<u>Title of Test & Method</u>	<u>Measured</u>	<u>Allowed</u>
2.2.1.6.1	Operating Force Center Active Panel		
	To open	20 lbf	30 lbf
	In Motion	5 lbf	30 lbf
	Right Active Panel		
	To open	18 lbf	30 lbf
	In Motion	3 lbf	30 lbf
2.2.1.6.2	Deglazing - ASTM E987 Center Active Panel		
	Top Rail (50 lbf)	10.2 % (0.051")	100%
	Bottom Rail (50 lbf)	7.8 % (0.039")	100%
	Left Stile (70 lbf)	6.0 % (0.030")	100%
	Right Stile (70 lbf)	5.4 % (0.027")	100%

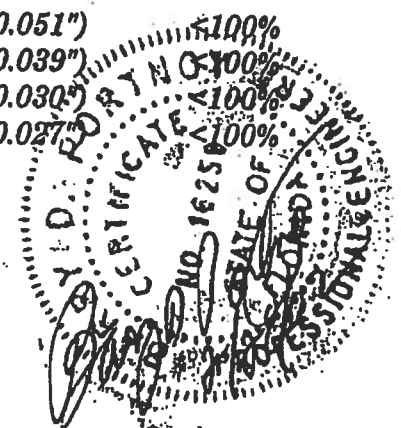

MI Home Products

3

NCTL-210-2065-1

<u>Par. No.</u>	<u>Title of Test & Method</u>	<u>Measured</u>	<u>Allowed</u>
2.2.1.6.2	Deglazing - ASTM E987 Right Active Panel		
	Meeting Rail (50 lbf)	8.4 % (0.042")	<100%
	Bottom Rail (50 lbf)	8.4 % (0.042")	<100%
	Left Stile (70 lbf)	8.0 % (0.040")	<100%
	Right Stile (70 lbf)	6.2 % (0.031")	<100%
2.1.2	Air Infiltration 1.57 psf(25mph)	Passed	0.30cfm/ft ²
2.1.3	Water Resistance-(5.0GPH/FT/2) WTP=4.50 psf	No entry	No entry
2.1.4.2	Uniform Load Structural - ASTM E330		
	45.0 psf Exterior	0.245"	0.381"
	45.0 psf Interior	0.258"	0.381"

OPTIONAL PERFORMANCE

<u>Par. No.</u>	<u>Title of Test & Method</u>	<u>Measured</u>	<u>Allowed</u>
4.3 *	Water Resistance - ASTM E547 & E331 5.0 gph/ft ² WTP=5.25 psf	No Entry	No Entry

Note: At this point in testing, an additional sill riser was attached to the existing main sill's interior vertical leg with the following results being obtained:


<u>Par. No.</u>	<u>Title of Test & Method</u>	<u>Measured</u>	<u>Allowed</u>
4.3 *	Water Resistance - ASTM E547 & E331 5.0 gph/ft ² WTP=6.00 psf	No Entry	No Entry
4.4.2	Uniform Load Structural - ASTM E330		
	52.5 psf Exterior	0.379"	0.381"
	52.5 psf Interior	0.380"	0.381"

* Test performed with and without screen

TEST COMPLETED 07/15/98

Note: In addition, Better Bilt Aluminum Products' Series "430" and "440" also received a SGD-C35 rating being identical in panel construction and interior sill leg heights.

This test specimen meets the performance criteria level of (SGD-C35) of the AAMA/AMA 101/I.S. 2-97 specification. Detailed drawings were available for laboratory records and compared to the test specimen at the time of this report. A copy of this report along with representative sections of the test specimen will be retained by NCTL for a period of four years. The results obtained apply only to the specimen tested.

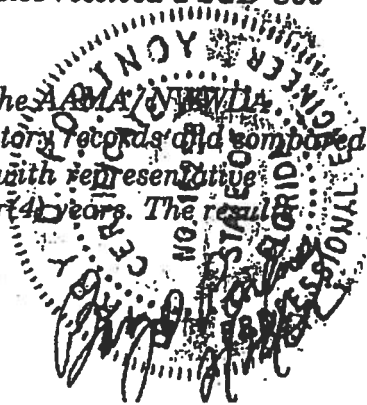

BETTER BILT ALUMINUM PRODUCTS

FLORIDA DOOR SERIES 420

COMPARATIVE ANALYSIS CHART IN DESIGN PRESSURE

CA980370

07-Jan-2002

98-0801

PANEL WIDTH >>	24	30	36	42	48	54	60
PANEL HEIGHT V							
80	85	71	62	56	52	48	46
96	69	57	49	44	40	37	35

TEST REPORT NOS. NCTL-210-2085-1 & 2

DESIGN PRESSURE ACHIEVED IN TEST: POS. & NEG. 35.0 PSF

WATER TEST PRESSURE: 5.25 PSF (SILL - 1-1/2" HGT.)

6.0 PSF (1-1/2" SILL W/ .500" ADAPTER - 2" HGT. O.A.)

TEST SIZE: 181 3/4" X 98 1/8"

CONFIGURATION TESTED: OXX

GLAZING: 3/16" TEMPERED GLASS

REINFORCING: (1) STL CHAN. 1-3/4" X 3/4"

X 1/16" @ ADAPTER STYLE:

(1) STL CHAN. 3/4" X 7/8"

X 1/16" @ EA. INTRLK STYLE

LIMITATIONS:

THE ABOVE VALUES ARE STRUCTURAL DESIGN LOADS & HAVE NOT BEEN CAPPED BY WATER PERFORMANCE

WATER PRESSURE REQUIREMENT OF 15% OF DESIGN LOAD APPLIES, POSITIVE DESIGN LOADS WOULD BE LIMITED TO 35 PSF W/ 1-1/2" SILL & 40 PSF W/ 2" SILL.

PANEL WIDTHS AND HEIGHTS ARE NOMINAL

PREPARED BY:


PRODUCT & APPLICATION ENGINEERING, INC.

250 INTERNATIONAL PARKWAY

SUITE 260

HEATHROW, FLORIDA 32748

PHONE 407 805-0365 FAX 407 805-0368

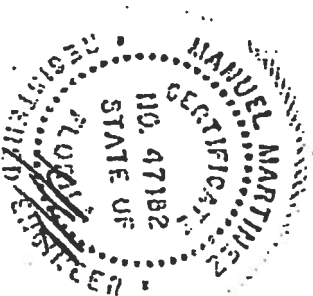

BETTER BILT ALUMINUM PRODUCTS FLORIDA DOOR SERIES 420

COMPARATIVE ANALYSIS CHART IN DESIGN PRESSURE

CA980371

07-Jan-2002

98-0801

PANEL WIDTH >>	24	30	36	42	48	54	60
PANEL HEIGHT V	64	54	47	42	39	37	35
80							

TEST REPORT NOS: NCTL-210-2085-4 & 3

DESIGN PRESSURE: POS. & NEG. 35.0 PSF

WATER TEST PRESSURE: 6.25 PSF (SILL - 1-1/2" HGT.)

8.0 PSF (1-1/2" SILL W/ 1/2" ADAPTER - 2" HGT. O.A.)

TEST SIZE: 181 3/4" X 82 1/8"

GLAZING: 3/16" TEMPERED GLASS

REINFORCING: NONE

CONFIGURATION TESTED: OXX

LIMITATIONS:

THE ABOVE VALUES ARE STRUCTURAL DESIGN LOADS & HAVE NOT BEEN CAPPED BY WATER PERFORMANCE.

WATER PRESSURE REQUIREMENT OF 15% OF DESIGN LOAD APPLIES, POSITIVE DESIGN LOADS WOULD BE LIMITED

TO 35 PSF W/ 1-1/2" SILL & 40 PSF W/ 2" SILL

PANEL WIDTHS AND HEIGHTS ARE NOMINAL (IN INCHES).

PREPARED BY:

PRODUCT & APPLICATION ENGINEERING, INC.

250 INTERNATIONAL PARKWAY

SUITE 250

HEATHROW, FLORIDA 32748


PHONE 407 805-0365 FAX 407 805-0388



Test Data Review Certificate

Certificate #3026447A

This certifies that Intertek Testing Services/ETL Semko has reviewed structural load test data and documentation supplied by Masonite/Premdor Exterior Door Products on the product lines indicated below to determine the appropriate design load and impact ratings as specified by Miami-Dade County, Florida Protocol PA201, PA202 and PA203.

The data supplied was reviewed for applicability in support of the data contained in the Masonite/Premdor Product Performance Data Manual for the product line and product models indicated below. ITS/ETL Semko certifies that the test reports provided are consistent with the Masonite Certificate of Performance sheets (COP's) contained in the product performance data manual specified herein. The attached Masonite/Premdor COP/Test Report Validation Matrices (uniquely numbered by product model) provides correlation information for each product model reviewed indicating the test lab, report number(s), product size and installation information and ratings for design load and applicability of the large missile impact test. All applicable COP's and Matrices must bear the Warnock Hersey verification stamp .

Product Line: **Johnson Entry Doors**

Product Models: Wood-Edge Steel Door Units	(Matrix #3026447A-001)
Metal-Edge Steel Door Units	(Matrix #3026447A-002)
Fiberglass Door Units	(Matrix #3026447A-003)

ITS/ETL-Semko has no direct knowledge of the tests conducted and has made no attempt to verify the accuracy or correctness of the data submitted. The review conducted was only to determine that the manufacturer's claims as represented in the COP's are correct representations of the data supplied from the laboratories. ITS/ETL Semko's review was for structural performance results only and did not include review of air infiltration or water penetration test results.

ISSUED: 6-14-02

Revision Date: June 14, 2002

Supersedes Certificate #3026447

Issued June 6, 2002


BY: 

Jim Turgeson, Project Manager

Test Data Review Certificate

Certificate #3026447A

This certifies that Intertek Testing Services/ETL Semko has reviewed structural load test data and documentation supplied by Masonite/Premdor Exterior Door Products on the product lines indicated below to determine the appropriate design load and impact ratings as specified by Miami-Dade County, Florida Protocol PA201, PA202 and PA203.

The data supplied was reviewed for applicability in support of the data contained in the Masonite/Premdor Product Performance Data Manual for the product line and product models indicated below. ITS/ETL Semko certifies that the test reports provided are consistent with the Masonite Certificate of Performance sheets (COP's) contained in the product performance data manual specified herein. The attached Masonite/Premdor COP/Test Report Validation Matrices (uniquely numbered by product model) provides correlation information for each product model reviewed indicating the test lab, report number(s), product size and installation information and ratings for design load and applicability of the large missile impact test. All applicable COP's and Matrices must bear the Warnock Hersey verification stamp .


Product Line: **Johnson Entry Doors**

Product Models: **Wood-Edge Steel Door Units** (Matrix #3026447A-001)
Metal-Edge Steel Door Units (Matrix #3026447A-002)
Fiberglass Door Units (Matrix #3026447A-003)

ITS/ETL-Semko has no direct knowledge of the tests conducted and has made no attempt to verify the accuracy or correctness of the data submitted. The review conducted was only to determine that the manufacturer's claims as represented in the COP's are correct representations of the data supplied from the laboratories. ITS/ETL Semko's review was for structural performance results only and did not include review of air infiltration or water penetration test results.

ISSUED: 6-14-02

Revision Date: June 14, 2002
Supersedes Certificate #3026447
Issued June 6, 2002

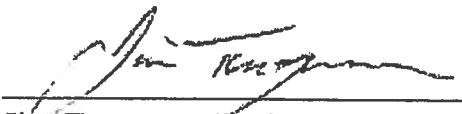BY: 
Jim Turgeson, Project Manager

WOOD-EDGE STEEL DOORS

COP# (WL-)	Config.	Swing (/O)	Max. Overall Size (ins.)	Leaf#	Nominal Max. Leaf Size (ins.)	Glazing Type*	+DP (psi)	-DP (psi)	Impact Appr'd	Ref. Test Reports ¹ (NCTL-210-)	Ref. Eval. Report ² (NCTL-210-)	Ass'y Detail (MAD-WL-MA)	Intall Detail (MID-WL-MA)
JH4101-02	X	I	36 x 80	1	36 x 80	O	66.0	66.0	Y	2185 1-3	-	0001-02	0001-02
JH4102-02	XX	I	72 x 80	1, 2	36 x 80	O	45.0	45.0	Y	1905 7-12; 1861 4-6, 10-12; 2185 1-3	2794-1	0002-02	0002-02
JH4103-02	XO/OX	I	50 x 80	1	36 x 80	O	57.0	57.0	Y	1880 7, 9, 10, 12; 1861 4-6, 10-12; 2185 1-3	2794-1	0003-02; 0006/0041-02	0003-02
JH4104-02	OXO	I	108 x 80	1	30 x 80	O	57.0	57.0	N	1905 7-12; 1861 4-6, 10-12; 1880 7, 9, 10, 12; 2185 1-3	2794-1	0004-02; 0007/0041-02	0004-02
JH4105-02	OXXO	I	144 x 80	1, 2	36 x 80	O	45.0	45.0	Y	1905 7-12; 1861 4-6, 10-12; 1885 1-3	2794-1	0005/0041-02	0005-02
JH4121-02	X	O	36 x 80	1	36 x 80	O	66.0	66.0	Y	2178 1-3	-	0011-02	0001-02
JH4122-02	XX	O	72 x 80	1, 2	36 x 80	O	45.0	45.0	Y	1905 7-12; 1864 4-8; 2178 1-3	2794-1	0012-02	0002-02
JH4123-02	XO/OX	O	50 x 80	1	36 x 80	O	57.0	57.0	Y	1880 7, 9, 10, 12; 1864 4-8, 10-12; 2178 1-3	2794-1	0013-02; 0016/0041-02	0003-02
JH4124-02	OXO	O	108 x 80	1	36 x 80	O	57.0	57.0	N	1905 7-12; 1864 5-8; 1880 7-12; 2178 1-3	2794-1	0014-02; 0017/0041-02	0004-02
JH4125-02	OXXO	O	144 x 80	1, 2	36 x 80	O	45.0	45.0	Y	1905 7-12; 1864 5-8; 2178 1-3	2794-1	0015-02; 0018/0041-02	0005-02
JH4141-02	X	I	36 x 80	1	36 x 80	IG	40.5	40.5	N	1897 7-12; 1861 4-6, 10-12; 2185 1-3	2794-1	0001/0041-02	0001-02
JH4142-02	XX	I	72 x 80	1, 2	36 x 80	IG	40.5	40.5	N	1897 7-12; 1861 4-6, 10-12; 2185 1-3	2794-1	0002/0041-02	0002-02
JH4143-02	XO/OX	I	72 x 80	1	36 x 80	IG	40.5	40.5	N	1897 2-12; 1861 4-6, 10-12; 2185 1-3	2794-1	0003-02; 0006/0041-02	0003-02
JH4144-02	OXO	I	108 x 80	1	36 x 80	IG	40.5	40.5	N	1897 7-12; 1861 4-6, 10-12; 2185 1-3	2794-1	0004-02; 0007/0041-02	0004-02
JH4145-02	OXXO	I	144 x 80	1, 2	36 x 80	IG	40.5	40.5	N	1897 7-12; 1861 4-6, 10-12; 2185 1-3	2794-1	0005-02; 0008/0041-02	0005-02
				SL	36 x 80	IG	40.5	40.5	N				

* O=opaque; IG=insulating glass with minimum 1/8" tempered glazing
* tested in accordance with Metro-Dade Protocols PA201, PA202 and PA203



June 14, 2002

COP/MAD/MID sheets referenced in this matrix provides additional information - available from the Masonite website (www.masonite.com) or the Masonite technical center.

WOOD-EDGE STEEL DOORS

COP# (WL-)	Config.	Swing (I/O)	Max. Overall Size (ins.)	Leaf#	Nominal Max. Leaf Size (ins.)	Glazing Type ¹	+DP (psf)	-DP (psf)	Impact Appr'd	Ref. Test Reports ² (NCTL-210-)	Ref. Eval. Report (NCTL-210-)	Ass'y Detail (MAD-WL-MMA)	Instal Detail (MID-WL-MMA)
JH4161-02	X	O	36 x 80	1	36 x 80	IG	40.5	40.5	N	1897 7-12; 1864 5-8; 2178 1-3	2794-1	0011/0041-02	0001-02
JH4162-02	XX	O	72 x 80	1, 2	36 x 80	IG	40.5	40.5	N	1897 7-12; 1864 5-8; 2178 1-3	2794-1	0012/0041-02	0002-02
JH4163-02	XO/OX	O	72 x 80	1	36 x 80	IG	40.5	40.5	N	1897 7-12; 1864 5-8; 2178 1-3	2794-1	0013-02; 0016/0041-02	0003-02
JH4164-02	OXO	O	108 x 80	SL	36 x 80	IG	40.5	40.5	N				
				1	36 x 80	IG	40.5	40.5	N	1897 7-12; 1864 5-8; 2178 1-3	2794-1	0014-02; 0017/0041-02	0004-02
JH4165-02	OXOX	O	144 x 80	SL	36 x 80	IG	40.5	40.5	N				
				1, 2	36 x 80	IG	40.5	40.5	N	1897 7-12; 1864 5-8; 2178 1-3	2794-1	0018/0041-02	0005-02
				SL	36 x 80	IG	40.5	40.5	N				

¹ O=opaque; IG=insulating glass with minimum 1/8" tempered glazing
² tested in accordance with Metro-Data Protocols PA201, PA202 and PA203



June 14, 2002

COP/MAD/MID sheets referenced
in this matrix provides additional
information - available from the
Masonite website
(www.masonite.com) or the
Masonite technical center.

METAL-EDGE STEEL DOORS

COP# (WL-)	Config.	Swing (I/O)	Max. Overall Size (ins.)	Leaf#	Nominal Max. Leaf Size (ins.)	Glazing Type ¹	+DP (psf)	-DP (psf)	Impact Appr'd	Ref. Test Reports ² (NCTL-210-)	Ref. Eval. Report (NCTL-210-)	Ass'y Detail (MAD-WL-MA)	Intall Detail (MID-WL-MA)
JH3101-02	X	I	36 x 80	1	36 x 80	O	76.0	76.0	Y	2185 1-3	2794-1	0001-02	0001-02
JH3102-02	XX	I	72 x 80	1, 2	36 x 80	O	55.0	55.0	Y	1905 1-6; 1861 1-3, 7-9; 2183 1-3	2794-1	0002-02	0002-02
JH3103-02	XO/OX	I	50 x 80	1	36 x 80	O	76.0	76.0	Y	1880 1-6; 1861 1-3, 7-9; 2183 1-3	2794-1	0003-02; 0006/0041-02	0003-02
JH3104-02	OXO	I	108 x 80	SL	14 x 80	IG	76.0	76.0	N	1905 1-6; 1861 1-3, 7-9; 2183 1-3	2794-1	0004-02; 0007/0041-02	0004-02
JH3105-02	OXOX	I	144 x 80	SL	14 x 80	IG	76.0	76.0	N	1905 1-6; 1861 1-3, 7-9; 2183 1-3	2794-1	0005-02; 0008/0041-02	0005-02
JH3106-02	X	I	36 x 96	1	36 x 96	O	55.0	55.0	N	1980 1-6; 1861 1-3, 7-9; 2183 1-3	2794-1	0001-02	0001-02
JH3107-02	XX	I	72 x 96	1, 2	36 x 96	O	48.3	48.3	Y	1980 1-6; 1861 1-3, 7-9; 2183 1-3	2794-1	0002-02	0002-02
JH3108-02	XO/OX	I	72 x 96	1	36 x 96	O	48.3	48.3	Y	1980 1-6; 1861 1-3, 7-9; 2183 1-3	2794-1	0003-02; 0016/0041-02	0003-02
JH3109-02	OXO	I	108 x 96	SL	36 x 96	IG	48.3	48.3	N	1980 1-6; 1861 1-3, 7-9; 2183 1-3	2794-1	0004-02; 0007/0041-02	0004-02
JH3110-02	OXOX	I	144 x 96	SL	36 x 96	IG	48.3	48.3	N	1980 1-6; 1861 1-3, 7-9; 2183 1-3	2794-1	0005-02	0005-02
JH3121-02	X	O	36 x 80	1	36 x 80	O	76.0	76.0	Y	2184 1-3	-	0011-02	0001-02
JH3122-02	XX	O	72 x 80	1, 2	36 x 80	O	55.0	55.0	Y	1905 1-6; 1864 1-4; 2184 1-3	2794-1	0012-02	0002-02
JH3123-02	XO/OX	O	50 x 80	1	36 x 80	O	76.0	76.0	Y	1880 1-6; 1864 1-4; 2184 1-3	2794-1	0013-02; 0016/0014-02	0003-02
JH3124-02	OXO	O	100 x 80	SL	14 x 80	IG	76.0	76.0	N	1880 1-6; 1864 1-4; 1905 1-6; 2184 1-3	2794-1	0014-02; 0017/0041-02	0004-02
JH3125-02	OXOX	O	144 x 80	SL	14 x 80	IG	76.0	76.0	N	1905 1-6; 1864 1-4; 2184 1-3	2794-1	0015-02; 0018/0041-02	0005-02
JH3126-02	X	O	36 x 96	1	36 x 96	O	55.0	55.0	N	1980 1-6; 1864 1-4; 2184 1-3	2794-1	0011-02	0001-02
JH3127-02	XX	O	72 x 96	1, 2	36 x 96	O	48.3	48.3	Y	1980 1-6; 1864 1-4; 2184 1-3	2794-1	0012-02	0002-02

¹ O=opaque; IG=insulating glass with minimum 1/8" tempered glazing
² tested in accordance with Metro-Data Protocols PA201, PA202 and PA203



COP/MAD/MID sheets referenced in this matrix provides additional information - available from the Masonite website (www.masonite.com) or the Masonite technical center.

METAL-EDGE STEEL DOORS

COP# (WL-)	Config. (I/O)	Swing (I/O)	Max. Overall Size (ins.)	Leaf#	Nominal Max. Leaf Size (ins.)	Glazing Type ¹	+DP (psf)	-DP (psf)	Impact Appr'd	Ref. Test Reports ² (NCTL-210-)	Ref. Eval. Report (NCTL-210-)	Ass'y Detail (MAD-WL-MA)	Instal Detail (MID-WL-MA)
JH3128-02	XO/OX	O	72 x 96	1	36 x 96	O	48.3	48.3	Y	1980 1-6; 1864 1-4; 2184 1-3	2794-1	0013-02; 0016/0041-02	0003-02
JH3129-02	OXO	O	108 x 96	1	36 x 96	IG	48.3	48.3	N	1980 1-6; 1864 1-4; 2184 1-3	2794-1	0014-02; 0017/0041-02	0004-02
JH3130-02	OXXO	O	144 x 96	1, 2	36 x 96	IG	48.3	48.3	Y	1980 1-6; 1864 1-4; 2184 1-3	2794-1	0015-02; 0018/0041-02	0005-02
JH3141-02	X	I	36 x 80	1	36 x 80	IG	50.5	50.5	N	1897 1-6; 1861 1-3; 7-9; 2183 1-3	2794-1	0001/0041-02	0001-02
JH3142-02	XX	I	72 x 80	1, 2	36 x 80	IG	50.5	50.5	N	1897 1-6; 1861 1-3; 7-9; 2183 1-3	2794-1	0002/0041-02	0002-02
JH3143-02	XO/OX	I	72 x 80	1	36 x 80	IG	50.5	50.5	N	1897 1-6; 1861 1-3; 7-9; 2183 1-3	2794-1	0003-02; 0006/0041-02	0003-02
JH3144-02	OXO	I	108 x 80	1	36 x 80	IG	50.5	50.5	N	1897 1-6; 1861 1-3; 7-9; 2183 1-3	2794-1	0004-02; 0007/0041-02	0004-02
JH3145-02	OXXO	I	144 x 80	1, 2	36 x 80	IG	50.5	50.5	N	1897 1-6; 1861 1-3; 7-9; 2183 1-3	2794-1	0005-02; 0008/0041-02	0005-02
JH3146-02	X	I	36 x 96	1	36 x 96	IG	43.0	45.0	N	1897 1-12; 1861 1-3; 7-9; 2183 1-3	2794-1	0001/0041-02	0001-02
JH3147-02	XX	I	72 x 96	1, 2	36 x 96	IG	43.0	45.0	N	1897 1-12; 1861 1-3; 7-9; 2183 1-3	2794-1	0002/0041-02	0002-02
JH3161-02	X	O	36 x 80	1	36 x 80	IG	50.5	50.5	N	1897 1-6; 1864 1-4; 2184 1-3	2794-1	0011/0041-02	0001-02
JH3162-02	XX	O	72 x 80	1, 2	36 x 80	IG	50.5	50.5	N	1897 1-6; 1864 1-4; 2184 1-3	2794-1	0012/0041-02	0002-02
JH3163-02	XO/OX	O	72 x 80	1	36 x 80	IG	50.5	50.5	N	1897 1-6; 1864 1-4; 2184 1-3	2794-1	0013-02; 0016/0041-02	0003-02
JH3164-02	OXO	O	108 x 80	1	36 x 80	IG	50.5	50.5	N	1897 1-6; 1864 1-4; 2184 1-3	2794-1	0014-02; 0017/0041-02	0004-02
JH3165-02	OXXO	O	144 x 80	1, 2	36 x 80	IG	50.5	50.5	N	1897 1-6; 1864 1-4; 2184 1-3	2794-1	0015-02; 0018/0041-02	0005-02
JH3166-02	X	O	36 x 96	1	36 x 96	IG	43.0	43.0	N	1897 1-12; 1864 1-4; 7-9; 2184 1-3	2794-1	0011-02	0001-02
JH3167-02	XX	O	72 x 96	1, 2	36 x 96	IG	43.0	45.0	N	1897 1-12; 1864 1-4; 7-9; 2184 1-3	2794-1	0012/0041-02	0002-02

¹ O=opaque; IG=insulating glass with minimum 1/8" tempered glazing
² tested in accordance with Metro-Dade Protocols PA201, PA202 and PA203



COP/MAD/MID sheets referenced
in this matrix provides additional
information - available from the
Masonite website
(www.masonite.com) or the
Masonite technical center.

FIBERGLASS DOORS

COP# (WL-)	Config.	Swing (I/O)	Max. Overall Size (ins.)	Leaf#	Nominal Max. Leaf Size (ins.)	Glazing Type ¹	+DP (psf)	-DP (psf)	Impact Appr'd	Ref. Test Reports ²	Ass'y Detail (MAD-WL-MA)	Initial Detail (MID-WL-MA)
MA0101-02	X	I	36 x 80	1	36 x 80	O	76.0	76.0	N	NCTL 210-1973 1-3	0001-02	0001-02
MA0102-02	XX	I	72 x 80	1, 2	36 x 80	O	55.0	55.0	N	CTLA-772W-2	0002-02	0002-02
MA0103-02	XO/OX	I	50 x 80	1	36 x 80	O	55.0	55.0	N	CTLA-772W-2	0003/0006/0041-02	0003-02
MA0104-02	OXO	I	64 x 80	SL	14 x 80	IG	55.0	55.0	N	CTLA-772W-2	0004/0007/0041-02	0004-02
MA0105-02	OXXO	I	100 x 80	SL	14 x 80	IG	55.0	55.0	N	CTLA-772W-2	0005/0008/0041-02	0005-02
MA0106-02	X	I	36 x 96	1	36 x 96	O	70.0	70.0	N	CTLA-772W	0001-02	0001-02
MA0107-02	XX	I	72 x 96	1, 2	36 x 96	O	55.0	55.0	N	CTLA-772W-1	0002-02	0002-02
MA0108-02	XO/OX	I	50 x 96	1	36 x 96	O	55.0	55.0	N	CTLA-772W-1	0003/0006/0041-02	0003-02
MA0109-02	OXO	I	64 x 96	SL	14 x 96	IG	55.0	55.0	N	CTLA-772W-1	0004/0007/0041-02	0004-02
MA0110-02	OXXO	I	100 x 96	SL	14 x 96	IG	55.0	55.0	N	CTLA-772W-1	0005/0014-02	0005-02
MA0121-02	X	O	36 x 80	SL	14 x 80	IG	55.0	55.0	N	NCTL 210-1973 1-3	0011-02	0001-02
MA0122-02	XX	O	72 x 80	1, 2	36 x 80	O	55.0	55.0	N	CTLA-772W-2	0012-02	0002-02
MA0123-02	XO/OX	O	50 x 80	1	36 x 80	O	55.0	55.0	N	CTLA-772W-2	0013/0016/0014-02	0003-02
MA0124-02	OXO	O	64 x 80	SL	14 x 80	IG	55.0	55.0	N	CTLA-772W-2	0014/0017/0041-02	0004-02
MA0125-02	OXXO	O	100 x 80	SL	14 x 80	IG	55.0	55.0	N	CTLA-772W-2	0015/0018/0041-02	0005-02
MA0126-02	X	O	36 x 96	1	36 x 96	O	70.0	70.0	N	CTLA-772W	0011-02	0001-02
MA0127-02	XX	O	72 x 96	1, 2	36 x 96	O	55.0	55.0	N	CTLA-772W-1	0012-02	0002-02
MA0128-02	XO/OX	O	50 x 96	1	36 x 96	O	55.0	55.0	N	CTLA-772W-1	0013/0016/0041-02	0003-02
MA0129-02	OXO	O	64 x 96	SL	14 x 96	IG	55.0	55.0	N	CTLA-772W-1	0014/0017/0041-02	0004-02
MA0130-02	OXXO	O	100 x 96	SL	14 x 96	IG	55.0	55.0	N	CTLA-772W-1	0015/0018/0041-02	0005-02

¹ O=opaque; IG=insulating glass with minimum 1/8" tempered glazing
² tested in accordance with Metro-Dade Protocols PA201, PA202 and PA203



COP/MAD/MID sheets referenced in this matrix provides additional information - available from the Masonite website (www.masonite.com) or the Masonite technical center.

FIBERGLASS DOORS

COP# (WL-)	Config.	Swing (l/r)	Max. Overall Size (ins.)	Leaf#	Nominal Max. Leaf Size (ins.)	Glazing Type*	+DP (psi)	-DP (psi)	Impact App'd	Ref. Test Reports ²	Ass'y Detail (MAD-WL-MA)	Initial Detail (MID-WL-MA)
MA0141-02	X	I	36 x 80	1	36 x 80	IG	52.0	52.0	N	CTLA-805W-2	0001/0041-02	0001-02
MA0142-02	XX	I	72 x 80	1, 2	36 x 80	IG	52.0	52.0	N	CTLA-805W-2	0002/0041-02	0002-02
MA0143-02	XO/OX	I	72 x 80	1	36 x 80	IG	52.0	52.0	N	CTLA-805W-2	0003/0006/0041-02	0003-02
MA0144-02	OXO	I	108 x 80	SL	36 x 80	IG	52.0	52.0	N	CTLA-805W-2	0004/0007/0041-02	0004-02
MA0145-02	OXXO	I	144 x 80	SL	36 x 80	IG	52.0	52.0	N	CTLA-805W-2	0005/0008/0041-02	0005-02
MA0146-02	X	I	36 x 96	1	36 x 96	IG	52.0	52.0	N	CTLA-805W	0001/0041-02	0001-02
MA0147-02	XX	I	72 x 96	1, 2	36 x 96	IG	40.0	40.0	N	CTLA-805W	0002/0041-02	0002-02
MA0148-02	XO/OX	I	72 x 96	1	36 x 96	IG	40.0	40.0	N	CTLA-805W	0003/0006/0041-02	0003-02
MA0149-02	OXO	O	108 x 96	SL	36 x 96	IG	40.0	40.0	N	CTLA-805W	0004/0007/0041-02	0004-02
MA0150-02	OXXO	I	144 x 96	SL	36 x 96	IG	40.0	40.0	N	CTLA-805W	0005/0007/0041-02	0005-02
MA0161-02	X	O	36 x 80	1	36 x 80	IG	55.0	55.0	N	CTLA-805W-2	0011/0041-02	0001-02
MA0162-02	XX	O	72 x 80	1, 2	36 x 80	IG	55.0	55.0	N	CTLA-805W-2	0012/0041-02	0002-02
MA0163-02	XO/OX	O	72 x 80	1	36 x 80	IG	55.0	55.0	N	CTLA-805W-2	0013/0016/0041-02	0003-02
MA0164-02	OXO	O	108 x 80	SL	36 x 80	IG	55.0	55.0	N	CTLA-805W-2	0014/0017/0041-02	0004-02
MA0165-02	OXXO	O	144 x 80	SL	36 x 80	IG	55.0	55.0	N	CTLA-805W-2	0015/0018/0041-02	0005-02
MA0166-02	X	O	36 x 96	1	36 x 96	IG	55.0	55.0	N	CTLA-805W	0011/0041-02	0001-02
MA0167-02	XX	O	72 x 96	1, 2	36 x 96	IG	47.0	47.0	N	CTLA-805W	0012/0041-02	0002-02
MA0168-02	XO/OX	O	72 x 96	1	36 x 96	IG	47.0	47.0	N	CTLA-805W	0013/0016/0041-02	0003-02
MA0169-02	OXO	O	108 x 96	SL	36 x 96	IG	47.0	47.0	N	CTLA-805W	0014/0017/0041-02	0004-02
MA0170-02	OXXO	O	144 x 96	SL	36 x 96	IG	47.0	47.0	N	CTLA-805W	0015/0018/0041-02	0005-02


* O=opaque, IG=insulating glass with minimum 1/8" tempered glazing
* tested in accordance with Metro-Dade Protocols PA201, PA202 and PA203



June 14, 2002

COP/MAD/MID sheets referenced in this matrix provides additional information - available from the Masonite website (www.masonite.com) or the Masonite technical center.

SINGLE DOOR WITH 2 SIDELITES

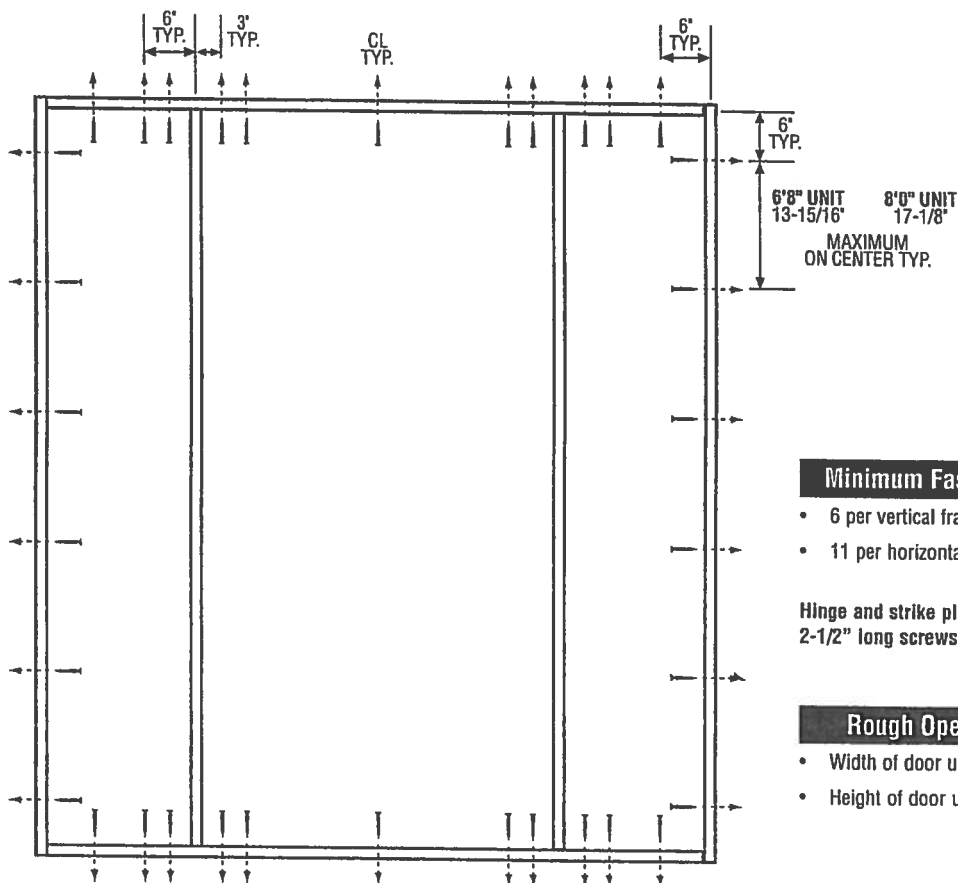

Minimum Fastener Count

- 6 per vertical framing member
- 11 per horizontal framing member

Hinge and strike plates require two 2-1/2" long screws per location.

Rough Opening (RO)

- Width of door unit plus 1/2"
- Height of door unit plus 1/4"



Test Data Review Certificate #3026447A; #3026447B; #3026447C and COP/Test Report Validation Matrix #3026447A-001, 002, 003; #3026447B-001, 002, 003; #3026447C-001, 002, 003 provides additional information - available from the ITS/WH website (www.itswh.com), the Masonite website (www.masonite.com) or the Masonite technical center.

Latching Hardware:

- Compliance requires that GRADE 3 or better (ANSI/BHMA A156.2) cylindrical and deadlock hardware be installed.
- **UNITS COVERED BY COP DOCUMENT 3244*, 3249, 3264* or 3269**
Compliance requires that 8" GRADE 1 (ANSI/BHMA A156.16) surface bolts be installed on latch side of active door panel - (1) at top and (1) at bottom.


*Based on required Design Pressure - see COP sheet for details.

Notes:

1. Anchor calculations have been carried out with the lowest (least) fastener rating from the different fasteners being considered for use. Fasteners analyzed for this unit include #8 and #10 wood screws or 3/16" Tapcons.
2. The wood screw single shear design values come from Table 11.3A of ANSI/AF & PA NDS for southern pine lumber with a side member thickness of 1-1/4" and achievement of minimum embedment. The 3/16" Tapcon single shear design values come from the ITW and ELCO Dade County approvals respectively, each with minimum 1-1/4" embedment.
3. Wood bucks by others, must be anchored properly to transfer loads to the structure.



SINGLE DOOR

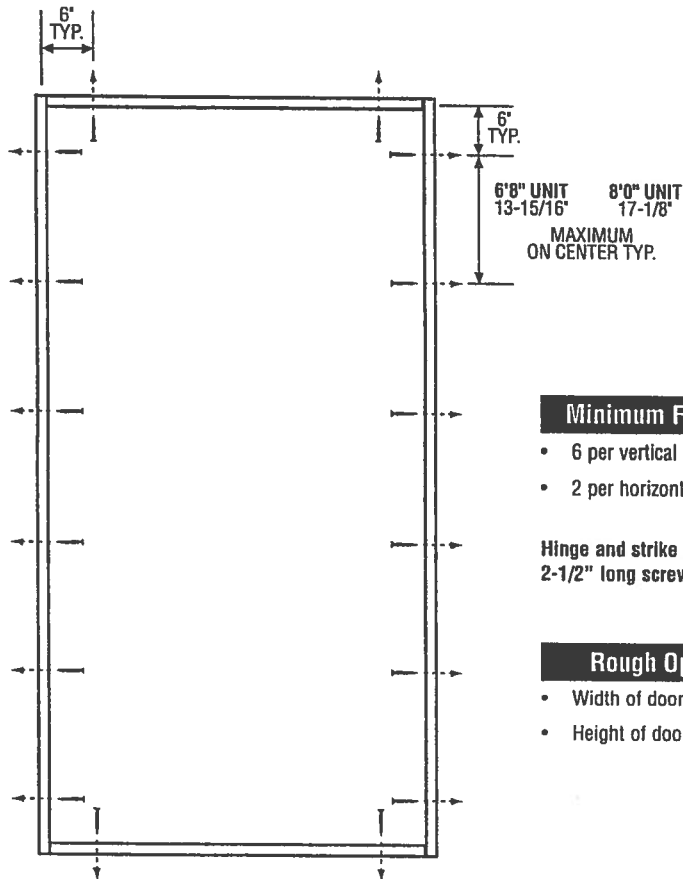

Minimum Fastener Count

- 6 per vertical framing member
- 2 per horizontal framing member

Hinge and strike plates require two 2-1/2" long screws per location.

Rough Opening (RO)

- Width of door unit plus 1/2"
- Height of door unit plus 1/4"



Test Data Review Certificate #3026447A; #3026447B; #3026447C and COP/Test Report Validation Matrix #3026447A-001, 002, 003; #3026447B-001, 002, 003; #3026447C-001, 002, 003 provides additional information - available from the ITS/WH website (www.itswh.com), the Masonite website (www.masonite.com) or the Masonite technical center.

Latching Hardware:

- Compliance requires that GRADE 3 or better (ANSI/BHMA A156.2) cylindrical and deadlock hardware be installed.
- **UNITS COVERED BY COP DOCUMENT 3146, 3166, 3241*, 3246, 3261* or 3266**
Compliance requires that 8" GRADE 1 (ANSI/BHMA A156.16) surface bolts be installed on latch side of active door panel - (1) at top and (1) at bottom.


*Based on required Design Pressure -- see COP sheet for details.

Notes:

1. Anchor calculations have been carried out with the lowest (least) fastener rating from the different fasteners being considered for use. Fasteners analyzed for this unit include #8 and #10 wood screws or 3/16" Tapcons.
2. The wood screw single shear design values come from Table 11.3A of ANSI/AF & PA NDS for southern pine lumber with a side member thickness of 1-1/4" and achievement of minimum embedment. The 3/16" Tapcon single shear design values come from the ITW and ELCO Dade County approvals respectively, each with minimum 1-1/4" embedment.
3. Wood bucks by others, must be anchored properly to transfer loads to the structure.




INSWING UNIT WITH SINGLE DOOR & TWO SIDELITES (BOXED CONSTRUCTION)

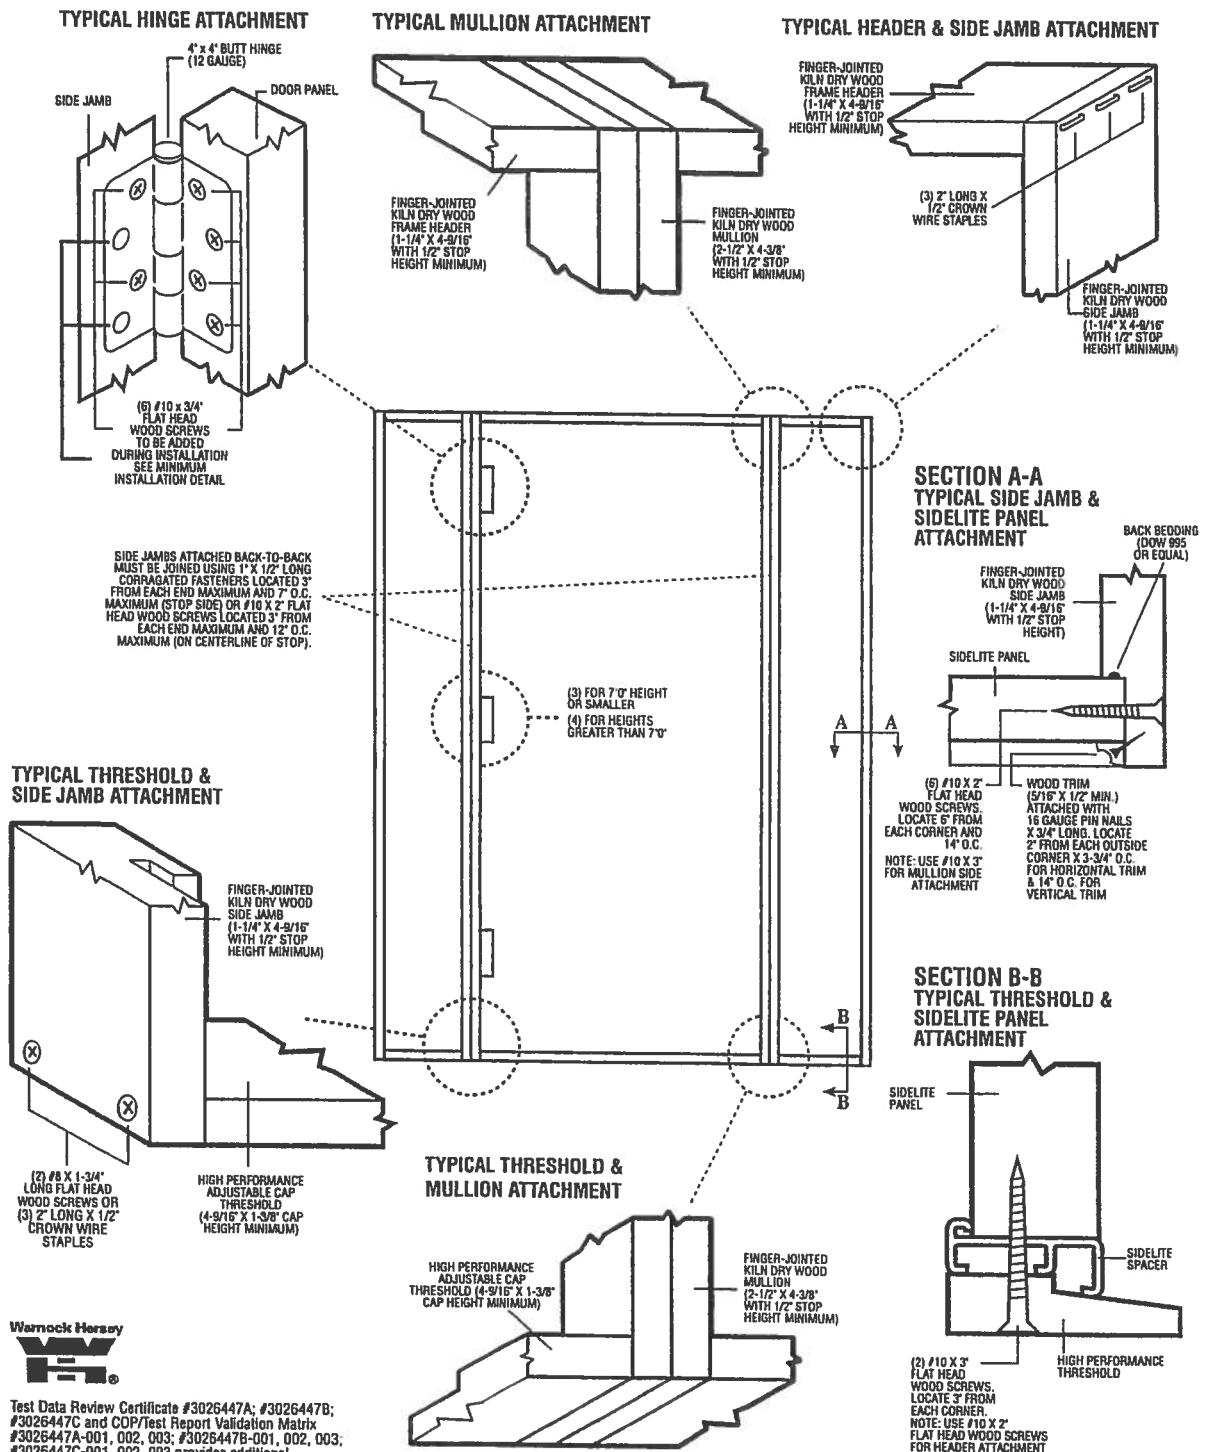


Test Data Review Certificate #3026447A; #3026447B; #3026447C and COP/Test Report Validation Matrix #3026447A-001, 002, 003; #3026447B-001, 002, 003; #3026447C-001, 002, 003 provides additional information - available from the ITS/WH website (www.itswh.com), the Masonite website (www.masonite.com) or the Masonite technical center.

OUTSWING UNITS WITH SINGLE DOOR

TYPICAL HINGE ATTACHMENT

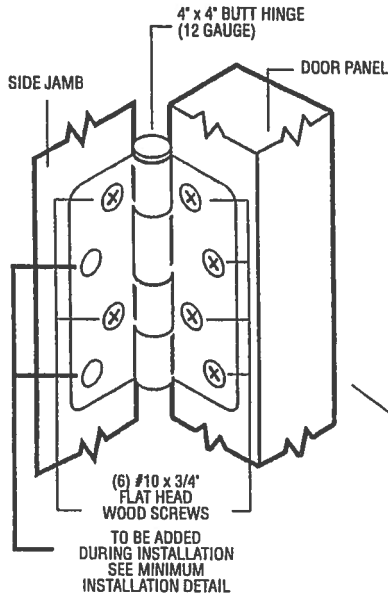


TYPICAL HEADER & SIDE JAMB ATTACHMENT

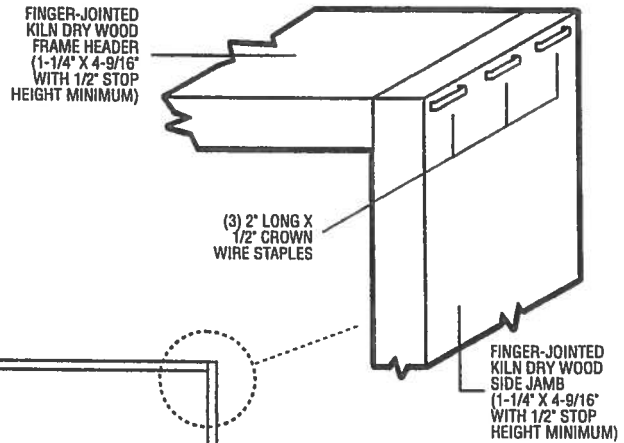

(3) FOR 7'0\"/>


TYPICAL THRESHOLD & SIDE JAMB ATTACHMENT

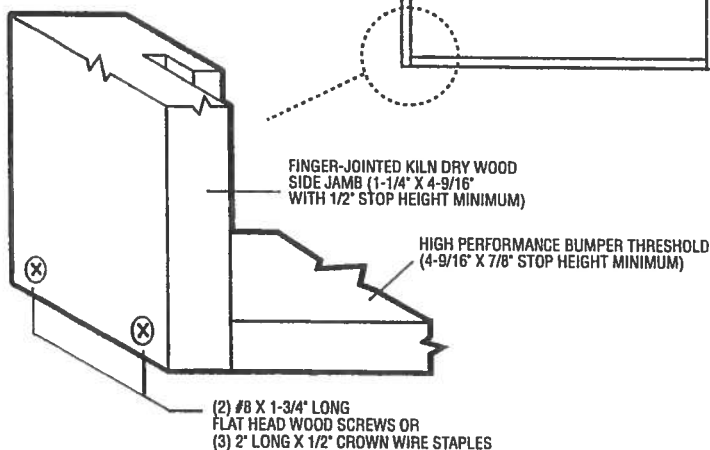


Test Data Review Certificate
#3026447A; #3026447B;
#3026447C and COP/Test Report
Validation Matrix #3026447A-001,
002, 003; #3026447B-001, 002,
003; #3026447C-001, 002, 003
provides additional information -
available from the ITS/WH website
(www.etsemko.com), the Masonite
website (www.masonite.com) or
the Masonite technical center.

INSWING UNIT WITH SINGLE DOOR


TYPICAL HINGE ATTACHMENT

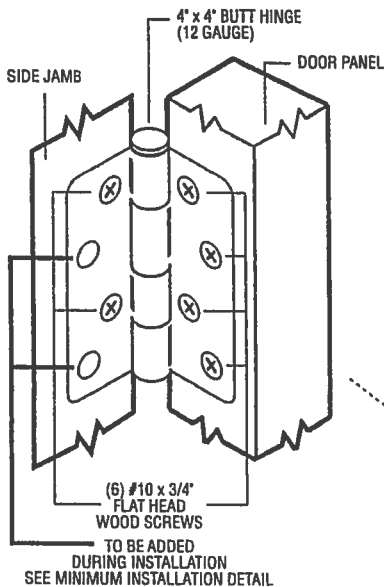

TYPICAL HEADER & SIDE JAMB ATTACHMENT

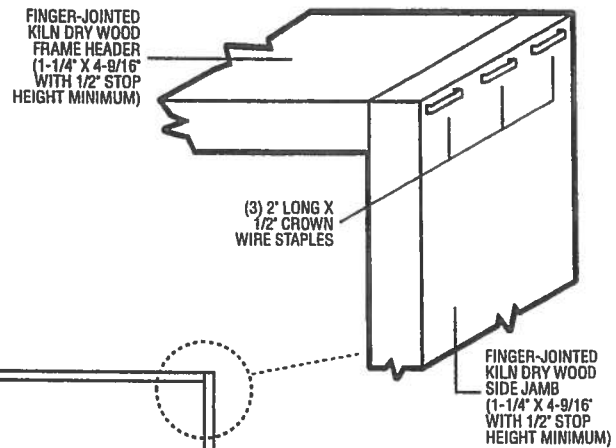

TYPICAL THRESHOLD & SIDE JAMB ATTACHMENT

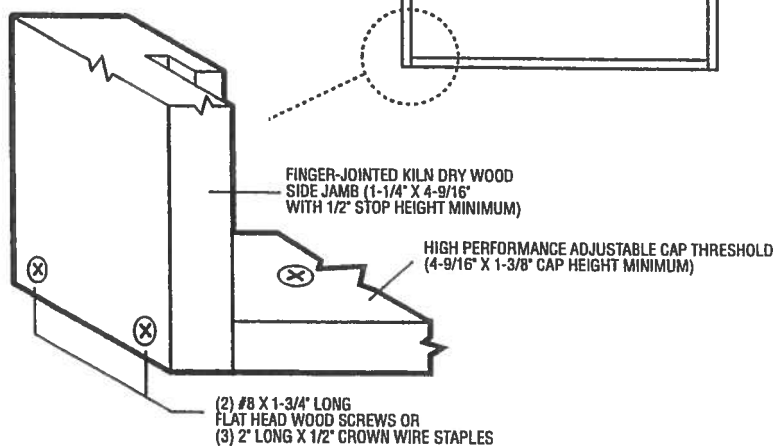


Test Data Review Certificate
#3026447A; #3026447B;
#3026447C and CDP Test Report
Validation Matrix #3026447A-001,
002, 003; #3026447B-001, 002,
003; #3026447C-001, 002, 003
provides additional information -
available from the ITSAWH website
(www.etlsemko.com), the Masonite
website (www.masonite.com) or
the Masonite technical center.




INSWING UNIT WITH DOUBLE DOOR

TYPICAL HINGE ATTACHMENT

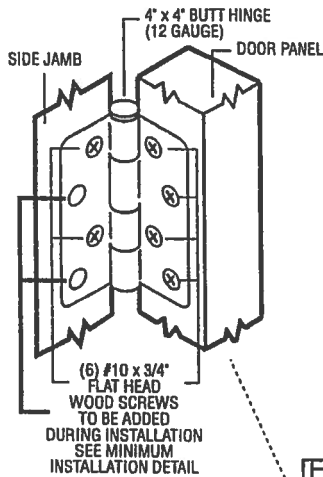


TYPICAL ASTRAGAL PROFILES

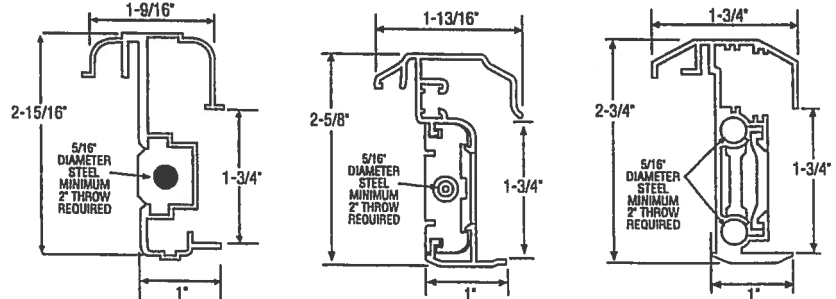


ALUMINUM EXTRUDED ASTRAGAL (0.06\"/>

TYPICAL HEADER & SIDE JAMB ATTACHMENT

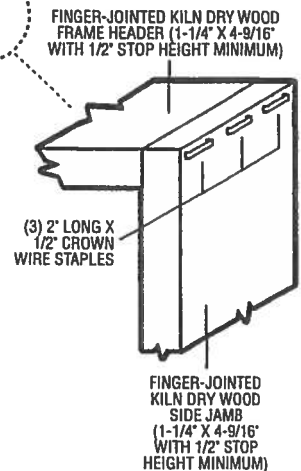

TYPICAL THRESHOLD & SIDE JAMB ATTACHMENT

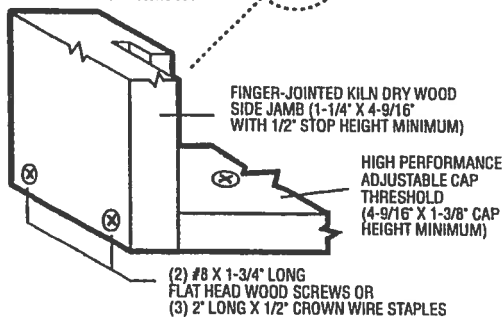


Test Data Review Certificate
#3026447A; #3026447B;
#3026447C and COP/Test Report
Validation Matrix #3026447A-001,
002, 003; #3026447B-001, 002,
003; #3026447C-001, 002, 003
provides additional information -
available from the ITS/WH website
(www.itswh.com), the Masonite
website (www.masonite.com) or
the Masonite technical center.




INSWING UNIT WITH DOUBLE DOOR

TYPICAL HINGE ATTACHMENT

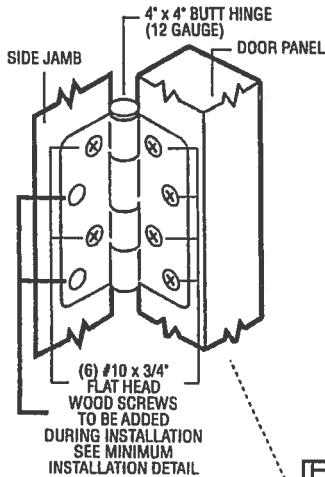


TYPICAL ASTRAGAL PROFILES

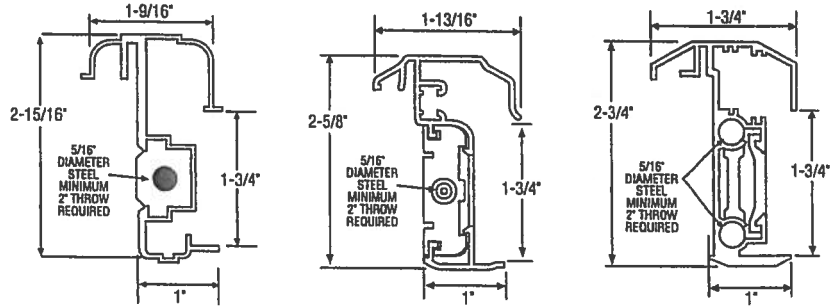


ALUMINUM EXTRUDED ASTRAGAL (0.06\"/>

TYPICAL HEADER & SIDE JAMB ATTACHMENT

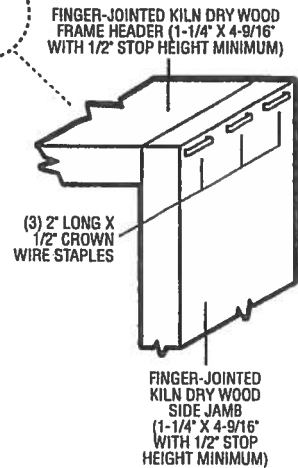


TYPICAL THRESHOLD & SIDE JAMB ATTACHMENT

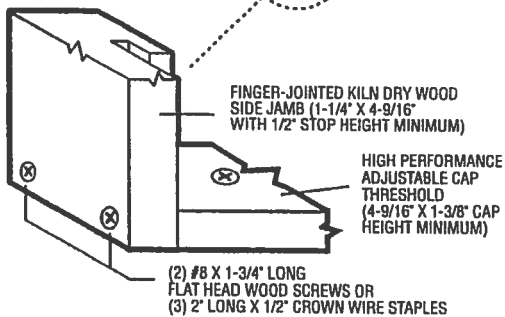

Test Data Review Certificate
#3026447A; #3026447B;
#3026447C and COP/Test Report
Validation Matrix #3026447A-001,
002, 003; #3026447B-001, 002,
003; #3026447C-001, 002, 003
provides additional information -
available from the ITS/WH website
(www.eUsemko.com), the Masonite
website (www.masonite.com) or
the Masonite technical center.

WOOD-EDGE STEEL DOORS

APPROVED ARRANGEMENT:

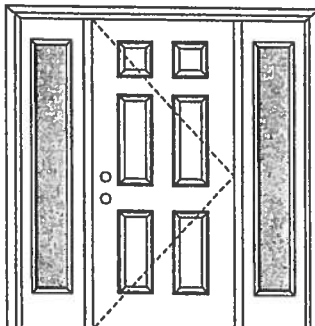

Test Data Review Certificate #3026447A and COP/Test Report Validation Matrix #3026447A-001 provides additional information - available from the ITS/WH website (www.etsmk.com), the Masonite website (www.masonite.com) or the Masonite technical center.

Note:
Units of other sizes are covered by this report as long as the panels used do not exceed 3'0" x 6'8".

Single Door with 2 Sidelites
Maximum unit size = 9'0" x 6'8"

Design Pressure

+57.0/-57.0 with maximum sidelite panel width of 1'2"

+45.0/-45.0 with maximum sidelite panel width of 3'0"

limited water unless special threshold design is used.

Large Missile Impact Resistance

Hurricane protective system (shutters) is NOT REQUIRED on opaque panels, but is required on glazed panels.

Actual design pressure and impact resistant requirements for a specific building design and geographic location is determined by ASCE 7-national, state or local building codes specify the edition required.

MINIMUM ASSEMBLY DETAIL:

Compliance requires that minimum assembly details have been followed - see MAD-WL-MA0004-02 or MAD-WL-MA0007-02 and MAD-WL-MA0041-02.

MINIMUM INSTALLATION DETAIL:

Compliance requires that minimum installation details have been followed - see MID-WL-MA0004-02.

APPROVED DOOR STYLES:



Flush




Arch Top 3-panel



3-panel



6-panel



New England 4-panel



Eyebrow 4-panel



8-panel



8-panel



15-panel



5-panel



5-panel with scroll



Eyebrow 5-panel



Eyebrow 5-panel with scroll

Johnson™
EntrySystems

June 17, 2002
Our continuing program of product improvement makes specifications, design and product detail subject to change without notice.




Exclusively from

Masonite®
Masonite International Corporation

WOOD-EDGE STEEL DOORS

APPROVED SIDELITE STYLES:

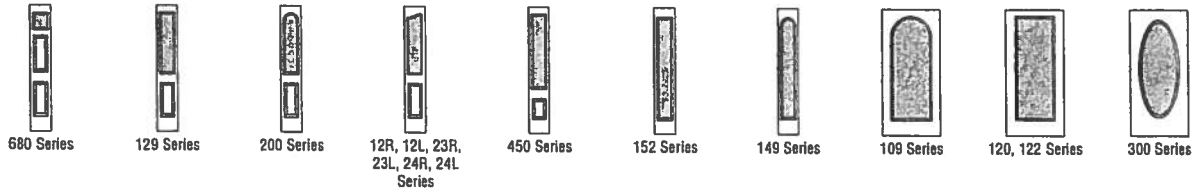

CERTIFIED TEST REPORTS:

NCTL 210-1905-7, 8, 9, 10, 11, 12; NCTL 210-1861-4, 5, 6, 10, 11, 12; NCTL-210-1880-7, 9, 10, 12; NCTL 210-2185-1, 2, 3

Certifying Engineer and License Number: Barry D. Portney, P.E. / 16258.

Unit Tested in Accordance with Miami-Dade BCCO PA201, PA202 and PA203.

Evaluation report NCTL-210-2794-1

Door panels constructed from 26-gauge 0.017" thick steel skins. Both stiles constructed from wood. Top end rails constructed of 0.041" steel. Bottom end rails constructed of 0.021" steel. Interior cavity of slab filled with rigid polyurethane foam core. Sidelite panels glazed with insulated glass mounted in a rigid plastic lip lite surround.

Frame constructed of wood with an extruded aluminum threshold.

PRODUCT COMPLIANCE LABELING:

TESTED IN ACCORDANCE WITH
MIAMI-DADE BCCO
PA201, PA202 & PA203

COMPANY NAME
CITY, STATE

To the best of my knowledge and ability the above side-hinged exterior door unit conforms to the requirements of the 2001 Florida Building Code, Chapter 17 (Structural Tests and Inspections).

State of Florida, Professional Engineer
Kurt Balthazor, P.E. – License Number 56533



Test Data Review Certificate #3026447A and COP/Test Report Validation Matrix #3026447A-001 provides additional information - available from the ITS/WH website (www.etlsemko.com), the Masonite website (www.masonite.com) or the Masonite technical center.

Johnson™
EntrySystems

June 17, 2002
Our continuing program of product improvement makes specifications, design and product detail subject to change without notice.

PREMDOR® Collection
Premium Quality Doors




Exclusively from

Masonite®
Masonite International Corporation

X

Opaque Inswing Unit

COP-WL-JH4101-02

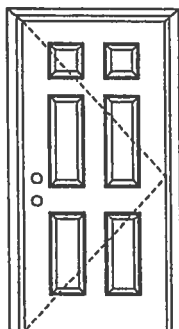WOOD-EDGE STEEL DOORS**APPROVED ARRANGEMENT:****Note:**

Units of other sizes are covered by this report as long as the panel used does not exceed 3'0" x 6'8".

Single Door

Maximum unit size = 3'0" x 6'8"

Design Pressure**+66.0/-66.0**

limited water unless special threshold design is used.

Large Missile Impact Resistance**Hurricane protective system (shutters) is NOT REQUIRED.**

Actual design pressure and impact resistant requirements for a specific building design and geographic location is determined by ASCE 7-national, state or local building codes specify the edition required.

Warnock Hersey



Test Data Review Certificate #3026447A and COP/Test Report Validation Matrix #3026447A-001 provides additional information - available from the ITS/WH website (www.itswh.com), the Masonite website (www.masonite.com) or the Masonite technical center.

MINIMUM ASSEMBLY DETAIL:

Compliance requires that minimum assembly details have been followed – see MAD-WL-MA0001-02.

MINIMUM INSTALLATION DETAIL:

Compliance requires that minimum installation details have been followed – see MID-WL-MA0001-02.

APPROVED DOOR STYLES:

Flush



Arch Top 3-panel



3-panel



6-panel



New England 4-panel



Eyebrow 4-panel



8-panel



9-panel



15-panel



5-panel



5-panel with scroll



Eyebrow 5-panel



Eyebrow 5-panel with scroll

Johnson™
EntrySystems

June 17, 2002

Our continuing program of product improvement makes specifications, design and product detail subject to change without notice.

PREMDOR Collection
Premium Quality Doors



Exclusively from

Masonite®

Masonite International Corporation

X

Opaque Inswing Unit

COP-WL-JH4101-02

WOOD-EDGE STEEL DOORS

CERTIFIED TEST REPORTS:

NCTL 210-2185-1, 2, 3

Certifying Engineer and License Number: Barry D. Portney, P.E. / 16258.

Unit Tested In Accordance with Miami-Dade BCCO PA201, PA202 and PA203.

Door panels constructed from 26-gauge 0.017" thick steel skins. Both stiles constructed from wood. Top end rails constructed of 0.041" steel. Bottom end rails constructed of 0.021" steel. Interior cavity of slab filled with rigid polyurethane foam core.

Frame constructed of wood with an extruded aluminum threshold.

PRODUCT COMPLIANCE LABELING:

TESTED IN ACCORDANCE WITH
MIAMI-DADE BCCO
PA201, PA202 & PA203

COMPANY NAME
CITY, STATE

To the best of my knowledge and ability the above side-hinged exterior door unit conforms to the requirements of the 2001 Florida Building Code, Chapter 17 (Structural Tests and Inspections).



State of Florida, Professional Engineer
Kurt Balthazor, P.E. – License Number 56533



Test Data Review Certificate #3026447A and COP/Test Report Validation Matrix #3026447A-001 provides additional information - available from the ITS/WH website (www.itsmko.com), the Masonite website (www.masonite.com) or the Masonite technical center.

Johnson
EntrySystems

June 17, 2002
Our continuing program of product improvement makes specifications, design and product detail subject to change without notice.

PREMDOR Collection
Premium Quality Doors



Exclusively from


Masonite

Masonite International Corporation

X

Opaque Outswing Unit

COP-WL-JH4121-02

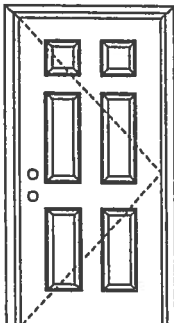WOOD-EDGE STEEL DOORS**APPROVED ARRANGEMENT:****Note:**

Units of other sizes are covered by this report as long as the panel used does not exceed 3'0" x 6'8".



Test Data Review Certificate #3026447A and COP/Test Report Validation Matrix #3026447A-001 provides additional information - available from the FTS/WH website (www.eltsemko.com), the Masonite website (www.masonite.com) or the Masonite technical center.

Single Door
Maximum unit size = 3'0" x 6'8"

Design Pressure
+66.0/-66.0

limited water unless special threshold design is used.

Large Missile Impact Resistance

Hurricane protective system (shutters) is NOT REQUIRED.

Actual design pressure and impact resistant requirements for a specific building design and geographic location is determined by ASCE 7-national, state or local building codes specify the edition required.

MINIMUM ASSEMBLY DETAIL:


Compliance requires that minimum assembly details have been followed -- see MAD-WL-MA0011-02.

MINIMUM INSTALLATION DETAIL:


Compliance requires that minimum installation details have been followed -- see MID-WL-MA0001-02.

APPROVED DOOR STYLES:

Flush



Arch Top 3-panel



3-panel



6-panel



New England 4-panel



Eyebrow 4-panel



8-panel



9-panel



15-panel



5-panel



5-panel with scroll



Eyebrow 5-panel



Eyebrow 5-panel with scroll

Johnson™
EntrySystems

June 17, 2002
Our continuing program of product improvement makes specifications, design and product detail subject to change without notice.



Exclusively from

Masonite®
Masonite International Corporation

X

Opaque Outswing Unit

COP-WL-JH4121-02

WOOD-EDGE STEEL DOORS

CERTIFIED TEST REPORTS:

NCTL 210-2178-1, 2, 3

Certifying Engineer and License Number: Barry D. Portney, P.E. / 16258.

Unit Tested in Accordance with Miami-Dade BCCO PA201, PA202 and PA203.

Door panels constructed from 26-gauge 0.017" thick steel skins. Both stiles constructed from wood. Top end rails constructed of 0.041" steel. Bottom end rails constructed of 0.021" steel. Interior cavity of slab filled with rigid polyurethane foam core.

Frame constructed of wood with an extruded aluminum bumper threshold.

PRODUCT COMPLIANCE LABELING:

TESTED IN ACCORDANCE WITH
MIAMI-DADE BCCO
PA201, PA202 & PA203

COMPANY NAME
CITY, STATE

To the best of my knowledge and ability the above side-hinged exterior door unit conforms to the requirements of the 2001 Florida Building Code, Chapter 17 (Structural Tests and Inspections).

Kurt L Balthaz

State of Florida, Professional Engineer
Kurt Balthazor, P.E. – License Number 56533

Warnock Hersey



Test Data Review Certificate #3026447A and COP/Test Report Validation Matrix #3026447A-001 provides additional information - available from the ITS/WH website (www.itswh.com), the Masonite website (www.masonite.com) or the Masonite technical center.

2

Johnson™
EntrySystems

June 17, 2002

Our continuing program of product improvement makes specifications, design and product detail subject to change without notice.



Exclusively from

Masonite®

Masonite International Corporation



MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING

PRODUCT CONTROL NOTICE OF ACCEPTANCE

Premdor Entry Systems
911 E. Jefferson, P.O. Box 76
Pittsburgh, KS 66762

BUILDING CODE COMPLIANCE OFFICE
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1503
(305) 375-2901 FAX (305) 375-2908

CONTRACTOR LICENSING SECTION
(305) 375-2527 FAX (305) 375-2558

CONTRACTOR ENFORCEMENT DIVISION
(305) 375-2966 FAX (305) 375-2908

PRODUCT CONTROL DIVISION
(305) 375-2902 FAX (305) 372-6339

Your application for Notice of Acceptance (NOA) of:

Entergy 6-8 S/E Inswing Opaque Double w/sidelites Residential Insulated Steel Door
under Chapter 8 of the Code of Miami-Dade County governing the use of Alternate Materials and Types of Construction, and completely described herein, has been recommended for acceptance by the Miami-Dade County Building Code Compliance Office (BCCO) under the conditions specified herein.

This NOA shall not be valid after the expiration date stated below. BCCO reserves the right to secure this product or material at any time from a jobsite or manufacturer's plant for quality control testing. If this product or material fails to perform in the approved manner, BCCO may revoke, modify, or suspend the use of such product or material immediately. BCCO reserves the right to revoke this approval, if it is determined by BCCO that this product or material fails to meet the requirements of the South Florida Building Code.

The expense of such testing will be incurred by the manufacturer.

ACCEPTANCE NO.: 01-0314.23
EXPIRES: 04/02/2006

Raul Rodriguez
Chief Product Control Division

THIS IS THE COVERSHEET, SEE ADDITIONAL PAGES FOR SPECIFIC AND GENERAL
CONDITIONS
BUILDING CODE & PRODUCT REVIEW COMMITTEE

This application for Product Approval has been reviewed by the BCCO and approved by the Building Code and Product Review Committee to be used in Miami-Dade County, Florida under the conditions set forth above.

Francisco J. Quintana, R.A.
Director
Miami-Dade County
Building Code Compliance Office

APPROVED: 06/05/2001

Premdor Entry Systems

ACCEPTANCE No. 01-0314.23

APPROVED : JUN 05 2001

EXPIRES : April 02, 2006

NOTICE OF ACCEPTANCE: SPECIFIC CONDITIONS

1. SCOPE

- 1.1 This renews the Notice of Acceptance No. 00-0321.25 which was issued on April 28, 2000. approves a residential insulated door, as described in Section 2 of this Notice of Acceptance designed to comply with the South Florida Building Code (SFBC), 1994 Edition for Miami-Dade County, for the locations where the pressure requirements, as determined by SFBC Chapter 23, do not exceed the Design Pressure Rating values indicated in the approved drawings.

2. PRODUCT DESCRIPTION

- 2.1 The Series Entergy 6-8 S/E Inswing Opaque Double Residential Insulated Steel Doors with Sidelites-Impact Resistant Door Slab Only and its components shall be constructed in strict compliance with the following documents: Drawing No 31-1029-EM-I, Sheets 1 through 6 of 6 titled "Premdor (Entergy Brand) Double Door with Sidelites in Wood Frames with Bump Threshold (Inswing)," prepared by manufacturer, dated 7/29/97 with revision C dated 01/11/00 bearing the Miami-Dade County Product Control approval stamp with the Notice of Acceptance number and approval date by the Miami-Dade County Product Control Division. These documents shall hereinafter be referred to as the approved drawings.

3. LIMITATIONS

- 3.1 This approval applies to single unit applications of pair of doors and single door only, as shown in approved drawings. Single door units shall include all components described in the active leaf of this approval.
- 3.2 Unit shall be installed only at locations protected by a canopy or overhang such that the angle between the edge of canopy or overhang to sill is less than 45 degrees. Unless unit is installed in non-habitable areas where the unit and the area are designed to accept water infiltration.

4. INSTALLATION


- 4.1 The residential insulated steel door and its components shall be installed in strict compliance with the approved drawings.
- 4.2 Hurricane protection system (shutters):
- 4.2.1 Door: the installation of this unit will not require a hurricane protection system.
- 4.2.2 Sidelite: the installation of this unit will require a hurricane protection system.

5. LABELING

- 5.1 Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved".

6. BUILDING PERMIT REQUIREMENTS

- 6.1 Application for building permit shall be accompanied by copies of the following:
- 6.1.1 This Notice of Acceptance
- 6.1.2 Duplicate copies of the approved drawings, as identified in Section 2 of this Notice of Acceptance, clearly marked to show the components selected for the proposed installation.
- 6.1.3 Any other documents required by the Building Official or the South Florida Building Code (SFBC) in order to properly evaluate the installation of this system.


Manuel Perez, P.E. Product Control Examiner
Product Control Division

Premdor Entry Systems

ACCEPTANCE No. 01-0314.23


APPROVED : JUN 05-2001


EXPIRES : April 02, 2006

NOTICE OF ACCEPTANCE: STANDARD CONDITIONS



1. Renewal of this Acceptance (approval) shall be considered after a renewal application has been filed and the original submitted documentation, including test supporting data, engineering documents, are no older than eight (8) years.
2. Any and all approved products shall be permanently labeled with the manufacturer's name, city, state, and the following statement: "Miami-Dade County Product Control Approved", or as specifically stated in the specific conditions of this Acceptance.
3. Renewals of Acceptance will not be considered if:
 - a. There has been a change in the South Florida Building Code affecting the evaluation of this product and the product is not in compliance with the code changes.
 - b. The product is no longer the same product (identical) as the one originally approved.
 - c. If the Acceptance holder has not complied with all the requirements of this acceptance including the correct installation of the product.
 - d. The engineer who originally prepared, signed and sealed the required documentation initially submitted, is no longer practicing the engineering profession.
4. Any revision or change in the materials, use, and/or manufacture of the product or process shall automatically be cause for termination of this Acceptance, unless prior written approval has been requested (through the filing of a revision application with appropriate fee) and granted by this office.
5. Any of the following shall also be grounds for removal of this Acceptance:
 - a. Unsatisfactory performance of this product or process.
 - b. Misuse of this Acceptance as an endorsement of any product, for sales, advertising or any other purposes.
6. The Notice of Acceptance number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the Notice of Acceptance is displayed, then it shall be done in its entirety.
7. A copy of this Acceptance as well as approved drawings and other documents, where it applies, shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at all time. The engineer needs not reseal the copies.
8. Failure to comply with any section of this Acceptance shall be cause for termination and removal of Acceptance.
9. This Notice of Acceptance consists of pages 1, 2 and this last page 3.

END OF THIS ACCEPTANCE

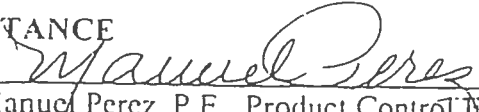
Manuel Perez, P.E., Product Control Examiner
Product Control Division

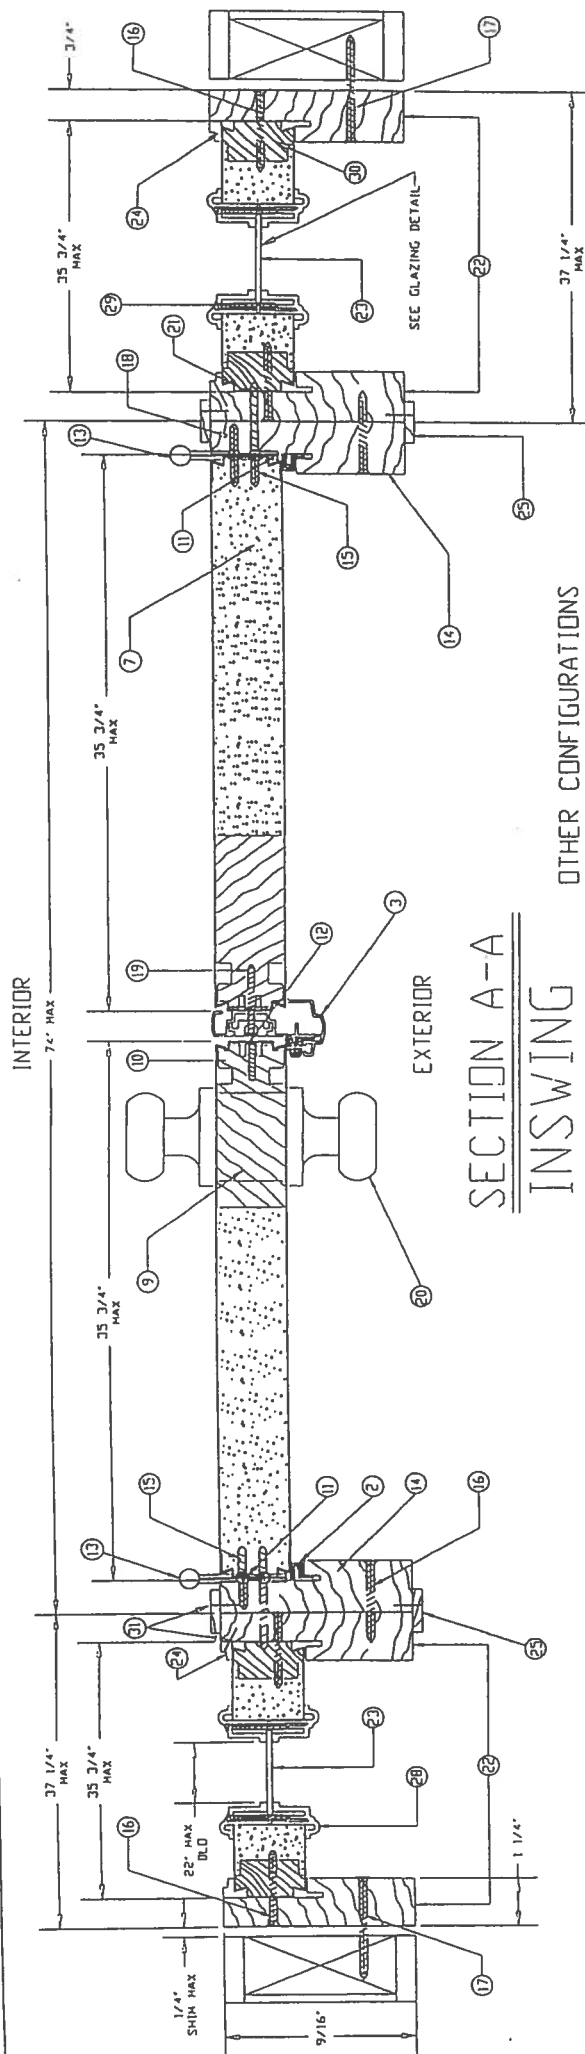

OTHER CONFIGURATIONS

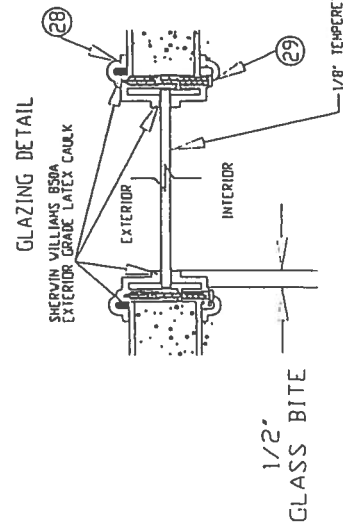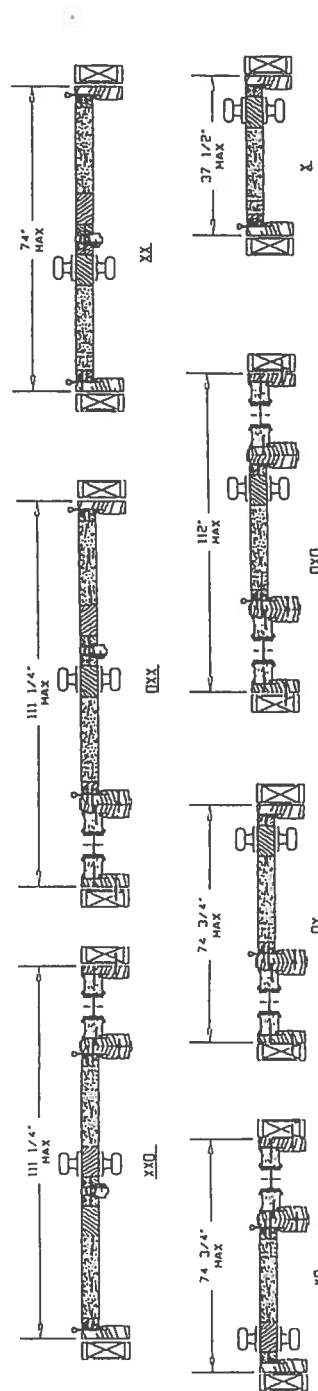

1/2\"/>


APPROVED AS COMPLYING WITH THE
 SCUM PLUMBING CODE
 DATE: JUN 05 2001
 BY: [Signature]
 PRODUCT CONTROL DIVISION
 BUILDING CODE COMPLIANCE OFFICE

REVISION	DATE	BY	DESCRIPTION
1	06-01-01	RS	ISSUED FOR CONSTRUCTION
2	06-01-01	RS	ISSUED FOR CONSTRUCTION
3	06-01-01	RS	ISSUED FOR CONSTRUCTION
4	06-01-01	RS	ISSUED FOR CONSTRUCTION
5	06-01-01	RS	ISSUED FOR CONSTRUCTION
6	06-01-01	RS	ISSUED FOR CONSTRUCTION
7	06-01-01	RS	ISSUED FOR CONSTRUCTION
8	06-01-01	RS	ISSUED FOR CONSTRUCTION
9	06-01-01	RS	ISSUED FOR CONSTRUCTION
10	06-01-01	RS	ISSUED FOR CONSTRUCTION
11	06-01-01	RS	ISSUED FOR CONSTRUCTION
12	06-01-01	RS	ISSUED FOR CONSTRUCTION
13	06-01-01	RS	ISSUED FOR CONSTRUCTION
14	06-01-01	RS	ISSUED FOR CONSTRUCTION
15	06-01-01	RS	ISSUED FOR CONSTRUCTION
16	06-01-01	RS	ISSUED FOR CONSTRUCTION
17	06-01-01	RS	ISSUED FOR CONSTRUCTION
18	06-01-01	RS	ISSUED FOR CONSTRUCTION
19	06-01-01	RS	ISSUED FOR CONSTRUCTION
20	06-01-01	RS	ISSUED FOR CONSTRUCTION
21	06-01-01	RS	ISSUED FOR CONSTRUCTION
22	06-01-01	RS	ISSUED FOR CONSTRUCTION
23	06-01-01	RS	ISSUED FOR CONSTRUCTION
24	06-01-01	RS	ISSUED FOR CONSTRUCTION
25	06-01-01	RS	ISSUED FOR CONSTRUCTION
26	06-01-01	RS	ISSUED FOR CONSTRUCTION
27	06-01-01	RS	ISSUED FOR CONSTRUCTION
28	06-01-01	RS	ISSUED FOR CONSTRUCTION
29	06-01-01	RS	ISSUED FOR CONSTRUCTION
30	06-01-01	RS	ISSUED FOR CONSTRUCTION

31-1029-EM-1
 SHEET 2 OF 6

MATERIALS LIST


ITEM NO.	DESCRIPTION	PART NUMBER	COMMENTS
1	WOOD HEAD JAMB	EM-14	1 1/4" X 4 9/16" MTL. TO BE PINE OR EQUIVALENT
2	COMPRESSION WEATHERSTRIP	EM-25	LOCKGREEN BRAND LDXSEAL 9650-1000
3	ALUMINUM ASTRAGAL	EM-12	PREMDOR BRAND OR EQUIVALENT - 5/8" ALUMINUM ASTRAGAL
4	ALUMINUM-BUMPER THRESHOLD	EM-15	PREMDOR BRAND OR EQUIVALENT - 1 1/4" X 4 9/16"
5	TOP CHANNEL	EM-08	PREMDOR BRAND - 1 1/16" - 20 GA STEEL
6	STEEL SKIN	26 GA. C107 (104 - 100)	FOR WALL THICKNESS 20 GA. PER INCHES PER UNLESS NOTED IS OK
7	POLYURETHANE FOAM CORE	BASF FOAM	DENSITY 2.0 TO 2.5 lbs./ft. ³
8	BOTTOM CHANNEL	EM-07	PREMDOR BRAND - 1 1/16" - 20 GA STEEL
9	WOOD LOCK BLOCK	EM-09	4" X 9 1/2" MTL. TO BE PINE OR EQUIVALENT
10	STRIKE STILE	EM-06	PREMDOR BRAND - 1 1/16" - 20 GA STEEL
11	HINGE STILE	EM-05	PREMDOR BRAND - 1 1/16" - 20 GA STEEL
12	LOCK PREP FILLER PLATE	EM-10	PREMDOR BRAND - .050" THICK - MTL. TO BE POLYETHYLENE
13	4"x4" HINGE	EM-16	HAGER BRAND HINGE OR EQUIVALENT - .097 THICK (STEEL)
14	WOOD HINGE JAMB	EM-13	1 1/4" X 4 9/16" MTL. TO BE PINE OR EQUIVALENT
15	#10-24 x 1/2" F.H.V.S.		(4) SCREWS PER HINGE INTO DOOR
16	#10 X 2" F.H.V.S.		(5) SCREWS THROUGH HINGE JAMB INTO SIDELITE JAMB, 8" DOWN FROM TOP. MAX. 8" OC. THEREAFTER
17	#10 F.H.V.S. MINIMUM 1 1/2" EXPOSED FOR 2 1/8" PER LAP JOINTS MINIMUM 1 1/2" EXPOSED		(6) SCREWS THROUGH EACH SIDELITE JAMB INTO SIDELITE, 4" DOWN FROM TOP, MAX 15" OC. THEREAFTER
18	#10 X 3/4" F.H.V.S.		REFER TO ELEVATION VIEW, FOR # OF SCREWS USED AND LOCATIONS
19	#8 X 2" F.H.V.S.		(2) SCREWS PER HINGE INTO JAMB
20	LOCKSET		(2) SCREWS AT EACH STRIKE PLATE
21	#10 X 1 3/4" F.H.V.S.		KVIKSET BRAND 200 LOCK OR HARLOC BRAND 100 LOCK
22	WOOD SIDELITE JAMB	EM-18	(2) SCREWS PER HINGE INTO JAMB
23	22" X 64" SINGLE PANEL GLASS	EM-19	1 1/4" X 4 9/16" MTL. TO BE PINE OR EQUIVALENT
24	SIDELITE TRIM (WOOD)	EM-20	TEMPERED GLASS IN POLYPROPYLENE FRAME - DC-1643 - 1/8" CLEAR TEMPERED GLASS
25	WOOD CASING	EM-21	5/16" X 1 1/2" MTL. TO BE PINE OR EQUIVALENT
26	WOOD SIDELITE HEAD JAMB	EM-22	1 1/4" X 4 9/16" MTL. TO BE PINE OR EQUIVALENT
27	WOOD SIDELITE BASE	EM-23	1 1/4" X 4 9/16" MTL. TO BE PINE OR EQUIVALENT
28	POLYPROPYLENE LITE FRAME	DC-1643, DOL-2	HP Polypropylene by DOL
29	#6 X 1 1/2" PAN HEAD SCREWS		SCREWS SPACING TO BE 3" IN FROM EACH CORNER AND NOT 18 PER FRAME TO EXCEED 14" OC. THEREAFTER
30	SIDELITE STILES	EM-26	15/16" X 1 1/16" MTL. TO BE PINE OR EQUIVALENT
31	PIN NAIL		3/4" LONG NAIL, 4" IN FROM END, MAX 8" OC. THEREAFTER, USED ON MULLIONS AND TRIM

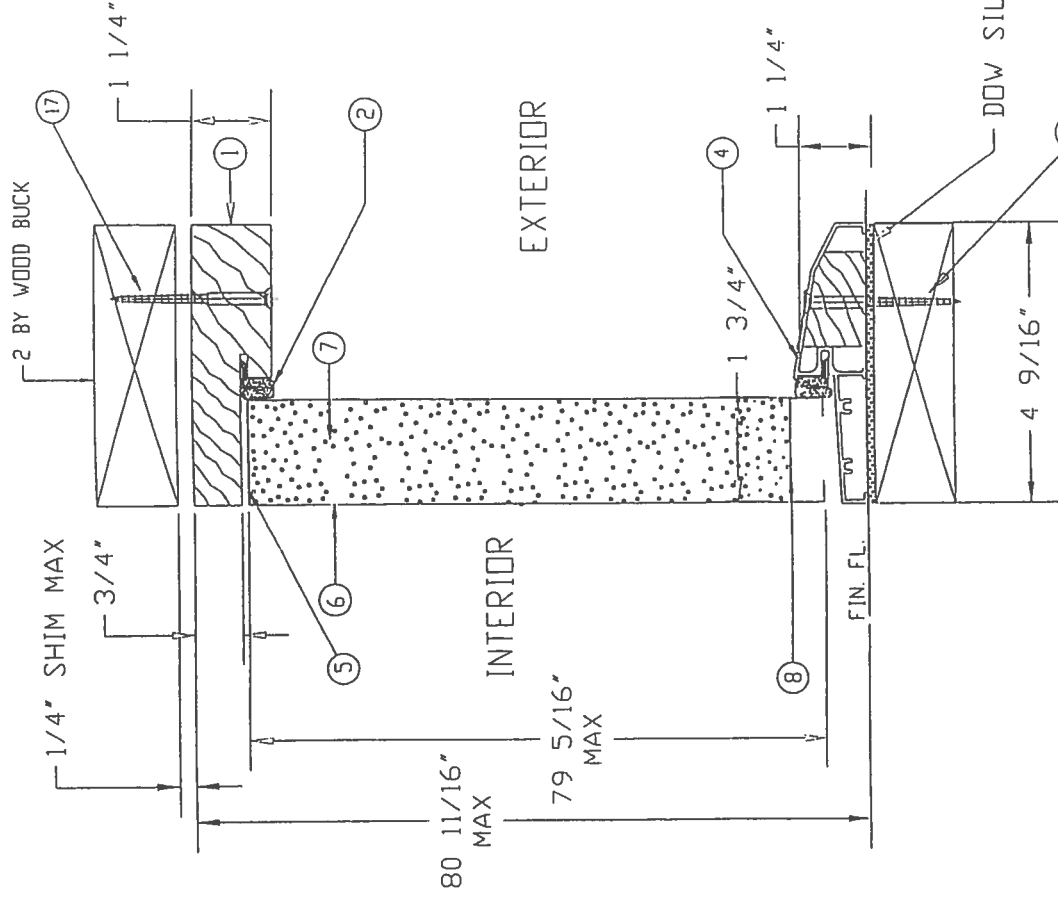

DOW SILICONE #995

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE: JUN 05 2001
BY: [Signature]
PROGONIA CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
PITTSBURGH, PA 15201-2777

LIMITS: UNLESS NOTED, FRAM. : DEC : ANG. :		B	DATE	COUNTY	MODIFICATIONS	1/11/01	JD
EXCLUSIONS: UNLESS NOTED, STD. COMPL. 104.3		A	ADDED	PAGE 5	COLOR OPTIONS	10-1-98	RS
ENGINEER:		LIR	REVISIONS				
DR. BY R.S.		DATE	7-29-97				
PREMDOR ENTRY SYSTEMS		SCALE:					
911 C. JETERSON		PART NAME: ENERGY SECT. EDGE DOOR (B-B)					
PITTSBURGH, PA 15201-2777		DATE					
31-1029-EM-1		DATE					
SHEET 3 OF 6		DATE					

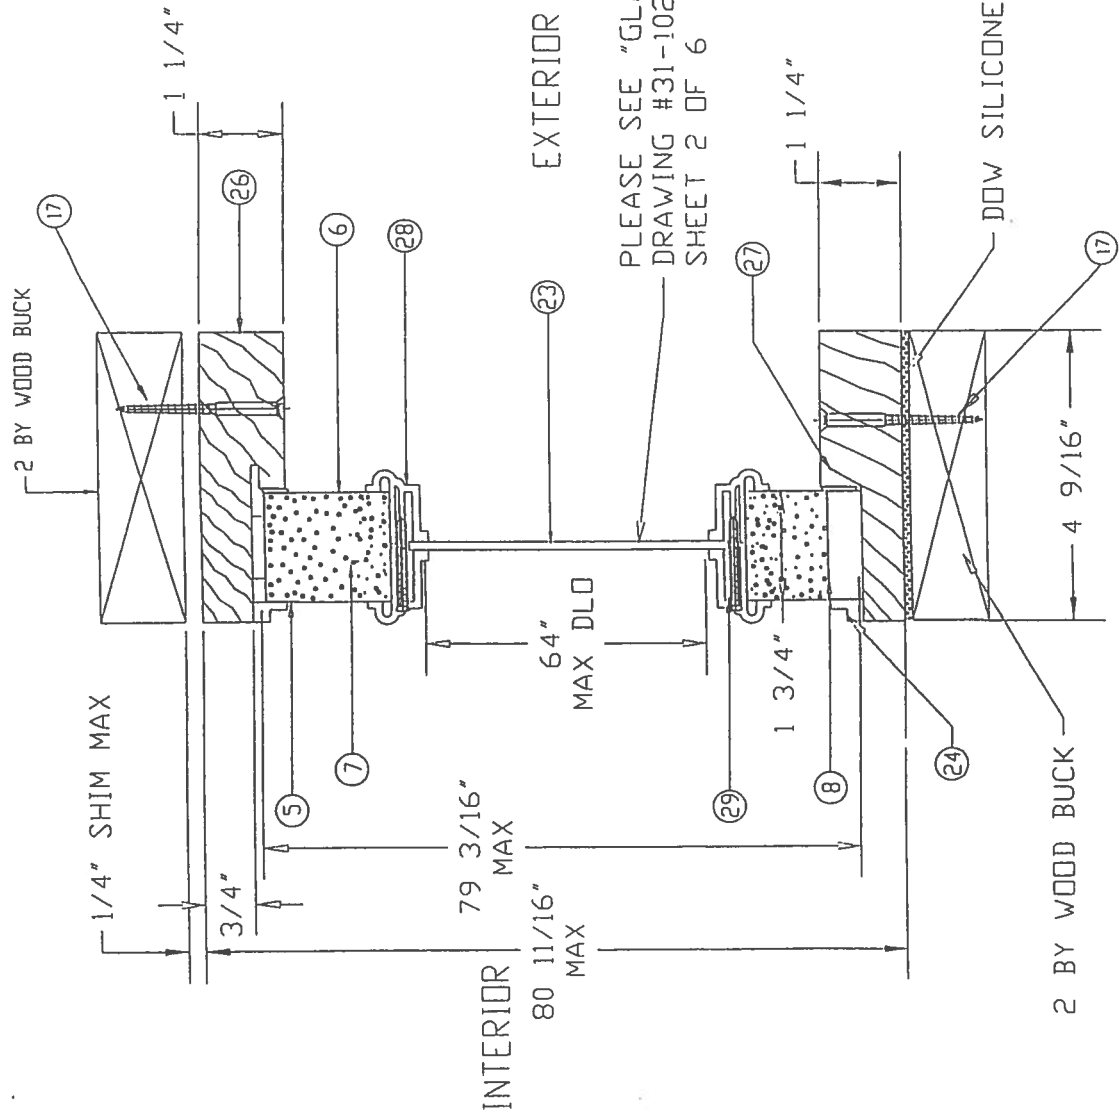

PLEASE SEE "GLAZING DETAIL"
DRAWING #31-1029-EM-I
SHEET 2 OF 6

2 BY WOOD BUCK 4 9/16"


DOW SILICONE #995

DATE COUNTY MODIFICATIONS	DATE	BY
D	1/11/01	JD
C	MATERIAL WAS POLYSTYRENE	6-2-99 RS
B	ADDED PAGE 5 (DOOR OPTIONS)	10-1-98 RS
A	ADD SCREWS TO LITE FRAME & MATERIAL LIST	12-18-97 RS
REVISIONS	DATE	BY
LIR		
PART NAME	ENERGY METAL EDGE	SIBELITE (C-C)
SCALE:		
DATE	7-29-97	
DR BY	RS	
PREMIOR ENTRY SYSTEMS		
911 C. JEFFERSON		
PITTSBURGH, KY 40502		
31-1029-EM-I		
SHEET 4 OF 6		


APPROVED AS COMPLYING WITH THE
SOUTH FLOOR BUILDING CODE
DATE JUN 05 2005
BY *Samuel*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE

SECTION C-C


OTHER DOOR CONFIGURATIONS

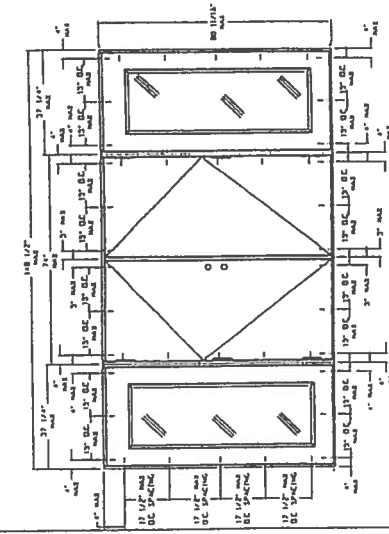


DXXD

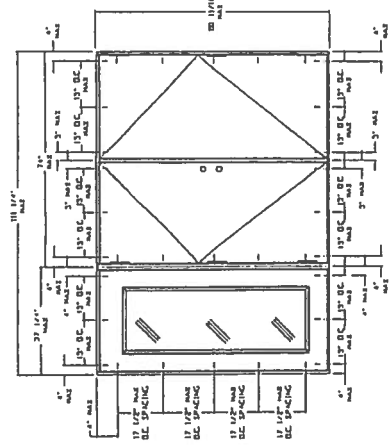


DXX

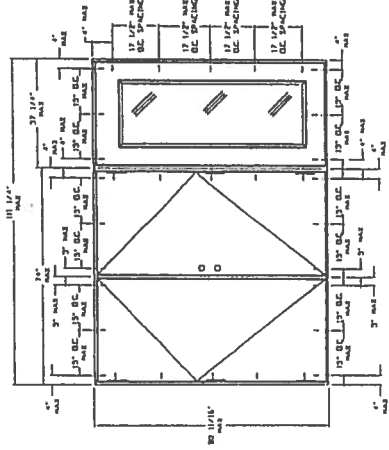


DXXD

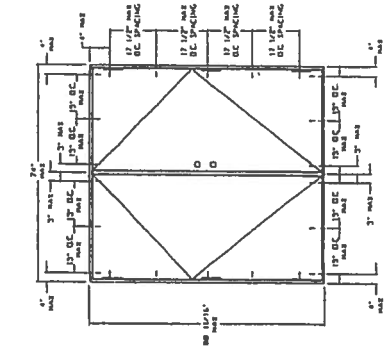


DXX

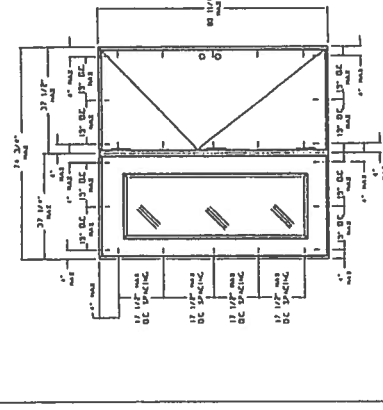


DX

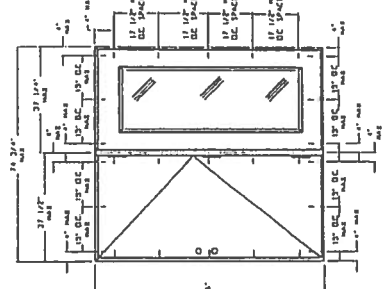

DXD

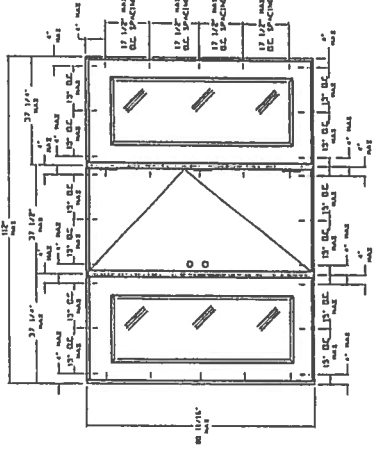

DXD

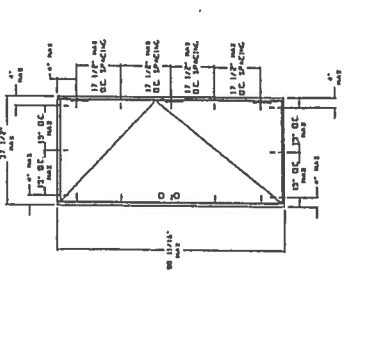

DX


APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE JUN 05 2009
E: *[Signature]*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE

LIMITS: UNLESS NOTED, FPM : DEC : ANG :		EXPANSIONS: UNLESS NOTED, STD. COMPL. 100'S	
ENGINEER:	DATE: 1-11-01	REVISIONS:	DATE: BY:
DR. BT. J.D.	PREMIOR ENTRY SYSTEMS	PART NAME:	
	911 E. JEFFERSON	SCALE:	
	PHILADELPHIA, PA 19106		




31-1029-EM-I
SHEET 5 OF 6

OTHER DOOR PANEL STYLES

79 5/16" MAX
36" MAX

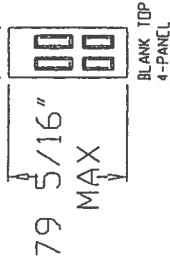

BLANK TOP
4-PANEL



5-PANEL
EYEBROW
V/SCROLL

5-PANEL
EYEBROW
V/SCROLL

5-PANEL
EYEBROW
V/SCROLL

5-PANEL
EYEBROW
V/SCROLL

5-PANEL
EYEBROW
V/SCROLL

5-PANEL
EYEBROW
V/SCROLL

5-PANEL
EYEBROW
V/SCROLL

5-PANEL
EYEBROW
V/SCROLL

5-PANEL
EYEBROW
V/SCROLL

5-PANEL
EYEBROW
V/SCROLL

5-PANEL
EYEBROW
V/SCROLL

5-PANEL
EYEBROW
V/SCROLL



5-PANEL
EYEBROW
V/SCROLL

5-PANEL
EYEBROW
V/SCROLL

5-PANEL
EYEBROW
V/SCROLL

OTHER SIDELITE STYLES

79 3/16" MAX
36" MAX



SL-10

SL-20

SL-30

SL-60

SL-50

SL-50B

SL-65A

SL-69B

SL-69C

SL-25

SL-55

SL-300

SL-40

SL-90A



SL-90B

SL-90C

SL-30C

SL-70

SL-80



PD-1

PD-2

PD-3

PD-4

PD-5

PD-6

PD-7

PD-8

PD-9

PD-10

PD-11

PD-12








PD-13

PD-14

PD-15

PD-16

PD-17



PD-18

PD-19

PD-20

PD-21

PD-22

PD-23

PD-24

PD-25

PD-26

PD-27

PD-28

PD-29












PD-30

PD-31

PD-32

PD-33


PD-34



APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE JUN 05 2001
BY *Manuel Silva*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0314-2-3

LIMITS UNLESS NOTED (FAC. EXTENSIONS UNLESS NOTED) STR. COMPL. I.D.C. 1		DATE		BY	
ENGINEER		REVISIONS		DATE	
DATE 12/15/01		PART NAME: PREMIOR DOOR OPTIONS		SCALE	
PREMIOR ENTRY SYSTEMS		31-1029-EM-1		SHEET 6 OF 6	
PHILIP C. LUTHER		PITTSBURGH, KS 66762			

W/ 1 1/2" MINIMUM EMBEDMENT
(12) PER HEAD & SILL, (5) PER JAMB
ALTERNATE: 3/16" PPH LAPSCINS
W/ 1 1/2" MINIMUM EMBEDMENT

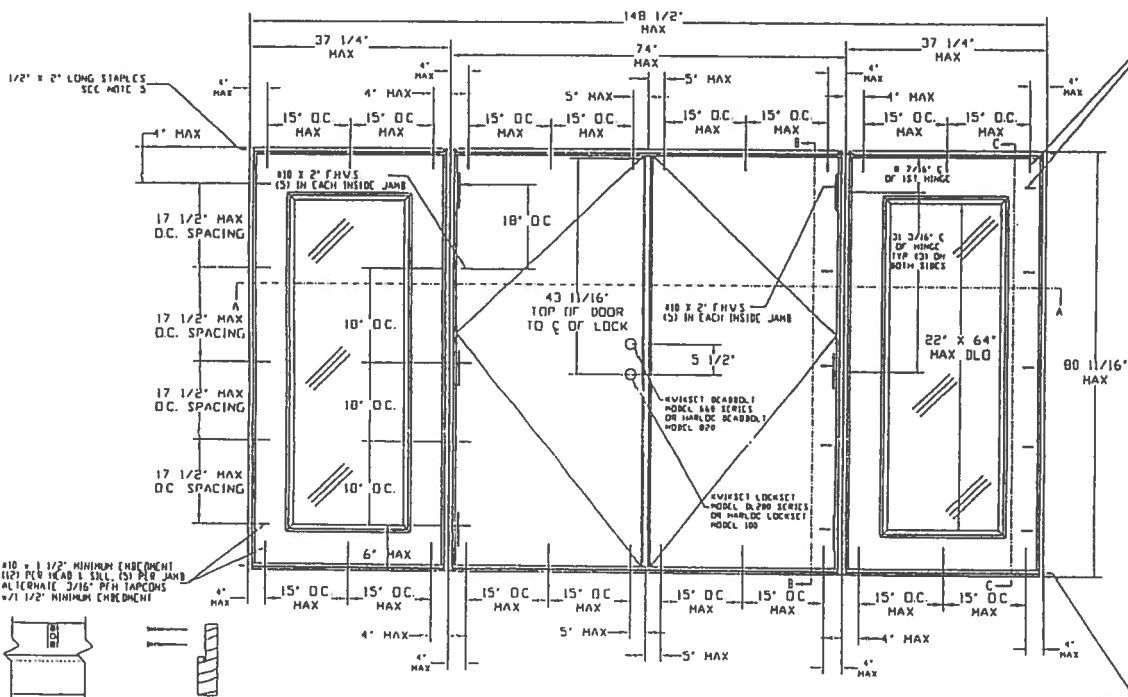

NOTES:

V. WOOD FRAME CONSTRUCTION WHERE DOOR SYSTEM IS ANCHORED TO A MINIMUM TWO BY WOOD OPENING.

... MASONRY OR CONCRETE CONSTRUCTION WHERE
DOOR SYSTEM IS ANCHORED DIRECTLY TO CONCRETE
OR MASONRY WITH OR WITHOUT A NON-STRUCTURAL
LINE BY WOOD BUCK.

1. ALL ANCHORING SCREWS TO BE 1/2" WITH
MINIMUM 1 1/2' EMBEDMENT INTO WOOD SUBSTRATE
OR 3/16" PFH TAPCONS WITH 1 1/2' MINIMUM EMBEDMENT
INTO MASONRY.

UNIT MUST BE INSTALLED WITH 'MIAMI-DADE COUNTY
APPROVED' SHUTTERS


THREE STAPLES PER SIDE JAMB INTO HEADER ON SIDELITES
AND DOOR, THREE STAPLES PER JAMB INTO THRESHOLD ON
SIDELITES AND DOOR

LATEX SEALANT TO BE APPLIED AT SIDE BY SIDE
AMBS AND SIDELITES.


DOOR/SIDELITE HEADER, DOOR/SIDELITE JAMBS, AND SIDELITE BASE
KNICKERS ARE COPIED AND BUT JOINED

DOORS SHALL BE PRE-PAINTED WITH A WATER-BASED EPOXY RUST

INHIBITIVE PRIMER PAINT WITH A DRY FILM THICKNESS OF 0.8 TO 1.2 MIL
b) FRAMES SHALL BE PRE-PAINTED WITH AN ACRYLIC LATEX WATER-BASED/
WATER-REDUCIBLE WHITE PRIMER WITH A DRY FILM THICKNESS OF 0.8 TO 1.2 MIL



ASTRAGAL



L.H. INSVING

R.H. INSVING

DESIGN PRESSURE RATINGS		
	WHERE WATER INFILTRATION REQUIREMENT IS NEEDED *	WHERE WATER INFILTRATION REQUIREMENT IS NOT NEEDED *
Positive	NOT APPROVED *	+55.0 psf
Negative	NOT APPROVED *	-55.0 psf

1. UNITS SHALL BE INSTALLED ONLY AT LOCATIONS PROTECTED BY A CANOPY OR OVERHANG SUCH THAT THE ANGLE BETWEEN THE EDGE OF CANOPY OR OVERHANG TO SILL IS LESS THAN 45 DEGREES. UNLESS UNIT IS INSTALLED IN NON-HABITABLE AREAS WHERE THE UNIT AND THE AREA ARE DESIGNED TO ACCEPT WATER INFILTRATION.

SOUTH FLORIDA BUILDING CODE

DATE JUN 05 2001

BY William Tere

PRODUCT CONTROL DIVISION

PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE

ACCEPTANCE NO. 01-0314, 23

LIMITS UNLESS NOTED FROM : DEC : ANG :		C BARE COUNTY MODIFICATIONS		12/17/00	JO
EXTENSIONS UNLESS NOTED, STD. COM. INT. :		A ADDED PAGE 5 (DOOR OPTIONS?)		10-1-99	RS
ENGINEER:		I ADD OTHER DOOR CONFIGURATIONS		12/28/97	RS
		LIR REVISIONS		DATE	BY
DR BY RS		PART NAME: EXTERIOR METAL EDGED DOUBLE DOOR W/STILLITES			
DATE 7-29-97		DATE:		SCALE: N.T.S.	
PREMDOR ENTRY SYSTEMS			31-1029-EM-1		
911 E. JEFFERSON			SHEET 1 OF 6		
PITTSBURGH, PA. 15222					



March 6, 2002

Subject: Elk Product Approval Information

All Prestique® and Capstone® products manufactured in Tuscaloosa, AL are certified under the Miami – Dade County Building Code Office (BCCO). These products also meet the requirements for the Florida Building Code since they are MD approved. The following test protocols must be passed by each of the products in order for MD product certification:

ASTM D3462

PA 100 (110 mph uplift and wind driven rain resistance)

PA 107 (Modified ASTM D3161 - 110 mph wind uplift resistance)

The nailing patterns that were used during the PA 100 and PA 107 wind test protocols for the Prestique and Capstone products are listed below. Also listed below are the Miami – Dade Notice of Acceptance Numbers (NOA).

Raised Profile, Prestique High Definition, Prestique 25, or Prestique 30 –

PA 100 = 4 nails

PA 107 = 5 nails

MD NOA# = 01-1226.04

Prestique I 35 or Prestique I* –

PA 100 = 4 nails

PA 107 = 5 nails

MD NOA# = 01-1226.05

Prestique Plus or Prestique Gallery Collection* –

PA 100 = 4 nails

PA 107 = 4 nails

MD NOA# = 01-1226.03

Capstone*

PA 100 = 4 Nails

PA 107 = 4 Nails

MD NOA# = 01-0523.01

* As per the Elk Limited Warranty, six nails are required for the Elk high wind warranty.


If there are any questions please contact:

Mike Reed – Technical Manager
(205) 342-0287


or

Daniel DeJarnette – QA Engineer
(205) 342-0298

ROOFING PRODUCTS SPECIFICATIONS — TUSCALOOSA, AL



**PRESTIQUE®
HIGH DEFINITION®**



RAISED PROFILE™

High Definition

Product size	13 1/4" x 39 3/4"	50-year limited warranty period;
Exposure	5 1/2"	non-prorated coverage for
Pieces/Bundle	16	shingles and application labor for
Bundles/Square	4/98.5 sq.ft.	the initial 5 years, plus an option
Squares/Pallet	11	for transferability*; prorated
		coverage for application labor and
		shingles for balance of limited
		warranty period; 5-year limited
		wind warranty*.

High Definition

Product size	13 1/4" x 38 3/4"	30-year limited warranty period;
Exposure	5 1/2"	non-prorated coverage for
Pieces/Bundle	22	shingles and application labor for
Bundles/Square	3/100 sq.ft.	the initial 5 years, plus an option
Squares/Pallet	16	for transferability*; prorated
		coverage for application labor and
		shingles for balance of limited
		warranty period; 5-year limited
		wind warranty*.

High Definition

Product size	13 1/4" x 39 3/4"	40-year limited warranty period;
Exposure	5 1/2"	non-prorated coverage for
Pieces/Bundle	16	shingles and application labor for
Bundles/Square	4/98.5 sq.ft.	the initial 5 years, plus an option
Squares/Pallet	14	for transferability*; prorated
		coverage for application labor and
		shingles for balance of limited
		warranty period; 5-year limited
		wind warranty*.

HIP AND RIDGE SHINGLES

Size: 12" x 12"
Exposure: 6 1/2"
Pieces/Bundle: 45
Coverage: 4 Bundles = 100 linear feet

High Definition

Product size	13 1/4" x 38 3/4"	30-year limited warranty period;
Exposure	5 1/2"	non-prorated coverage for
Pieces/Bundle	22	shingles and application labor for
Bundles/Square	3/100 sq.ft.	the initial 5 years, plus an option
Squares/Pallet	16	for transferability*; prorated
		coverage for application labor and
		shingles for balance of limited
		warranty period; 5-year limited
		wind warranty*.

52 Bundles/Pallet
18 Pallets/Truck
936 Bundles/Truck
19 Pieces/Bundle
1 Bundle = 120.33 linear feet

Available Colors: Antique Slate, Weatheredwood, Shakedown, Sablewood, Hickory, Barkwood**, Forest Green, Wedgewood**, Birchwood**, Sandalwood, Gallery Collection: Balsam Forest™, Weathered Sage™, Sienna Sunset™.

All Prestique, Raised Profile and Seal-A-Ridge roofing products contain Elk WindGuard® sealant. WindGuard activates with the sun's heat, bonding shingles into a wind and weather resistant cover that resists blow-offs and leaks.

Check for availability with built-in StainGuard® treatment to inhibit the discoloration of roofing granules caused by the growth of certain types of algae. Not available in Sablewood.

All Prestique and Raised Profile shingles meet UL® Wind Resistant (UL 997) and Class "A" Fire Ratings (UL 790); and ASTM Specifications D 3018, Type-I; D 3161, Type-I; E 108 and the requirements of ASTM D 3462.

All Prestique and Raised Profile shingles meet the latest Metro Dade building code requirements.

*See actual limited warranty for conditions and limitations.

**Check for product availability.

SPECIFICATIONS

SCOPE: Work includes furnishing all labor, materials and equipment necessary to complete installation of (name) shingles specified herein. Color shall be (name of color). Hip and ridge type to be Elk Seal-A-Ridge with formula FLX.

All exposed metal surfaces (flashing, vents, etc.) to be painted with matching Elk roof accessory paint.

PREPARATION OF ROOF DECK: Roof deck to be dry, well-seasoned 1" x 6" (25.4mm x 152.4mm) boards; exterior-grade plywood (exposure 1 rated sheathing) at least 3/8" (9.525mm) thick conforming to the specifications of the American Plywood Association; 7/16" (11.074mm) oriented strandboard; or chipboard. Most fire retardant plywood decks are NOT approved substrates for Elk shingles. Consult Elk Field Service for application specifications over other decks and other slopes.

MATERIALS: Underlayment for standard roof slopes, 4" per foot (101.6/304.8mm) or greater; apply non-perforated No. 15 or 30 asphalt-saturated felt underlayment. For low slopes (4" per foot (101.6/304.8mm) to a minimum of 2" per foot (50.8/304.8mm)), use two plies of underlayment overlapped a minimum of 19". Fasteners shall be of sufficient length and holding power for securing material as required by the application instructions printed on shingle wrapper.

For areas where algae is a problem, shingles shall be (name) with StainGuard treatment, as manufactured by the Elk Tuscaloosa plant. Hip and ridge type to be Seal-A-Ridge with formula FLX with StainGuard treatment.

Complete application instructions are published by Elk and printed on the back of every shingle bundle. All

warranties are contingent upon the correct installation as shown on the instructions. These instructions are the minimum required to meet Elk application requirements. In some areas, building codes may require additional application techniques or methods beyond our instructions. In these cases, the local code must be followed. Under no circumstances will Elk accept application requirements less than those contained in its application instructions.

For specifications in CSI format, call 800.354.SPEC (7732) or e-mail specinfo@elkcorp.com.

**SOUTHEAST &
ATLANTIC OFFICE:**
800.945.5551


CORPORATE HEADQUARTERS:
800.354.7732

PLANT LOCATION:
800.945.5545


ELK
www.elkcorp.com

DIRECTIONS FOR APPLICATION


Please read carefully. Failure to follow these instructions may void the product warranty. See specific application instructions for Prestique® Plus and Prestique Gallery Collection™ 110 MPH and Prestique 130 MPH limited wind warranty requirements.

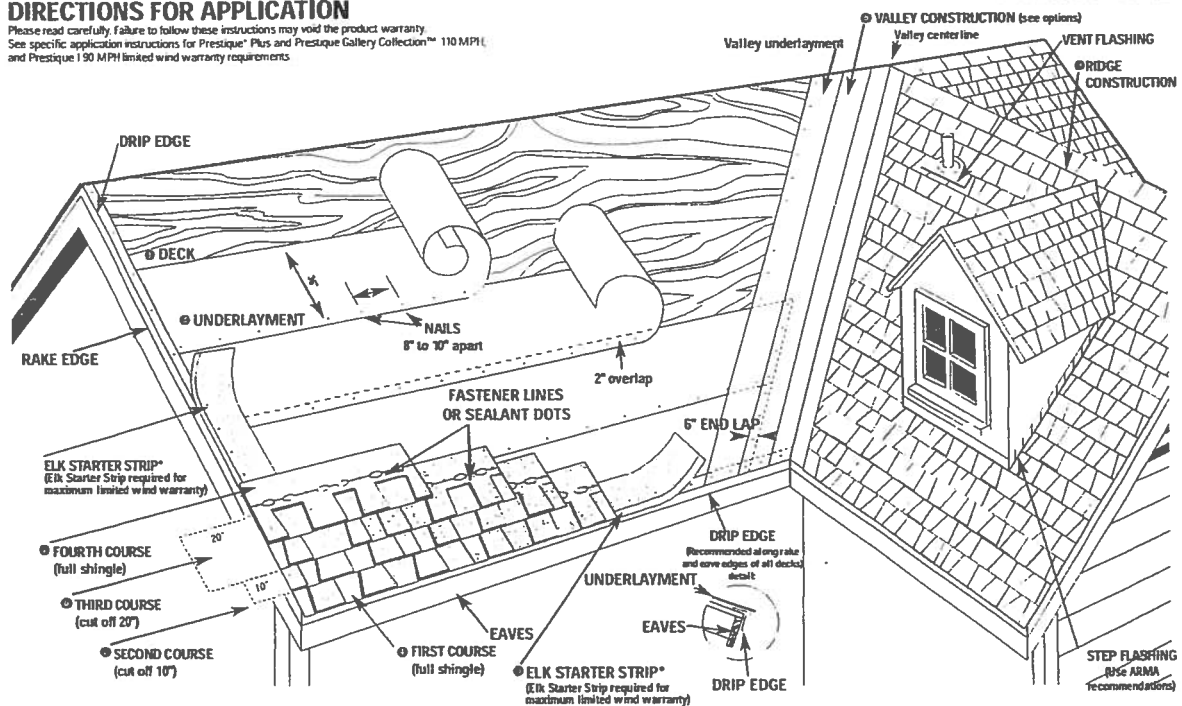


④ VALLEY CONSTRUCTION OPTION (California Open and California Closed are also acceptable) NOTE: For complete ARMA valley installation details, see ARMA Residential Asphalt Roofing Manual.



VALLEY CENTER LINE



VALLEY CENTER LINE



VALLEY CENTER LINE

DIRECTIONS FOR APPLICATION

These application instructions are the minimum required to meet Elk's application requirements. Your failure to follow these instructions may void the product warranty. In some areas, the building codes may require additional application techniques or methods beyond our instructions. In these cases, the local code must be followed. Under no circumstances will Elk accept application requirements that are less than those printed here. Shingles should not be jammed tightly together. All attics should be properly ventilated. Note: It is not necessary to remove tape on back of shingle.

① DECK PREPARATION

Roof decks should be dry, well-seasoned 1" x 6" boards or exterior grade plywood minimum 3/8" thick and conform to the specifications of the American Plywood Association or 7/16" oriented strandboard, or 7/16" chipboard.

② UNDERLAYMENT

Apply underlayment (Non-Perforated No. 15 or 30 asphalt saturated felt). Cover drip edge at eaves only.

For low slope (2/12 up to 4/12), completely cover the deck with two plies of underlayment overlapping a minimum of 18". Begin by fastening a 19" wide strip of underlayment placed along the eaves. Place a full 36" wide sheet over the starter, horizontally placed along the eaves and completely overlapping the starter strip.

EAVE FLASHING FOR ICE DAMS (ASK A ROOFING CONTRACTOR, REFER TO ARMA MANUAL OR CHECK LOCAL CODES)

For standard slope (4/12 to less than 2/12), use coated roll roofing of no less than 50 pounds over the felt underlayment extending from the eave edge to a point at least 24" beyond the inside wall of the living space below or one layer of a self-adhered eave and flashing membrane.

For low slope (2/12 up to 4/12), use a continuous layer of asphalt plastic cement between the two plies of underlayment from the eave edge up roof to a point at least 24" beyond the inside wall of the living space below or one layer of a self-adhered eave and flashing membrane.

Consult the Elk Field Service Department for application specifications over other decks and other slopes.

③ STARTER SHINGLE COURSE

USE AN ELK STARTER STRIP OR A STRIP SHINGLE INVERTED WITH THE HEADLAP APPLIED AT THE EAVE EDGE. With at least 4" trimmed from the end of the first shingle, start at the rake edge overhanging the eave 1/2" to 3/4". Fasten 2" from the lower edge and 1" from each side. Shingles may be applied with a course alignment of 45° on the roof.

④ FIRST COURSE

Start at rake and continue course with full shingles laid flush with the starter course.

⑤ SECOND COURSE

Start at the rake with the shingle having 10" trimmed off and continue across roof with full shingles.

⑥ THIRD COURSE

Start at the rake with the shingle having 20" trimmed off and continue across roof with full shingles.

⑦ FOURTH COURSE

Start at the rake and continue with full shingles across roof.

FIFTH AND SUCCEEDING COURSES

Repeat application as shown for second, third, and fourth courses. Do not rack shingles straight up the roof.

⑧ VALLEY CONSTRUCTION

Open, woven and closed cut valleys are acceptable when applied by Asphalt Roofing Manufacturing Association (ARMA) recommended procedures. For metal valleys, use 36" wide vertical underlayment prior to applying 18" metal flashing (secure edge with nails). No nails are to be within 6" of valley center.

⑨ RIDGE CONSTRUCTION

For ridge construction use Class "A" Seal-A-Ridge® with formula FLX™ (See Ridge package for installation instructions.)

FASTENERS

While nailing is the preferred method for Elk shingles, Elk will accept fastening methods according to the following instructions.

Always nail or staple through the fastener line or on products without fastener lines, nail or staple between and in line with sealant dots.

NAILS: Corrosive resistant, 3/8" head, minimum 12-gauge roofing nails. Elk recommends 1-1/4" for new roofs and 1-1/2" for re-roofs. In cases where you are applying shingles to a roof that has an exposed overhang, for new roofs only, 3/4" ring shank nails are allowed to be used from the eave's edge to a point up the roof that is past the outside wall line. 1" ring shank nails allowed for re-roof.

STAPLES: Corrosive resistant, 16-gauge minimum, crown width minimum of 15/16". Note: An improperly adjusted staple gun can result in raised staples that can cause a fish-mouthed appearance and can prevent sealing.

Fasteners should be long enough to obtain 3/4" deck penetration or penetration through deck, whichever is less.

MANSARD APPLICATIONS

Correct fastening is critical to the performance of the roof. For slopes exceeding 6/12 (or 21/12) use six fasteners per shingle. Locate fasteners in the fastener area 1" from each side edge with the remaining four fasteners equally spaced along the length of the double thickness (laminated) area. Only fastening methods according to the above instructions are acceptable.

LIMITED WIND WARRANTY


For a Limited Wind Warranty, all Prestique and Raised Profile™ shingles must be applied with 4 properly placed fasteners, or in the case of mansard applications, 6 properly placed fasteners per shingle.

For a Limited Wind Warranty up to 110 MPH for Prestique Gallery Collection or Prestique Plus or 90 MPH for Prestique I, shingles must be applied with 6 properly placed NAILS per shingle. SHINGLES APPLIED WITH STAPLES WILL NOT QUALIFY FOR THIS ENHANCED LIMITED WIND WARRANTY. Also, Elk Starter Strip shingles must be applied at the eaves and rake edges to qualify Prestique Plus, Prestique Gallery Collection and Prestique I shingles for this enhanced Limited Wind Warranty. Under no circumstances should the Elk Shingles or the Elk Starter Strip overhanging the eaves or rake edge more than 3/4" of an inch.



HELP STOP BLOW-OFFS AND CALL-BACKS

A minimum of four fasteners must be driven into the DOUBLE THICKNESS (laminated) area of the shingle. Nails or staples must be placed along – and through – the 'fastener line' or on products without fastener lines, nail or staple between and in line with sealant dots. CAUTION: Do not use fastener line for shingle alignment.

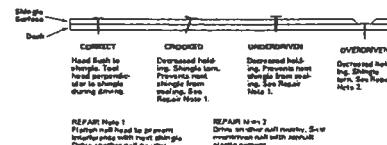

Refer to local codes which in some areas may require specific application techniques beyond those Elk has specified. All Prestique and Raised Profile shingles have a U.L.® Wind Resistance Rating when applied in accordance with these instructions using nails or staples on re-roofs as well as new construction.

CAUTION TO WHOLESALE: Careless and improper storage or handling can harm fiberglass shingles. Keep these shingles completely covered, dry, reasonably cool, and protected from the weather. Do not store near various sources of heat. Do not store in direct sunlight until applied. DO NOT DOUBLE STACK. Systematically rotate all stock so that the material that has been stored the longest will be the first to be moved out.

© 2002 Elk Corporation of Dallas.

All trademarks, ® are registered trademarks of Elk Corporation of Dallas, an ELCOR company. Raised Profile, RidgeCrest, Gallery Collection and FLX are trademarks pending registration of Elk Corporation of Dallas. UL is a registered trademark of Underwriters Laboratories, Inc.

ELK
www.elkcorp.com

CERTIFIED TESTING LABORATORIES

Architectural Division • 7252 Narcoossee Rd. • Orlando, FL 32822


(407) 384-7744 • Fax (407) 384-7751

Web Site: www.ctlarch.com

E-mail: ctlarch.com

Report Number: CTLA-991W-1-AWT

Report Date: February 18, 2003

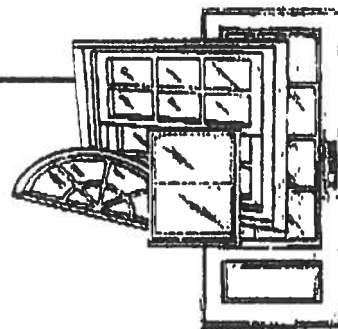

STRUCTURAL PERFORMANCE TEST REPORT

Client: ACTION WINDOOR TECHNOLOGY INC
1312 W. CROSBY ROAD
CARROLLTON, TX 75006

Product Type and Series: AWT Series 3950 Vinyl Fin Frame Single Hung Window with Reinforced Sash Top Rail, Stiles & Meeting Rail H-R40 (36" x 72")

Test Specifications: AAMA/NWDA 101/LS-2-97 "Voluntary Specifications for Aluminum, Vinyl (PVC) and Wood Windows and Glass Doors"

Frame: Vinyl Fin frame measured 35.50" wide x 71.50" high overall. Mitered corner weld construction. Fixed meeting rail secured to each frame jamb with one (1) #8 x 2" PH. screw.

Ventilator: Operable sash measured 33.375" wide x 35.25" high overall. Mitered corner weld construction. Clear lite measured 31.5625" high x 33.5625" high. Fixed lite measured 32.50" wide x 33.4375" high.

Weather Stripping: One (1) strip of woolpile .220" high with integral plastic fin frame sill. One (1) strip of woolpile .250" high with integral plastic fin sash top rail exterior. One (1) strip of woolpile .250" high each sash stile exterior leg. One (1) strip of woolpile .250" high with integral plastic fin each sash stile interior leg. One (1) strip of foam filled bulb weatherstrip sash bottom rail.

Hardware & Location: Two (2) metallic sweep locks located on sash top rail approx 8" from each end of rail. Two (2) metallic keepers located on fixed meeting rail. One (1) tilt latch at each end of sash top rail. One (1) block and tackle at each frame jamb. One (1) pivot bar at each end of sash bottom rail.

Glazing: 5/8" insulated annealed glass consisting of .125" glass .375" air space with swiggle .125" glass. Sash exterior glazed. Fixed lite interior glazed adhesive foam strip backbedding and vinyl snap in glazing bead.

Sealant: A silicone type sealant was used on sill and to seal specimen to test buck.

Weep System: Weep notch measuring 2.25" x leg height located each end of sill weeping to the exterior

Muntins: N/A

Reinforcement: Fixed meeting rail has one (1) piece of extruded aluminum reinforcement measuring .662" wide x .755" high x .099" thick x full length. Top rail, and sash stiles has one (1) piece of extruded aluminum reinforcement measuring .590" wide x .995" high x .115" thick x full length.

Additional Description: N/A

Screen: Roll formed aluminum frame, fiberglass mesh with vinyl spline. Two (2) metallic retainer clips and two (2) metallic plungers. Corners secured with plastic corner keys

Installation: Twenty-six (26) 1.75" roofing nails were used to secure the specimen to the wood test buck. Five (5) were located in head and sill measuring 4", 13", 21", 29", and 33" from left jamb. Eight (8) were located in each jamb measuring 4.50", 14.25", 24", 32.75", 42", 57.25", 60.50" and 70" from sill.

Surface Finish: White Vinyl

Comment: Nominal 2 mil polyethylene film was used to seal against air leakage during structural loads. The film was used in a manner that did not influence the test results

Performance Test Results

Paragraph No	Title of Test	Method	Measured	Allowed
2.1.2	Air Infiltration @ 1.57 psf	ASTM E283-91	.18 cfm/ft ²	.34 cfm/ft ²
The tested specimen meets or exceeds the performance levels specified in AAMA/NWWDA 101/AS 2-97. Results recorded in two (2) decimals at the clients request. Unit tested with shims installed under cam locks.				
2.1.3	Water Resistance @ 5.0 gph/ft ²	ASTM E547-93 Four (4) five (5) minute cycles	No Entry	No Entry
	WTP= 6.75 psf	ASTM E331-93 Fifteen (15) minute duration	No Entry	No Entry
Unit tested with insect screen.				
2.1.3	Water Resistance @ 5.0 gph/ft ²	ASTM E547-93 Four (4) five (5) minute cycles	No Entry	No Entry
	WTP= 6 psf	ASTM E331-93 Fifteen (15) minute duration	No Entry	No Entry
Unit tested without insect screen.				
2.1.4.2	Uniform Load Structural Permanent Deformation @ 60 psf positive @ 60 psf negative	ASTM E330-90 Ten (10) second load	.015" .005"	.134" .134"
2.1.8	Forced Entry Resistance	AAMA 1302.5-76		
	Test A		0"	1/4"
	Test B		0"	1/4"
	Test C		0"	1/4"
	Test D, E and F		0"	1/4"
	Test G		0"	1/4"

Performance Test Results (continued)

<u>Paragraph No</u>	<u>Title of Test</u>	<u>Method</u>	<u>Measured</u>	<u>Allowed</u>
2.2.2.5.1	Operating Force Sash	AAMA/NWWDA 101/1.S.2-97	18 lbs.	30 lbs.
2.2.2.5.2	Deglazing Top Rail 70 lbs Bottom Rail 70 lbs Left Side 50 lbs Right Side 50 lbs	ASTM E987-88	.039" = 7.8% < 100% .038" = 7.6% < 100% .050" = 10% < 100% .035" = 7.0% < 100%	
2.1.7	Welded Corner Test	AAMA/NWWDA 101/ IS2-97	Passed	

Test Date November 21, 2002


Test Completion Date: November 21, 2002

Remarks: Detailed drawings were available for laboratory records and comparison to the test specimen at the time of this report. A copy of this report along with representative sections of the test specimen will be retained by CTL for a period of four (4) years. The results obtained apply only to the specimen tested.

This test report does not constitute certification of this product, but only that the above test results were obtained using the designated test methods and they indicate compliance with the performance requirements (paragraphs as listed) of the above referenced specifications.

Certified Testing Laboratories assumes that all information provided by the client is accurate and that the physical and chemical properties of the components are as stated by the manufacturer.

Certified Testing Laboratories, Inc

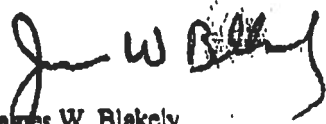
James W. Blakely
Vice President
Architectural Division

cc: Action Window Technology Inc. (3)
File (1)

Report Number: ETC-04-034-14644.0

Test Start Date: 04/10/03

Test Finish Date: 03/16/04

Report Date: 03/18/04

Expiration Date: 03/18/08

Penetration Structural Test Report

Rendered To:

Vinyl Building Products, Inc.
One Raritan Road
Oakland, NJ 07436

Series/Model

2900 Horizontal Slider (OX)

Description: The product tested was a vinyl Horizontal Sliding window. The test specimen was glazed with 5/8-inch thick insulating glass units constructed with double strength annealed glass. The frame size was 69 inches wide by 48 inches high by 2-3/4 inches deep. See Appendix A.

Test Specification: ANSI/AAMA/NWDA 101/LS.2

Summary of Results

Overall Design Pressure	35.0 psf
Air Leakage Rate	0.18 scfm/ft ²
Maximum Water Pressure Achieved	5.25 psf
Maximum Structural Pressure Achieved	60.0 psf
Forced Entry Resistance - (ASTM)	Grade 10

Product Designation**H-R35 69 x 48**

Specifications: The test specimen was evaluated in accordance with ANSI/AAMA/NWDA 101/I.S.2 "Voluntary Specification for Aluminum, Vinyl and Wood Windows and Glass Doors". Sections 1, 2 and 4 only. All performance specifications in this standard shall be met for full compliance to the standard and for product certification, labeling or represented as conforming to this standard.

Referenced Test Reports: NONE

Note – The test data in any section below with an "RTR" comment have not been obtained from this specimen but from the Referenced Test Report with a specimen of the same or larger size and identical construction.

Design Pressure (DP): The product tested herein has been first evaluated to the Gateway pressure in the referenced specification for the performance class rating achieved.

Gateway Performance Tests

<u>Specification Paragraph</u>	<u>Title of Test</u>	<u>Results</u>	<u>Allowed</u>
2.1.2	<u>Air Infiltration – ASTM E283</u> Test Pressure - 1.57 psf The tested specimen exceeds the performance levels specified in ANSI/AAMA/NWDA 101/I.S.2 for air infiltration.	0.18 scfm/ft ²	0.30 scfm/ft ²
2.1.3	<u>Water Resistance -- ASTM E547</u> 5 gal/hr-ft ² – 4 Test cycles – 24 Minutes Design Pressure - 15.0 psf Test Pressure – 2.86 psf With and Without Screen	Pass	No Leakage
2.1.4.2	<u>Uniform Structural Load - ASTM E330</u> Design Pressure - 15.0 psf Test Pressure Positive Load – 22.5 psf (150% x DP) Negative Load – 22.5 psf (150% x DP) Note: Measurement taken after load from center of the meeting stile	0.033 in. 0.020 in.	0.177 in. 0.177 in.
2.1.7	<u>Corner Weld</u> Frame – 4 Corners Sashes – 4 Corners	Pass Pass	< 100% < 100%
2.1.8	<u>Forced Entry Resistance - ASTM E588</u> Lock/Tool Manipulation Tests A1 through A7 Lock/Tool Manipulation	Pass Pass Pass	No Entry No Entry No Entry
2.2.1.6.1	<u>Operating Force -- No Standardized Method</u> Right Sash -- Open/Close	18/18 lbf	20 lbf
2.2.1.6.2	<u>De-glazing – ASTM E987</u> Right Sash: Left Stile - 70 lbf Right Stile - 70 lbf Top Rail - 50 lbf Bottom Rail - 50 lbf	0.0% 0.0% 0.0% 0.0%	<100% <100% <100% <100%

Optional Performance Tests

The manufacturer specified herein has successfully achieved all the required criteria in Section 2 of the referenced specification for the Gateway size of the achieved Performance Rating and has further successfully tested the product to higher performance levels as indicated below.

Design Pressure (DP): The product tested herein has been additionally evaluated to the Design Pressure referenced below.

Specification

<u>Paragraph</u>	<u>Title of Test</u>	<u>Results</u>	<u>Allowed</u>
4.3	<u>Water Resistance - ASTM E547</u> 5 gal/hr-ft ² - 4 Test cycles - 24 Minutes Design Pressure - 35.0 psf Test Pressure - 5.25 psf (15% x DP) With and Without Screen	Pass	No Leakage
4.4	<u>Uniform Structural Load - ASTM E330</u> Design Pressure - 40.0 psf Test Pressure Positive Load - 60.0 psf (150% x DP) Negative Load - 60.0 psf (150% x DP) Note: Measurement taken after load from center of meeting stile	0.069 in. 0.066 in.	0.177 in. 0.177 in.

Conditions, Terms, and General Notes Regarding These Tests

The product tested Has Been compared to the detailed drawings, bill of materials and fabrication information supplied by the client so named herein. Our analysis, which includes dimensional and component description comparisons, indicate the tested product and engineering information supplied by the client: "Are Equivalent". See Appendix A. The report and representative samples will be retained for four years from the date of initial test.

These test results were obtained by employing all requirements of the designated test methods with no deviations. The test results and specimen supplied for testing are in compliance with the referenced specifications.

The test results are specific to the product tested by this laboratory and of the sample supplied by the client named herein, and they relate to no other product either manufactured by the client, a Fabricator of the client or of installed field performance.

This report does not constitute an AAMA or NWWDA certified product under the certification programs of these organizations. The program administrator of these programs and organizations may only grant product certification.


ETC Laboratories makes no opinions or endorsements regarding this product and its performance. This report may not be reproduced or quoted in partial form without the expressed written approval of ETC Laboratories.


No conclusions of any kind regarding the adequacy of the glass in the test specimen may be drawn from the test. Procedure "A" in ASTM E330 was used for this test.

ETC Laboratories letters, reports, its name or insignia or mark are for the exclusive use of the client so named herein and any other use is strictly prohibited. The report, letters and the name of ETC Laboratories, its seal or mark shall not be used in any circumstance to the general public or in any advertising.

Limitation of Liability: Due diligence was used in rendering this professional opinion. By acceptance of this report, this client agrees to hold harmless and indemnify ETC Laboratories, its employees and offices and owners against all claims and demands of any kind whatsoever, which arise out of or in any manner connected with the performance of work referred to herein.

FOR ETC LABORATORIES


Mark Sennett
AWS Supervisor


Arthur Murray, VP
Manager, Wind Engineering Laboratory

TEST REPORT

ETC Laboratories



RIGHT-J LOAD AND EQUIPMENT SUMMARY

Entire House

Touchstone Heating and Air, Inc.

Job: Wise Estates Lot 42
02/08/06

490 SE 3rd Ave., Lake Butler, FL 32054 Phone: 386-496-3467 Fax: 386-496-3147

Project Information

For: Concept Construction
2108 W US Hwy 90 Suite 170-144, Lake City, FL 32055
Phone: 386-755-8887 Fax: 386-755-2165

Notes:

Design Information

Weather: Gainesville, FL US

Winter Design Conditions

Outside db	33 °F
Inside db	70 °F
Design TD	37 °F

Summer Design Conditions

Outside db	92 °F
Inside db	75 °F
Design TD	17 °F
Daily range	M
Relative humidity	50 %
Moisture difference	52 gr/lb

Heating Summary

Building heat loss	46313 Btuh
Ventilation air	8 cfm
Ventilation air loss	313 Btuh
Design heat load	46626 Btuh

Sensible Cooling Equipment Load Sizing

Structure	25865 Btuh
Ventilation	0 Btuh
Design temperature swing	3.0 °F
Use mfg. data	n
Rate/swing multiplier	0.97
Total sens. equip. load	25089 Btuh

Infiltration

Method	Simplified
Construction quality	Average
Fireplaces	0

Latent Cooling Equipment Load Sizing

Internal gains	230 Btuh
Ventilation	0 Btuh
Infiltration	7124 Btuh
Total latent equip. load	7354 Btuh

	Heating	Cooling
Area (ft²)	1793	1793
Volume (ft³)	15241	15241
Air changes/hour	0.10	0.80
Equiv. AVF (cfm)	25	203

Total equipment load	32443 Btuh
Req. total capacity at 0.70% SHR	3.0 ton

Heating Equipment Summary

Make	Trane
Trade	
TWR036C100	
Efficiency	9.1 HSPF
Heating input	
Heating output	32600 Btuh @ 47°F
Heating temp rise	26 °F
Actual heating fan	1123 cfm
Heating air flow factor	0.024 cfm/Btuh
Space thermostat	

Cooling Equipment Summary

Make	Trane
Trade	
TWR036C100	
TWG036	
Efficiency	13.0 EER
Sensible cooling	23800 Btuh
Latent cooling	10200 Btuh
Total cooling	34000 Btuh
Actual cooling fan	1120 cfm
Cooling air flow factor	0.043 cfm/Btuh
Load sensible heat ratio	78 %

Bold/italic values have been manually overridden

Printout certified by ACCA to meet all requirements of Manual J 7th Ed.

RESIDENTIAL MINIMUM PLAN REQUIREMENTS AND CHECKLIST FOR FLORIDA BUILDING CODE 2004 and FLORIDA RESIDENTIAL CODE 2004 WITH AMENDMENTS ONE (1) AND TWO (2) FAMILY DWELLINGS

ALL REQUIREMENTS ARE SUBJECT TO CHANGE
EFFECTIVE OCTOBER 1, 2005

ALL BUILDING PLANS MUST INDICATE THE FOLLOWING ITEMS AND INDICATE COMPLIANCE WITH CHAPTER 16 OF THE FLORIDA BUILDING CODE 2004 BY PROVIDING CALCULATIONS AND DETAILS THAT HAVE THE SEAL AND SIGNATURE OF A CERTIFIED ARCHITECT OR ENGINEER REGISTERED IN THE STATE OF FLORIDA, OR ALTERNATE METHODOLOGIES, APPROVED BY THE STATE OF FLORIDA BUILDING COMMISSION FOR ONE-AND-TWO FAMILY DWELLINGS. FOR DESIGN PURPOSES THE FOLLOWING BASIC WIND SPEED AS PER FIGURE 1609 SHALL BE USED.

WIND SPEED LINE SHALL BE DEFINED AS FOLLOWS: THE CENTERLINE OF INTERSTATE 75.

1. ALL BUILDINGS CONSTRUCTED EAST OF SAID LINE SHALL BE ----- 100 MPH
2. ALL BUILDINGS CONSTRUCTED WEST OF SAID LINE SHALL BE ----- 110 MPH
3. NO AREA IN COLUMBIA COUNTY IS IN A WIND BORNE DEBRIS REGION

APPLICANT – PLEASE CHECK ALL APPLICABLE BOXES BEFORE SUBMITTAL

GENERAL REQUIREMENTS: Two (2) complete sets of plans containing the following:

Applicant	Plans Examiner	
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	All drawings must be clear, concise and drawn to scale ("Optional" details that are not used shall be marked void or crossed off). Square footage of different areas shall be shown on plans.
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Designers name and signature on document (FBC 106.1). If licensed architect or engineer, official seal shall be affixed.
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<u>Site Plan including:</u>
		a) Dimensions of lot
		b) Dimensions of building set backs
		c) Location of all other buildings on lot, well and septic tank if applicable, and all utility easements.
		d) Provide a full legal description of property.
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<u>Wind-load Engineering Summary, calculations and any details required</u>
		Plans or specifications must state compliance with FBC Section 1609.
		The following information must be shown as per section 1603.1.4 FBC
		a. Basic wind speed (3-second gust), miles per hour (km/hr).
		b. Wind importance factor, I_w , and building classification from Table 1604.5 or Table 6-1, ASCE 7 and building classification in Table 1-1, ASCE 7.
		c. Wind exposure, if more than one wind exposure is utilized, the wind exposure and applicable wind direction shall be indicated.
		d. The applicable enclosure classifications and, if designed with ASCE 7, internal pressure coefficient.
		e. Components and Cladding. The design wind pressures in terms of psf (kN/m ²) to be used for the design of exterior component and cladding materials not specifically designed by the registered design professional.
		<u>Elevations including:</u>
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	a) All sides
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	b) Roof pitch
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	c) Overhang dimensions and detail with attic ventilation

- d) Location, size and height above roof of chimneys.
- e) Location and size of skylights
- f) Building height
- e) Number of stories

Floor Plan including:

- a) Rooms labeled and dimensioned.
- b) Shear walls identified.
- c) Show product approval specification as required by Fla. Statute 553.842 and Fla. Administrative Code 9B-72 (see attach forms).
- d) Show safety glazing of glass, where required by code.
- e) Identify egress windows in bedrooms, and size.
- f) Fireplace (gas vented), (gas non-vented) or wood burning with hearth, (Please circle applicable type).
- g) Stairs with dimensions (width, tread and riser) and details of guardrails and handrails.
- h) Must show and identify accessibility requirements (accessible bathroom)

Foundation Plan including:

- Location of all load-bearing wall with required footings indicated as standard or monolithic and dimensions and reinforcing.
- All posts and/or column footing including size and reinforcing
- Any special support required by soil analysis such as piling
- Location of any vertical steel.

Roof System:

- a) **Truss package including:**
 1. Truss layout and truss details signed and sealed by Fl. Pro. Eng.
 2. Roof assembly (FBC 106.1.1.2)Roofing system, materials, manufacturer, fastening requirements and product evaluation with wind resistance rating)
- b) **Conventional Framing Layout including:**
 1. Rafter size, species and spacing
 2. Attachment to wall and uplift
 3. Ridge beam sized and valley framing and support details
 4. Roof assembly (FBC 106.1.1.2)Roofing systems, materials, manufacturer, fastening requirements and product evaluation with wind resistance rating)

Wall Sections including:

- a) Masonry wall
 1. All materials making up wall
 2. Block size and mortar type with size and spacing of reinforcement
 3. Lintel, tie-beam sizes and reinforcement
 4. Gable ends with rake beams showing reinforcement or gable truss and wall bracing details
 5. All required connectors with uplift rating and required number and size of fasteners for continuous tie from roof to foundation shall be designed by a Windload engineer using the engineered roof truss plans.
 6. Roof assembly shown here or on roof system detail (FBC 106.1.1.2) Roofing system, materials, manufacturer, fastening requirements and product evaluation with resistance rating)
 7. Fire resistant construction (if required)
 8. Fireproofing requirements
 9. Shoe type of termite treatment (termiteicide or alternative method)
 10. Slab on grade
 - a. Vapor retarder (6mil. Polyethylene with joints lapped 6 inches and sealed)
 - b. Must show control joints, synthetic fiber reinforcement or Welded fire fabric reinforcement and supports
 11. Indicate where pressure treated wood will be placed
 12. Provide insulation R value for the following:

- a. Attic space
- b. Exterior wall cavity
- c. Crawl space (if applicable)

☒
☒

b) Wood frame wall

1. All materials making up wall
2. Size and species of studs
3. Sheathing size, type and nailing schedule
4. Headers sized
5. Gable end showing balloon framing detail or gable truss and wall hinge bracing detail
6. All required fasteners for continuous tie from roof to foundation (truss anchors, straps, anchor bolts and washers) shall be designed by a Windload engineer using the engineered roof truss plans.
7. Roof assembly shown here or on roof system detail (FBC 106.1.1.2) Roofing system, materials, manufacturer, fastening requirements and product evaluation with wind resistance rating)
8. Fire resistant construction (if applicable)
9. Fireproofing requirements
10. Show type of termite treatment (termicide or alternative method)
11. Slab on grade
 - a. Vapor retarder (6Mil. Polyethylene with joints lapped 6 inches and sealed
 - b. Must show control joints, synthetic fiber reinforcement or welded wire fabric reinforcement and supports
12. Indicate where pressure treated wood will be placed
13. Provide insulation R value for the following:
 - a. Attic space
 - b. Exterior wall cavity
 - c. Crawl space (if applicable)

☒
☐

c) Metal frame wall and roof (designed, signed and sealed by Florida Prof. Engineer or Architect)

Floor Framing System:

- a) Floor truss package including layout and details, signed and sealed by Florida Registered Professional Engineer
- b) Floor joist size and spacing
- c) Girder size and spacing
- d) Attachment of joist to girder
- e) Wind load requirements where applicable

Plumbing Fixture layout

Electrical layout including:

- a) Switches, outlets/receptacles, lighting and all required GFCI outlets identified
- b) Ceiling fans
- c) Smoke detectors
- d) Service panel and sub-panel size and location(s)
- e) Meter location with type of service entrance (overhead or underground)
- f) Appliances and HVAC equipment
- g) Arc Fault Circuits (AFCI) in bedrooms
- h) Exhaust fans in bathroom

HVAC information

- a) Energy Calculations (dimensions shall match plans)
- b) Manual J sizing equipment or equivalent computation
- c) Gas System Type (LP or Natural) Location and BTU demand of equipment

Disclosure Statement for Owner Builders

*****Notice Of Commencement Required Before Any Inspections Will Be Done Private Potable Water**

☒
☒

- a) Size of pump motor
- b) Size of pressure tank
- c) Cycle stop valve if used

THE FOLLOWING ITEMS MUST BE SUBMITTED WITH BUILDING PLANS

1. **Building Permit Application:** A current Building Permit Application form is to be completed and submitted for all residential projects.
2. **Parcel Number:** The parcel number (Tax ID number) from the Property Appraiser (386) 758-1084 is required. A copy of property deed is also requested.
3. **Environmental Health Permit or Sewer Tap Approval:** A copy of the Environmental Health permit, existing septic approval or sewer tap approval is required before a building permit can be issued. (386) 758-1058 (Toilet facilities shall be provided for construction workers)
4. **City Approval:** If the project is to be located within the city limits of the Town of Fort White, prior approval is required. The Town of Fort White approval letter is required to be submitted by the owner or contractor to this office when applying for a Building Permit. (386) 497-2321
5. **Flood Information:** All projects within the Floodway of the Suwannee or Santa Fe Rivers shall require permitting through the Suwannee River Water Management District, before submitting application to this office. Any project located within a flood zone where the base flood elevation (100 year flood) has been established shall meet the requirements of Section 8.8 of the Columbia County Land Development Regulations. Any project located within a flood zone where the base flood elevation has not been established (Zone A) shall meet the requirements of Section 8.7 of the Columbia County Land Development Regulations. **CERTIFIED FINISHED FLOOR ELEVATIONS WILL BE REQUIRED ON ANY PROJECT WHERE THE BASE FLOOD ELEVATION (100 YEAR FLOOD) HAS BEEN ESTABLISHED.**
A development permit will also be required. Development permit cost is \$50.00
6. **Driveway Connection:** If the property does not have an existing access to a public road, then an application for a culvert permit (\$25.00) must be made. If the applicant feels that a culvert is not needed, they may apply for a culvert waiver (\$50.00). All culvert waivers are sent to the Columbia County Public Works Department for approval or denial. **If the project is to be located on a F.D.O.T. maintained road, than an F.D.O.T. access permit is required.**
7. **911 Address:** If the project is located in an area where the 911 address has been issued, then the proper paperwork from the 911 Addressing Department must be submitted. (386) 752-8787

ALL REQUIRED INFORMATION IS TO BE SUBMITTED FOR REVIEW. YOU WILL BE NOTIFIED WHEN YOUR APPLICATION AND PLANS ARE APPROVED AND READY TO PERMIT. PLEASE DO NOT EXPECT OR REQUEST THAT PERMIT APPLICATIONS BE REVIEWED OR APPROVED WHILE YOU ARE HERE – TIME WILL NOT ALLOW THIS –PLEASE DO NOT ASK

Location: _____**Project Name:** _____

As required by Florida Statute 553.842 and Florida Administrative Code 9B-72, please provide the information and the product approval number(s) on the building components listed below if they will be utilized on the construction project for which you are applying for a building permit on or after April 1, 2004. We recommend you contact your local product supplier should you not know the product approval number for any of the applicable listed products. More information about statewide product approval can be obtained at www.floridabuilding.org

Category/Subcategory	Manufacturer	Product Description	Approval Number(s)
A. EXTERIOR DOORS			
1. Swinging			
2. Sliding			
3. Sectional			
4. Roll up			
5. Automatic			
6. Other			
B. WINDOWS			
1. Single hung			
2. Horizontal Slider			
3. Casement			
4. Double Hung			
5. Fixed			
6. Awning			
7. Pass-through			
8. Projected			
9. Mullion			
10. Wind Breaker			
11. Dual Action			
12. Other			
C. PANEL WALL			
1. Siding			
2. Soffits			
3. EIFS			
4. Storefronts			
5. Curtain walls			
6. Wall louver			
7. Glass block			
8. Membrane			
9. Greenhouse			
10. Other			
D. ROOFING PRODUCTS			
1. Asphalt Shingles			
2. Underlayments			
3. Roofing Fasteners			
4. Non-structural Metal Rf			
5. Built-Up Roofing			
6. Modified Bitumen			
7. Single Ply Roofing Sys			
8. Roofing Tiles			
9. Roofing Insulation			
10. Waterproofing			
11. Wood shingles /shakes			
12. Roofing Slate			

13. Liquid Applied Roof Sys			
14. Cements-Adhesives – Coatings			
15. Roof Tile Adhesive			
16. Spray Applied Polyurethane Roof			
17. Other			
E. SHUTTERS			
1. Accordion			
2. Bahama			
3. Storm Panels			
4. Colonial			
5. Roll-up			
6. Equipment			
7. Others			
F. SKYLIGHTS			
1. Skylight			
2. Other			
G. STRUCTURAL COMPONENTS			
1. Wood connector/anchor			
2. Truss plates			
3. Engineered lumber			
4. Railing			
5. Coolers-freezers			
6. Concrete Admixtures			
7. Material			
8. Insulation Forms			
9. Plastics			
10. Deck-Roof			
11. Wall			
12. Sheds			
13. Other			
H. NEW EXTERIOR ENVELOPE PRODUCTS			
1.			
2.			

The products listed below did not demonstrate product approval at plan review. I understand that at the time of inspection of these products, the following information must be available to the inspector on the jobsite; 1) copy of the product approval, 2) the performance characteristics which the product was tested and certified to comply with, 3) copy of the applicable manufacturers installation requirements.

I understand these products may have to be removed if approval cannot be demonstrated during inspection.

Contractor or Contractor's Authorized Agent Signature

Print Name

Date

Location

Permit # (FOR STAFF USE ONLY)

NOTICE:

ADDRESSES BY APPOINTMENT ONLY!

TO OBTAIN A 9-1-1 ADDRESS THE REQUESTER MUST CONTACT THE COLUMBIA COUNTY 9-1-1 ADDRESSING DEPARTMENT AT (386) 752-8787 FOR AN APPOINTMENT TIME AND DATE:


YOU CAN NOT OBTAIN A NEW ADDRESS OVER THE TELEPHONE. MUST MAKE AN APPOINTMENT!

THE ADDRESSING DEPARTMENT IS LOCATED AT 263 NW LAKE CITY AVENUE (OFF OF WEST U.S. HIGHWAY 90 WEST OF INTERSTATE 75 AT THE COLUMBIA COUNTY EMERGENCY OPERATIONS CENTER).

THE REQUESTER WILL NEED THE FOLLOWING:

1. THE PARCEL OR TAX ID NUMBER (SAMPLE: "25-4S-17-12345-123" OR "R12345-123") FOR THE PROPERTY.
2. A PLAT, PLAN, SITE PLAN, OR DRAWING SHOWING THE PROPERTY LINES OF THE PARCEL.
 - a. LOCATION OF PLANNED RESIDENT OR BUSINESS STRUCTURE ON THE PROPERTY WITH DISTANCES FROM TWO OF THE PROPERTY LINES TO THE STRUCTURE (SEE SAMPLE BELOW).
 - b. LOCATION OF THE ACCESS POINT (DRIVEWAY, ETC.) ON THE ROADWAY FROM WHICH LOCATION IS TO BE ADDRESSED WITH A DISTANCE FROM A PARALLEL PROPERTY LINE AND OR PROPERTY CORNER (SEE SAMPLE BELOW).
 - c. TRAVEL OF THE DRIVEWAY FROM THE ACCESS POINT TO THE STRUCTURE (SEE SAMPLE BELOW).

SAMPLE:

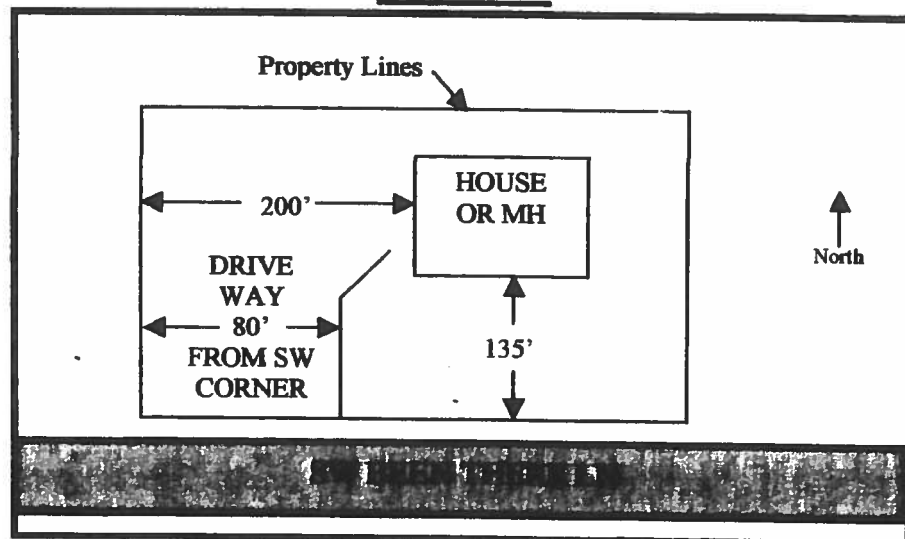


NOTE: 5 TO 7 WORKING DAYS MAY BE REQUIRED IF ADDRESSING DEPARTMENT NEEDS TO CONDUCT AN ON SITE SURVEY.

JOB NO: 3217

PAGE NO:

NOTES:
FRONT DORMER GABLE TO BE CONV. FRAMED
ALL VALLEYS TO BE CONV. FRAMED EXCEPT
TRUSSES C4, C5, AND C6

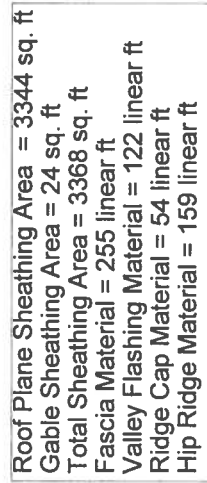



Donald F. Lee & Associates, Inc.
Surveyors & Engineers

24278

140 NW Ridgewood Avenue
Lake City, Florida 32055
(386) 755-6166
Fax (386) 755-6167
donald@dlfa.com

Tuesday, May 30, 2006

TO: Columbia County Building & Zoning Department


FROM: Tim Delbene, PLS - Donald F. Lee & Associates, Inc.

RE: Lot 21, Block C , Wise Estates - Floor Elevation Check

CC: Concept Construction

The Finished Floor (stemwall) Elevation was obtained for this foundation under construction on the above referenced lot. The elevation measured was 96.06 feet MSL. This measurement is based on subdivision project benchmark data.

SIGNED:

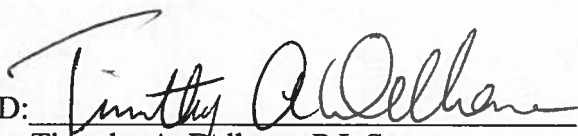
Timothy A. Delbene, P.L.S.

DATE: 5 / 30 / 2006