


TRUSS INFORMATION-

- 7/12 SLOPE
- 4/12 PORCH SLOPE
- ALL 8' CLGS. UNLESS NOTED
- GABLE END TRUSSES DROPPED 3"-1/2 FOR OUTLOOKERS
- 16" O.H.
- 12" O.H. GABLE ENDS
- 7/12 HEELS RAISED TO MATCH O.H.'S TO 4/12 SOFFIT

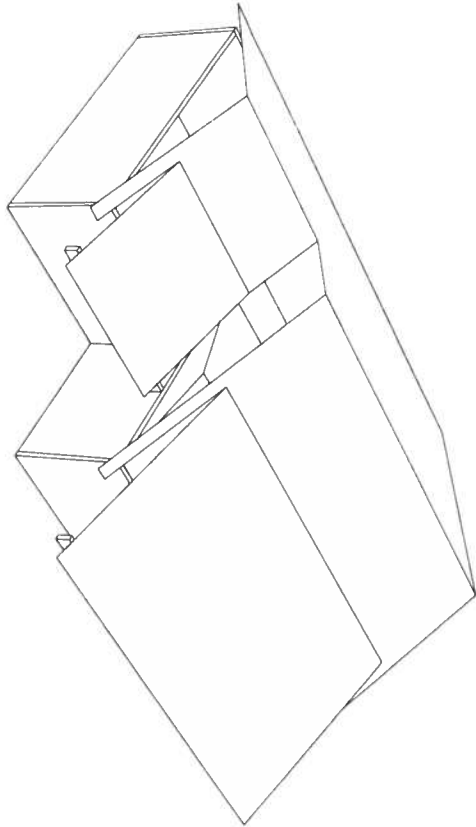

BEARING HEIGHT SCHEDULE
8'-1 11/8

NOTES:

- 1) REFER TO HD 91 RECOMMENDATIONS FOR HANDLING INSTALLATION AND TEMPORARY BRACING. REFER TO ENGINEERED DRAWINGS FOR PERMANENT BRACING REQUIRED
- 2) ALL TRUSSES INCLUDING TRUSSES UNDER VALLEY FRAMING MUST BE COMPLETELY DRESSED OR REFER TO DETAIL VWS FOR ALTERNATE BRACING REQUIREMENTS
- 3) ALL VALLEYS ARE TO BE CONVENTIONALLY FRAMED BY BUILDER
- 4) ALL TRUSSES ARE DESIGNED FOR 2' o.c MAXIMUM SPACING, UNLESS OTHERWISE NOTED
- 5) ALL WALLS SHOWN ON PLACEMENT PLAN ARE CONSIDERED TO BE LOAD BEARING, UNLESS OTHERWISE NOTED
- 6) 5/42 TRUSSES MUST BE INSTALLED WITH THE TOP BEING UP
- 7) ALL ROOF TRUSS HANGERS TO BE SAMPSON HT026 UNLESS OTHERWISE NOTED. ALL FLOOR TRUSS HANGERS TO BE SAMPSON TH4422 UNLESS OTHERWISE NOTED
- 8) BEARING AREA, INTER. (HQS) TO BE FURNISHED BY BUILDER

SHOP DRAWING APPROVAL

THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND JOISTS. ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS, REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.

Expenditure History Date: _____

Approved by: _____ Date: _____



PHONE 904.437.3344 FAX 904.437.3494

PHONE 904.772.6100 FAX 904.772.1973

PHONE 386.755.6994 FAX 386.755.7973

PHONE 407.322.0094 FAX 407.322.5553

BUILDER

CASON BUILDERS

11544 507155

ALACHUA, FL

DATE

PLAN # 9916

SCALE NTS

01/20/07

BPC

L251203