

FOUNDATION SHEET

GREGORY P. RIVERS, P.E.
1-863-272-4516

ANY DIMENSIONS IN PARENTHESES ARE APPROXIMATE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING ALL DIMENSIONS AND CONDITIONS PRIOR TO CONSTRUCTION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING ALL RECORDS AND DOCUMENTATION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR COMPLETING ALL WORK IN ACCORDANCE WITH THE SPECIFICATIONS AND CONDITIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING ALL RECORDS AND DOCUMENTATION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR COMPLETING ALL WORK IN ACCORDANCE WITH THE SPECIFICATIONS AND CONDITIONS.

DATE: 11/10/20
REVISION: 1
DRAWING: 11/10/20


SCALE-NA
DRAWN BY- JASON HEMENWAY 352-493-9613/221-2467
APPROVED

FIRST FLOOR HEATED SQFT-
FLORIDA ROOM SQFT-
COVERED PORCH AND DECK SQFT-
SHOP SQFT-1500
TOTAL SQFT-1500

DRAWN FOR-DIXIE RENTAL
CITY- HIGH SPRINGS
DRAWN FOR-SELF

ANCHOR BOLT SCHEDULE			
DIA.	EMBED LENGTH IN CONC. "E"	"P"	"C"
1/2"	10"	3.5"	1/2" MAX
5/8"	12"	3.5"	1/2" MAX
3/4"	1-4"	3.5"	1/2" MAX
1"	1-6"	3.5"	1/2" MAX

NOTES:
1. ANCHOR BOLTS SHALL HAVE BOLTS HEAD OR DOUBLE NUT
2. BOLT LENGTH = E + P
3. ANCHOR BOLTS TO BE SET IN CONCRETE 36
4. SHIM BOLTS (NOT) DO NOT USE LEVELING NUTS
NOTE:
ANCHOR BOLTS SHALL BE SET USING PLANOORIENTATIONS
PROVIDED BY METAL BUILDING FRAME.

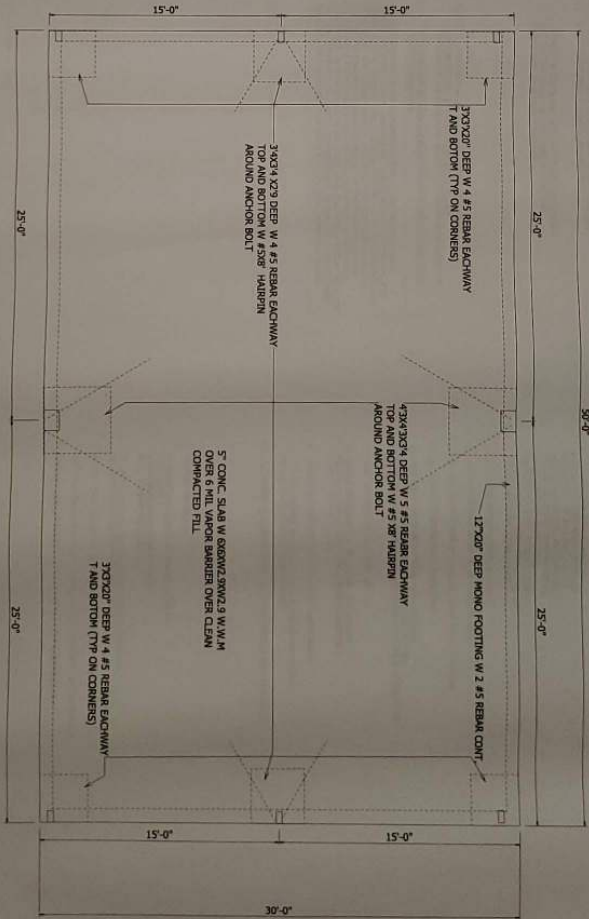

NOTE:
1). ANCHOR BOLT SIZE AND QUANTITY AND PLACEMENT DEMENSIONS
PER ELITE STRUCTURES JOB ID 11438 DATED 12-2-19
2). REFER TO ELITE STRUCTURE PLANS FOR BEVELED EDGE AT DOORS
3). CONTRA; JOINTS SHALL BE CUT 1/3 SLAB DEPTH 1/8" WIDE AND 15" OC MAX

