


6/12 PITCH - 18" O/H

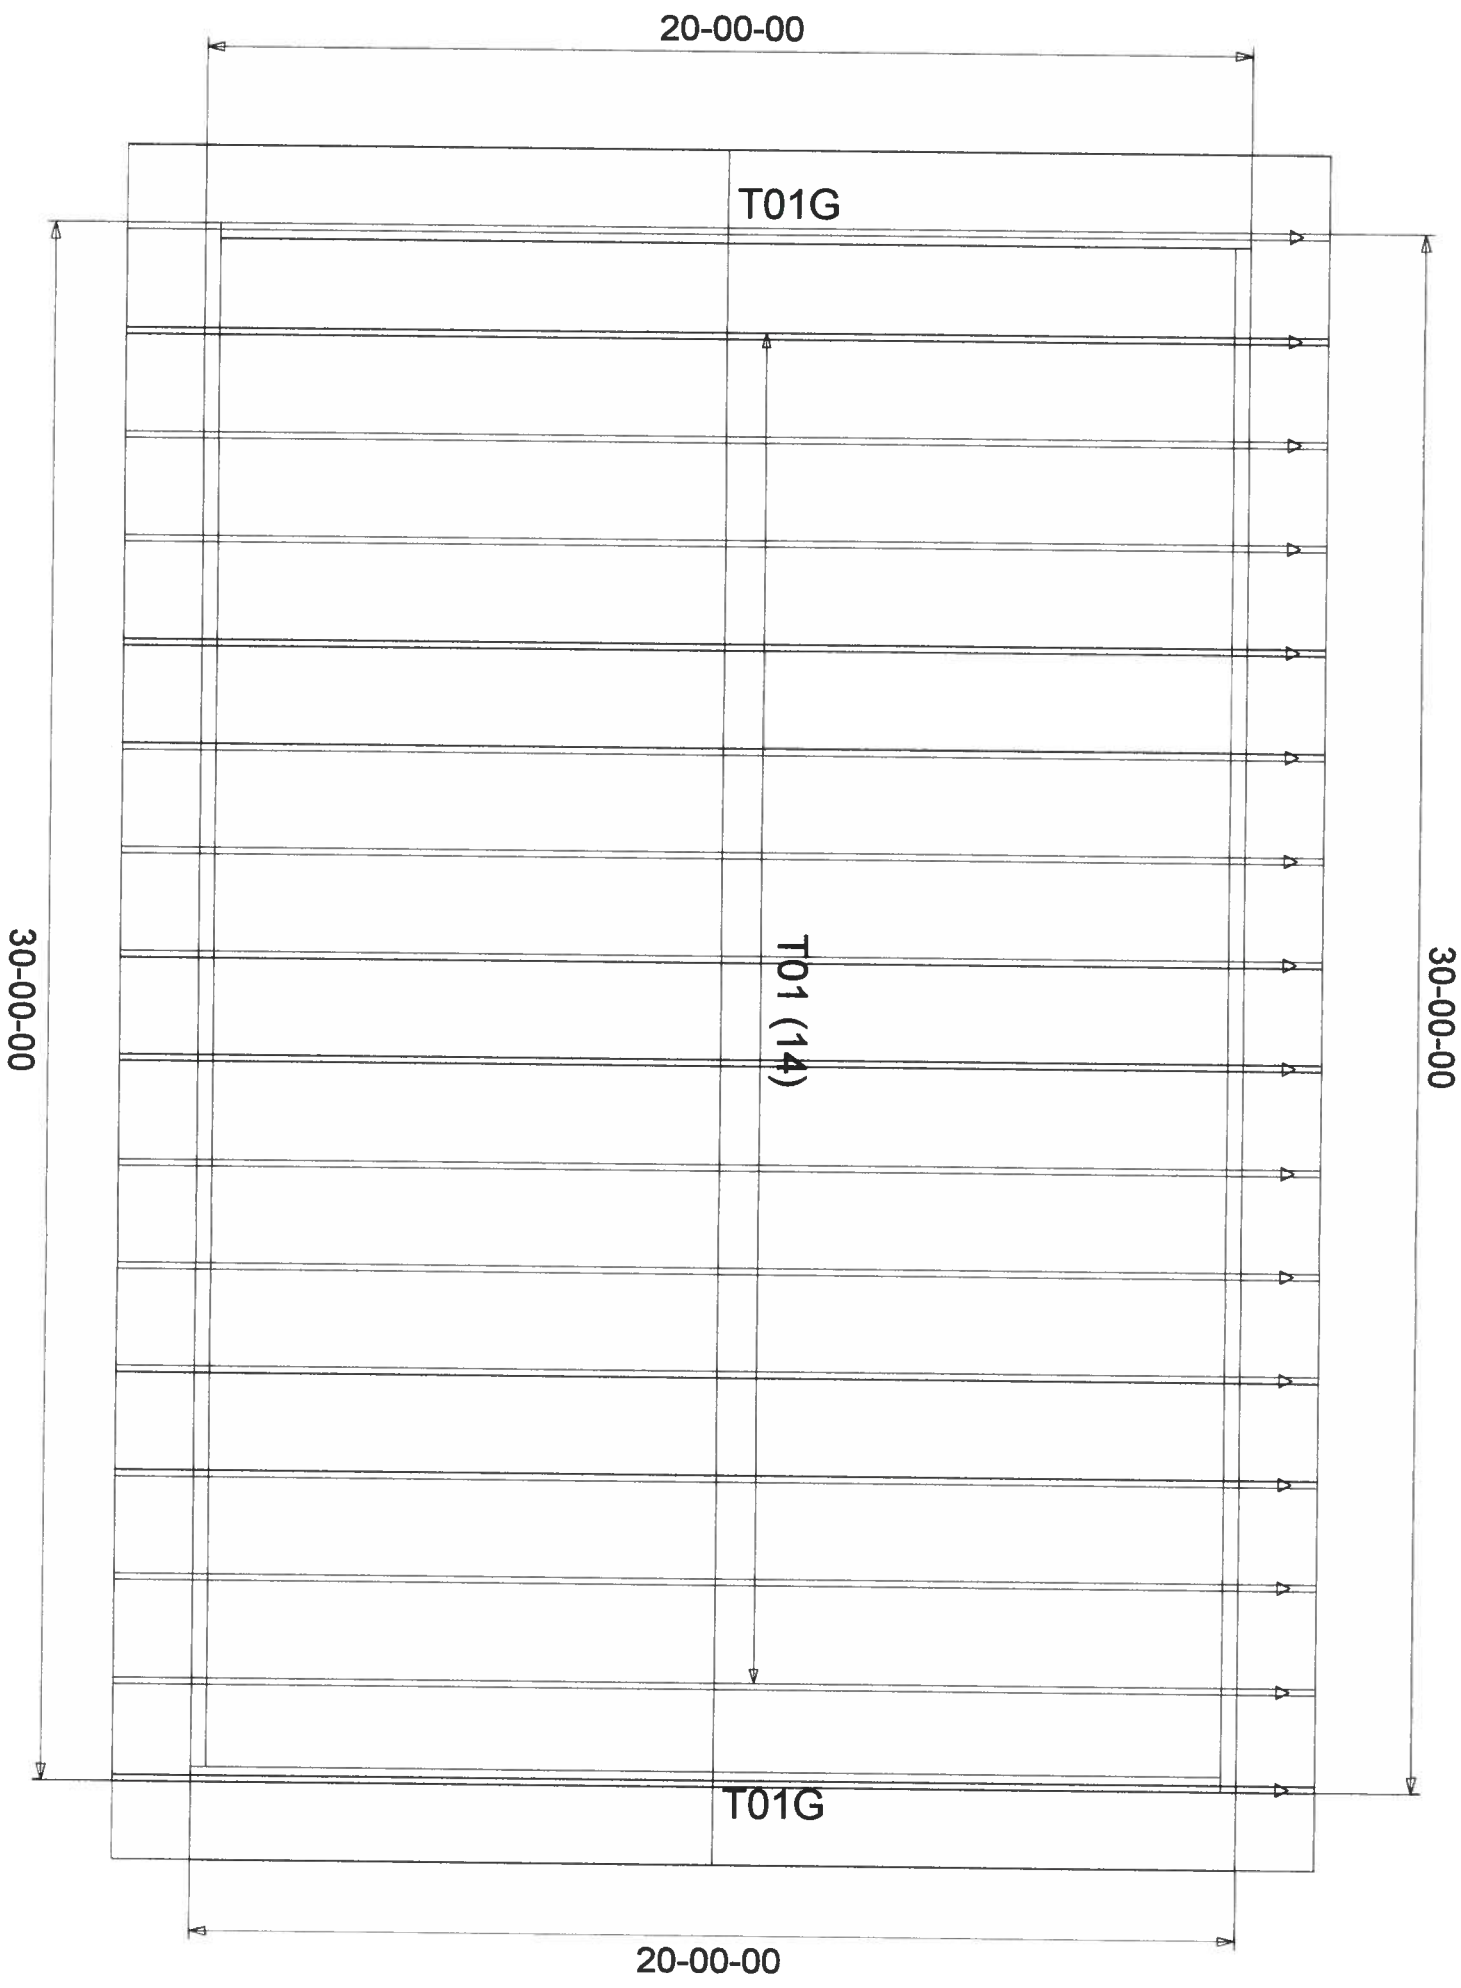

BEARING HEIGHT SCHEDULE

13' 1-1/8"

NOTES:

- 1) REFER TO IBC 91 (RECOMMENDATIONS FOR TRUSS INSTALLATION AND TEMPORARY BRACING REFER TO ENGINEER DRAWINGS FOR PERMANENT BRACING REQUIRED)
- 2) ALL TRUSSES (INCLUDING TRUSSES UNDER VALLEY FRAMING) MUST BE COMPLETELY DECKED OR REFER TO DETAIL V05 FOR ALTERNATE BRACING REQUIREMENTS.
- 3) ALL VALLEYS ARE TO BE CONVENTIONALLY FRAMED BY BUILDER.
- 4) ALL TRUSSES ARE DESIGNED FOR 2 OC MAXIMUM SPACING, UNLESS OTHERWISE NOTED.
- 5) ALL WALLS SHOWN ON PLACEMENT PLAN ARE CONSIDERED TO BE LOAD BEARING, UNLESS OTHERWISE NOTED.
- 6) 5/42 TRUSSES MUST BE INSTALLED WITH THE TOP BEING UP.
- 7) BEARING JOIST (BJR) TO BE FURNISHED BY BUILDER.



Jacksonville  
Tampa  
Lake City

IC CONST.

WALLER GARAGE

DATE: 12-4-19  
BY: KLH  
PROJECT: 2179898  
CONTACT: 2179898

FL Approval Codes - Mitek Plates #'s 2197.2 - 2197.4, Versa-Lam #1644-R4 & BCI Joists #1392-R4