

As required by Florida Statute 553.842 and Florida Administrative Code 9B-72, please provide the information and approval numbers on the building components listed below if they will be utilized on the construction project for which you are applying for a building permit. We recommend you contact your local product supplier should you not know the product approval number for any of the applicable listed products. Statewide approved products are listed online @ [www.floridabuilding.org](http://www.floridabuilding.org)

Category/Subcategory	Manufacturer	Product Description	Approval Number(s)
<b>1. EXTERIOR DOORS</b>			
A. SWINGING			
B. SLIDING			
C. SECTIONAL/ROLL UP			
D. OTHER			
<b>2. WINDOWS</b>			
A. SINGLE/DOUBLE HUNG	Simonton	5050 Reflections	5167.13
B. HORIZONTAL SLIDER			
C. CASEMENT			
D. FIXED	Simonton	5050 Reflections	5177.19
E. MULLION			
F. SKYLIGHTS			
G. OTHER			
<b>3. PANEL WALL</b>			
A. SIDING			
B. SOFFITS			
C. STOREFRONTS			
D. GLASS BLOCK			
E. OTHER			
<b>4. ROOFING PRODUCTS</b>			
A. ASPHALT SHINGLES			
B. NON-STRUCTURAL METAL			
C. ROOFING TILES			
D. SINGLE PLY ROOF			
E. OTHER			
<b>5. STRUCTURAL COMPONENTS</b>			
A. WOOD CONNECTORS			
B. WOOD ANCHORS			
C. TRUSS PLATES			
D. INSULATION FORMS			
E. LINTELS			
F. OTHERS			
<b>6. NEW EXTERIOR</b>			
<b>ENVELOPE PRODUCTS</b>			

The products listed below did not demonstrate product approval at plan review. I understand that at the time of inspection of these products, the following information must be available to the inspector on the jobsite; 1) copy of the product approval, 2) performance characteristics which the product was tested and certified to comply with, 3) copy of the applicable manufacturers installation requirements.

Further, I understand these products may have to be removed if approval cannot be demonstrated during inspection.


  
 Contractor OR Agent Signature

06/28/2024

Date

NOTES: \_\_\_\_\_


**MODEL DESIGNATION:** Simonton Double Hung Series 43-40 / 43-45 Vinyl Window

**MAXIMUM OVERALL NOMINAL SIZE:** See Size Chart

**DESIGN PRESSURE RATING:** See Size Chart

**USABLE CONFIGURATIONS:** X  
X

**GENERAL DESCRIPTION:** The head, sill, and side jambs are extruded PVC. The wall thickness through which the anchor screw penetrates is a minimum of 0.070".


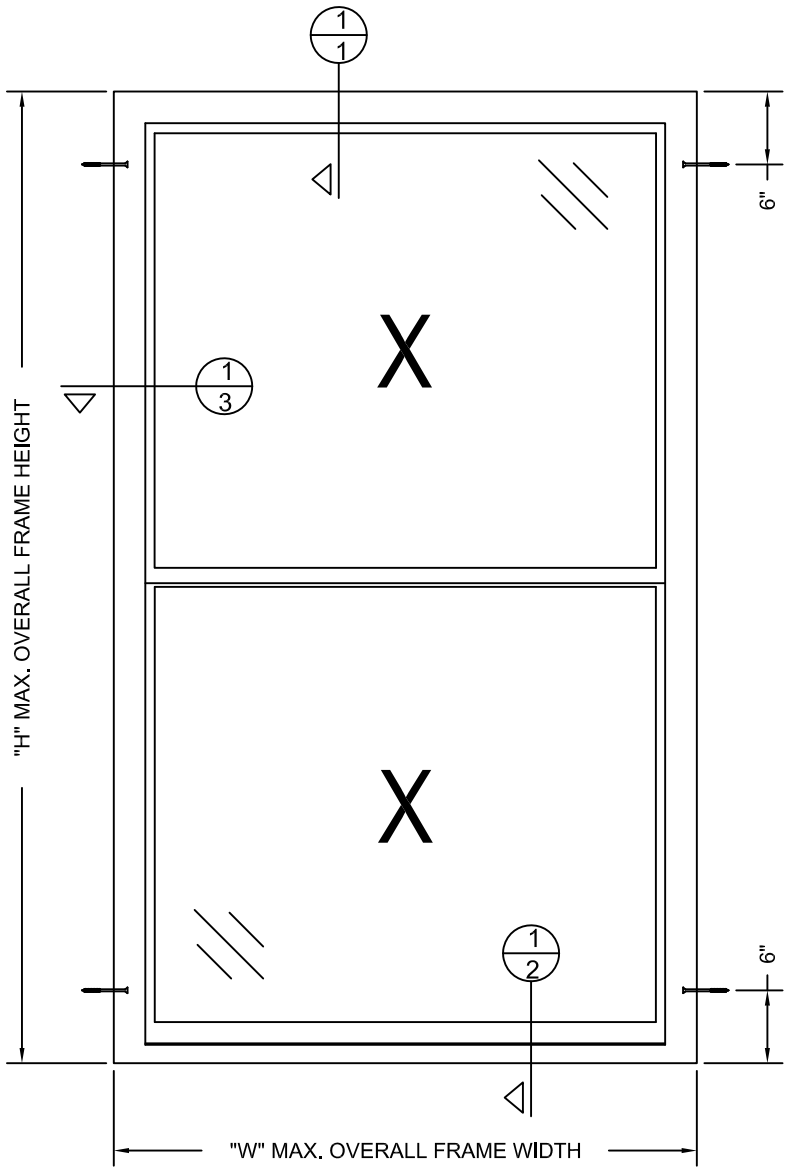


SIZE CHART		
OVERALL SIZE		DP RATING
WIDTH "W"	HEIGHT "H"	
46"	84"	±25 PSF
36"	72"	±30 PSF
44"	63"	±35 PSF
48"	80"	
52"	71"	
36"	63"	±45 PSF
44"	63"	
32"	62"	±50 PSF
36"	74"	


NOTES:


- THIS INSTALLATION HAS BEEN EVALUATED FOR USE IN LOCATIONS ADHERING TO THE FLORIDA BUILDING CODES AND WHERE PRESSURE REQUIREMENTS AS DETERMINED BY ASCE 7 MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES DO NOT EXCEED THE DESIGN PRESSURE RATINGS HEREIN, FOR USE OUTSIDE THE H.V.H.Z.
- ALL INTERIOR AND EXTERIOR PERIMETER SURFACES OF THE WINDOW MUST BE CAULKED.
- ANCHORS SHALL BE AS SPECIFIED AND SPACED AS SHOWN. ANCHOR EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO AND INTO WOOD.
- THE RESPONSIBILITY FOR SELECTION OF SIMONTON PRODUCTS TO MEET ANY APPLICABLE LOCAL LAWS, BUILDING CODES, ORDINANCES, OR OTHER SAFETY REQUIREMENTS RESTS SOLELY WITH THE ARCHITECT, BUILDING OWNER, OR CONTRACTOR.
- SHIMS ARE OPTIONAL. MAX. SHIM STACK IS 1/4".
- WOOD BUCKS (BY OTHERS) MUST BE ENGINEERED AND ANCHORED PROPERLY TO TRANSFER LOADS TO THE STRUCTURE.
- SCREWS SHOULD BE A MINIMUM OF 3/4" FROM THE EDGE OF THE WOOD.
- WHEN USED IN AREAS REQUIRING IMPACT PROTECTION, THIS PRODUCT REQUIRES THE USE OF APPROVED IMPACT RESISTANT SHUTTERS OR OTHER EXTERNAL PROTECTION.
- FLASHING SHOULD BE APPLIED USING THE ASTM E 2112 METHOD APPROPRIATE FOR THE OPENING INTO WHICH THE WINDOW IS BEING INSTALLED.
- INSTALLATION SCREWS MUST BE AT LEAST 3/4" FROM THE EDGE OF THE WOOD..
- GLAZING SHALL COMPLY WITH ASTM E 1300.
- DESIGNATION "X" IS FOR OPERABLE PANEL AND "O" IS FOR FIXED PANEL
- USE 100% PURE SILICONE CAULK COMPLIANT WITH AAMA 800 SECTION I - SEALANT SPECIFICATIONS FOR USE WITH ARCHITECTURAL FENESTRATION PRODUCTS. FOR MORE DETAILS VISIT SIMONTON.COM.
- USE A BACKER ROD ON ALL JOINTS >3/4" DEEP AND/OR WIDER THAN 1/4". FINISHED CAULK JOINT SHOULD BE A MINIMUM OF 3/8" DEEP.

NO P.E. SEAL REQUIRED  
INSTALLATION SUPPORTED  
BY AAMA TEST REPORTS

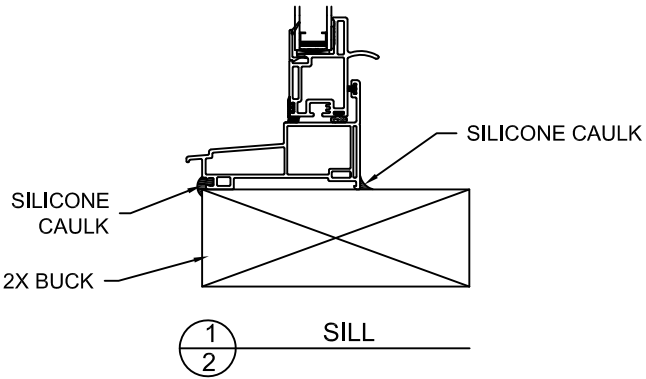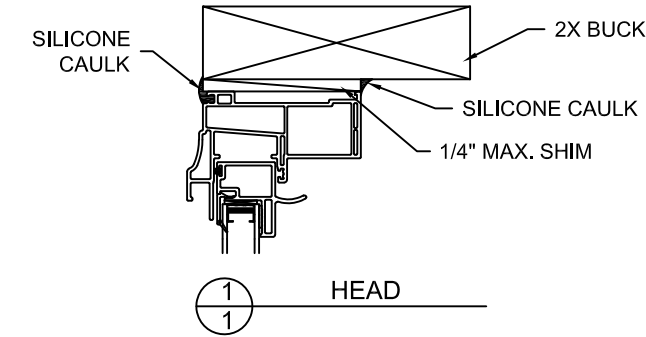

REV. #:	REVISIONS:	REVISED BY:	DATE:
2	ADDED MIN. EDGE DIST. NOTE.	B.J.S.	06/17/15
3	ADDED NOTES 12 & 13 - AAMA 800	LMH	08/15/16
4	ADDITION TO SIZE CHART.	LMH	12/01/17
5	CORRECTED SIZE CHART DIMENSION.	LMH	07/11/19
6	ADDED DP25 TO SIZE CHART	LMH	09/25/19

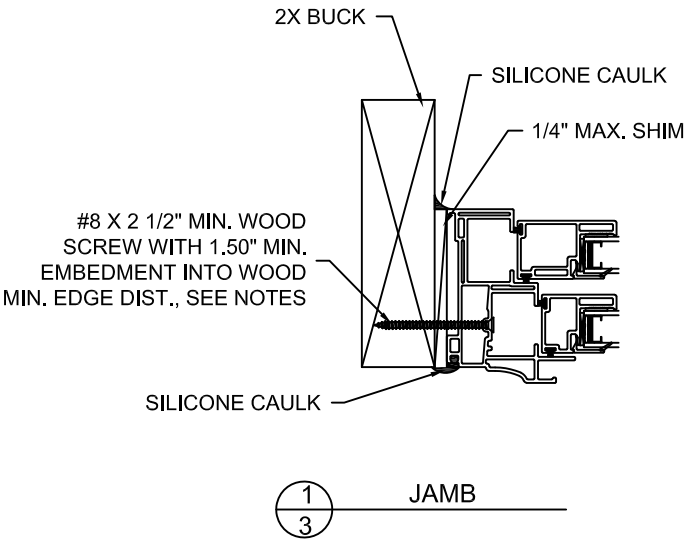

<p><b>DISCLOSURE STATEMENT</b></p> <p>This document is the property of Simonton Windows, which retains all proprietary and other rights to its subject matter. This document is provided to the recipient on the expressed condition that it is not to be disclosed, reproduced in whole or part, nor used in conjunction with the design, manufacture or repair of goods for anyone other than Simonton Windows without its consent. This restriction does not limit the recipient's rights to utilize information contained in this document which is properly obtained from another source.</p> <p>FILE: FL 5167</p>	MATERIAL:		<p>Dimensional Tolerances <u>Unless Otherwise Specified</u></p> <p>Decimals      Angles</p> <p>.X ± .03      0° 30 min. .XX ± .01 .XXX ± .005</p>	<div> <b>SIMONTON®</b> W I N D O W S</div> <p>1 Cochrane Avenue Pennsboro, WV 26415</p> <div><div>SCALE: FIT</div><div>SHEET: 1 of 1</div></div> <p>SERIES: 43-40 / 43-45 DOUBLE HUNG</p> <p>TITLE: 2X BUCK INSTALLATION (AS TESTED)</p>	SIZE: B	DRAWING NO.: IN0432b	REV.: 6
	RMS FINISH:				DRAWN BY: T.D.D.	DATE: 09/04/09	
	EXCEPT AS NOTED				CHECKED BY:	DATE:	
	ALLOY & TEMPER:				APPR'V'D BY:	DATE:	
	WEIGHT:	VOLUME:					
	SURFACE AREA:	PERIMETER:					
	FINISH TREATMENT:						

MODEL DESIGNATION: Simonton Series 43-35 Vinyl Fixed Window

MAXIMUM OVERALL NOMINAL SIZE: See Size Chart





DESIGN PRESSURE RATING: See Size Chart

USABLE CONFIGURATIONS: 0

GENERAL DESCRIPTION: The head, sill, and side jambs are extruded PVC. The wall thickness through which the anchor screw penetrates is a minimum of 0.070".


NO P.E. SEAL REQUIRED  
INSTALLATION SUPPORTED  
BY AAMA TEST REPORTS

REV. #	REVISIONS:	REVISED BY:	DATE:
2	ADDED "NO PE SEAL REQUIRED" & "43-40 ONLY" NOTES.	T.D.D.	10/17/08
3	UPDATED SIZE CHART PER TEST REPORT #86427.01.	T.D.D.	11/23/09
4	UPDATED NOTES AND GENERAL DESCRIPTION.	T.D.D.	03/31/11
5	ADDED GLAZING DETAILS.	T.D.D.	06/08/11
6	CHANGED SASH-FRAME CODE AND FRAME PROFILES PER NEW TESTING.	T.D.D.	02/23/12
7	ADDED MIN. EDGE DIST. NOTES	GJM	06/17/15

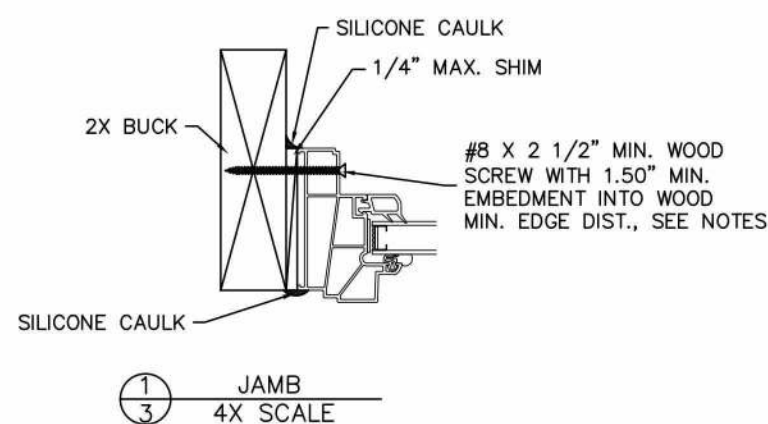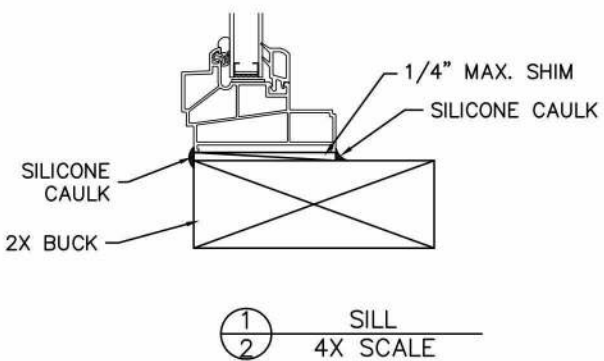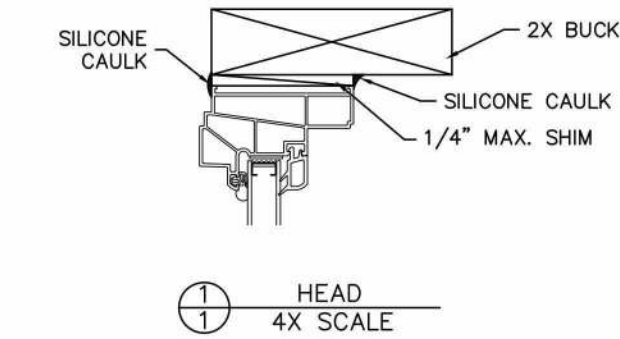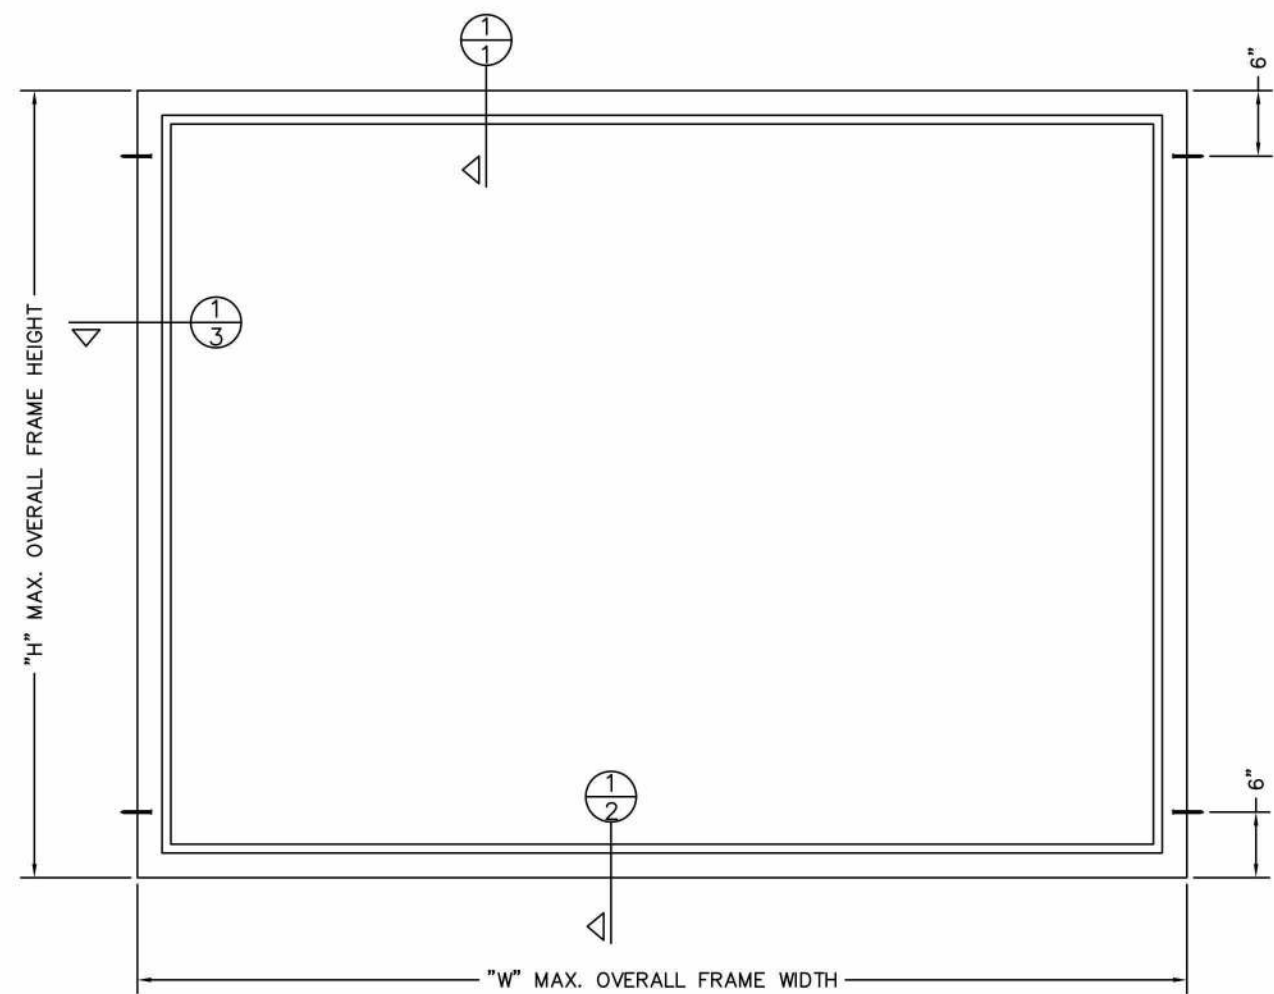

- NOTES:
- 1. This installation has been evaluated for use in locations adhering to the Florida Building Codes and where pressure requirements as determined by ASCE 7 Minimum Design Loads for Buildings and Other Structures do not exceed the design pressure ratings herein, for use outside the H.V.H.Z.
  - 2. All exterior perimeter surfaces of the window must be caulked. Interior caulking is optional unless noted otherwise.
  - 3. Anchors shall be as specified and spaced as shown. Anchor embedment to base material shall be beyond wall dressing or stucco and into wood.
  - 4. The responsibility for selection of Simonton products to meet any applicable local laws, building codes, ordinances, or other safety requirements rests solely with the architect, building owner, or contractor.
  - 5. Shims are optional. Max. shim stack is 1/4".
  - 6. Wood bucks (by others) must be engineered and anchored properly to transfer loads to the structure.
  - 7. When used in areas requiring impact protection this product **REQUIRES** the use of approved impact resistant shutters or other external protection.
  - 8. Flashing should be applied using the ASTM E 2112 methodology appropriate for the opening into which the window is being installed.
  - 9. Installation screws must be at least 3/4" from the edge of the wood.
  - 10. Glazing shall comply with ASTM E 1300-04.

SIZE CHART		
OVERALL SIZE		DP RATING
WIDTH "W"	HEIGHT "H"	
96"	72"	±40 PSF
74"	63"	±50 PSF
80"	48"	

<b>DISCLOSURE STATEMENT</b> This document is the property of Simonton Windows, which retains all proprietary and other rights to its subject matter. This document is provided to the recipient on the expressed condition that it is not to be disclosed, reproduced in whole or part, nor used in conjunction with the design, manufacture or repair of goods for anyone other than Simonton Windows without its consent. This restriction does not limit the recipient's rights to utilize information contained in this document which is properly obtained from another source.	MATERIAL:		Dimensional Tolerances Unless Otherwise Specified	 <b>SIMONTON</b> WINDOWS 1 Cochrane Avenue Pennsboro, WV 26415	SIZE: DRAWING NO.: B IN0094	REV.: 7
	RMS FINISH:				DRAWN BY: G.L.S.	DATE: 11/9/06
	ALLOY & TEMPER:				CHECKED BY:	DATE:
	WEIGHT:	VOLUME:			APPR'VD BY:	DATE:
	SURFACE AREA:	PERIMETER:			43-35 PICTURE (FIXED) WINDOW	
FILE: IN0094	FINISH TREATMENT:		Decimals Angles .X ± .03 .XX ± .01 .XXX ± .005	SCALE: FIT SHEET: 1 of 1	TITLE: 2X BUCK INSTALLATION	