
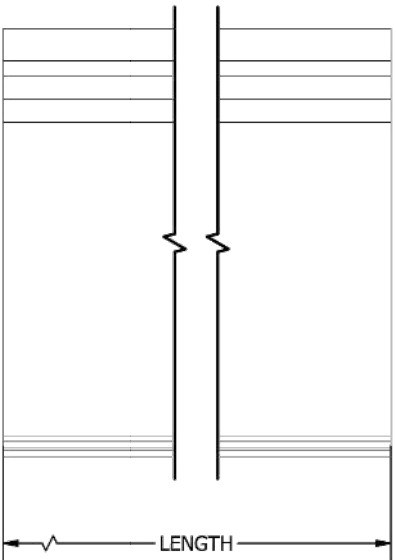
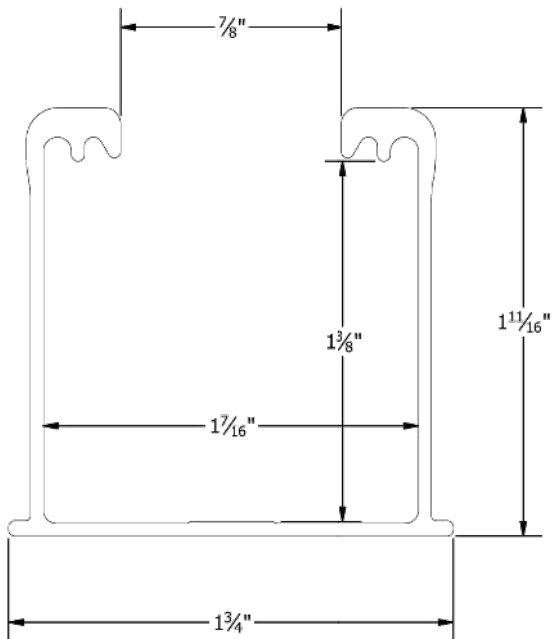


PART # TABLE		
P/N	DESCRIPTION	LENGTH
084RLM1	NXT HORIZON RAIL 84" MILL	84"
084RLD1	NXT HORIZON RAIL 84" DARK	84"
168RLM1	NXT HORIZON RAIL 168" MILL	168"
168RLD1	NXT HORIZON RAIL 168" DARK	168"
208RLM1	NXT HORIZON RAIL 208" MILL	208"
208RLD1	NXT HORIZON RAIL 208" DARK	208"
246RLM1	NXT HORIZON RAIL 246" MILL	246"
246RLD1	NXT HORIZON RAIL 246" DARK	246"

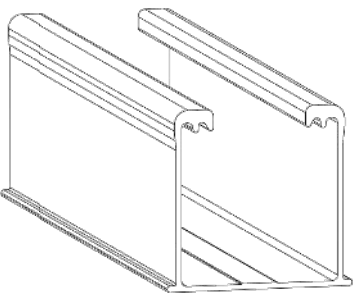

1411 BROADWAY BLVD. NE
ALBUQUERQUE, NM 87102 USA
PHONE: 505.242.6411
WWW.UNIRAC.COM

PRODUCT LINE: NXT HORIZON

DRAWING TYPE: PART DETAIL

DESCRIPTION: RAIL

REVISION DATE: 9/13/2021

DRAWING NOT TO SCALE
ALL DIMENSIONS ARE
NOMINAL




PRODUCT PROTECTED BY
ONE OR MORE US PATENTS
LEGAL NOTICE

NH-P01

SHEET

PART # TABLE		
P/N	DESCRIPTION	LENGTH
RLSPLCM1	NXT HORIZON RAIL SPLICE	10"

4X - 5/16"-18 x 5/8"
HEX FLANGE SCREW - TYPE F

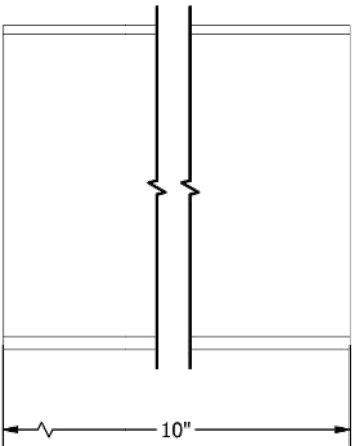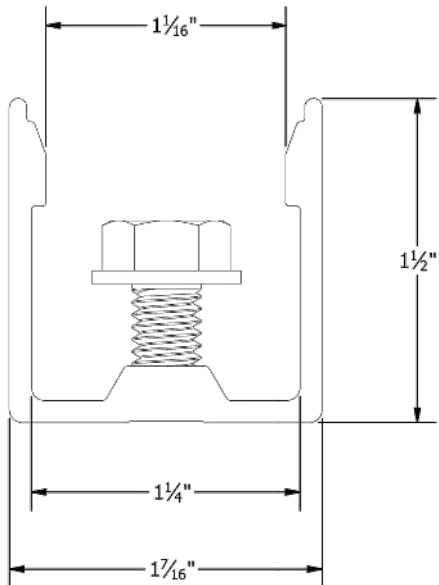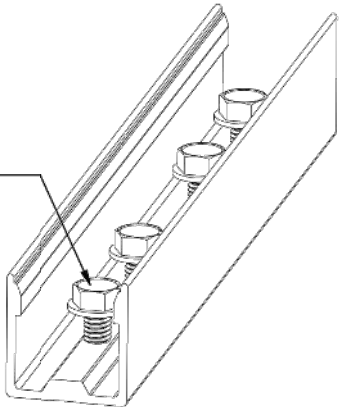

1411 BROADWAY BLVD. NE
ALBUQUERQUE, NM 87102 USA
PHONE: 505.242.6411
WWW.UNIRAC.COM

PRODUCT LINE: NXT HORIZON

DRAWING TYPE: PART DETAIL

DESCRIPTION: RAIL SPLICE

REVISION DATE: 9/22/2021

DRAWING NOT TO SCALE
ALL DIMENSIONS ARE
NOMINAL

PRODUCT PROTECTED BY
ONE OR MORE US PATENTS
LEGAL NOTICE


NH-P02

SHEET



PRO CUSTOM SOLAR LLC D.B.A. MOMENTUM SOLAR
325 HIGH STREET, METUCHEN, NJ 08840
(732) 902-6224
MOMENTUMSOLAR.COM

**PROFESSIONAL
ENGINEERING**

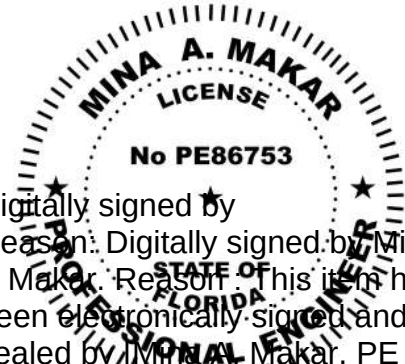

Digitally signed by
Reason: Digitally signed by Mina
A Makar. Reason: This item has
been electronically signed and
sealed by [Mina A. Makar, PE
86753, COA # 33404] on the
Date and Time Stamp shown.
Reason: This item has been
electronically signed and sealed by
[Mina A. Makar, PE 86753, COA #
33404] on the Date and Time Stamp
shown. Printed copies of this document are not
considered signed and sealed
and the signature must be verified
on any electronic copies

Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies

Date: 2024.06.05 02:06:50 -05:00

SOLAR CONTRACTOR

CAMERON CHRISTENSEN
CERTIFIED SOLAR CONTRACTOR LICENSE NUMBER: CVC57036
MOMENTUM SOLAR
5728 MAJOR BLVD. SUITE 307, ORLANDO FL. 32819

CUSTOMER INFORMATION

CRYSTAL HAIR - MS151756
274 NORTHWEST OPEN COURT
LAKE CITY, FL 32055
(386) 288-8884

PV SYSTEM INFORMATION

SYSTEM SIZE (DC): 9.84 KW
24 MODULES: HANWHA Q.PEAK DUO BLK
ML-G10+ 410
24 INVERTERS: ENPHASE
IQ7PLUS-72-2-US

PROJECT INFORMATION

INITIAL	DATE: 6/5/2024	DESIGNER: AKL
REV:	DATE:	DESIGNER:
REV:	DATE:	DESIGNER:

ATTACHMENT DETAIL

PV-1.1

The right way to attach almost anything to metal roofs!

S-5![®]

The Right Way!

CorruBracket[™]


CorruBracket[™] can be used to mount almost anything to corrugated metal roofing and is compatible with 7/8" and 3/4" corrugated roofing. No messy sealants to apply! No chance for leaks! The CorruBracket comes with factory-applied butyl sealant already in the base, and the S-5![®] patented reservoir conceals the sealant, preventing UV degradation.

Installation is simple! CorruBracket is mounted directly into the supporting structure of the roof, i.e. roof decking, wood or steel purlins, or trusses. No surface preparation is necessary; simply wipe away excess oils and debris, peel the release paper, align, and apply. Secure through the pre-punched holes using the appropriate screws for the supporting structure.

CorruBracket is so strong, it will even support heavy-duty applications like snow retention. For corrugated profiles, the CorruBracket is the perfect match for our ColorGard[®] snow retention system. CorruBracket is economical and facilitates quick and easy installation.

S-5![®] CorruBracket[™] is the right way to attach almost anything to 7/8" and 3/4" corrugated roofing, including PV via DirectAttached[™] or rail methods.

888-825-3432 | www.S-5.com

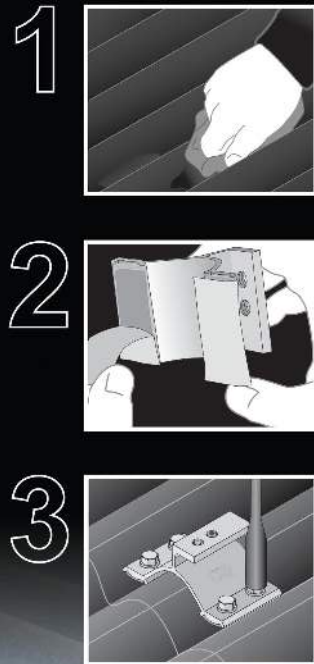

CorruBracket[™]

S-5![®]


The Right Way!

CorruBracket[™] is extremely versatile. It can be used for almost any attachment need on 7/8" and 3/4" corrugated metal roofing. No messy sealants to apply. The factory-applied butyl sealant waterproofs and makes installation a snap!


Each CorruBracket[™] comes with factory-applied butyl sealant in the base. CorruBracket is compatible with most common metal roofing materials. For design assistance, ask your distributor, or use our web-based calculator at www.S-5.com for job-specific system engineering and design of your next snow retention project. Also, please visit our website for more information including CAD details, metallurgical compatibilities and specifications.

The CorruBracket has been tested for load-to-failure results on wood decking, and metal and wood purlins. The independent lab test data found at www.S-5.com can be used for load-critical designs and applications. S-5![®] holding strength is unmatched in the industry.

Example Profile

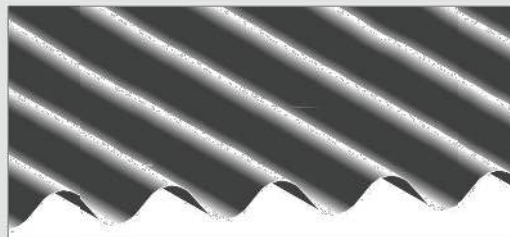

CorruBracket[™]

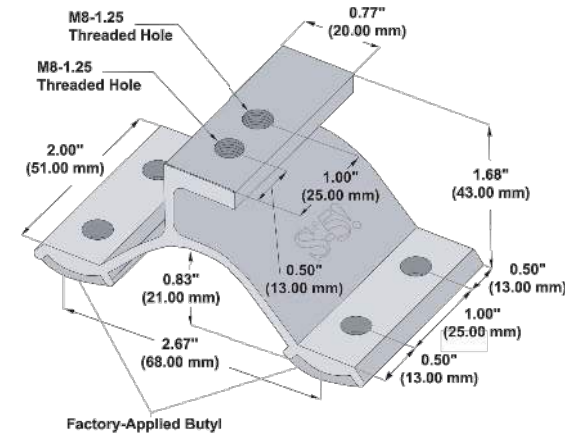


Please note: All measurements are rounded to the second decimal place. Contact your distributor for information about hardware requirements.

Example Applications

S-5-PV Kit (DirectAttached[™] or Rail)



ColorGard[®]

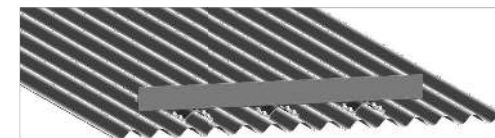

S-5![®] Warning! Please use this product responsibly!

Products are protected by multiple U.S. and foreign patents. For published data regarding holding strength, bolt torque, patents and trademarks visit the S-5! website at www.S-5.com.


Copyright 2013, Metal Roof Innovations, Ltd. S-5! products are patent protected. S-5! aggressively protects its patents, trademarks, and copyrights. Version 120517.

Distributed by



PRO CUSTOM SOLAR LLC D.B.A. MOMENTUM SOLAR
325 HIGH STREET, METUCHEN, NJ 08840
(732) 902-6224
MOMENTUMSOLAR.COM

PROFESSIONAL ENGINEERING

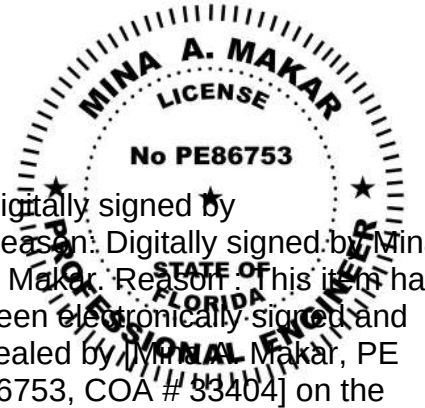

Digitally signed by Mina A. Makar. Reason: Digitally signed by Mina A. Makar. Reason: This item has been electronically signed and sealed by Mina A. Makar, PE 86753, COA # 33404] on the Date and Time Stamp shown. Reason: Digitally signed by Mina A. Makar. Reason: This item has been electronically signed and sealed by Mina A. Makar, PE 86753, COA # 33404] on the Date and Time Stamp shown. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies

Date: 2024.06.05 02:06:50 -05:00

SOLAR CONTRACTOR

CAMERON CHRISTENSEN
CERTIFIED SOLAR CONTRACTOR LICENSE NUMBER: CVC57036
MOMENTUM SOLAR
5728 MAJOR BLVD. SUITE 307, ORLANDO FL. 32819

CUSTOMER INFORMATION

CRYSTAL HAIR - MS151756
274 NORTHWEST OPEN COURT
LAKE CITY, FL 32055
(386) 288-8884

PV SYSTEM INFORMATION

SYSTEM SIZE (DC): 9.84 KW
24 MODULES: HANWHA Q.PEAK DUO BLK ML-G10+ 410
24 INVERTERS: ENPHASE IQ7PLUS-72-2-US

PROJECT INFORMATION

INITIAL:	DATE: 6/5/2024	DESIGNER: AKL
REV:	DATE:	DESIGNER:
REV:	DATE:	DESIGNER:

ATTACHMENT DETAIL

PV-1.1 (2)



IQ Series Microinverters extend the reliability standards set forth by previous generations and undergo over a million hours of power-on testing, enabling Enphase to provide an industry-leading warranty of up to 25 years.

- Lightweight and simple
- Faster installation with improved, lighter two-wire cabling
- Built-in rapid shutdown compliant (NEC 2014 & 2017)

- Optimized for high powered 60-cell/120 half-cell and 72-cell/144 half-cell* modules
- More than a million hours of testing
- Class II double-insulated enclosure
- UL listed

- Complies with advanced grid support, voltage and frequency ride-through requirements
- Remotely updates to respond to changing grid requirements
- Configurable for varying grid profiles
- Meets CA Rule 21 (UL 1741-SA)


Enphase IQ 7 and IQ 7+ Microinverters

INPUT DATA (AC)		IQ 7-60-2-US		IQ7PLUS-72-2-US	
Commonly used module pairings¹		235 W - 350 W +		235 W - 440 W +	
Module compatibility		60-cell/120 half-cell PV modules only		60-cell/120 half-cell and 72-cell/144 half-cell PV modules	
Maximum input DC voltage		48 V		60 V	
Peak power tracking voltage		27 V - 37 V		27 V - 45 V	
Operating range		16 V - 48 V		16 V - 60 V	
Min/Max start voltage		22 V / 48 V		22 V / 60 V	
Max DC short circuit current (module Isc)		15 A		15 A	
Overvoltage class DC port		II		II	
DC port backfeed current		0 A		0 A	
PV array configuration		1 x 1 ungrounded array; No additional DC side protection required; AC side protection requires max 20A per branch circuit			
OUTPUT DATA (AC)		IQ 7 Microinverter		IQ 7+ Microinverter	
Peak output power		250 VA		295 VA	
Maximum continuous output power		240 VA		290 VA	
Nominal (L-L) voltage/range²		240 V / 211-264 V		240 V / 211-264 V	
Maximum continuous output current		1.0 A (240V)		1.21 A (240 V) 1.39 A (208 V)	
Nominal frequency		60 Hz		60 Hz	
Extended frequency range		47 - 68 Hz		47 - 68 Hz	
AC short circuit fault current over 3 cycles		5.8 Arms		5.8 Arms	
Maximum units per 20 A (L-L) branch circuit³		16 (240 VAC) 13 (208 VAC)		13 (240 VAC) 11 (208 VAC)	
Overvoltage class AC port		III		III	
AC port backfeed current		18 mA		18 mA	
Power factor setting		1.0		1.0	
Power factor (adjustable)		0.85 leading ... 0.85 lagging		0.85 leading ... 0.85 lagging	
EFFICIENCY		@240 V @208 V		@240 V @208 V	
Peak efficiency		97.6 % 97.6 %		97.5 % 97.3 %	
CEC weighted efficiency		97.0 % 97.0 %		97.0 % 97.0 %	
MECHANICAL DATA					
Ambient temperature range		-40°C to +55°C			
Relative humidity range		4% to 100% (condensing)			
Connector type		MC4 (or Amphenol H4 UTX with additional Q-DCC-5 adapter)			
Dimensions (HxWxD)		212 mm x 175 mm x 30.2 mm (without bracket)			
Weight		1.08 kg (2.38 lbs)			
Cooling		Natural convection - No fans			
Approved for wet locations		Yes			
Pollution degree		PD3			
Enclosure		Class II double-insulated, corrosion resistant polymeric enclosure			
Environmental category / UV exposure rating		NEMA Type 6 / outdoor			
FEATURES					
Communication		Power Line Communication (PLC)			
Monitoring		Enlighten Manager and MyEnlighten monitoring options. Both options require installation of an Enphase IQ Envoy.			
Disconnecting means		The AC and DC connectors have been evaluated and approved by UL for use as the load-break disconnect required by NEC 690.			
Compliance		CA Rule 21 (UL 1741-SA) UL 62109-1, UL1741/IEEE1547, FCC Part 15 Class B, ICES-0003 Class B, CAN/CSA-C22.2 NO. 107.1-01 This product is UL Listed as PV Rapid Shut Down Equipment and conforms with NEC 2014, NEC 2017, and NEC 2020 section 690.12 and C22.1-2015 Rule 64-218 Rapid Shutdown of PV Systems, for AC and DC conductors, when installed according manufacturer's instructions.			

- 



PROFESSIONAL ENGINEERING

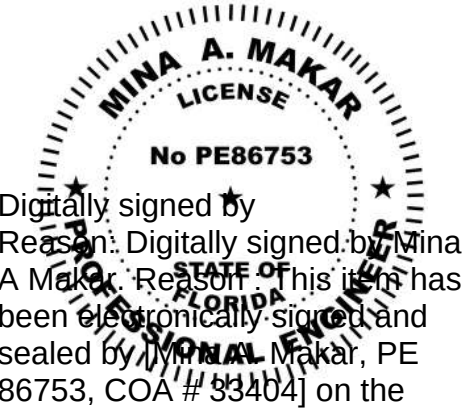

Digitally signed by
Reason: Digitally signed by Mina
A Makar, Reason: This item has
been electronically signed and
sealed by [Mina Makar, PE
86753, COA # 33404] on the
Date and Time Stamp shown.
Reason: This item has been
electronically signed and sealed by
[Mina Makar, PE 86753, COA #
33404] on the Date and Time Stamp
shown on any electronic copies
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies
Date: 2024.06.05 02:06:50 -05:00

CAMERON CHRISTENSEN
CERTIFIED SOLAR CONTRACTOR LICENSE NUMBER: CVC57036
MOMENTUM SOLAR
5728 MAJOR BLVD. SUITE 307, ORLANDO FL. 32819

CRYSTAL HAIR - MS151756
274 NORTHWEST OPEN COURT
LAKE CITY, FL 32055
(386) 288-8884

SYSTEM SIZE (DC): 9.84 KW
24 MODULES: HANWHA Q.PEAK DUO BLK
ML-G10+ 410
24 INVERTERS: ENPHASE
IQ7PLUS-72-2-US

INITIAL	DATE: 6/5/2024	DESIGNER: AKL
REV:	DATE:	DESIGNER:
REV:	DATE:	DESIGNER:

INVERTER DETAIL

PV-1.2


PV-1.3

ROOF	PANEL COUNT	TILT	AZIMUTH	SHADING	LANDSCAPE MAX SPAN (ROOF AREA 1/2/3)	PORTRAIT MAX SPAN (ROOF AREA 1/2/3)	LANDSCAPE MAX CANTILEVER	PORTRAIT MAX CANTILEVER
R1	24	18°	267°	75%	48 /48 /48	48 /48 /48	16 /10 /10	16 /10 /10



PRO CUSTOM SOLAR LLC D.B.A. MOMENTUM SOLAR
325 HIGH STREET, METUCHEN, NJ 08840
(732) 902-6224
MOMENTUMSOLAR.COM

PROFESSIONAL ENGINEERING

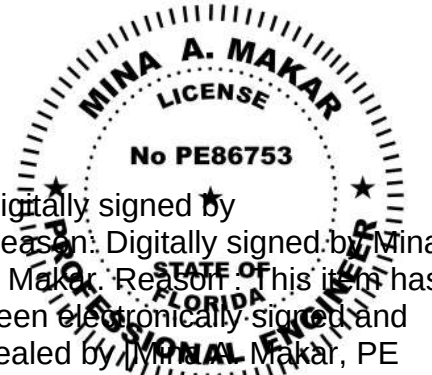

Digitally signed by Reason: Digitally signed by Mina A Makar. Reason: This item has been electronically signed and sealed by Mina A Makar, PE 86753, COA # 33404] on the Date and Time Stamp shown. ~~using a digital signature. Printed copies of this document are not electronically signed and sealed by Mina A Makar, PE 86753, COA # 33404 and the signature must be verified on any electronic copies~~

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies

Date: 2024.06.05 02:06:50 -05:00

SOLAR CONTRACTOR

CAMERON CHRISTENSEN
CERTIFIED SOLAR CONTRACTOR LICENSE NUMBER: CVC57036
MOMENTUM SOLAR
5728 MAJOR BLVD. SUITE 307, ORLANDO FL. 32819

CUSTOMER INFORMATION

CRYSTAL HAIR - MS151756
274 NORTHWEST OPEN COURT
LAKE CITY, FL 32055
(386) 288-8884

PV SYSTEM INFORMATION


SYSTEM SIZE (DC): 9.84 KW
24 MODULES: HANWHA Q.PEAK DUO BLK
ML-G10+ 410
24 INVERTERS: ENPHASE
IQ7PLUS-72-2-US

PROJECT INFORMATION

INITIAL	DATE: 6/5/2024	DESIGNER: AKL
REV:	DATE:	DESIGNER:
REV:	DATE:	DESIGNER:

ROOF LAYOUT

PV-2

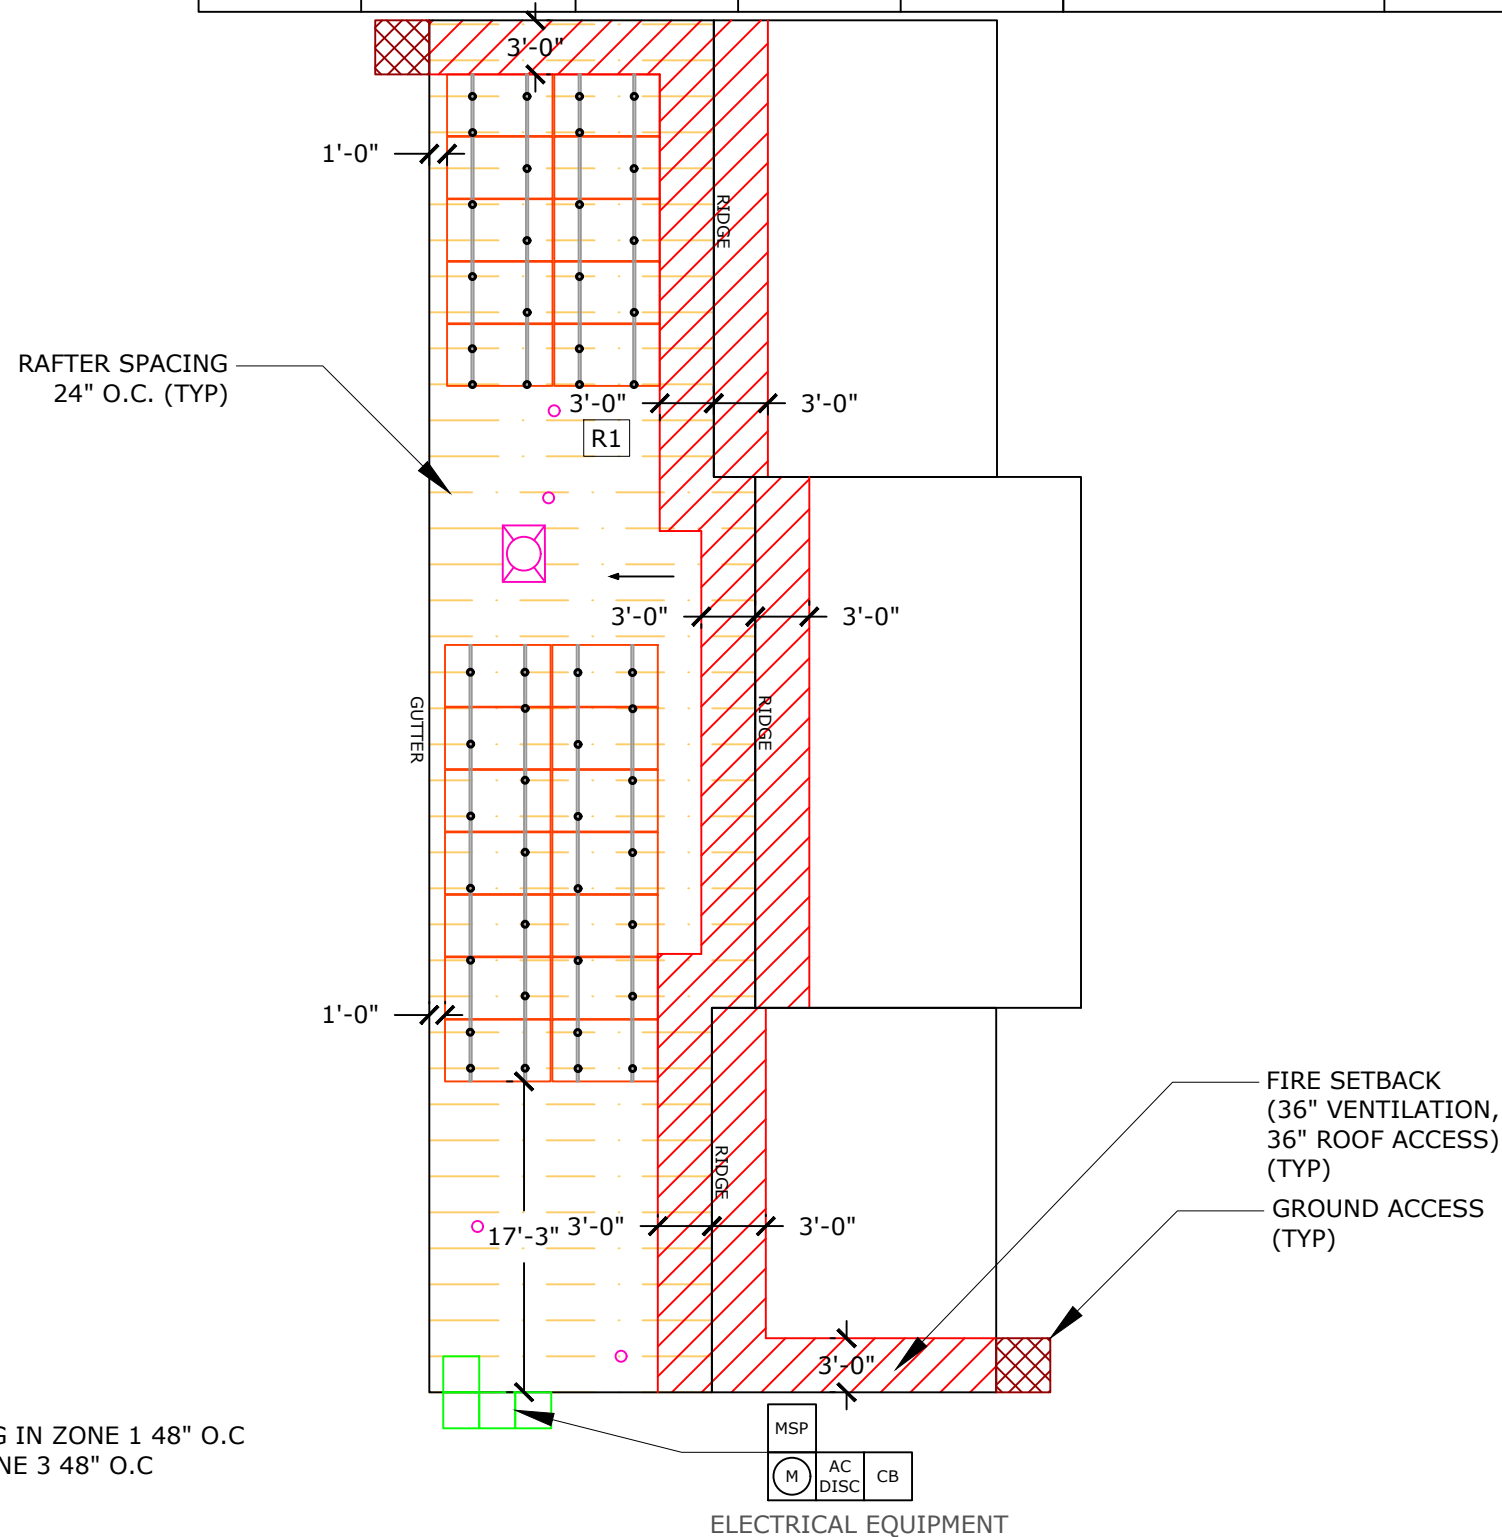

CLAMPING MAX SPACING IN ZONE 1 48" O.C
AND IN ZONE 2 AND ZONE 3 48" O.C

NOTE:

1. ROOF COVERING MATERIAL IS COMPOSED OF CORRUGATED METAL.
2. EXACT ATTACHMENT LOCATION AND QUANTITY OF ATTACHMENTS ARE BASED ON EXISTING RAFTER LOCATIONS OBTAINED FROM FIELD MEASUREMENTS. THE LOCATION AND QUANTITY OF ATTACHMENTS MAY VARY BASED ON RAFTER LAYOUT START POINT, SPACING VARIATIONS AND ROOFING TYPE. VERIFY IN THE FIELD ALL RAFTER LOCATIONS AND ADJUST LAYOUT AS REQUIRED. A TILE ROOF WILL PRODUCE A STAGGERED ATTACHMENT LAYOUT BECAUSE OF EXISTING STAGGERED TILE JOINT LOCATIONS.

TOTAL SQUARE FOOTAGE OF ROOF: 2677 SQFT

SQUARE FOOTAGE OF SOLAR ARRAY:506.9 SQFT

PERCENTAGE OF SOLAR ROOF COVERAGE: 18.94%

18" RIDGE SETBACK SHALL BE REQUIRED

SYMBOL LEGEND			
	MAIN SERVICE PANEL		CHIMNEY
	SUB-PANEL		SKYLIGHT
	UTILITY METER		VENT
	AC DISCONNECT		PIPE VENT
	UTILITY DISCONNECT		FAN
	LOAD CENTER		SATELLITE DISH
	NEMA 3R BOX W/ ENVOY-S		FIRE SETBACKS
	COMBINER BOX		MIN 3'x3' GROUND ACCESS POINT
	MODULE		PITCH DIRECTION
		WIND PRESSURE ZONE LINES. REFER TO PV-2.2 FOR ADDITIONAL INFO	

ELECTRICAL NOTES:

1. ALL CALCULATIONS FOR VOC, VMAX, IMP AND ISC HAVE BEEN CALCULATED USING THE MANUFACTURED STRING CALCULATOR BASED ON ASHRAE 2% HIGH AND EXTREME MINIMUM TEMPERATURE COEFFICIENTS.
2. THE ENTIRE ARRAY IS BONDED ACCORDING TO (NEC 690.43(A) THROUGH (D) WITH 250.134 OR 250.136.
3. THIS SYSTEM COMPLIES WITH NEC 2020
4. BRANCH CIRCUIT CALCULATION FOR WIRE TAG 1 DISPLAYS THE LARGEST BRANCH CIRCUIT IN SYSTEM. OTHER BRANCH CIRCUITS SHALL HAVE LOWER DESIGN CURRENT THAN THE ONE SHOWN. IN ADDITION, VOLTAGE DROP CALCULATIONS FROM PANELS TO THE COMBINER BOX SHALL BE SHOWN IN A SIMILAR FASHION
5. ALL CONDUCTORS ARE SIZED BASED ON NEC 2020 ARTICLE 310
6. ALL EQUIPMENT INSTALLED IS RATED AT 75°C
7. INVERTER NOC (NOMINAL OPEN CURRENT) OBTAINED FROM EQUIPMENT DATASHEET
8. CONTRACTOR SHALL BE RESPONSIBLE FOR COMPLYING WITH ALL LOCAL AND NATIONAL CODE REQUIREMENTS.
9. EACH MODULE MUST BE GROUNDED ACCORDING TO USER INSTRUCTIONS
10. ALL EQUIPMENT SHALL BE LISTED PER NEC 690.4(B)
11. PER NEC 690.13, 690.15, PROVIDE A WARNING SIGN AT ALL LOCATIONS WHERE TERMINALS OF THE DISCONNECTING MEANS MAY BE ENERGIZED IN THE OPEN POSITION> SIGN SHALL READ *WARNING - ELECTRIC SHOCK HAZARD - DO NOT TOUCH TERMINALS - OR EQUIVALENT.
12. PER NEC 705.10, PROVIDE A PERMANENT PLAQUE OR DIRECTORY SHOWING ALL ELECTRIC POWER SOURCES ON THE PREMISES AT SERVICE ENTRANCE.
13. INTERCONNECTION METHOD SHALL COMPLY WITH NEC 705.12
14. AND OPTION FOR A SINGLE CIRCUIT BRANCH TO BE SPLIT INTO TWO SUB-CIRCUIT BRANCHES IS ACCEPTABLE.
15. ALL CONDUCTORS MUST BE COPPER.
16. NEUTRAL AND EQUIPMENT GROUNDING CONDUCTOR BONDED AS PER NEC 250.24(C).
17. EQUIPMENT GROUNDING CONDUCTOR IS CONNECTED TO A GROUNDING ELECTRODE SYSTEM PER 250.54(D).
18. FUSES FOR PV DISCONNECT HAVE AIC RATINGS OF 200KA AC AND 20KA DC.
19. SUPPLY SIDE CONNECTION SHALL BE MADE USING ILSCO INSULATION PIERCING CONNECTORS (IPC). MAKE, MODEL, AND RATING OF INTERCONNECTION CAN BE SEEN ON TABLE 1 BELOW.
20. METHOD OF INTERCONNECTION CAN BE SEEN IN FIGURE 1.
21. UTILITY HAS 24-HR UNRESTRICTED ACCESS TO ALL PHOTOVOLTAIC SYSTEM COMPONENTS LOCATED AT THE SERVICE ENTRANCE.

22. WORKING CLEARANCES AROUND THE EXISTING AND NEW ELECTRICAL EQUIPMENT WILL BE MAINTAINED IN ACCORDANCE WITH NEC ARTICLE 110.26.
23. CONDUCTORS EXPOSED TO SUNLIGHT SHALL BE LISTED AS SUNLIGHT RESISTANT PER NEC ARTICLE 300.6 (C)(1) AND ARTICLE 310.8 (D).
24. CONDUCTORS EXPOSED TO WET LOCATIONS SHALL BE SUITABLE FOR USE IN WET LOCATIONS PER NEC ARTICLE 310.10 (C).
25. TOTAL AREA OF ALL CONDUCTORS, SPLICES, AND TAPS INSTALLED AT ANY CROSS SECTION OF THE WIRING DOES NOT EXCEED 75% OF THE CROSS SECTIONAL AREA OF THE SPACE. NEC 312.8(A)(2).
26. SYSTEM IS CONSIDERED AN AC MODULE SYSTEM. NO DC CONDUCTORS ARE PRESENT IN CONDUIT, COMBINER, JUNCTION BOX, DISCONNECT. AND COMPLIES WITH 690.6 - NO DC DISCONNECT AND ASSOCIATED DC LABELING ARE REQUIRED.
27. SYSTEM COMPLIES WITH 690.12 RAPID SHUTDOWN AND ASSOCIATED LABELING AS PER 690.56(C). AC VOLTAGE AND SYSTEM OPERATING CURRENT SHALL BE PROVIDED 690.51.
28. CONDUCTORS IN CONDUIT ARE AC CONDUCTORS BRANCH CIRCUITS AND NOT PV SOURCE CIRCUITS. 690.6.
29. ALL GROUNDING SHALL COMPLY WITH 690.47(A) IN THAT THE AC MODULES WILL COMPLY WITH 250.64.
30. NO TERMINALS SHALL BE ENERGIZED IN THE OPEN POSITION IN THIS AC MODULE SYSTEM 690.13(B), 690.6.
31. WHERE APPLICABLE: INTERCONNECTION SHALL COMPLY WITH 705.11(A) THROUGH (E) OR 705.12(B) THROUGH (E)
32. ALL WARNING SIGN(S) OR LABEL(S) SHALL COMPLY WITH 2020 NEC ARTICLE 110.21(B). LABEL WARNINGS SHALL ADEQUATELY WARN OF THE HAZARD. LABELS SHALL BE PERMANENTLY AFFIXED TO THE EQUIPMENT, AND LABELS REQUIRED SHALL BE SUITABLE FOR THE ENVIRONMENT.
33. PV POWER CIRCUIT LABELS SHALL APPEAR ON EVERY SECTION OF THE WIRING SYSTEM THAT IS SEPARATED BY ENCLOSURES, WALLS, PARTITIONS, CEILINGS, OR FLOORS.


TABLE 1:

MAKE	MODEL	VOLTAGE RATING	CONDUCTOR RANGE MAIN	CONDUCTOR RANGE TAP
ILSCO	IPC 4006	600 V	4/0-4 AWG	6-14 AWG
ILSCO	IPC 4020	600 V	4/0-2 AWG	2/0-6 AWG

INSTRUCTIONS FOR LINE TAPS


FIGURE 1:

1. ADJUST THE CONNECTOR NUT TO SUITABLE LOCATION
2. PUT THE BRANCH WIRE INTO THE CAP SHEATH FULLY
3. INSERT THE MAIN WIRE, IF THERE ARE TWO LAYS OF INSULATED LAY IN THE MAIN CABLE, SHOULD STRIP A CERTAIN LENGTH OF THE FIRST INSULATED LAY FROM INSERTED END
4. TURN THE NUT BY HAND, AND FIX THE CONNECTOR IN SUITABLE LOCATION.
5. SCREW THE NUT WITH THE SLEEVE SPANNER.
6. SCREW THE NUT CONTINUALLY UNTIL THE TOP PART IS CRACKED AND DROPPED DOWN

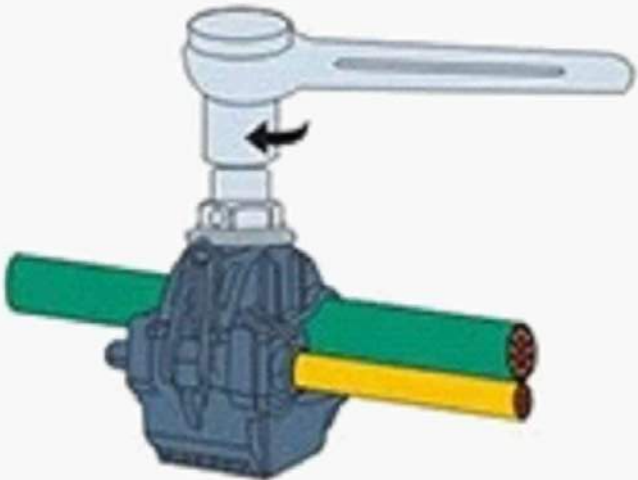

PRO CUSTOM SOLAR LLC D.B.A. MOMENTUM SOLAR
325 HIGH STREET, METUCHEN, NJ 08840
(732) 902-6224
MOMENTUMSOLAR.COM

PROFESSIONAL
ENGINEERING

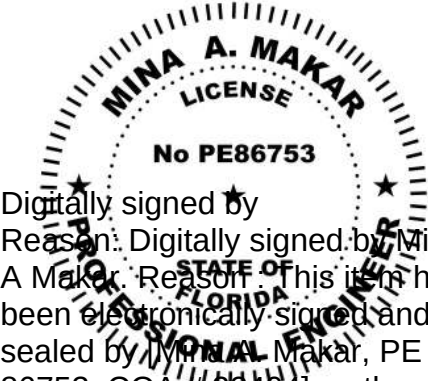

Digitally signed by Mina A Makar. Reason: Digitally signed by Mina A Makar. Reason: This item has been electronically signed and sealed by Mina A Makar, PE 86753, COA # 33404] on the Date and Time Stamp shown. Digitally signed by Mina A Makar. Reason: Digitally signed by Mina A Makar. Reason: This item has been electronically signed and sealed by Mina A Makar, PE 86753, COA # 33404] on the Date and Time Stamp shown. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies. Date: 2024.06.05 02:06:50 -05:00

SOLAR CONTRACTOR

CAMERON CHRISTENSEN
CERTIFIED SOLAR CONTRACTOR LICENSE NUMBER: CVC57036
MOMENTUM SOLAR
5728 MAJOR BLVD. SUITE 307, ORLANDO FL. 32819

CUSTOMER INFORMATION

CRYSTAL HAIR - MS151756
274 NORTHWEST OPEN COURT
LAKE CITY, FL 32055
(386) 288-8884

PV SYSTEM INFORMATION










SYSTEM SIZE (DC): 9.84 KW
24 MODULES: HANWHA Q.PEAK DUO BLK ML-G10+ 410
24 INVERTERS: ENPHASE IQ7PLUS-72-US

PROJECT INFORMATION

INITIAL	DATE: 6/5/2024	DESIGNER: AKL
REV:	DATE:	DESIGNER:
REV:	DATE:	DESIGNER:

ELECTRICAL CONT.

PV-3.1

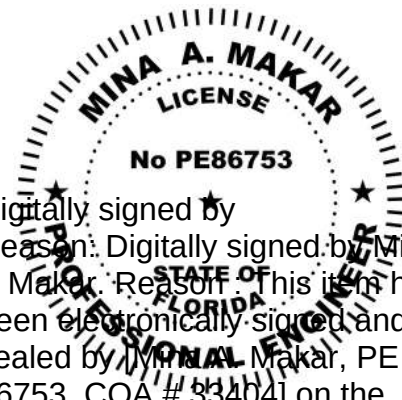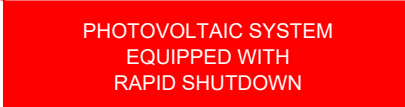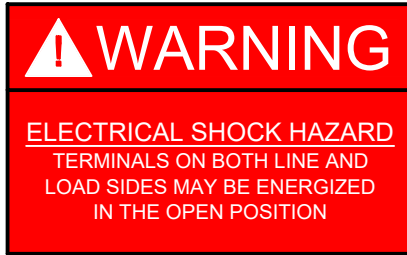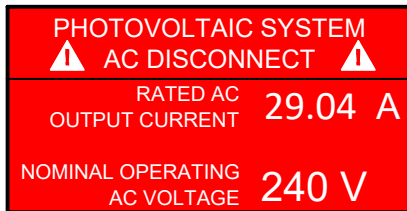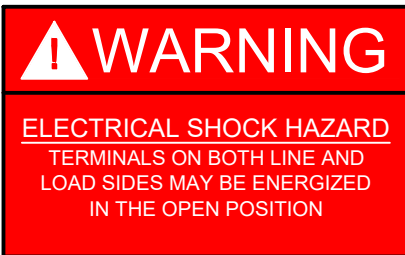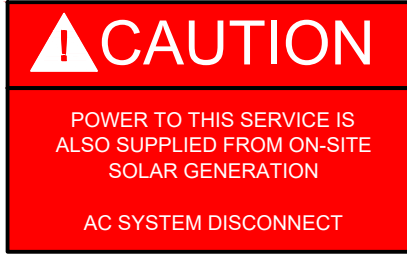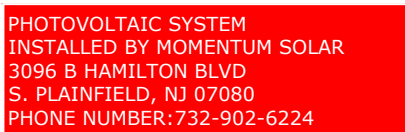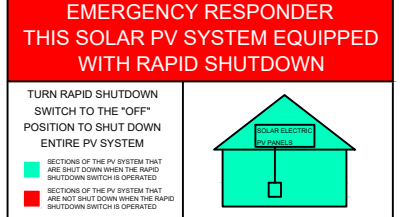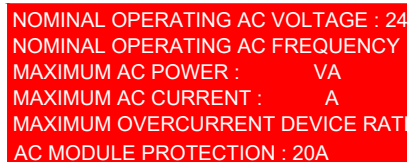ALL WARNING SIGN(S) OR LABEL(S) SHALL COMPLY WITH NEC ARTICLE 110.21(B). LABEL WARNINGS SHALL ADEQUATELY WARN OF THE HAZARD. LABELS SHALL BE PERMANENTLY AFFIXED TO THE EQUIPMENT, AND LABELS REQUIRED SHALL BE SUITABLE FOR THE ENVIRONMENT.						 PRO CUSTOM SOLAR LLC D.B.A. MOMENTUM SOLAR 325 HIGH STREET, METUCHEN, NJ 08840 (732) 902-6224 MOMENTUMSOLAR.COM PROFESSIONAL ENGINEERING  Digitally signed by Reason: Digitally signed by Mina A Makar Reason: This item has been electronically signed and sealed by Mina A Makar, PE 86753, COA # 53404] on the Date and Time Stamp shown using a digital signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies. Date: 2024.06.05 02:06:50 -05:00 SOLAR CONTRACTOR CAMERON CHRISTENSEN CERTIFIED SOLAR CONTRACTOR LICENSE NUMBER: CVC57036 MOMENTUM SOLAR 5728 MAJOR BLVD. SUITE 307, ORLANDO FL. 32819 CUSTOMER INFORMATION CRYSTAL HAIR - MS151756 274 NORTHWEST OPEN COURT LAKE CITY, FL 32055 (386) 288-8884 PV SYSTEM INFORMATION SYSTEM SIZE (DC): 9.84 KW 24 MODULES: HANWHA Q.PEAK DUO BLK ML-G10+ 410 24 INVERTERS: ENPHASE IQ7PLUS-72-2-US PROJECT INFORMATION <table><tr><td>INITIAL</td><td>DATE: 6/5/2024</td><td>DESIGNER: AKL</td></tr><tr><td>REV:</td><td>DATE:</td><td>DESIGNER:</td></tr><tr><td>REV:</td><td>DATE:</td><td>DESIGNER:</td></tr></table> EQUIPMENT LABELS PV-3.2			INITIAL	DATE: 6/5/2024	DESIGNER: AKL	REV:	DATE:	DESIGNER:	REV:	DATE:	DESIGNER:
INITIAL	DATE: 6/5/2024	DESIGNER: AKL															
REV:	DATE:	DESIGNER:															
REV:	DATE:	DESIGNER:															
TAG	LABEL		QUANTITY	LOCATION	NOTE	EXAMPLES											
○			12	AC CONDUITS	1 AT EVERY SEPARATION BY ENCLOSURES / WALLS / PARTITIONS / CEILINGS / FLOORS OR NO MORE THAN 10'												
○			1	COMBINER BOX	1 AT ANY COMBINER BOX												
○			1	JUNCTION BOX	1 AT ANY JUNCTION BOX												
○			1	AC DISCONNECT (RSD SWITCH)	1 OF EACH AT FUSED AC DISCONNECT COMPLETE VOLTAGE AND CURRENT VALUES ON DISCONNECT LABEL												
○																	
○			1	UTILITY METER	1 AT UTILITY METER												
○			1	INTERCONNECTION POINT	1 OF EACH AT BUILDING INTERCONNECTION POINT												
○			1	BACKFEED PANEL													
○			1	AC CURRENT PV MODULES													