

GENERAL NOTES SECTIONS

A. CONCRETE & FOUNDATION DESIGN:

- 1. ALL CONCRETE AND FOUNDATIONS ATTACHED TO THE HOST STRUCTURE SHALL HAVE A PRE INSPECTION.
- 2. ALL CONCRETE GRADE BEAMS AND FOOTINGS SHALL BE 3000 PSI MINIMUM.
- 3. ALL CONCRETE FILLED SUPPORTED SLABS SHALL BE 2500 PSI MINIMUM, 3 1/2" NOMINAL THICKNESS.
- 4. FIBERMESH (3/4" PER CUBIC YARD MIN.) MEETING APPROPRIATE ACI AND ASTM REQUIREMENTS MAY BE USED IN LIEU OF WELDED WIRE MESH
- 5. ALL SLABS ON GRADE SHALL BE A MINIMUM OF 4" THICK WITH FIBERMESH.
- 6. ALL REINFORCING SHALL CONFORM TO ASTM A615, BE GRADE 60 (60 KSI MIN.) DEFORMED BARS, #3 BARS MAY BE GRADE 40
- 7. ALL OVER POUR CONCRETE FILLED SUPPORTED SLABS SHALL BE 3000 PSI MIN., 2" MINIMUM THICKNESS.
- 8. SOIL BEARING PRESSURE SHALL BE A MINIMUM OF 1500 PSF.
- 9. THE CONCRETE SHALL CONFORM TO ASTM C94 FOR THE FOLLOWING:
 - 9.1. OPC (PORTLAND CEMENT TYPE 1, - ASTM C 150).
 - 9.2. AGGREGATES - #6 STONE ,ASTM C 33 SIZE NO. 67 LESS THAN 3/4"
 - 9.3. AIR ENTRAINING +/- 1%- ASTM C 260.
 - 9.4. WATER REDUCING AGENT - ASTM C 494.
 - 9.5. CLEAN POTABLE WATER.
 - 9.6. OTHER ADMIXTURES SHALL NOT BE PERMITTED.
- 10. METAL WELDED WIRE SHALL CONFORM TO ASTM A 185.
- 11. PREPARE & PLACE CONCRETE ACCORDING TO AMERICAN CONCRETE INSTITUTE MANUAL STANDARD PRACTICE, PART 1, 2, & 3 ALONG WITH HOT WEATHER CONDITIONS RECOMMENDATIONS.
- 12. IF UTILIZING EXISTING CONCRETE FOR FOUNDATION, CONCRETE SHALL BE A MINIMUM OF 4" IN THICKNESS, VISIBLY FREE OF ANY STRUCTURAL EXCESSIVE CRACKING, SPALLING OR OTHER DETERIORATION.

B. MASONRY:

- 1. CONCRETE MASONRY UNITS (CMU) SHALL BE STANDARD HOLLOW UNITS AND SHALL BE 2000 PSI MINIMUM BASED ON TYPE M OR S MORTAR.
- 2. ALL MORTAR SHALL BE OF TYPE M OR S.
- 3. ALL GROUT SHALL BE 2000 PSI MINIMUM AND HAVE MAXIMUM COARSE AGGREGATE SIZE OF 3/8"
- 4. PROVIDE CLEAN-OUTS FOR REINFORCED CELLS CONTAINING REINFORCEMENT WHEN GROUT POUR EXCEEDS 5'-0" IN HEIGHT.

C. ALUMINUM:

- 1. ALL STRUCTURAL ALUMINUM SHALL CONFORM TO THE MINIMUM REQUIREMENTS OF 6005-T5 FOR ALLOY WITH A MINIMUM THICKNESS OF 0.040" FOR SUPPORTING MEMBERS.
- 2. WHERE KICK PLATES ARE USED A MINIMUM THICKNESS OF 0.024" SHALL APPLY.
- 3. STRUCTURAL ALUMINUM DESIGN CONFORMS TO "PART 1-A - SPECIFICATIONS FOR ALUMINUM STRUCTURES - ALLOWABLE STRESS DESIGN" OR "PART 1-B - SPECIFICATIONS FOR ALUMINUM STRUCTURES - BUILDING LOAD AND RESISTANCE FACTOR DESIGN" OF THE ALUMINUM DESIGN MANUAL PREPARED BY THE ALUMINUM ASSOCIATION, INC. WASHINGTON D.C. THE FLORIDA BUILDING CODE 8TH EDITION (CHAPTER 16 STRUCTURAL DESIGN & CHAPTER 20 ALUMINUM).
- 4. WHERE ALUMINUM COMES INTO CONTACT WITH STEEL, OR PRESSURE TREATED LUMBER PROVIDE DIELECTRIC SEPARATION.
- 5. ALUMINUM MEMBERS SHALL BE STITCHED WITH NO LESS THAN #10 SMS 6" FROM THE ENDS AND 12" ON CENTER, IF USING #12 SPACING MAY BE 24" ON CENTER.
- 6. VINYL AND ACRYLIC PANELS SHALL BE REMOVABLE. THEY SHALL BE IDENTIFIED WITH A DECAL. ESSENTIALLY STATING "REMOVABLE PANEL SHALL BE REMOVED WHEN WIND SPEEDS EXCEED 75 MPH". DECAL SHALL BE PLACED SO IT IS VISIBLE WHEN PANEL IS INSTALLED. VINYL AND ACRYLIC PANELS MAY NOT BE USED IN FLOOD ZONE A.

- 7. 1"x2"x0.045" NON-STRUCTURAL MEMBERS SHALL BE ATTACHED TO HOST WITH 1/4"Ø X 1-3/4" EMBEDMENT & 24" O.C. MASONRY SCREW FOR CONCRETE & EQUIVALENT SIZE WOOD SCREW WHEN IN WOOD & #10X 1/2" EMBEDMENT SMS OR TEK SCREWS IN ALUMINUM MEMBERS TYPICAL.

D. FASTENERS:

- 1. ALL LAG BOLTS SHALL CONFORM TO STAINLESS STEEL TYPE 300 18-8, WITH STANDARD FLAT WASHER UNLESS MANUFACTURER GALVANIZES BOLTS SPECIFICS FOR USE WITH ACQ PRESSURE TREATED WOOD.
- 2. HEX BOLTS HAS TO BE ASTM A 325, PLATED WITH STANDARD FLAT WASHERS AND NUTS.
- 3. ALL CONCRETE SCREWS SHALL BE: SIMPSON, HILTI, RAWL, TAPCON, REDHEAD, DYNABOLT, PORTECT OR APPROVED EQUAL.
- 4. ALL METAL TIES AND ASSOCIATED ACCESSORIES SHALL BE HOT DIPPED GALVANIZED.
- 5. ALL LAG BOLTS SHALL HAVE A MINIMUM EMBEDMENT OF 8X BOLT DIAMETER INTO STRUCTURAL FRAMING (G= 42 MIN.).
- 6. LAG BOLTS AND SCREWS INTO WOOD FRAMING SHALL BE PROVIDED WITH PILOT HOLES HAVING A DIAMETER NOT GREATER THAN 70 PERCENT OF THE THREAD DIAMETER OF THE BOLT OR SCREW. ALL LAG BOLTS AND SCREWS SHALL BE INSERTED IN PILOT HOLES BY TURNING AND UNDER NO CIRCUMSTANCES BY DRIVING WITH A HAMMER.
- 7. ALL EXPANSION ANCHORS SHALL BE DESIGNED IN ACCORDANCE WITH THE SPECIFIC MANUFACTURERS REQUIREMENTS AND ALLOWABLE LOADS AND SHALL ONLY BE APPLIED IN CONDITIONS ACCEPTABLE TO MANUFACTURER. FASTENERS SHALL BE A MINIMUM OF SAE GRADE #5 OR BETTER ZINC PLATED.
- 8. ALL FASTENERS CONNECTING ALUMINUM COMPONENTS OR PRESSURE TREATED LUMBER ARE STAINLESS STEEL TYPE 300 18-8, UNLESS MANUFACTURER GALVANIZED BOLTS SPECIFICS FOR USE WITH ACQ PRESSURE TREATED WOOD, OR OTHERWISE NOTED ON PLANS.
- 9. ALL FASTENERS SHALL COMPLY WITH ASTM A153.
- 10. ALL CONNECTORS SHALL COMPLY WITH ASTM A653 CLASS G-185.
- 11. FOR SMS, THE MINIMUM CENTER-TO-CENTER SPACING SHALL BE 3/4" AND MINIMUM CENTER-TO-EDGE SHALL BE 1/2" UNLESS NOTED OTHER WISE.

E. REFERENCE STANDARDS: (CURRENT EDITIONS OF)

- ASTM E 119
- ASTM E 1300
- ASCE 7

ALUMINUM DESIGN MANUAL-AA ASM35, AND SPEC. FOR ALUMINUM PART 1-A, & 1-B

- ASTM C94
 - ASTM C150
 - ASTM C33
 - ASTM C260
 - ASTM C494
 - ASTM A615
 - ASTM A185
- THE FLORIDA BUILDING CODE 8TH EDITION (CHAPTERS 16, 20 & 23).

F. ABBREVIATIONS:

THE FOLLOWING LIST OF ABBREVIATIONS IS NOT INTENDED TO REPRESENT ALL THOSE USED ON THESE DRAWINGS, BUT TO SUPPLEMENT THE MORE COMMON ABBREVIATIONS.

- 1. TYP -- TYPICAL
- 2. SIM -- SIMILAR
- 3. UN -- UNLESS OTHERWISE NOTED
- 4. CONT -- CONTINUOUS
- 5. VIF -- VERIFY IN FIELD

G. RESPONSIBILITY:

- 1. ALL SITE WORK SHALL BE PERFORMED BY A LICENSED CONTRACTOR IN ACCORDANCE WITH APPLICABLE BUILDING CODES, LOCAL ORDINANCES, ETC.
- 2. CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND DETAILS, NOTIFYING ENGINEER OF ANY DISCREPANCIES BETWEEN DRAWINGS, FABRICATED ITEMS, OR ACTUAL FIELD CONDITIONS.
- 3. THESE DRAWINGS REPRESENT THE ACCEPTABILITY OF THE 'SUNROOM' ROOM ADDITION ELEMENTS AS PROVIDED BY THE CONTRACTOR.

- 4. ALL DETAILS ON THESE DRAWINGS ARE ENGINEERED BASED ON INFORMATION PROVIDED BY THE CONTRACTOR AND MANUFACTURER.
- 5. ANY DETAILS NOT SHOWN ARE TO BE ENGINEERED BY A LICENSED P.E. IN ACCORDANCE WITH STANDARD ENGINEERING PRACTICES.
- 6. WHEN ATTACHING TO FASCIA, THE HOST STRUCTURE SHALL HAVE AT LEAST A 2"x4" FASCIA AND ROOF TRUSS SYSTEM. CONTRACTOR SHALL VERIFY THIS AND IF SMALLER, CONTRACTOR SHALL BRING STRUCTURE UP TO A 2"x4" FASCIA AND ENSURE LESS THAN A 2'-0" OVERHANG.
- 7. FBC PLANS & ENGINEERING SERVICES INC. DOES NOT WARRANT, EITHER EXPRESSLY OR IMPLIED, THE QUALITY OF THE CONSTRUCTION, AND IS NOT RESPONSIBLE FOR THE INTERPRETATION OF DESIGNS AND END USE BY THE CLIENT /CONTRACTOR.
- 8. CONTRACTOR TO VERIFY FEMA FLOOD ZONE OF THE PROPOSED STRUCTURE LOCATION TO ENSURE STRUCTURE IS NOT WITHIN SPECIAL FLOOD HAZARD AREAS.

H. MISCELLANEOUS:

- 1. ALUMINUM ADDITIONS ARE NOT TO BE INSTALLED ON A MANUFACTURED HOME, TRAILER HOME, OR PRE-FAB HOME. IF THE EXISTING STRUCTURE IS ONE OF THESE, A SEPARATE 4TH WALL SUPPORT SYSTEM MUST BE ENGINEERED SO THAT NO ADDITIONAL LOADING IS PLACED ON THE MANUFACTURED HOME.
- 2. IF ENCLOSURE CONTAINS A SWIMMING POOL OR SPA, THE ENCLOSURE SHALL COMPLY WITH RESIDENTIAL SWIMMING BARRIER REQUIREMENTS OF THE FLORIDA BUILDING CODE 8TH EDITION RESIDENTIAL R 4501.17 IN ITS ENTIRETY.
- 3. DOOR LOCATIONS MAY BE DETERMINED IN THE FIELD BY CONTRACTOR.
- 4. IF PAVES ARE UNDER ALUMINUM MEMBERS THEY SHALL HAVE EPOXY ADHESIVE TO CONCRETE OR IF USING GROUT, ENSURE BONDING AGENT IS USED FIRST AND ADHERED WITH MINIMUM 3000 PSI GROUT.
- 5. SCREENING MATERIAL SHALL BE 18X14X0.013 OR EQUIVALENT DENSITY SCREEN MESH ONLY UNLESS NOTED ON DRAWING S-2.
- 6. ALL STRUCTURAL POST SHALL BE ANCHORED TO AN EXISTING/PROPOSED CONCRETE FOUNDATION FOR UPLIFT PURPOSES.
- 7. TORNADO CODE NOT APPLICABLE TO RISK CATEGORY 1 AND RISK CATEGORY 2 STRUCTURES
- 7.1. ASCE/SEI STANDARD 7-22, FIGS. 32.5-1, 32.5-2, AND G-2.1 THROUGH -4

SCREEN ENCLOSURE

DESIGN DATA: (SITE SPECIFIC DESIGN INFORMATION)

| | |
|-----------------------------------------------------|---------|
| 1. ULTIMATE DESIGN WIND SPEED Vult (3 SECOND GUST): | 130 MPH |
| NOMINAL DESIGN WIND SPEED Vasd: | 101-MPH |
| 2. RISK CATEGORY: | 1 |
| 3. WIND EXPOSURE: | B |
| 4. WIND LOADS: | 6 PSF |
| SCREEN ROOF: | 23 PSF |
| SCREEN WALLS (WINDWARD): | 20 PSF |
| SCREEN WALLS (LEEWARD): | N/A |
| SOLID ROOF: | N/A |

5. FACTOR APPLIED TO SCREEN WIND LOADS FOR 18X14X0.013 OR EQUIVALENT DENSITY SCREEN MESH: 0.88

6. FACTOR APPLIED TO SCREEN WIND LOADS FOR ALLOWABLE STRESS DESIGN: 0.6

7. LIVE LOAD: 300 lb. VERTICAL DOWNLOAD ON PRIMARY SCREEN ENCLOSURE MEMBERS, 200 lb. VERTICAL DOWNLOAD ON SCREEN ENCLOSURE PURLINS, 10 PSF VERTICAL DOWNLOAD ON SOLID ROOF.

8. SCREEN ROOF TYPE: HIPPED GABLE

9. SOLID ROOF TYPE: N/A

10. EXISTING FOOTING (MIN. 12"x12" LINEAL FOOTING) MEETS THE REQUIREMENTS TO RESIST THE UPLOADS FOR THE PROPOSED STRUCTURE.



ST E


| ALUMINUM STRUCTURAL MEMBERS | |
|--------------------------------------------|-----|
| HOLLOW SECTIONS | S-1 |
| 2 X 2:.....2" X 2" X 0.044" | |
| 2 X 3:.....2" X 3" X 0.050" | S-2 |
| 2 X 4:.....2" X 4" X 0.050" | |
| 2 X 5:.....2" X 5" X 0.050" | S-3 |
| 3 X 3:.....3" X 3" X 0.125" | |
| OPEN BACK SECTIONS | S-4 |
| 1 X 2:.....1" X 2" X 0.040" | |
| 1 X 3:.....1" X 3" X 0.045" | |
| SNAP SECTIONS | |
| 2 X 2 SMS:.....2" X 2" X 0.045" | |
| 2 X 3 SMS:.....2" X 3" X 0.072" | |
| 2 X 4 SMS:.....2" X 4" X 0.045" | |
| 3 X 3 SMS:.....3" X 3" X 0.090" | |
| SELF MATING (SMB) | |
| 2 X 4 SMB:.....2" X 4" X 0.044" X 0.100" | |
| 2 X 5 SMB:.....2" X 5" X 0.050" X 0.118" | |
| 2 X 6 SMB:.....2" X 6" X 0.050" X 0.120" | |
| 2 X 7 SMB:.....2" X 7" X 0.057" X 0.120" | |
| 2 X 8 SMB:.....2" X 8" X 0.072" X 0.224" | |
| 2 X 9 SMB:.....2" X 9" X 0.072" X 0.224" | |
| 2 X 10 SMB:.....2" X 10" X 0.092" X 0.374" | |
| TUBE SECTIONS | |
| 2 X 2:.....2" X 2" X 0.090" | |



| | | | | | |
|--------------------------------------------------------|----------|------------------------------------------------|-------------------------------------------------------------------------------------------------------------|-----|--|
| P.E. OF RECORD | | FBC PLANS & ENGINEERING SERVICES, INC. | | | |
| DAVID W. SMITH | FL 53608 | THOMAS L. HANSON | FL 38654 | | |
| IAN J. FOSTER | FL 93654 | JOEL FALARDEAU | FL 70667 | | |
| ERIK STUART | FL 77605 | ADDRESS: 5344 9th Street Zephyrhills, FL 33542 | PHONE: (813)838-0735 FAX: (1-866)824-7894 E-MAIL: erb@fbcplans.com WEBSITE: www.fbcplans.com C.O.A.: #29054 | | |
| JOB NUMBER: 24_0528_284 | | DRAW DATE: 05/28/2024 | | S-1 | |
| REVISION 1: | | REVISION 2: | | | |
| REVISION 3: | | NOTES | | | |
| PROJECT: FOXF 262 SW OAK WAY LAKE CITY, FLORIDA, 32025 | | CONTRACTOR: LAKESIDE ALUMINUM | | | |

DOOR LOCATION MAY BE DETERMINED IN THE FIELD BY THE CONTRACTOR.
18X14 SCREEN TO BE USED




F

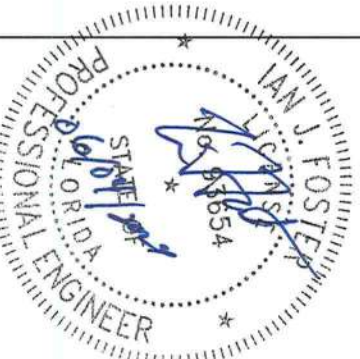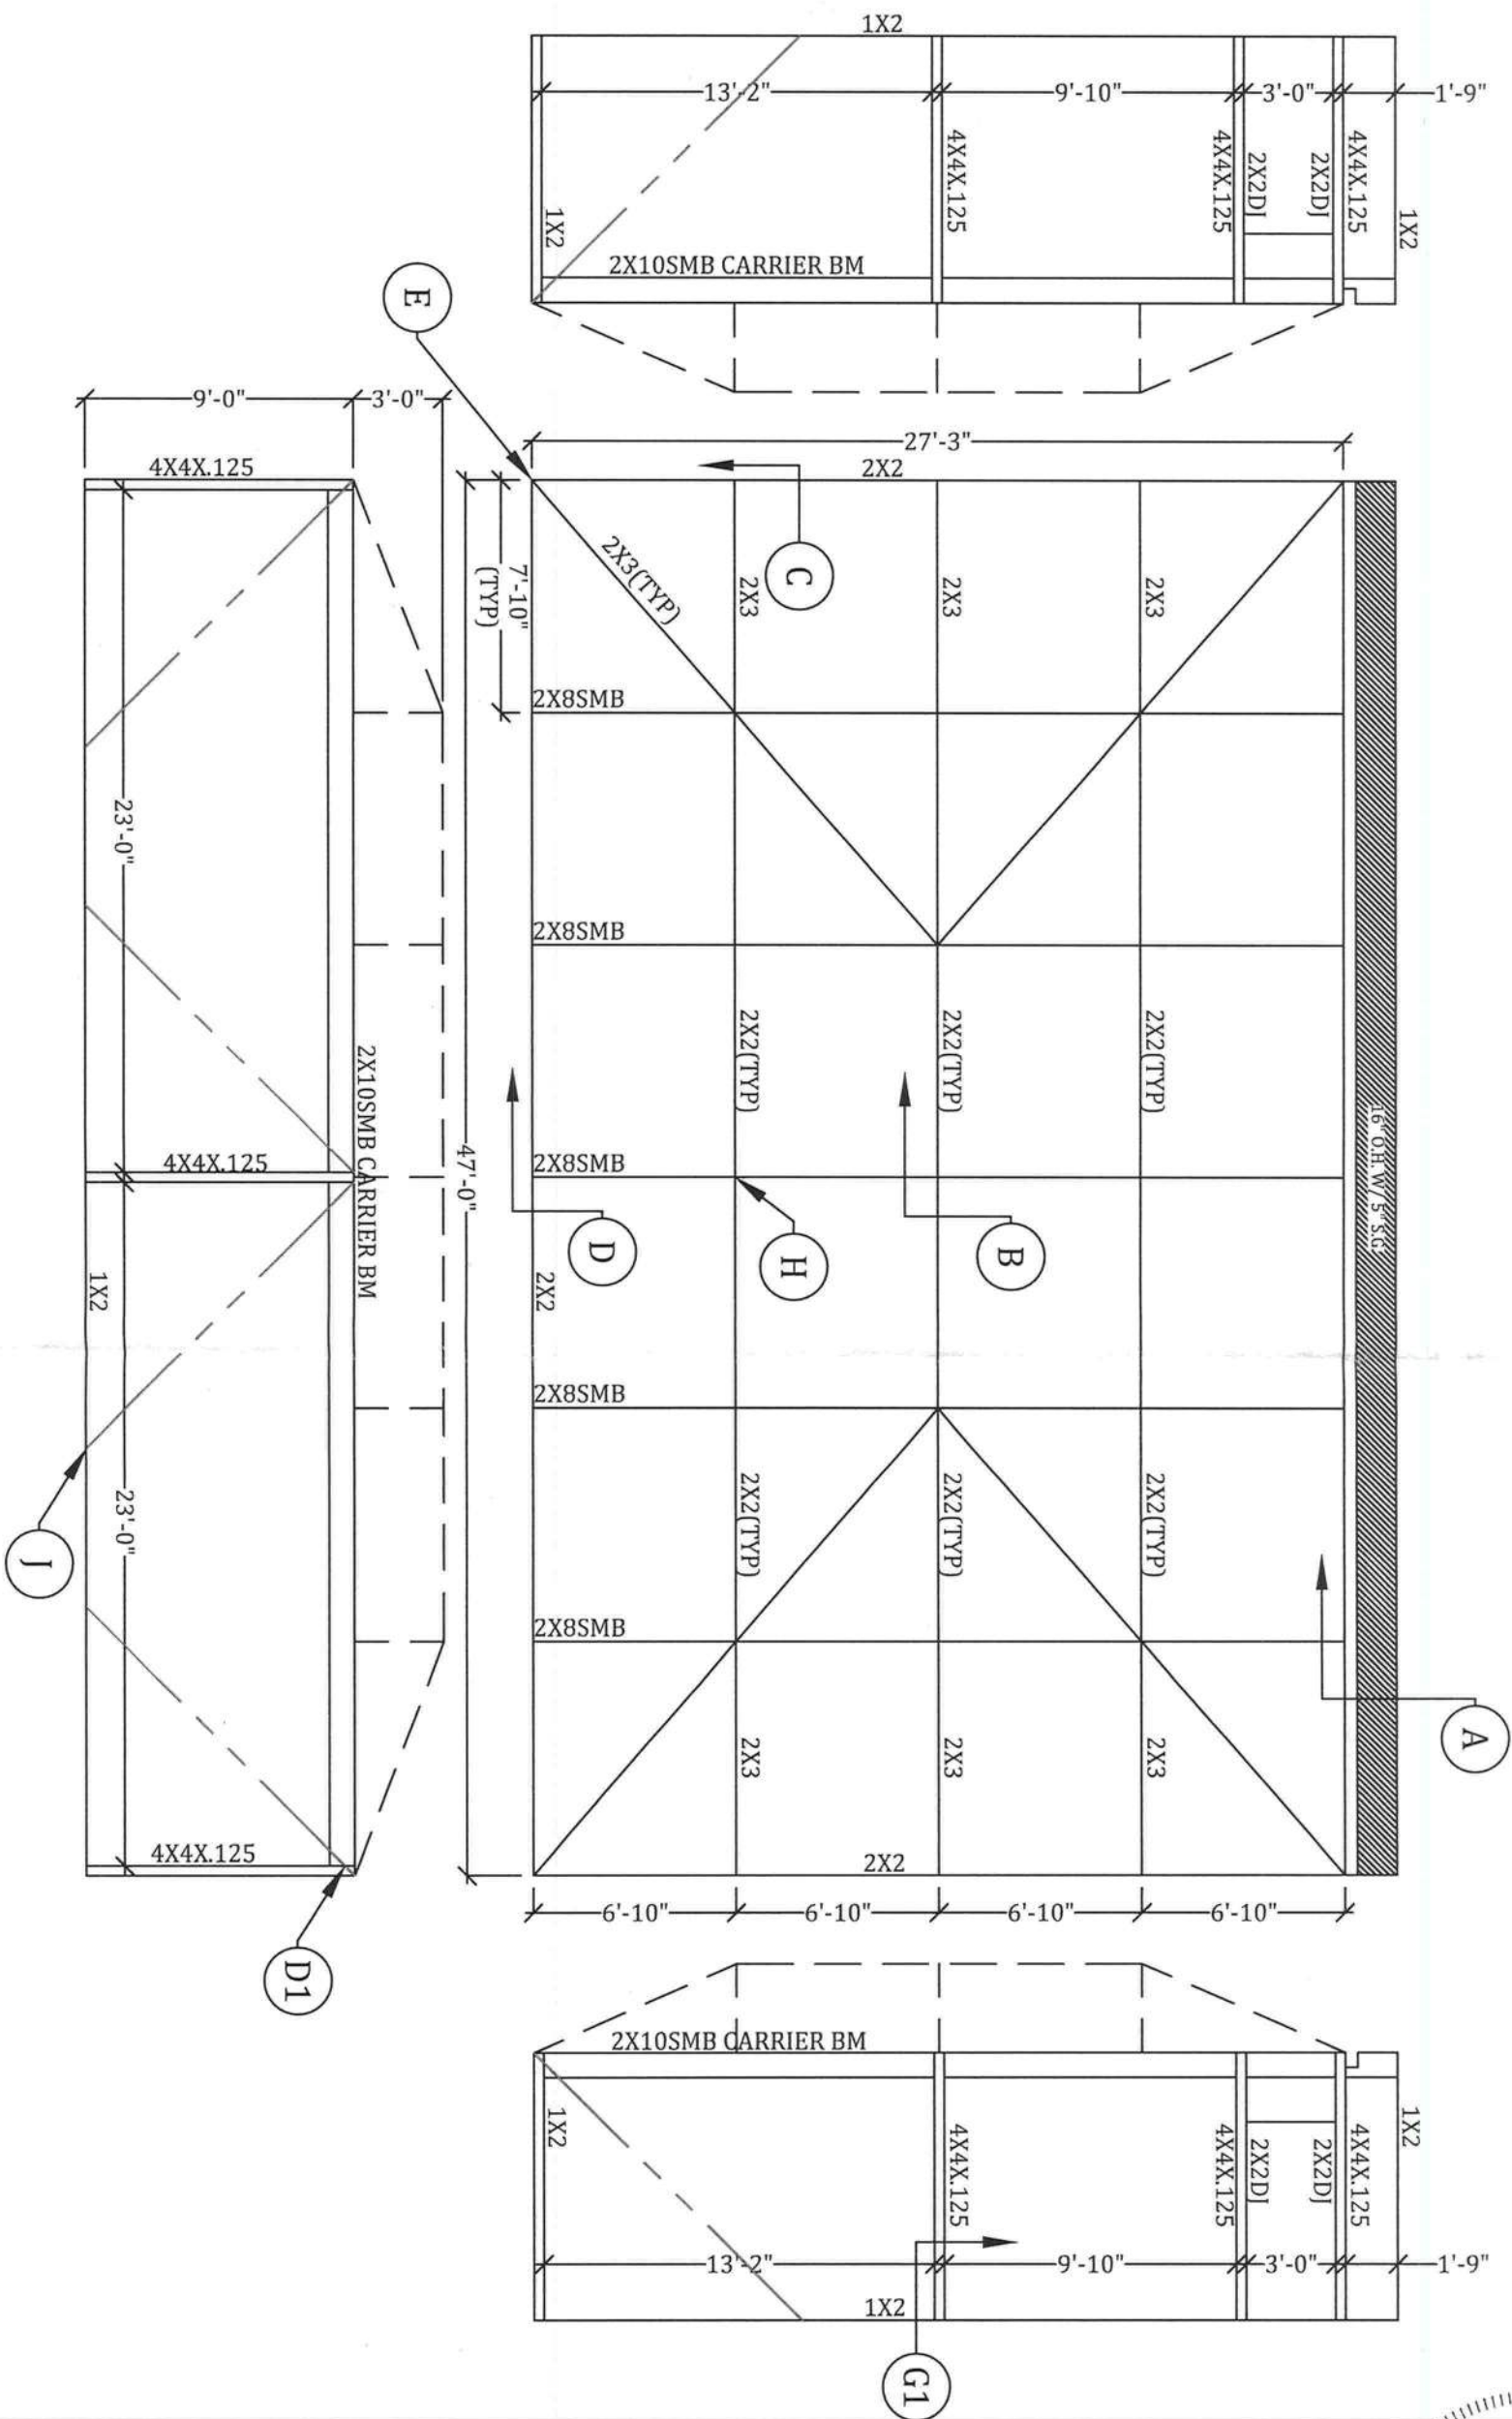




| | | | | | | | | |
|-----|---------|-----------------------|-------------|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|------------------|----------|
| S-2 | DRAWING | JOB NUMBER: | 24_0528_284 | PROJECT FOXX 262 SW OAK WAY LAKE CITY, FLORIDA, 32025 | FBC PLANS & ENGINEERING SERVICES, INC. | | P.E. OF RECORD | |
| | | DRAW DATE: 05/28/2024 | | | | DAVID W. SMITH | FL 53608 | |
| | | REVISION 1: | | CONTRACTOR LAKESIDE ALUMINUM |  Florida Building Code PLANS & ENGINEERING SERVICE, INC | ADDRESS: 5344 9th Street Zephyrhills, FL 33542 | THOMAS L. HANSON | FL 38654 |
| | | REVISION 2: | | | | PHONE: (813)838-0735 FAX: 1-(866)824-7894 | IAN J. FOSTER | FL 93654 |
| | | REVISION 3: | | | | E-MAIL: erb@fbcplans.com WEBSITE: www.fbcplans.com | JOEL FALARDEAU | FL 70667 |
| | | | | | | C.O.A.: #29054 | ERIK STUART | FL 77605 |

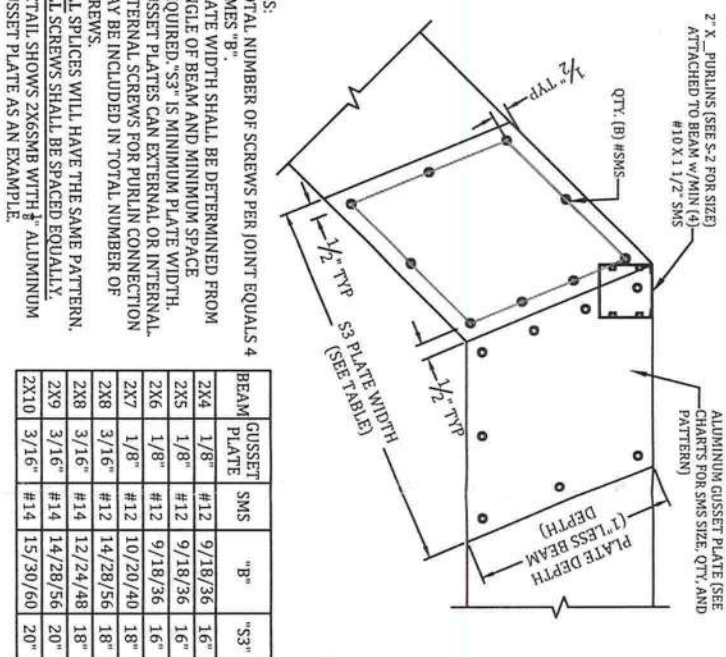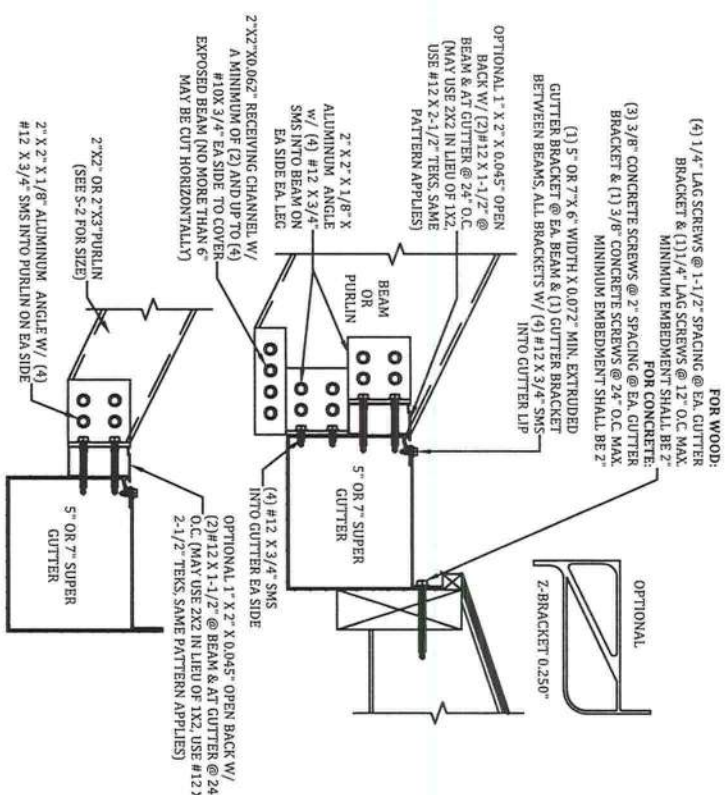

| BEAM | GUSSET PLATE | SMS | "B" | "S3" |
|------|-----------------|-----|----------|------|
| 2X4 | 1/8" | #12 | 9/18/36 | 16" |
| 2X5 | 1/8" | #12 | 9/18/36 | 16" |
| 2X6 | 1/8" | #12 | 9/18/36 | 16" |
| 2X7 | 1/8" | #12 | 10/20/40 | 18" |
| 2X8 | 3/16" | #12 | 14/24/48 | 18" |
| 2X8 | 3/16" | #14 | 12/24/48 | 18" |
| 2X9 | 3/16" | #14 | 14/28/56 | 20" |
| 2X10 | 3/16" | #14 | 15/30/60 | 20" |

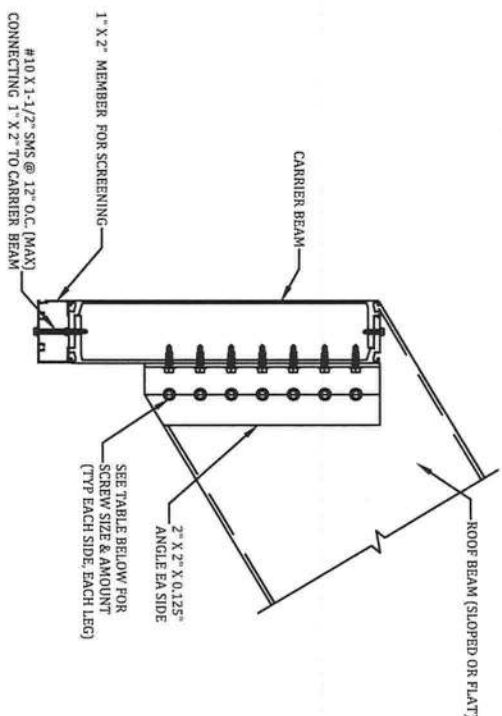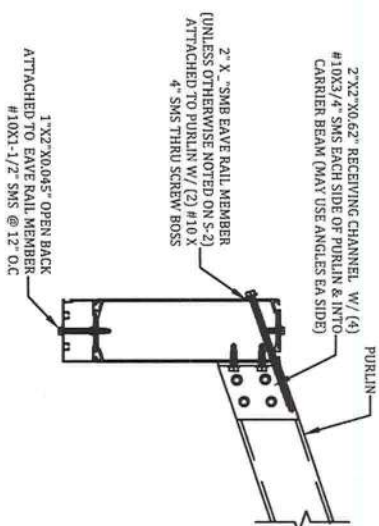

| ROOF BEAM SIZE | 3/4" SMS PER SIDE PER LEG OF ANGLE | QTY. |
|----------------------|---------------------------------------------|------|
| 2X4 | #12 | 4 |
| 2X5 | #12 | 5 |
| 2X6 | #12 | 5 |
| 2X7 | #14 | 6 |
| 2X8 | #14 | 7 |
| 2X9 | #14 | 8 |
| 2X10 | #14 | 9 |

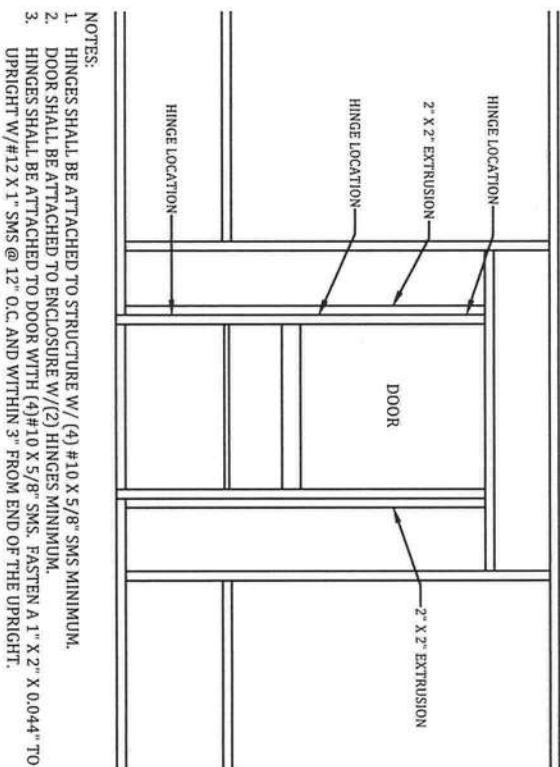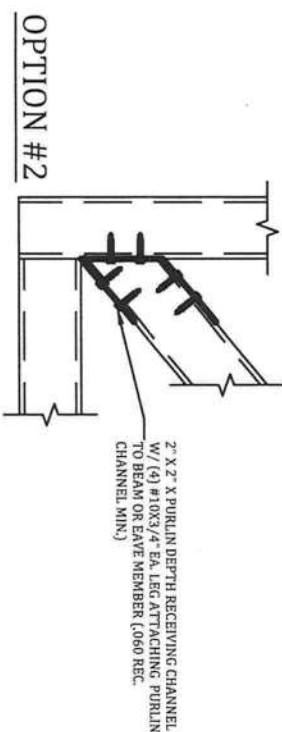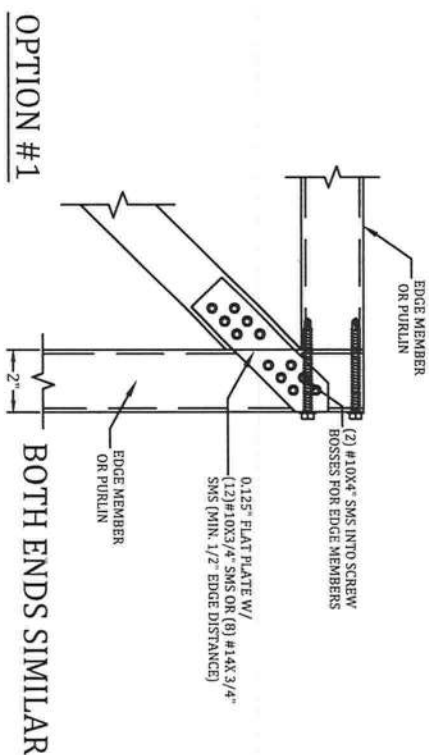

| P.E. OF RECORD | |
|------------------|----------|
| DAVID W. SMITH | FL 53608 |
| THOMAS L. HANSON | FL 38654 |
| IAN J. FOSTER | FL 93654 |
| JOEL FALARDEAU | FL 70667 |
| ERIK STUART | FL 77605 |

**FBC PLANS & ENGINEERING
SERVICES, INC.**



ADDRESS: 5344 9th Street
Zephyrhills, FL 33542
PHONE: (813)838-0735
FAX: 1-(866)824-7894
E-MAIL: erb@fbcplans.com
WEBSITE: www.fbcplans.com
C.O.A.: #29054


PROJECT
FOXX
262 SW OAK WAY
LAKE CITY, FLORIDA, 32025

CONTRACTOR
LAKESIDE ALUMINUM

JOB NUMBER:
24_0528_284

DRAW DATE: 05/28/2024

REVISION 1:
REVISION 2:
REVISION 3:

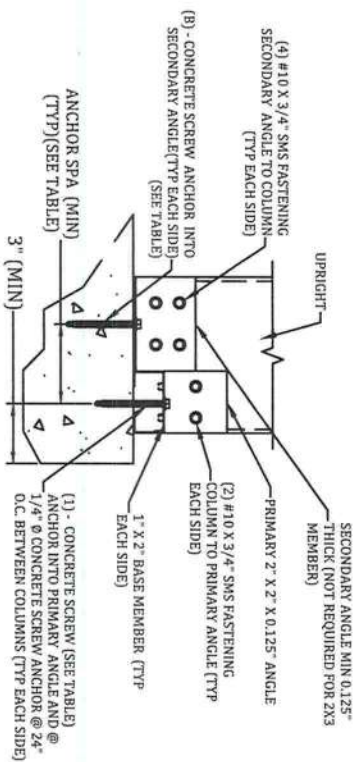


| COLUMN SIZE | 1/4" AND 3/8" Ø ANCHOR | |
|-------------|------------------------|------|
| | "B" MINIMUM SPACING | |
| 2X3-1/4" | 0 | 0" |
| 2X4-1/4" | 1 | 3" |
| 2X5-1/4" | 1 | 3" |
| 2X6-3/8" | 1 | 4" |
| 2X7-3/8" | 1 | 5" |
| 2X8-3/8" | 2 | 3" |
| 2X9-3/8" | 2 | 4" |
| 2X10-3/8" | 2 | 4.5" |

- NOTES:
- NUMBER OF ANCHORS "B" IS EACH SIDE INTO THE SECONDARY ANGLE AND DOES NOT INCLUDE THE ANCHOR INTO THE 1X2.
 - MINIMUM EMBEDMENT OF ANCHORS INTO CONCRETE FOOTING SHALL BE 2-3/4" AT ALL UPRIGHT LOCATIONS. ALL SCREW LENGTHS AT UPRIGHT CONNECTIONS SHALL BE OF SUFFICIENT LENGTH FOR REQUIRED EMBEDMENT INTO CONCRETE FOOTING WHEN A PAVEMENT DECK IS PRESENT.
 - CONCRETE SCREW ANCHOR DESIGNS ARE BASED ON THOSE LISTED ON S-1, D. FASTENERS, OTHER BRAND & TYPE SHALL BE APPROVED BY ENGINEER.
 - 2X3W/1X2 CORNER POST SHALL REQUIRE SAME BASE CONNECTIONS AS 2X4 SHOWN IN TABLE.
 - IF FOR AN IN-FILL, TOP OF COLUMN CONNECTION SIMILAR IF CONCRETE LINTEL.
 - IF WOOD LINTEL/DECK, DOUBLE LEDGE REQUIRED (MIN. 3/8") MAY SUBSTITUTE LAG SCREW FOR LDT FOR BOTH PRIMARY & SECONDARY ANGLES.
 - 2X2X.045 DOOR JAMB MEMBER SHALL CONNECT SIMILAR TO 2X3 MEMBER.


G

2" X 3" OR LARGER UPRIGHT TO CONCRETE W/ WO PAVEMENT

DETAILS
SCALE: N.T.S.


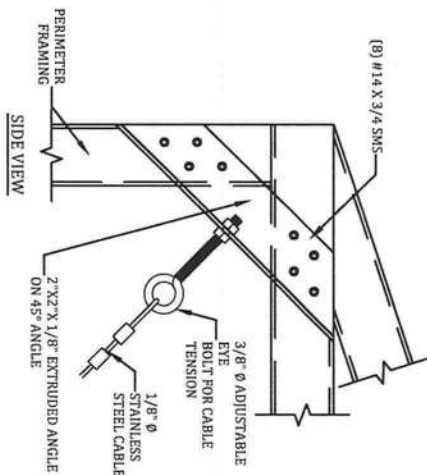


OPTION #1

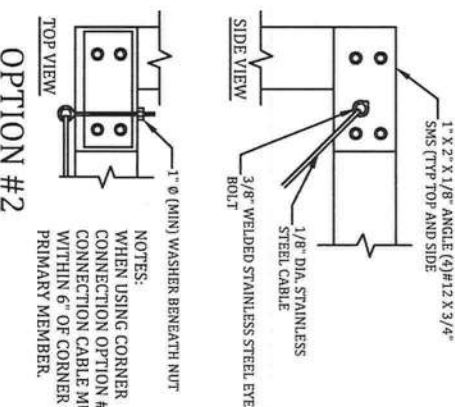


OPTION #2

OPTION #3

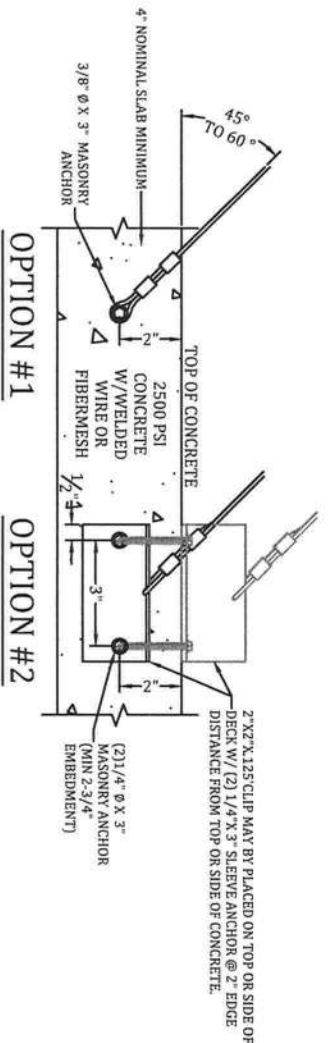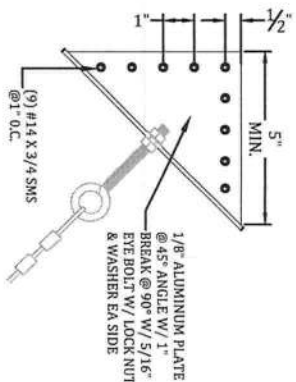


OPTION #2

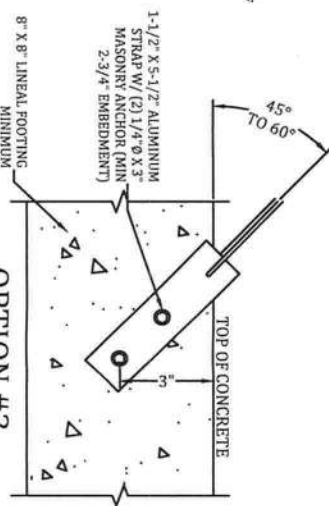

OPTION #1

OPTION #2

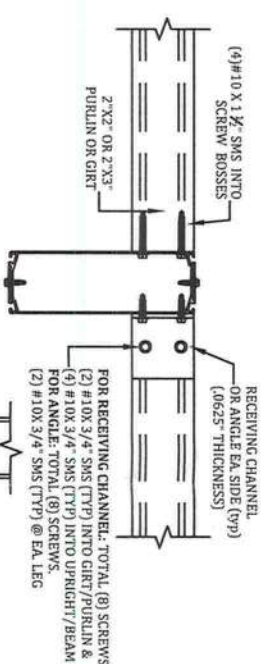


- NOTES:
- KICK PLATE TO BE APPLIED TO UPRIGHT CHAIRRAIL OR GIRT IF APPLICABLE

H

PURLIN OR GIRT TO BEAM OR POST DETAIL

SCALE: N.T.S.


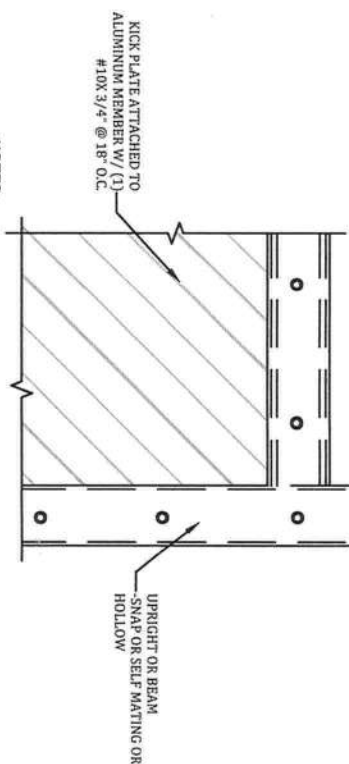


D1

BEAM TO POST DETAIL

SCALE: N.T.S.

- NOTE:
- PERPENDICULAR CARRIER BEAM: USE 0.125" RECEIVING CHANNEL WHICH WILL CONNECT TO THE POST W/ (4) 3/8" THRU BOLTS USED FOR THE PRIMARY CARRIER BEAM. THEN USE (3) 3/8" Ø MACHINE BOLTS W/ 3/4" Ø WASHERS TO ATTACH THE PERPENDICULAR CARRIER BEAM TO THE RECEIVING CHANNEL.
 - HORIZONTAL BEAM DETAIL WILL BE PROVIDED IF NEEDED.

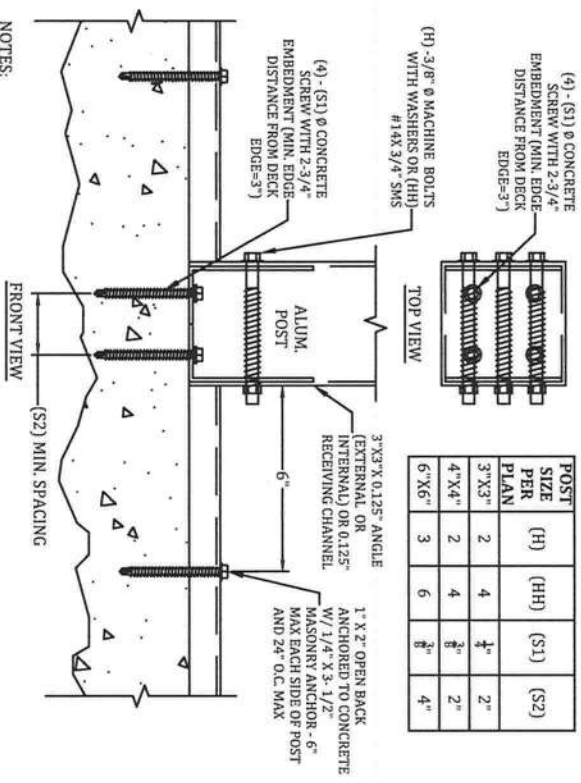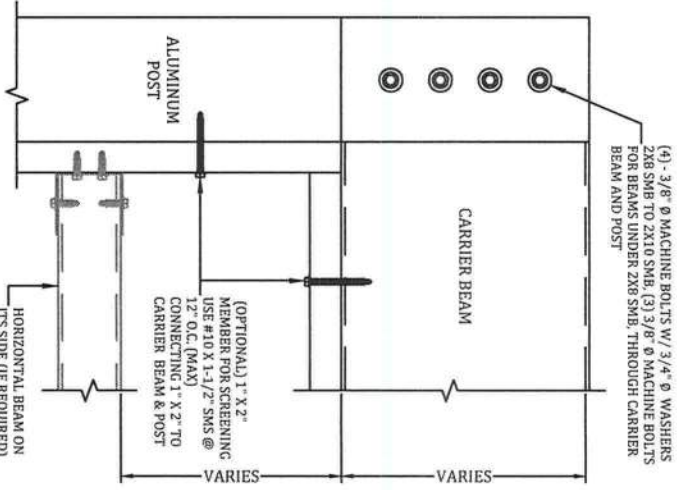


| POST SIZE PER PLAN | (H) | (HH) | (S1) | (S2) |
|--------------------|-----|------|--------|------|
| 3"X3" | 2 | 4 | 1 1/4" | 2" |
| 4"X4" | 2 | 4 | 3" | 2" |
| 6"X6" | 3 | 6 | 3" | 4" |

G1

ALUM. POST CONNECTION DETAIL

SCALE: N.T.S.

- NOTES:
- CONCRETE SCREW ANCHOR DESIGNS ARE BASED ON TITEN HD (S1) Ø SCREW ANCHORS. OTHER SIZE OR TYPE OF ANCHORS SHALL NOT BE USED.
 - FOR PATIO COVERS AND CARPORTS: DISREGARD THE 1X2 OPEN BACK SCREEN MEMBER ON THE FOUNDATION TYPE.
 - MINIMUM EMBEDMENT OF ANCHORS INTO CONCRETE FOOTING SHALL BE 2-3/4" AT ALL POST LOCATIONS. ALL SCREW LENGTHS AT POST CONNECTIONS SHALL BE OF SUFFICIENT LENGTH FOR REQUIRED EMBEDMENT INTO CONCRETE FOOTING WHEN A PAVEMENT DECK IS PRESENT.
 - MINIMUM EMBEDMENT OF ANCHORS INTO CONCRETE FOOTING SHALL BE 2-3/4" AT ALL UPRIGHT LOCATIONS. ALL SCREW LENGTHS AT UPRIGHT CONNECTIONS SHALL BE OF SUFFICIENT LENGTH FOR REQUIRED EMBEDMENT INTO CONCRETE FOOTING WHEN A PAVEMENT DECK IS PRESENT.
 - DETAIL MAY BE FLIPPED AS NEEDED
 - USE 1/4" X 3" LAG SCREWS IN LIEU OF CONCRETE SCREWS FOR WOOD HEADERS

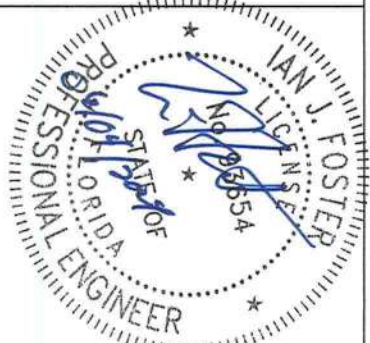

| P.E. OF RECORD | |
|------------------|----------|
| DAVID W. SMITH | FL 53608 |
| THOMAS L. HANSON | FL 38654 |
| IAN J. FOSTER | FL 93654 |
| JOEL FALARDEAU | FL 70667 |
| ERIK STUART | FL 77605 |

FBC PLANS & ENGINEERING SERVICES, INC.

ADDRESS: 5344 9th Street
Zephyrhills, FL 33542
(813)838-0735
1-(866)824-7894
E-MAIL: erb@fbclplans.com
WEBSITE: www.fbclplans.com
C.O.A.: #29054

Florida Building Code
PLANS & ENGINEERING SERVICE, INC

PROJECT
FOXX
262 SW OAK WAY
LAKE CITY, FLORIDA, 32025

CONTRACTOR
LAKESIDE ALUMINUM

| JOB NUMBER: | |
|-----------------------|--|
| 24_0528_284 | |
| DRAW DATE: 05/28/2024 | |
| REVISION 1: | |
| REVISION 2: | |
| REVISION 3: | |