

DATE 02/02/2006

Columbia County Building Permit

PERMIT

This Permit Expires One Year From the Date of Issue

000024101

APPLICANT ED PICKLES PHONE 758-9900

ADDRESS 136 SW DEPUTY J. DAVIS LAKE CITY FL 32055

OWNER DAVID MOORE PHONE 954-873-5608

ADDRESS 109 SW ZINNA GLEN LAE CITY FL 32055

CONTRACTOR CORBETTS MOBILE HOME PHONE 758-9900

LOCATION OF PROPERTY 41S, TL ON CR 18, TL ON CR 131, TR ON MERRIGOLD, TR ON SNAP DRAGON, HOME ON HILL, NEW GATE

TYPE DEVELOPMENT MH,UTILITY ESTIMATED COST OF CONSTRUCTION 0.00

HEATED FLOOR AREA TOTAL AREA HEIGHT STORIES

FOUNDATION WALLS ROOF PITCH FLOOR

LAND USE & ZONING A-3 MAX. HEIGHT

Minimum Set Back Requirments: STREET-FRONT 30.00 REAR 25.00 SIDE 25.00

NO. EX.D.U. 0 FLOOD ZONE X DEVELOPMENT PERMIT NO.

PARCEL ID 13-6S-16-09696-128 SUBDIVISION TUSTENUGGEE PLANT. UNREC

LOT 28 BLOCK PHASE UNIT 2 TOTAL ACRES

000000959 DIH000060

Culvert Permit No. Culvert Waiver Contractor's License Number Applicant/Owner/Contractor

WAIVER 05-1084 BK JH Y

Driveway Connection Septic Tank Number LU & Zoning checked by Approved for Issuance New Resident

COMMENTS: ONE FOOT ABOVE THE ROAD

Check # or Cash 8179

FOR BUILDING & ZONING DEPARTMENT ONLY

(footer/Slab)

Temporary Power date/app. by Foundation date/app. by Monolithic date/app. by

Under slab rough-in plumbing date/app. by Slab date/app. by Sheathing/Nailing date/app. by

Framing date/app. by Rough-in plumbing above slab and below wood floor date/app. by

Electrical rough-in date/app. by Heat & Air Duct date/app. by Peri. beam (Lintel) date/app. by

Permanent power date/app. by C.O. Final date/app. by Culvert date/app. by

M/H tie downs, blocking, electricity and plumbing date/app. by Pool date/app. by

Reconnection date/app. by Pump pole date/app. by Utility Pole date/app. by

M/H Pole date/app. by Travel Trailer date/app. by Re-roof date/app. by

BUILDING PERMIT FEE \$ 0.00 CERTIFICATION FEE \$ 0.00 SURCHARGE FEE \$ 0.00

MISC. FEES \$ 200.00 ZONING CERT. FEE \$ 50.00 FIRE FEE \$ 66.08 WASTE FEE \$ 98.00

FLOOD DEVELOPMENT FEE \$ FLOOD ZONE FEE \$ 27.00 CULVERT FEE \$ TOTAL FEE 439.08

INSPECTORS OFFICE CLERKS OFFICE

NOTICE: IN ADDITION TO THE REQUIREMENTS OF THIS PERMIT, THERE MAY BE ADDITIONAL RESTRICTIONS APPLICABLE TO THIS PROPERTY THAT MAY BE FOUND IN THE PUBLIC RECORDS OF THIS COUNTY. AND THERE MAY BE ADDITIONAL PERMITS REQUIRED FROM OTHER GOVERNMENTAL ENTITIES SUCH AS WATER MANAGEMENT DISTRICTS, STATE AGENCIES, OR FEDERAL AGENCIES.

"WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT."

This Permit Must Be Prominently Posted on Premises During Construction

PLEASE NOTIFY THE COLUMBIA COUNTY BUILDING DEPARTMENT AT LEAST 24 HOURS IN ADVANCE OF EACH INSPECTION, IN ORDER THAT IT MAY BE MADE WITHOUT DELAY OR INCONVIENCE, PHONE 758-1008. THIS PERMIT IS NOT VALID UNLESS THE WORK AUTHORIZED BY IT IS COMMENCED WITHIN 6 MONTHS AFTER ISSUANCE.

The Issuance of this Permit Does Not Waive Compliance by Permittee with Deed Restrictions.

Contacted

PERMIT APPLICATION / MANUFACTURED HOME INSTALLATION APPLICATION

For Office Use Only (Revised 8-23-05) Zoning Official BK1-30-06 Building Official OK JTH 1-30-06
 AP# 0601-69 Date Received 1-27-06 By GT Permit # 959/24101
 Flood Zone X Development Permit N/A Zoning A-3 Land Use Plan Map Category A-3
 Comments _____

FEMA Map# _____ Elevation _____ Finished Floor _____ River _____ In Floodway _____

- ☒ Site Plan with Setbacks Shown ☒ EH Signed Site Plan ☐ EH Release ☒ Well letter ☐ Existing well
☒ Copy of Recorded Deed or Affidavit from land owner ☐ Letter of Authorization from installer

Tustnuggee Plantation UNREC. Lot 28, Unit 2

- Property ID # R 13-65-16-09 696-128 Must have a copy of the property deed
- New Mobile Home JACOBSEN Used Mobile Home _____ Year 06
- Applicant DAVID MOORE ~~Ed Pickles~~ Phone # 954-873-5608
- Address 109 S.W. Zinnia Glen
- Name of Property Owner DAVID MOORE Phone# _____
- 911 Address 109 S.W. Zinnia Glen
- Circle the correct power company - FL Power & Light - Clay Electric
 (Circle One) - Suwannee Valley Electric - Progress Energy
- Name of Owner of Mobile Home DAVID MOORE Phone # _____
 Address 109 S.W. Zinnia Glen
- Relationship to Property Owner IS THE OWNER
- Current Number of Dwellings on Property 0 NONE
- Lot Size Lot 28 Total Acreage 10 ACRES
- Do you : Have an Existing Drive or need a Culvert Permit or a Culvert Walver (Circle one)
- Is this Mobile Home Replacing an Existing Mobile Home No (Powers)
- Driving Directions to the Property I-75 Exit 399 Go North on 441 to Rt-18 and turn Left. Go about 1 mile turn Left onto CR-131 turn Left on the Mangold go to the End turn Right on Long Dragon then on the Right New Gate at Road
TIC Ed Pickles
- Name of Licensed Dealer/Installer Collette Mobile Home Phone # 386-688-3800
- Installers Address 136 SW Deputy Davis Lane Lake City FL 32006
- License Number DJH 000060 Installation Decal # 7987

(KAREN F MOORE)



13-6S-16-09696-128
MOORE DAVID E & KAREN F
9/1/2004 - \$39,500 - V/Q

Columbia County Property Appraiser

J. Doyle Crews, CFA - Lake City, Florida - 386-758-1083

PARCEL: 13-6S-16-09696-128 - NO AG ACRE (009900)

AKA LOT 28 TUSTENUGGEE PLANTATION UNIT 2 UNREC: COMM NE COR, RUN
W 1318.54 FT FOR

Name: MOORE DAVID E & KAREN F	LandVal	\$57,000.00
Site: TUSTENUGGEE PLANTATION UN	BldgVal	\$0.00
Mail: 10827 LA SALINAS CIRCLE	ApprVal	\$57,000.00
Boca Raton, FL 33428	JustVal	\$57,000.00
Sales 9/1/2004 \$39,500.00 V / Q	Assd	\$57,000.00
Info 3/1/2003 \$27,000.00 V / Q	Exmpt	\$0.00
	Taxable	\$57,000.00

0 0.1 0.2 0.3 mi



This information, GIS Map Updated: 8/3/2005, was derived from data which was compiled by the Columbia County Property Appraiser Office solely for the governmental purpose of property assessment. This information should not be relied upon by anyone as a determination of the ownership of property or market value. No warranties, expressed or implied, are provided for the accuracy of the data herein, its use, or its interpretation. Although it is periodically updated, this information may not reflect the data currently on file in the Property Appraiser's office. The assessed values are NOT certified values and therefore are subject to change before being finalized for ad valorem assessment purposes.

PERMIT NUMBER

Installer Calvin Miller License # 224 000000

Address of home being installed 108 S.W. Zivara Ave



Manufacturer JACOBS Length x width 32x68

NOTE: if home is a single wide fill out one half of the blocking plan if home is a trible or quad wide sketch in remainder of home

I understand Lateral Arm Systems cannot be used on any home (new or used) where the sidewall ties exceed 5 ft 4 in.

Installer's initials

ML

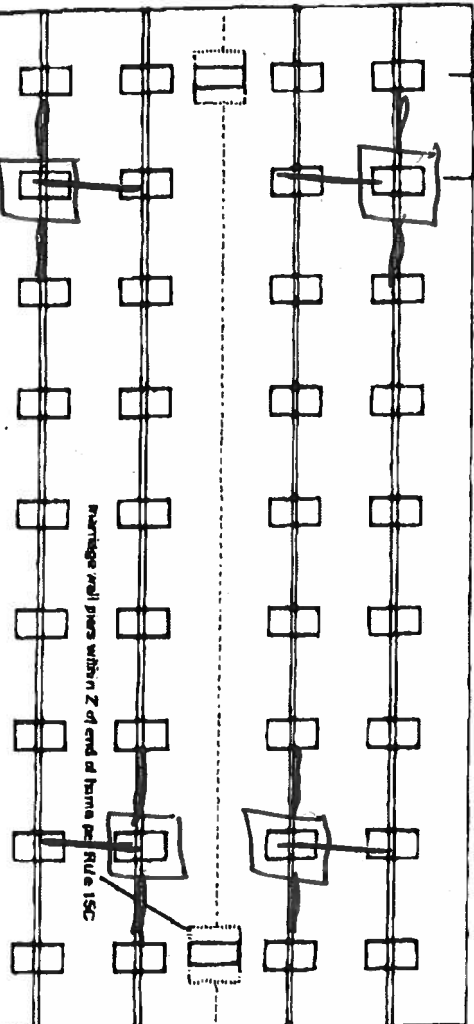

New Home ☒ Used Home ☐

Home installed to the Manufacturer's Installation Manual ☒

Home is installed in accordance with Rule 15-C ☒

Single wide ☐ Wind Zone II ☐ Wind Zone III ☐

Double wide ☒ Installation Decal # 7907

Triple/Quad ☐ Serial # 27505

PIER SPACING TABLE FOR USED HOMES

Load bearing capacity (sq in)	Footer size (256)	18 1/2" x 18 1/2" (342)	20" x 20" (400)	22" x 22" (484)	24" x 24" (576)	26" x 26" (676)
1000 psf	3"	4"	5"	6"	7"	8"
1500 psf	4" 6"	6"	7"	8"	8"	8"
2000 psf	6" 6"	8"	8"	8"	8"	8"
2500 psf	7" 6"	8"	8"	8"	8"	8"
3000 psf	8"	8"	8"	8"	8"	8"
3500 psf	8"	8"	8"	8"	8"	8"

* interpolated from Rule 15C-1 pier spacing table.

PIER PAD SIZES

I-beam pier pad size 6" 6" o/c

Perimeter pier pad size 65" o/c

Other pier pad sizes (required by the mfg.)

Draw the approximate locations of marriage wall openings 4 foot or greater. Use this symbol to show the piers.

List all marriage wall openings greater than 4 foot and their pier pad sizes below.

Opening Pier pad size

12' 4" M22 o/c

ANCHORS

4" 5 ft

FRAME TIES

within 2' of end of home spaced at 5' 4" o/c

TIEDOWN COMPONENTS

Longitudinal Stabilizing Device (LSD)

Manufacturer

Longitudinal Stabilizing Device w/ Lateral Arms

Manufacturer

Sidewall Longitudinal Marriage wall Shearwall

Number

POCKET PENETROMETER TEST

The pocket penetrometer tests are rounded down to or check here to declare 1000 lb. soil without testing.

X 2000 X 2000 X 2000 psf

POCKET PENETROMETER TESTING METHOD

1. Test the perimeter of the home at 6 locations.
2. Take the reading at the depth of the footer.
3. Using 500 lb. increments, take the lowest reading and round down to that increment.

X 2000 X 2000 X 2000

TORQUE PROBE TEST

The results of the torque probe test is 300 inch pounds or check here if you are declaring 5' anchors without testing. A test showing 275 inch pounds or less will require 4 foot anchors.

Note: A state approved lateral arm system is being used and 4 ft. anchors are allowed at the sidewall locations. I understand 5 ft anchors are required at all centerline tie points where the torque test reading is 275 or less and where the mobile home manufacturer may requires anchors with 4000 lb holding capacity.

Installer's initials

ALL TESTS MUST BE PERFORMED BY A LICENSED INSTALLER

Installer Name Wallace & Kelly
Date Tested 11/23/06

Electrical

Connect electrical conductors between multi-wide units, but not to the main power source. This includes the bonding wire between multi-wide units. Pg

Plumbing

Connect all sewer drains to an existing sewer tap or septic tank. Pg.

Connect all potable water supply piping to an existing water meter, water tap, or other independent water supply systems. Pg

Site Preparation

Debris and organic material removed
Water drainage: Natural Swale Pad Other

Fastening multi wide units

Floor: Type Fastener: 2x4 Length: 5" Spacing: 14"
Wall: Type Fastener: 2x4 Length: 5" Spacing: 16"
Roof: Type Fastener: 2x4 Length: 5" Spacing: 16"
For used homes a min. 30 gauge, 8" wide, galvanized metal strip will be centered over the peak of the roof and fastened with galv. roofing nails at 2" on center on both sides of the centerline.

Gasket (meet the proofing requirement)

I understand a properly installed gasket is a requirement of all new and used homes and that condensation, mold, mildew and buckled marriage walls are a result of a poorly installed or no gasket being installed. I understand a strip of tape will not serve as a gasket.

Installer's initials

Type gasket Spun foam Installed: W&K
Pg. Between Floors: Yes
Between Walls: Yes
Bottom of ridgebeam: Yes

Weatherproofing


The bottomboard will be repaired and/or taped. Yes
Siding on units is installed to manufacturer's specifications. Yes
Fireplace chimney installed so as not to allow infusion of rain water. Yes

Miscellaneous


Skirting to be installed. Yes
Dryer vent installed outside of skirting. Yes
Range downflow vent installed outside of skirting. Yes
Drain lines supported at 4 foot intervals. Yes
Electrical crossovers protected. Yes
Other: N/A

Installer verifies all information given with this permit worksheet is accurate and true based on the manufacturer's installation instructions and or Rule 15C-1 & 2.

Installer Signature Wallace & Kelly Date 11/23/06

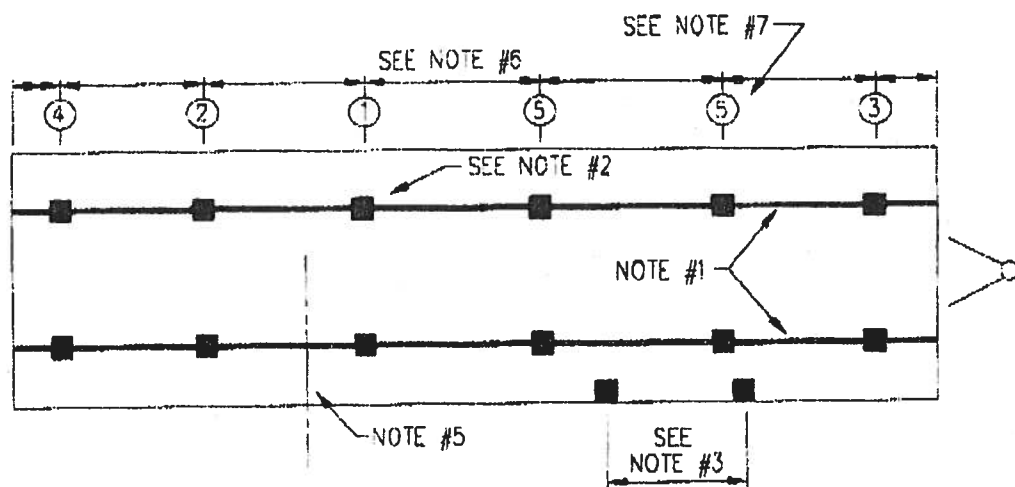

TYPICAL SINGLE WIDE BLOCKING
(SEE SU-01-0004 FOR NOTES)

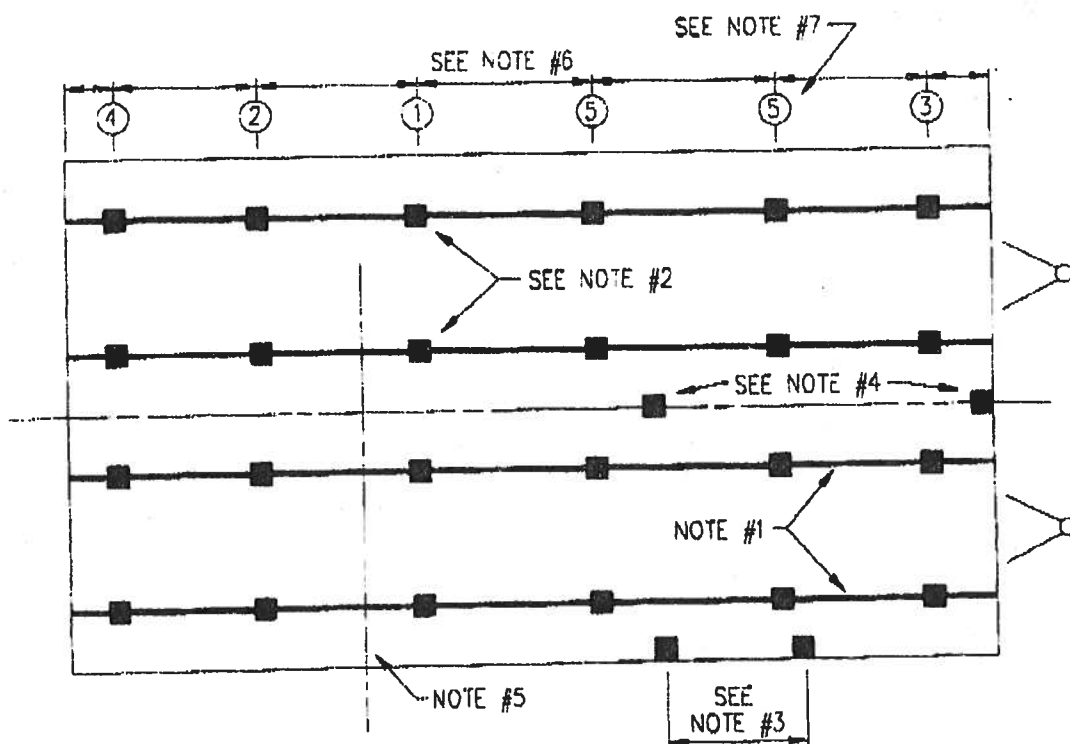

TYPICAL DOUBLE WIDE BLOCKING
(SEE SU-01-0004 FOR NOTES)



JACOBSEN HOMES

P.O. BOX 368
SAFETY HARBOR, FLORIDA 34695
PHONE (727) 726-1138

NOTICE:
THESE SPECIFICATIONS AND DRAWINGS ARE
ORIGINAL, PROPRIETARY, AND CONFIDENTIAL
MATERIALS OF JACOBSEN MANUFACTURING
INC. SUCH MATERIALS ARE PROVIDED TO THE
RECIPIENT FOR SPECIFIC PURPOSES AND MUST BE
KEPT CONFIDENTIAL AND SECRET FROM OTHERS.

DRAWN BY:	S.A.	DATE:	6-6-94
DRAWING TITLE:		DOUBLE WIDE BLOCKING	
DRAWING NUMBER:		SU-01-0003	

REV. LETTER:

—

PIER FOOTER SIZING CHART FOR MARRIAGE WALL OPENINGS ①

(FOR SIDEWALL OPENINGS SEE NOTE ③)

		LOAD SPANS ④					
24' WIDE	SOIL BEARING CAPACITY PSF	8'-12'	12'-16'	16'-20'	20'-24'	24'-28'	28'-32'
	1000	390 sq. in.	494 sq. in.	597 sq. in.	701 sq. in.	805 sq. in.	908 sq. in.
	1500	260 sq. in.	329 sq. in.	398 sq. in.	467 sq. in.	536 sq. in.	606 sq. in.
	2000	195 sq. in.	247 sq. in.	299 sq. in.	351 sq. in.	402 sq. in.	454 sq. in.
	2500	156 sq. in.	197 sq. in.	239 sq. in.	280 sq. in.	322 sq. in.	363 sq. in.
MIN. PIER CAP.		2708 lbs.	3428 lbs.	4148 lbs.	4868 lbs.	5588 lbs.	6308 lbs.

		LOAD SPANS ④					
25'-4" WIDE	SOIL BEARING CAPACITY PSF	8'-12'	12'-16'	16'-20'	20'-24'	24'-28'	28'-32'
	1000	409 sq. in.	519 sq. in.	628 sq. in.	737 sq. in.	847 sq. in.	956 sq. in.
	1500	273 sq. in.	346 sq. in.	419 sq. in.	492 sq. in.	565 sq. in.	638 sq. in.
	2000	205 sq. in.	259 sq. in.	314 sq. in.	369 sq. in.	423 sq. in.	478 sq. in.
	2500	164 sq. in.	207 sq. in.	251 sq. in.	295 sq. in.	339 sq. in.	383 sq. in.
MIN. PIER CAP.		2841 lbs.	3601 lbs.	4361 lbs.	5121 lbs.	5881 lbs.	6641 lbs.

		LOAD SPANS ④					
26'-8" WIDE	SOIL BEARING CAPACITY PSF	8'-12'	12'-16'	16'-20'	20'-24'	24'-28'	28'-32'
	1000	428 sq. in.	544 sq. in.	659 sq. in.	774 sq. in.	889 sq. in.	1004 sq. in.
	1500	286 sq. in.	362 sq. in.	439 sq. in.	516 sq. in.	593 sq. in.	670 sq. in.
	2000	214 sq. in.	272 sq. in.	329 sq. in.	387 sq. in.	445 sq. in.	502 sq. in.
	2500	171 sq. in.	217 sq. in.	264 sq. in.	310 sq. in.	356 sq. in.	402 sq. in.
MIN. PIER CAP.		2975 lbs.	3775 lbs.	4575 lbs.	5375 lbs.	6175 lbs.	6975 lbs.


		LOAD SPANS ④					
30'-8" WIDE	SOIL BEARING CAPACITY PSF	8'-12'	12'-16'	16'-20'	20'-24'	24'-28'	28'-32'
	1000	486 sq. in.	618 sq. in.	751 sq. in.	883 sq. in.	1016 sq. in.	1148 sq. in.
	1500	324 sq. in.	412 sq. in.	501 sq. in.	589 sq. in.	677 sq. in.	766 sq. in.
	2000	243 sq. in.	309 sq. in.	375 sq. in.	442 sq. in.	508 sq. in.	574 sq. in.
	2500	194 sq. in.	247 sq. in.	300 sq. in.	353 sq. in.	406 sq. in.	459 sq. in.
MIN. PIER CAP.		3375 lbs.	4295 lbs.	5215 lbs.	6135 lbs.	7055 lbs.	7975 lbs.

WINDZONE III
(110 MPH)
ALL EXPOSURES
20 PSF ROOF
10 PSF D.L.

NOTES:

- SEE DETAIL 'B' PAGE SU-01-0001 FOR BLOCKING AND ANCHORING OF MARRIAGE WALL OPENINGS WIDER THAN 48 INCHES.
- SEE NOTES ②, ③, AND ④ UNDER TABLE 1, PAGE SU-01-0040.
- FOR ALL UNIT WIDTHS, USE 177 sq. ft. PIER FOOTER UNDER SIDEWALL OPENINGS THAT ARE 48 INCHES TO 96 INCHES WIDE, FOR OPENINGS THAT ARE 96 INCHES TO 144 INCHES, USE 242 sq. ft. PIER FOOTER UNDER SIDEWALL OPENINGS (MIN. 1000 PSF SOIL BEARING REQ'D).
- FOR PROPER LOAD SPANS, SEE SU-03-0001. ("LOAD SPANS" ARE CLEARSPANS; PIER SPECIFICATIONS ABOVE ASSUME CLEARSPAN OCCURS ON ONE SIDE OF PIER ONLY - IF CLEARSPAN OCCURS ON BOTH SIDES, ADD VALUES LISTED ABOVE FOR EACH CLEARSPAN)
- CHECK WITH LOCAL JURISDICTION TO DETERMINE THE SOIL VALUE ON YOUR SITE OR HAVE A SOIL BEARING TEST PERFORMED ON YOUR SOIL TO DETERMINE THE VALUE.


REF. CALCS.



DAPIA APPROVAL

APPROVED BY

NIA INC.
FEDERAL MANUFACTURED HOME
CONSTRUCTION AND SAFETY STANDARDS
MAR 0.1 1999



JACOBSEN HOMES

P.O. BOX 388
SAFETY HARBOR, FLORIDA 34895
PHONE (727) 726-1138

NOTICE:
THESE SPECIFICATIONS AND DRAWINGS ARE ORIGINAL, PROPRIETARY, AND CONFIDENTIAL MATERIALS OF JACOBSEN MANUFACTURING INC. SUCH MATERIALS ARE PROVIDED TO THE RECIPIENT FOR SPECIFIC PURPOSES AND MUST BE KEPT CONFIDENTIAL AND SECRET FROM OTHERS.

DATE: 2-6-99

DRAWING TITLE: PIER FOOTER SIZING CHART FOR MARR. WALL OPENINGS

DRAWING NUMBER: SU-01-0030

REV. LETTER: A

TABLE I
PIER FOOTER SIZING AND PIER SPACING CHART
 (SEE NOTES BELOW)

12'-WIDE WIDTH MAXIMUM ① ⑤

PIER SPACING	SOIL BEARING PSF CAPACITY ② ⑥	REQUIRED PIER FOOTER AREA, SQ. IN. ④
3'-0" MAXIMUM FROM EACH END AND 8'-0" ON CENTER MAXIMUM (MINIMUM PIER CAPACITY 4548#)	1000	655
	1500	437
	2000	327
	2500	262
4'-0" MAXIMUM FROM EACH END AND 10'-0" ON CENTER MAXIMUM (MINIMUM PIER CAPACITY 5608#)	1000	808
	1500	538
	2000	404
	2500	323

13'-4"-WIDE WIDTH MAXIMUM ① ⑤

PIER SPACING	SOIL BEARING PSF CAPACITY ② ⑥	REQUIRED PIER FOOTER AREA, SQ. IN. ④
3'-0" MAXIMUM FROM EACH END AND 8'-0" ON CENTER MAXIMUM (MINIMUM PIER CAPACITY 5014#)	1000	718
	1500	478
	2000	358
	2500	287
4'-0" MAXIMUM FROM EACH END AND 10'-0" ON CENTER MAXIMUM (MINIMUM PIER CAPACITY 6191#)	1000	884
	1500	590
	2000	442
	2500	354

15'-4"-WIDE WIDTH MAXIMUM ⑤

PIER SPACING	SOIL BEARING PSF CAPACITY ② ⑥	REQUIRED PIER FOOTER AREA, SQ. IN. ④
3'-0" MAXIMUM FROM EACH END AND 8'-0" ON CENTER MAXIMUM (MINIMUM PIER CAPACITY 5815#)	1000	807
	1500	539
	2000	404
	2500	323
4'-0" MAXIMUM FROM EACH END AND 10'-0" ON CENTER MAXIMUM (MINIMUM PIER CAPACITY 6941#)	1000	1000
	1500	666
	2000	500
	2500	400

ALL ZONES
 ALL EXPOSURES
 20 PSF ROOF
 10 PSF D.I.


NOTES:

- ① ON MULTIPLE SECTION HOUSES, CHECK EACH SECTION INDIVIDUALLY.
- ② UNDISTURBED SOIL OR 90% COMPACTION FOR FILL.
- ③ ALL FOOTERS TO BE BELOW FROST LINE.
- ④ MORE THAN ONE PIER MAY BE USED TO ACHIEVE THE MINIMUM SQUARE INCHES REQUIRED.
- ⑤ ALL UNIT WIDTHS TO INCLUDE 6" SIDE OVERHANG ONE SIDE OR ONE 3" OVERHANG ON EACH SIDE MAXIMUM.
- ⑥ CHECK WITH LOCAL JURISDICTION TO DETERMINE THE SOIL VALUE ON YOUR SITE OR HAVE A SOIL BEARING TEST PERFORMED ON YOUR SOIL TO DETERMINE THE VALUE.

REF. CALCS.

CWA-85.01-85.02

ENGINEER APPROVAL:



DIAPY APPROVAL:

APPROVED BY

NIA INC.
 FEDERAL MANUFACTURED HOME
 CONSTRUCTION AND SAFETY STANDARDS
 MAR 01 1999



JACOBSEN HOMES

P.O. BOX 348
 SAFETY HARBOR, FLORIDA 34895
 PHONE (727) 726-1138

NOTICE:
 THESE SPECIFICATIONS AND DRAWINGS ARE
 ORIGINAL, PROPRIETARY AND CONFIDENTIAL
 MATERIALS OF JACOBSEN MANUFACTURING
 INC. SUCH MATERIALS ARE LOANED TO THE
 RECIPIENT FOR SPECIFIC PURPOSES AND MUST BE
 KEPT CONFIDENTIAL AND SECRET FROM OTHERS.

DATE:

M.T.

DATE:

2-8-99

REV. LETTER:


A

DRAWING TITLE:

PIER FOOTER SPECS CHART

DRAWING NUMBER:

SU-01-0040

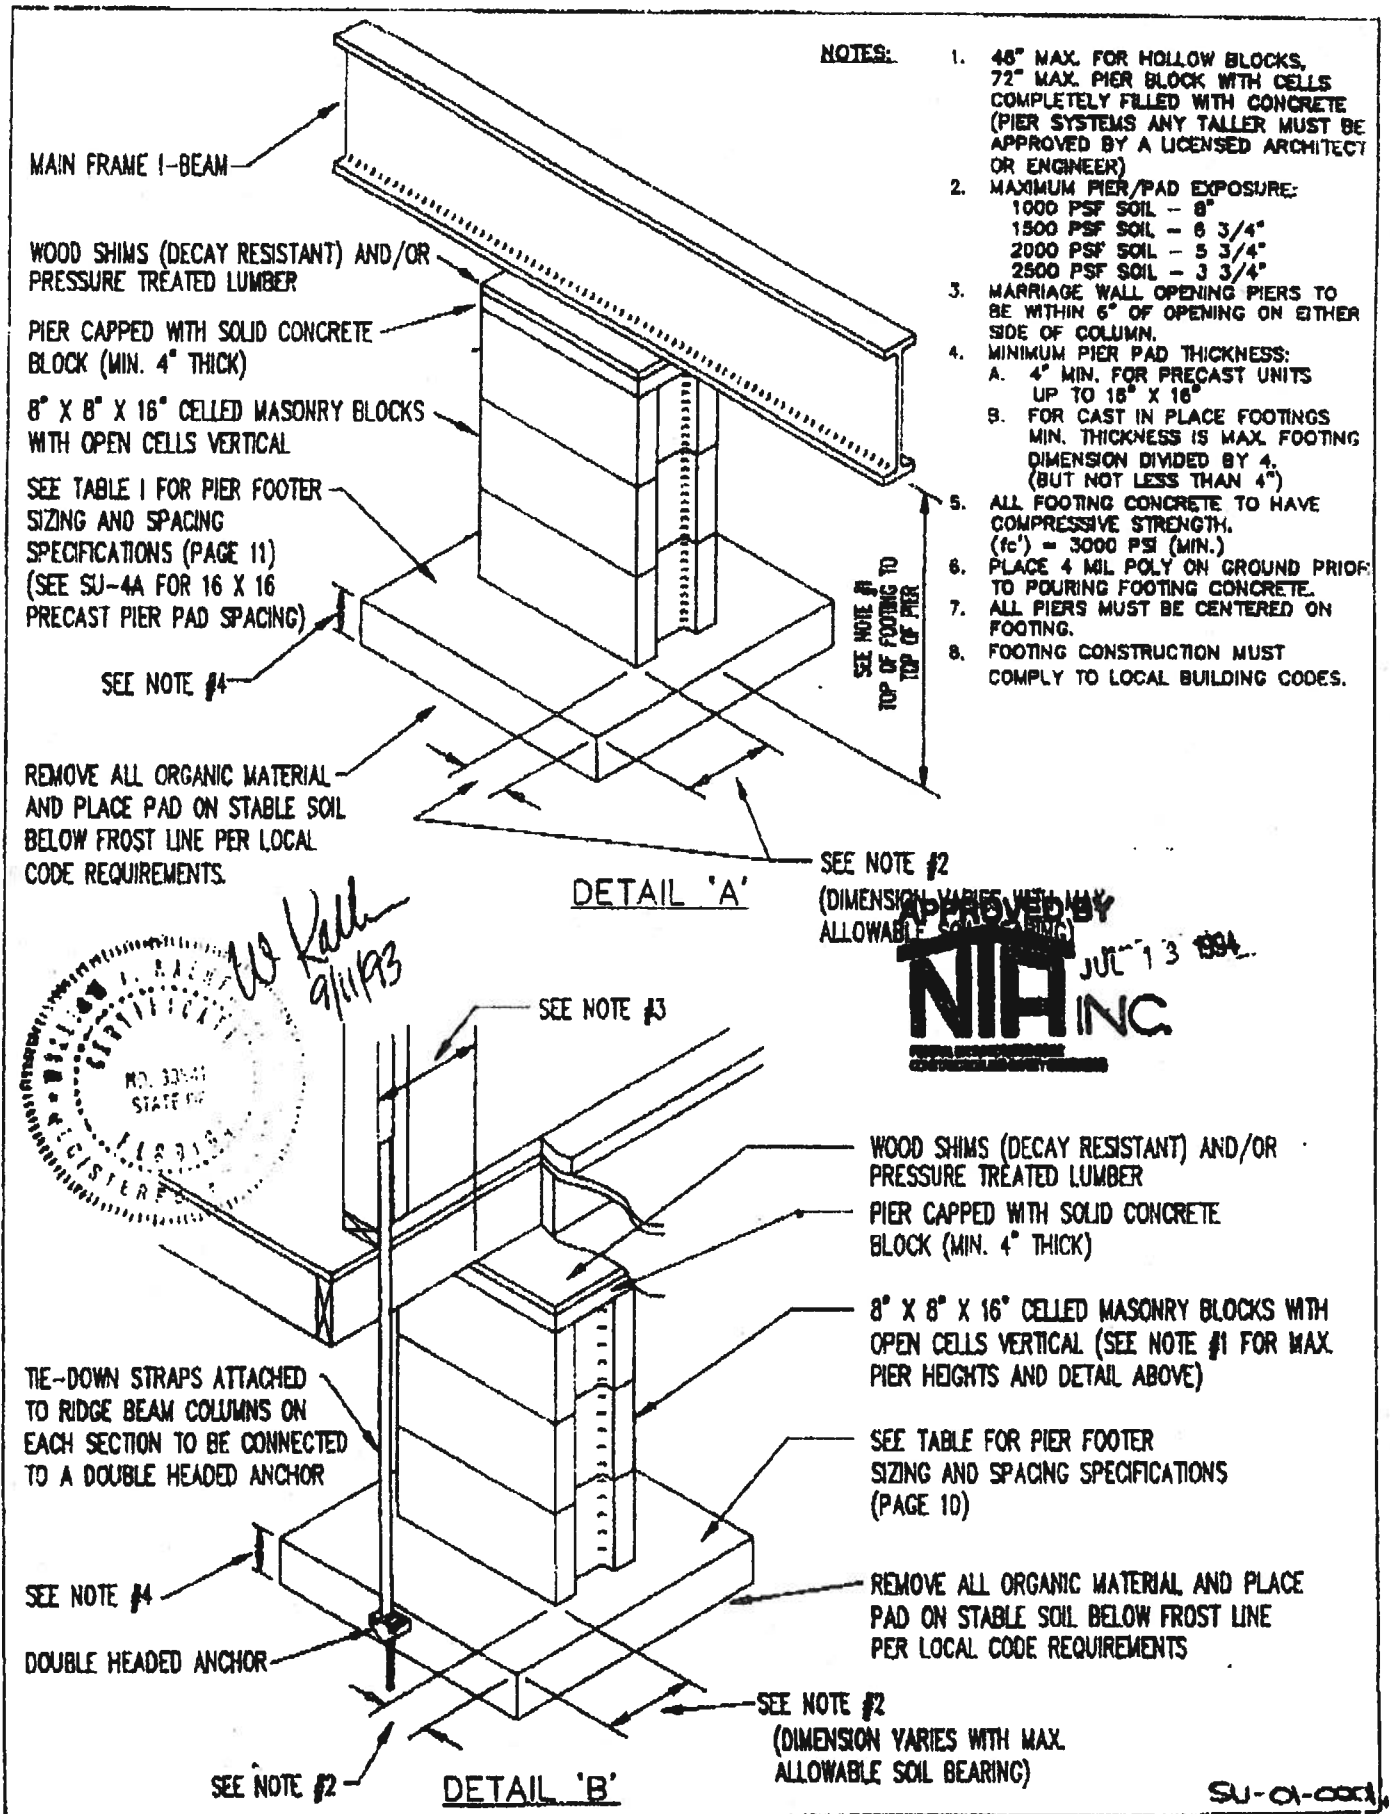


RON E. BIAS WELL DRILLING**RT.2 BOX 5340****FT. WHITE, FLORIDA 32038****(904) 497-1045****MOBILE: 364-9233****LIC: 1930SRWMD****TO: Columbia County Building Department****Description of well to be installed for Customer: David Moore****Located at Address: 109 S.W. Zinnia Glen, Ft. White****1 hp - 1 1/2" drop over 80 + gallon tank, 250 gallon equivalent captive with back flow preventer. 35-gallon draw down with check valve pass requirements.****This well was installed according to all State and Local codes for residential wells.****Ron E Bias****Ron Bias**

STATE OF FLORIDA
DEPARTMENT OF HEALTH
APPLICATION FOR ONSITE SEWAGE DISPOSAL SYSTEM CONSTRUCTION PERMIT

Permit Application Number 05-1084N

PART II - SITEPLAN

Scale: 1 inch = 50 feet.

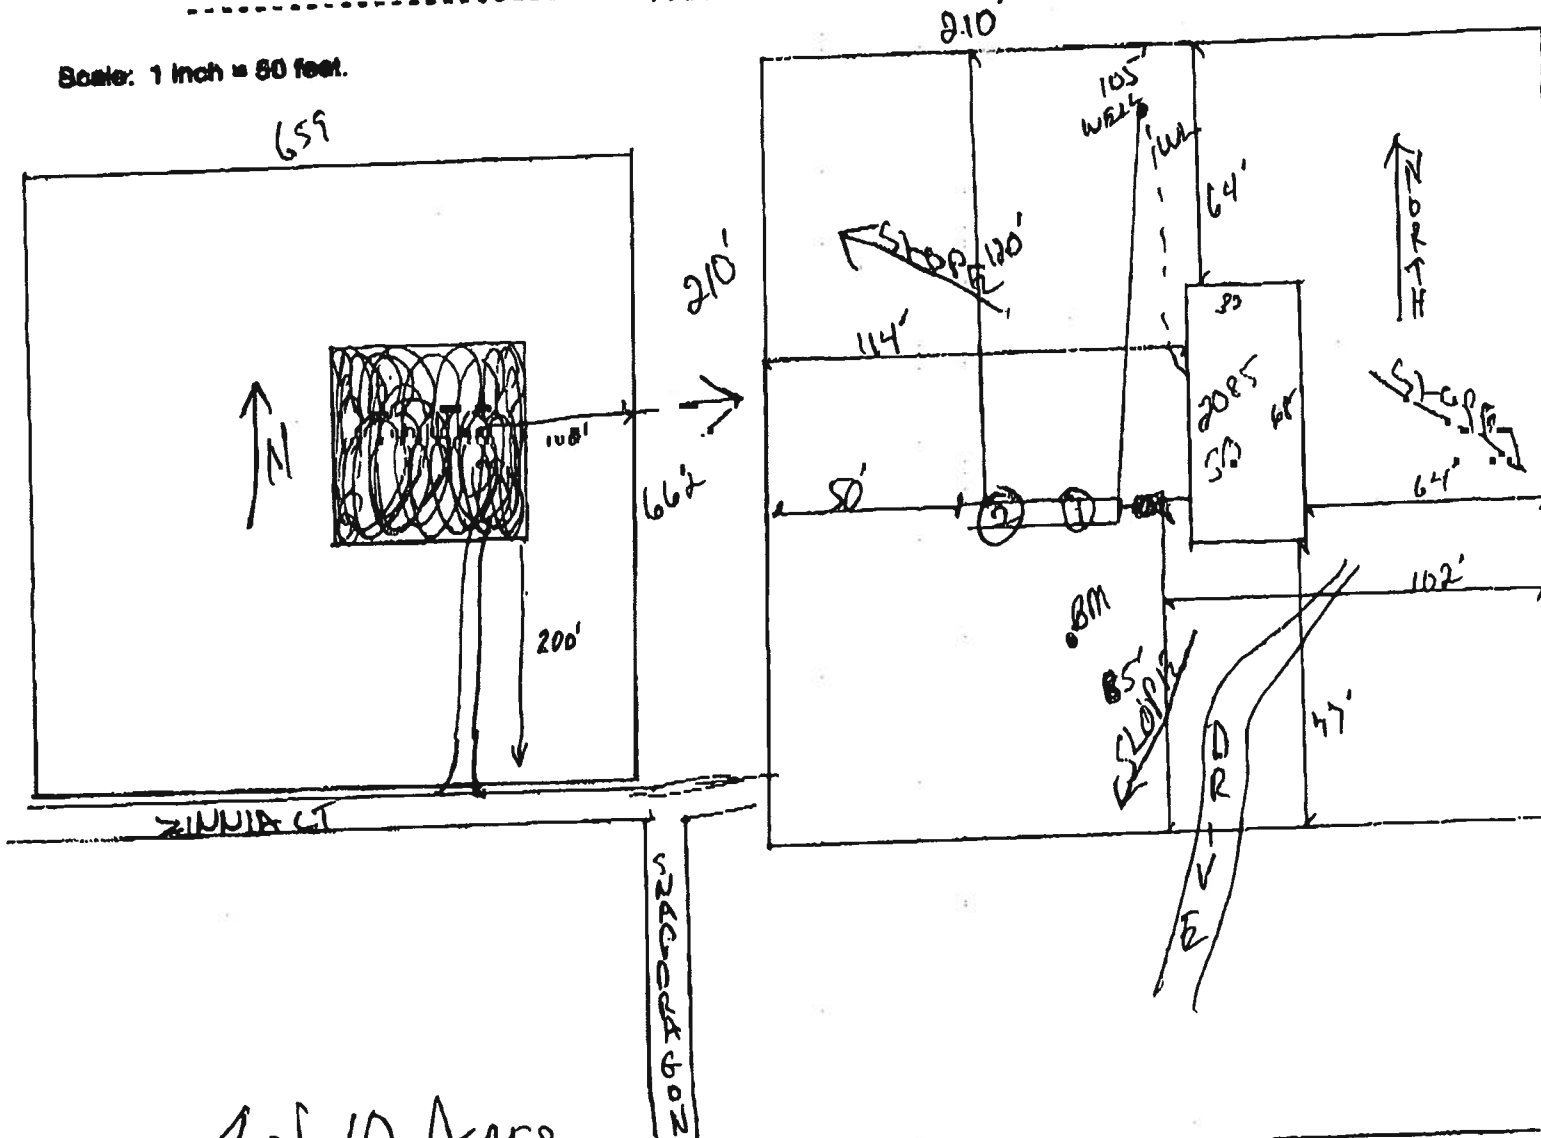

Notes:

Site Plan submitted by:

Plan Approved

24

Not Approved

MASTER CONTRACTOR

Date 10/28/05

County Health Department

ALL CHANGES MUST BE APPROVED BY THE COUNTY HEALTH DEPARTMENT

@ CAM112M01	CamaUSA Appraisal System	Columbia County
1/27/2006 10:40	Legal Description Maintenance	64000 Land 001
Year T Property	Sel	AG 000
2006 R 13-6S-16-09696-128	...	Bldg 000
TUSTENUGGEE PLANTATION UN		Xfea 000
MOORE DAVID E & KAREN F		64000 TOTAL B


1	AKA LOT 28 TUSTENUGGEE	PLANTATION UNIT 2 UNREC: COMM	2
3	NE COR, RUN W 1318.54 FT FOR	POB, CONT W 659.27 FT, S	4
5	662.16 FT, E 659.47 FT, N	662.15 FT TO POB. ORB 976-2720	6
7	WD 1025-1007.		8
9			10
11			12
13			14
15			16
17			18
19			20
21			22
23			24
25			26
27			28

Mnt 10/01/2004 KYLIE

F1=Task F3=Exit F4=Prompt F10=GoTo PgUp/PgDn F24=More



APPROXIMATE SCALE IN FEET




NATIONAL FLOOD INSURANCE PROGRAM

**FIRM
FLOOD INSURANCE RATE MAP**

**COLUMBIA
COUNTY,
FLORIDA
(UNINCORPORATED AREAS)**

PANEL 225 OF 290

PANEL LOCATION




**COMMUNITY-PANEL NUMBER
120070 0225 B**

**EFFECTIVE DATE:
JANUARY 6, 1988**



Federal Emergency Management Agency

This is an official copy of a portion of the above referenced flood map. It was extracted using F-MIT Version 1.0. This map does not reflect changes or amendments which may have been made subsequent to the date on the title block. Further information about National Flood Insurance Program flood hazard maps is available at www.fema.gov/mit/fsc.

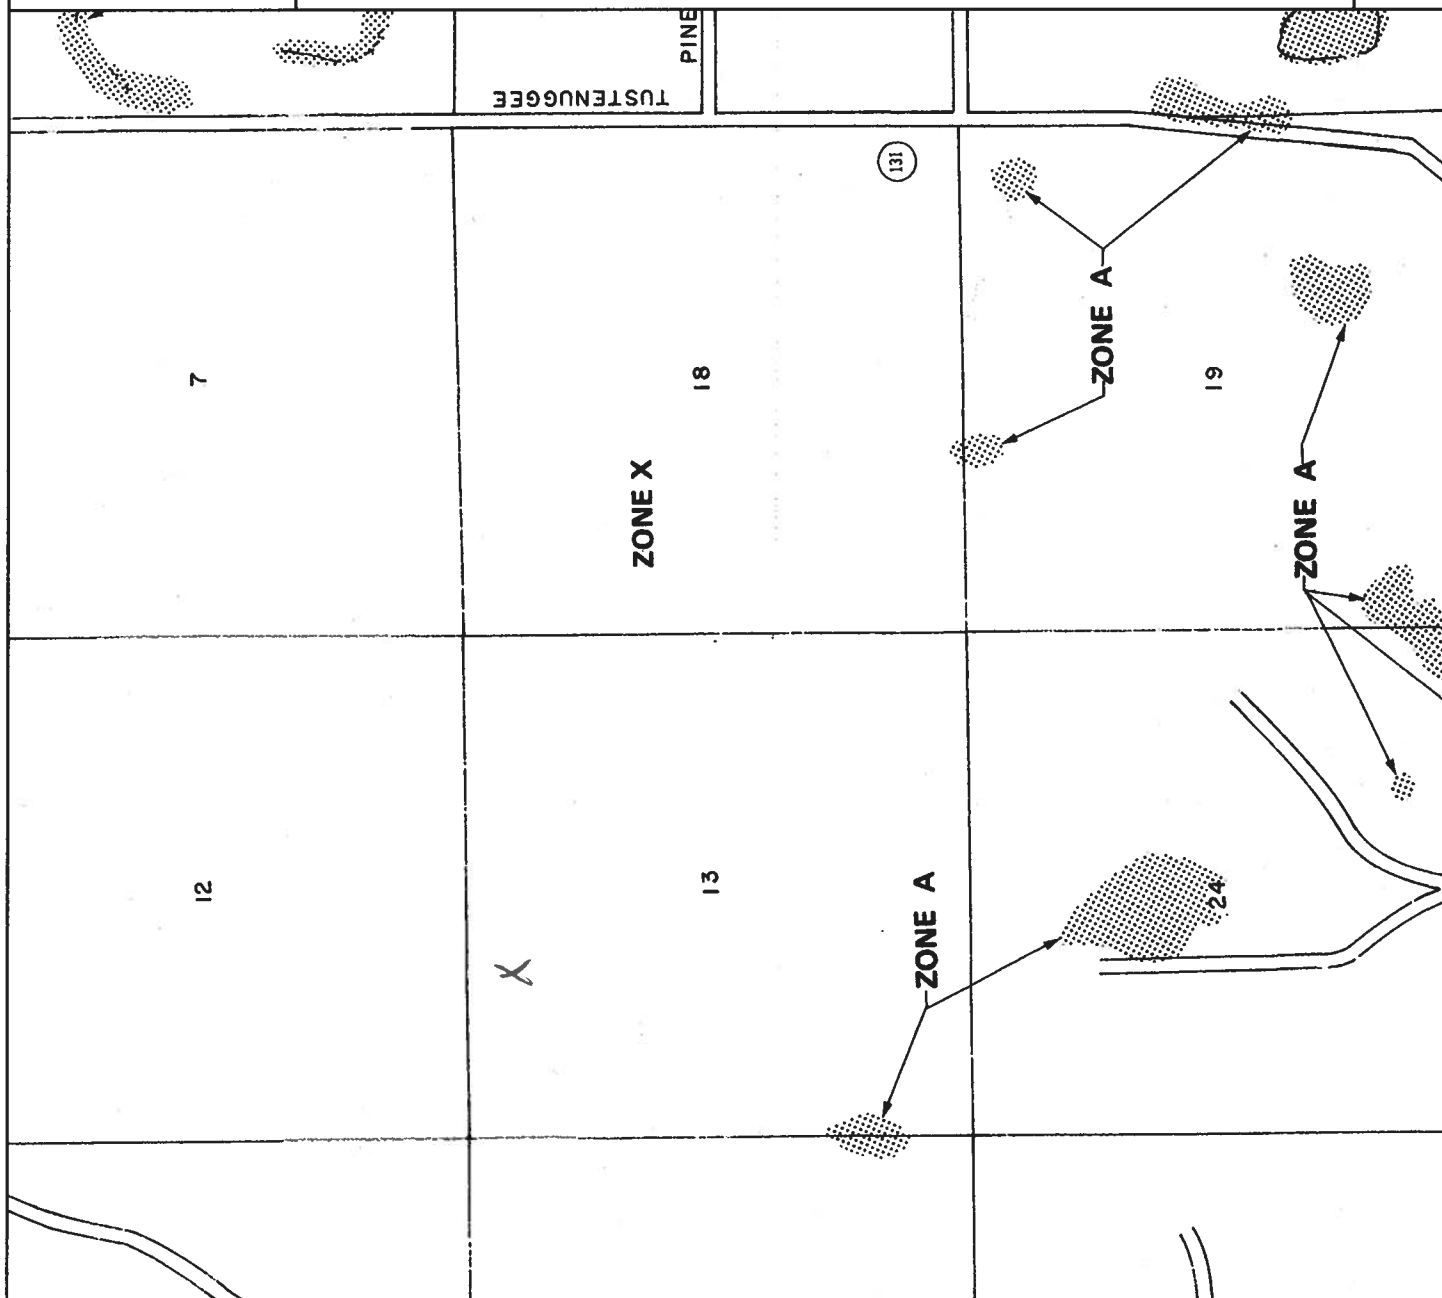

**Columbia County Building Department
Culvert Waiver**

**Culvert Waiver No.
000000959**

Weggie

DATE: 02/02/2006 BUILDING PERMIT NO. 24101

APPLICANT ED PICKLES PHONE 758-9900

ADDRESS 136 SW DEPUTY J. DAVIS LAKE CITY FL 32055

OWNER DAVID MOORE PHONE 954-873-5608

ADDRESS 109 SW ZINNA GLEN LAE CITY FL 32055

CONTRACTOR CRBETTS MOBILE HOME PHONE 758-9900

LOCATION OF PROPERTY 41S, TL ON CR 18, TL ON CR 131, TR ON MERRIGOLD, TR ON
SNAP DRAGAN, HOME ON HILL, NEW GAT3

SUBDIVISION/LOT/BLOCK/PHASE/UNIT TUSTENUGGEE PLANT. 28

PARCEL ID # 13-6S-16-09696-128

I HEREBY CERTIFY THAT I UNDERSTAND AND WILL FULLY COMPLY WITH THE DECISION OF THE COLUMBIA
COUNTY PUBLIC WORKS DEPARTMENT IN CONNECTION WITH THE HEREIN PROPOSED APPLICATION.

SIGNATURE: *[Signature]*

A SEPARATE CHECK IS REQUIRED
MAKE CHECKS PAYABLE TO BCC

Amount Paid 50.00


PUBLIC WORKS DEPARTMENT USE ONLY

I HEREBY CERTIFY THAT I HAVE EXAMINED THIS APPLICATION AND DETERMINED THAT THE
CULVERT WAIVER IS:

APPROVED _____ NOT APPROVED - NEEDS A CULVERT PERMIT

COMMENTS: Private Rd.

SIGNED: *Willie Minter* DATE: 1-7-06



ANY QUESTIONS PLEASE CONTACT THE PUBLIC WORKS DEPARTMENT AT 386-752-5955.

135 NE Hernando Ave., Suite B-21
Lake City, FL 32055
Phone: 386-758-1008 Fax: 386-758-2160



RECEIVED
FZ.9.06
CP

COLUMBIA COUNTY
OFFICE

M/H OCCUPANCY

COLUMBIA COUNTY, FLORIDA

Department of Building and Zoning Inspection

This Certificate of Occupancy is issued to the below named permit holder for the building and premises at the below named location, and certifies that the work has been completed in accordance with the Columbia County Building Code.

Parcel Number 13-6S-16-09696-128

Building permit No. 000024101

Permit Holder CORBETTS MOBILE HOME

Owner of Building DAVID MOORE

Location: 109 SW ZINNIA GLEN, FT. WHITE, FL



Date: 02/09/2006

Harry Dicks

Building Inspector

POST IN A CONSPICUOUS PLACE
(Business Places Only)

**CERTIFICATE
OF
COMPLETION**

M/H OCCUPANCY

COLUMBIA COUNTY, FLORIDA

Department of Building and Zoning Inspection

This Certificate of Occupancy is issued to the below named permit holder for the building and premises at the below named location, and certifies that the work has been completed in accordance with the Columbia County Building Code.

Parcel Number 13-6S-16-09696-128

Building permit No. 000024101

Permit Holder CORBETTS MOBILE HOME

Owner of Building DAVID MOORE

Location: 109 SW ZINNIA GLEN, FT. WHITE, FL

Date: 02/09/2006

Building Inspector

POST IN A CONSPICUOUS PLACE
(Business Places Only)



Harry Dicks