



12"X12" STD RIBBON FOOTING
 GOOD FOR CAGE BEAM SPANS
 40 FT WIND ZONE 130 MPH
 40 FT WIND ZONE 140 MPH
 40 FT WIND ZONE 150 MPH
 40 FT WIND ZONE 160 MPH
 PER 2023 FBC 8TH ED

This item has been digitally signed and sealed by J. Kent Kimes, PE on date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Digitally signed by James K Kimes
 DN: c=US, o=KIMES ENGINEERING AND MANAGEMENT SERVICES INC, dnQualifier=A01410C000001877C95694C00059AC5, cn=James K Kimes
 Date: 2025.03.26 16:10:57 -04'00'

NOTES - CONCRETE F&P STRUCTURE:

1. USE CONCRETE MINIMUM 3,000 PSI @ 28 DAYS, MAY USE GUNITE OR SHOTCRETE
2. REINFORCING STEEL: MINIMUM ASTM A615 GR 60
3. LAP #5 BARS MINIMUM 25", #3 BARS MIN 15"
4. MIN 3" CLEARANCE TO SOIL FOR STEEL
5. PLACE FOOTING ON FILL COMPACTED TO 95% MODIFIED PROCTOR OR ON UNDISTURBED EARTH MEETING 2,000 PSF
6. ANY STEEL WITHIN 5' OF POOL WATER MUST BE BONDED TO EQUIPMENT

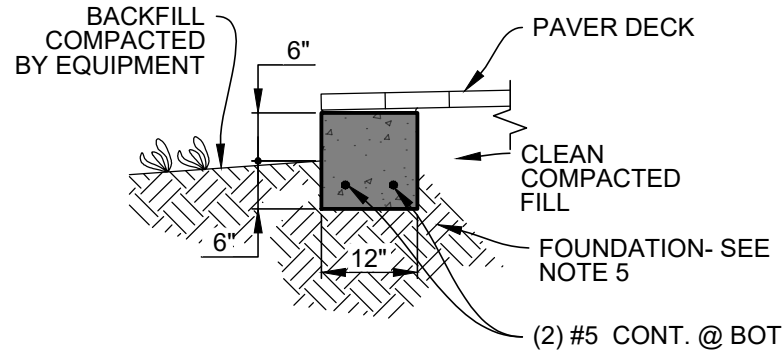

12"X12" FOOTING

SCALE: N.T.S.

SUPPLEMENTAL SPEC
 12"X12" STD FOOTING

330 SW UTAH ST
 GATOR POOL BUILDERS



1925 Worth Ct
 Bradenton, FL 34211
 Office: 941-749-0311
 C.A. 27189

©2024 Kimes Engineering and Management Services, Inc.
 This drawing is the property of Kimes Engineering and Management Services, Inc. & is not to be reproduced or copied in whole or in part. It is only for the project & site specifically identified herein & is not to be used on any other project. It is to be returned upon request.

PROJ. NO.:
 2023 FBC

DWG BY: JKK
 CKD BY: JKK

DRAWING: JKK
 3-Feb-24

PRINTED:
 2-Aug-24

SPEC