



**COLUMBIA COUNTY BUILDING DEPARTMENT
RESIDENTIAL CHECK LIST**

**MINIMUM PLAN REQUIREMENTS: FLORIDA BUILDING CODE RESIDENTIAL 2017 EFFECTIVE 1 JANUARY 2018
AND THE NATIONAL ELECTRICAL 2014 EFFECTIVE 1 JANUARY 2018**

ALL REQUIREMENTS ARE SUBJECT TO CHANGE

ALL BUILDING PLANS MUST INDICATE COMPLIANCE WITH THE CURRENT FLORIDA BUILDING CODES RESIDENTIAL AND THE NATIONAL ELECTRICAL CODE. ALL PLANS OR DRAWINGS SHALL PROVIDE CALCULATIONS AND DETAILS THAT HAVE THE SEAL AND SIGNATURE OF A CERTIFIED ARCHITECT OR ENGINEER REGISTERED IN THE STATE OF FLORIDA, OR ALTERNATE METHODOLOGIES, APPROVED BY THE STATE OF FLORIDA BUILDING COMMISSION FOR ONE-AND-TWO FAMILY DWELLINGS, FBC 1609.3.1 THRU 1609.3.3.

FOR DESIGN PURPOSES THE FOLLOWING BASIC WIND SPEEDS ARE PER FLORIDA BUILDING CODE FIGURE 1609-A THROUGH 1609-C ULTIMATE DESIGN WIND SPEEDS FOR RISK CATEGORY AND BUILDINGS AND OTHER STRUCTURES

Revised 7/1/18

Website: <http://www.columbiacountyfla.com/BuildingandZoning.asp>

Items to Include-
Each Box shall be
Circled as
Applicable

GENERAL REQUIREMENTS:

APPLICANT – PLEASE CHECK ALL APPLICABLE BOXES BEFORE SUBMITTAL

Select From Drop down

1	Two (2) complete sets of plans containing the following:	<input checked="" type="checkbox"/>		
2	All drawings must be clear, concise, drawn to scale, details that are not used shall be marked void	<input checked="" type="checkbox"/>		
3	Condition space (Sq. Ft.)	Total (Sq. Ft.) under roof	Yes	No NA

Designers name and signature shall be on all documents and a licensed architect or engineer, signature and official embossed seal shall be affixed to the plans and documents as per the FLORIDA BUILDING CODES RESIDENTIAL 107.1.

Site Plan information including:

4	Dimensions of lot or parcel of land	- ✓		
5	Dimensions of all building set backs	- ✓		
6	Location of all other structures (include square footage of structures) on parcel, existing or proposed well and septic tank and all utility easements.	- ✓		
7	Provide a full legal description of property.	- ✓		

Wind-load Engineering Summary, calculations and any details are required.

GENERAL REQUIREMENTS: APPLICANT – PLEASE CHECK ALL APPLICABLE BOXES BEFORE SUBMITTAL		Items to Include- Each Box shall be Circled as Applicable		
8	Plans or specifications must show compliance with FBCR Chapter 3	Yes	No	NA
Select From Drop down				
9	Basic wind speed (3-second gust), miles per hour	- ✓		
10	(Wind exposure – if more than one wind exposure is used, the wind exposure and applicable wind direction shall be indicated)	- ✓		
11	Wind importance factor and nature of occupancy	- ✓		
12	The applicable internal pressure coefficient, Components and Cladding	- ✓		
13	The design wind pressure in terms of psf (kN/m ²), to be used for the design of exterior component, cladding materials not specifically designed by the registered design professional.	- ✓		

Elevations Drawing including:

14	All side views of the structure	- ✓		
15	Roof pitch	- ✓		
16	Overhang dimensions and detail with attic ventilation	- ✓		
17	Location, size and height above roof of chimneys	- ✓		
18	Location and size of skylights with Florida Product Approval	- ✓		✓
19	Number of stories	- ✓		
20	Building height from the established grade to the roofs highest peak	- ✓		

Floor Plan Including:

21	Dimensioned area plan showing rooms, attached garage, breeze ways, covered porches, deck, balconies	- ✓		
22	Raised floor surfaces located more than 30 inches above the floor or grade	- ✓		
23	All exterior and interior shear walls indicated	- ✓		
24	Shear wall opening shown (Windows, Doors and Garage doors)	- ✓		
25	Show compliance with Section FBCR 310 Emergency escape and rescue opening shown in each bedroom (net clear opening shown) and Show compliance with Section FBC 1405.13.2 where the opening of an operable window is located more than 72 inches above the finished grade or surface below, the lowest part of the clear opening of the window shall be a minimum of 24 inches above the finished floor of the room in which the window is located. Glazing between the floor and 24 inches shall be fixed or have openings through which a 4-inch-diameter sphere cannot pass.	✓ -		
26	Safety glazing of glass where needed	- ✓		
27	Fireplaces types (gas appliance) (vented or non-vented) or wood burning with Hearth (see chapter 10 and chapter 24 of FBCR)	✓		✓
28	Show stairs with dimensions (width, tread and riser and total run) details of guardrails, Handrails	- ✓		
29	Identify accessibility of bathroom (see FBCR SECTION 320)	- ✓		

All materials placed within opening or onto/into exterior walls, soffits or roofs shall have Florida product approval number and mfg. installation information submitted with the plans (see Florida product approval form)

GENERAL REQUIREMENTS: APPLICANT – PLEASE CHECK ALL APPLICABLE BOXES BEFORE SUBMITTAL		Items to Include- Each Box shall be Circled as Applicable
---	--	--

FBCR 403: Foundation Plans

		Select From Drop down		
30	Location of all load-bearing walls footings indicated as standard, monolithic, dimensions, size and type of reinforcing.	- ✓		
31	All posts and/or column footing including size and reinforcing	- ✓		
32	Any special support required by soil analysis such as piling.	- ✓		
33	Assumed load-bearing value of soil _____ Pound Per Square Foot	- ✓		✓
34	Location of horizontal and vertical steel, for foundation or walls (include # size and type) For structures with foundation which establish new electrical utility companies service connection a Concrete Encased Electrode will be required within the foundation to serve as an grounding electrode system. Per the National Electrical Code article 250.52.3	✓ -		

FBCR 506: CONCRETE SLAB ON GRADE

35	Show Vapor retarder (6mil. Polyethylene with joints taped 6 inches and sealed)	- ✓		✓
36	Show control joints, synthetic fiber reinforcement or welded fire fabric reinforcement and Spalls	- ✓		✓

FBCR 318: PROTECTION AGAINST TERMITES

37	Indicate on the foundation plan if soil treatment is used for subterranean termite prevention or Submit other approved termite protection methods. Protection shall be provided by registered termiticides	- ✓		
----	--	-----	--	--

FBCR 606: Masonry Walls and Stem walls (load bearing & shear Walls)

38	Show all materials making up walls, wall height, and Block size, mortar type	- ✓		
39	Show all Lintel sizes, type, spans and tie-beam sizes and spacing of reinforcement	- ✓		

Metal frame shear wall and roof systems shall be designed, signed and sealed by Florida Prof. Engineer or Architect

Floor Framing System: First and/or second story

40	Floor truss package shall including layout and details, signed and sealed by Florida Registered Professional Engineer	-	✓		
41	Show conventional floor joist type, size, span, spacing and attachment to load bearing walls, stem walls and/or piers	-	✓		
42	Girder type, size and spacing to load bearing walls, stem wall and/or piers	-	✓		
43	Attachment of joist to girder	-	✓		
44	Wind load requirements where applicable	-	✓		
45	Show required under-floor crawl space	-	✓		
46	Show required amount of ventilation opening for under-floor spaces	-	✓		
47	Show required covering of ventilation opening	-	✓		
48	Show the required access opening to access to under-floor spaces	-	✓		
49	Show the sub-floor structural panel sheathing type, thickness and fastener schedule on the edges & intermediate of the areas structural panel sheathing	-	✓		
50	Show Draftstopping, Fire caulking and Fire blocking	-	✓		
51	Show fireproofing requirements for garages attached to living spaces, per FBCR section 302.6	-	✓		
52	Provide live and dead load rating of floor framing systems (psf).	-	✓		

FBCR CHAPTER 6 WOOD WALL FRAMING CONSTRUCTION

GENERAL REQUIREMENTS: APPLICANT – PLEASE CHECK ALL APPLICABLE BOXES BEFORE SUBMITTAL		Items to Include- Each Box shall be Circled as Applicable			
---	--	--	--	--	--

Select from Drop down

53	Stud type, grade, size, wall height and oc spacing for all load bearing or shear walls	-	✓		
54	Fastener schedule for structural members per table FBC-R602.3.2 are to be shown	-	✓		
55	Show wood structural panel's sheathing attachment to studs, joist, trusses, rafters and structural members, showing fastener schedule attachment on the edges & intermediate of the areas structural panel sheathing	-	✓		
56	Show all required connectors with a max uplift rating and required number of connectors and oc spacing for continuous connection of structural walls to foundation and roof trusses or rafter systems	-	✓		
57	Show sizes, type, span lengths and required number of support jack studs, king studs for shear wall opening and girder or header per FBC-R602.7.	-	✓		
58	Indicate where pressure treated wood will be placed	-	✓		
59	Show all wall structural panel sheathing, grade, thickness and show fastener schedule for structural panel sheathing edges & intermediate areas	-	✓		
60	A detail showing gable truss bracing, wall balloon framing details or/ and wall hinge bracing detail	-	✓		

FBCR :ROOF SYSTEMS:

61	Truss design drawing shall meet section FBC-R 802.10. 1 Wood trusses	-	✓		
62	Include a layout and truss details, signed and sealed by Florida Professional Engineer	-	✓		
63	Show types of connector's assemblies' and resistance uplift rating for all trusses and rafters	-	✓		
64	Show gable ends with rake beams showing reinforcement or gable truss and wall bracing details	-	✓		
65	Provide dead load rating of trusses	-	✓		

FBCR 802:Conventional Roof Framing Layout

66	Rafter and ridge beams sizes, span, species and spacing	-	✓		
67	Connectors to wall assemblies' include assemblies' resistance to uplift rating	-	✓		
68	Valley framing and support details	-	✓		
69	Provide dead load rating of rafter system	-	✓		

FBCR 803 ROOF SHEATHING

70	Include all materials which will make up the roof decking, identification of structural panel sheathing, grade, thickness	-	✓		
71	Show fastener Size and schedule for structural panel sheathing on the edges & intermediate areas	-	✓		

ROOF ASSEMBLIES FRC Chapter 9

72	Include all materials which will make up the roof assemblies covering	-		
73	Submit Florida Product Approval numbers for each component of the roof assemblies covering	-		

FBCR Chapter 11 Energy Efficiency Code for Residential Building

Residential construction shall comply with this code by using the following compliance methods in the FBCR Chapter 11 Residential buildings compliance methods. **Two of the required forms are to be submitted, N1100.1.1.1 As an alternative to the computerized Compliance Method A, the Alternate Residential Point System Method hand calculation, Alternate Form 600A, may be used. All requirements specific to this calculation are located in Sub appendix C to Appendix G. Buildings complying by this alternative shall meet all mandatory requirements of this chapter. Computerized versions of the Alternate Residential Point System Method shall not be acceptable for code compliance.**

GENERAL REQUIREMENTS: APPLICANT – PLEASE CHECK ALL APPLICABLE BOXES BEFORE SUBMITTAL		Items to Include- Each Box shall be Circled as Applicable		
---	--	--	--	--

Select from Drop Down

74	Show the insulation R value for the following areas of the structure	-	✓	
75	Attic space	-	✓	
76	Exterior wall cavity	-	✓	
77	Crawl space	-	✓	

HVAC information

78	Submit two copies of a Manual J sizing equipment or equivalent computation study	-	✓	
79	Exhaust fans shown in bathrooms Mechanical exhaust capacity of 50 cfm intermittent or 20 cfm continuous required	-	✓	
80	Show clothes dryer route and total run of exhaust duct	-	✓	

Plumbing Fixture layout shown

81	All fixtures waste water lines shall be shown on the foundation plan	-	✓	
82	Show the location of water heater	-	✓	

Private Potable Water

83	Pump motor horse power	-	✓	
84	Reservoir pressure tank gallon capacity	-	✓	
85	Rating of cycle stop valve if used	-	✓	

Electrical layout shown including

86	Show Switches, receptacles outlets, lighting fixtures and Ceiling fans	-	✓	
87	Show all 120-volt, single phase, 15- and 20-ampere branch circuits outlets required to be protected by Ground-Fault Circuit Interrupter (GFCI) Article 210.8 A	-	✓	
88	Show the location of smoke detectors & Carbon monoxide detectors	-	✓	
89	Show service panel, sub-panel, location(s) and total ampere ratings	-	✓	
90	On the electrical plans identify the electrical service overcurrent protection device for the main electrical service. This device shall be installed on the exterior of structures to serve as a disconnecting means for the utility company electrical service. Conductors used from the exterior disconnecting means to a panel or sub panel shall have four-wire conductors, of which one conductor shall be used as an equipment ground. Indicate if the utility company service entrance cable will be of the overhead or underground type. For structures with foundation which establish new electrical utility companies service connection a Concrete Encased Electrode will be required within the foundation to serve as an Grounding electrode system. Per the National Electrical Code article 250.52.3	-	✓	
91	Appliances and HVAC equipment and disconnects	-	✓	
92	Show all 120-volt, single phase, 15- and 20-ampere branch circuits supplying outlets installed in dwelling unit family rooms, dining rooms, living rooms, parlors, libraries, dens, bedrooms, sunrooms, recreation rooms, closets, hallways, or similar rooms or areas shall be protected by a listed Combination arc-fault circuit interrupter, Protection device.	-	✓	

Notice Of Commencement:

A notice of commencement form RECORDED in the Columbia County Clerk Office is required to be filed with the Building Department BEFORE ANY INSPECTIONS can be performed.

<p align="center">GENERAL REQUIREMENTS: APPLICANT – PLEASE CHECK ALL APPLICABLE BOXES BEFORE SUBMITTAL</p>	<p align="center">Items to Include- Each Box shall be Circled as Applicable</p>
---	--

****ITEMS 95, 96, & 98 Are Required After APPROVAL from the ZONING DEPT.****

Select from Drop down

93	Building Permit Application A current Building Permit Application is to be completed, by following the Checklist all supporting documents must be submitted. There is a \$15.00 application fee. The completed application with attached documents and application fee can be mailed.	- ✓		
94	Parcel Number The parcel number (Tax ID number) from the Property Appraisers Office (386) 758-1083 is required. A copy of property deed is also required. www.columbiacountyfla.com	- ✓		
95	Environmental Health Permit or Sewer Tap Approval A copy of a approved Columbia County Environmental Health (386) 758-1058	- ✓		
96	City of Lake City A City Water and/or Sewer letter. Call 386-752-2031	- ✓		✓
97	Toilet facilities shall be provided for all construction sites	- ✓		
98	Town of Fort White (386) 497-2321 If the parcel in the application for building permit is within the Corporate city limits of Fort White, an approval land use development letter issued by the Town of Fort is required to be submitted with the application for a building permit.	-		✓
99	Flood Information: All projects within the Floodway of the Suwannee or Santa Fe Rivers shall require permitting through the Suwannee River Water Management District, before submitting a application to this office. Any project located within a flood zone where the base flood elevation (100 year flood) has been established shall meet the requirements of Section 8.5.2 of the Columbia County Land Development Regulations. Any project located within a flood zone where the base flood elevation has not been established (Zone A) shall meet the requirements of Section 8.5.3 of the Columbia County Land Development Regulations (Municode.com)	- ✓		
100	CERTIFIED FINISHED FLOOR ELEVATIONS will be required on any project where the approved FIRM Flood Maps show the property is in a AE, Floodway, and AH flood zones. Additionally One Foot Rise letters are required for AE and AH zones. In the Floodway Flood zones a Zero Rise letter is required.	- ✓		
101	A Flood development permit is also required for AE, Floodway & AH. Development permit cost is \$50.00	-		
102	Driveway Connection: If the property does not have an existing access to a public road, then an application for a culvert permit (\$25.00) must be made. County Public Works Dept. determines the size and length of every culvert before instillation and completes a final inspection before permanent power is granted. If the applicant feels that a culvert is not needed, they may apply for a culvert waiver (\$50.00) Separate Check when issued. If the project is to be located on an F.D.O.T. maintained road, then an F.D.O.T. access permit is required.	- ✓		
103	911 Address: An application for a 911 address must be applied for and received through the Columbia County Emergency Management Office of 911 Addressing Department (386) 758-1125.	- ✓		

Ordinance Sec. 90-75. - Construction debris. (e) It shall be unlawful for any person to dispose of or discard solid waste, including construction or demolition debris at any place within the county other than on an authorized disposal site or at the county's solid waste facilities. The temporary storage, not to exceed seven days of solid waste (excluding construction and demolition debris) on the premises where generated or vegetative trash pending disposition as authorized by law or ordinance, shall not be deemed a violation of this section. The temporary storage of construction and demolition debris on the premises where generated or vegetative trash pending disposition as authorized by law or ordinance shall not be deemed in violation of this section; provided, however, such construction and demolition debris must be disposed of in accordance with this article prior to the county's issuance of a certificate of occupancy for the premises. The burning of lumber from a construction or demolition project or vegetative trash when done so with legal and proper permits from the authorized agencies and in accordance with such agencies' rules and regulations, shall not be deemed a violation of this section. No person shall bury, throw, place, or deposit, or cause to be buried, thrown, placed, or deposited, any solid waste, special waste, or debris of any kind into or on any of the public streets, road right-of-way, highways, bridges, alleys, lanes, thoroughfares, waters, canals, or vacant lots or lands within the county. No person shall bury any vegetative trash on any of the public streets, road right-of-way, highways, bridges, lanes, thoroughfares, waters, canals, or lots less than ten acres in size within the county.



Lumber design values are in accordance with ANSI/TPI 1 section 6.3
These truss designs rely on lumber values established by others.

RE: shokat_house - Shokat house

MiTek USA, Inc.

6904 Parke East Blvd.
Tampa, FL 33610-4115

Site Information:

Customer Info: Sammy Keen Project Name: . Model: .
Lot/Block: . Subdivision: .
Address: ., .
City: Columbia County State: FL

Name Address and License # of Structural Engineer of Record, If there is one, for the building.


Name: License #:
Address:
City: State:

General Truss Engineering Criteria & Design Loads (Individual Truss Design Drawings Show Special Loading Conditions):

Design Code: FBC2017/TPI2014 Design Program: MiTek 20/20 8.2
Wind Code: ASCE 7-10 Wind Speed: 130 mph
Roof Load: 40.0 psf Floor Load: 55.0 psf

This package includes 13 individual, Truss Design Drawings and 0 Additional Drawings.
With my seal affixed to this sheet, I hereby certify that I am the Truss Design Engineer and this index sheet conforms to 61G15-31.003, section 5 of the Florida Board of Professional Engineers Rules.

No.	Seal#	Truss Name	Date
1	T18103994	F01	9/12/19
2	T18103995	F02	9/12/19
3	T18103996	F03	9/12/19
4	T18103997	F04	9/12/19
5	T18103998	F05	9/12/19
6	T18103999	F06	9/12/19
7	T18104000	F07	9/12/19
8	T18104001	F08	9/12/19
9	T18104002	M01	9/12/19
10	T18104003	M02	9/12/19
11	T18104004	M03	9/12/19
12	T18104005	M05	9/12/19
13	T18104006	M06	9/12/19

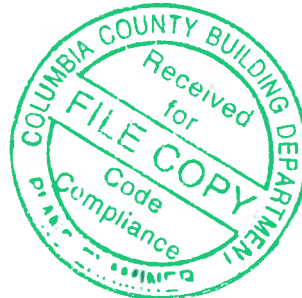


The truss drawing(s) referenced above have been prepared by MiTek USA, Inc.
under my direct supervision based on the parameters
provided by Mayo Truss Company, Inc..

Truss Design Engineer's Name: O'Regan, Philip

My license renewal date for the state of Florida is February 28, 2021.

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek or TRENCO. Any project specific information included is for MiTek's or TRENCO's customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek or TRENCO has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.

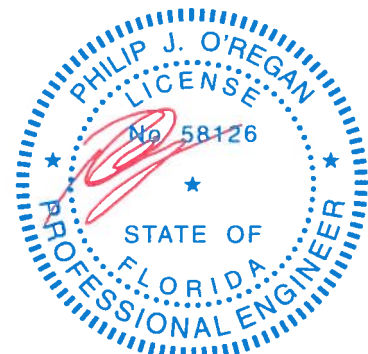

Philip J. O'Regan PE No.58126
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:


September 12, 2019

O'Regan, Philip


1 of 1

Symbols

PLATE LOCATION AND ORIENTATION



Center plate on joint unless x, y offsets are indicated. Dimensions are in ft-in-sixteenths. Apply plates to both sides of truss and fully embed teeth.

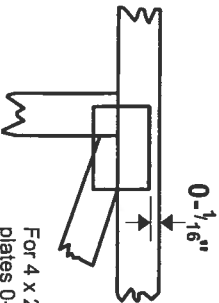

For 4 x 2 orientation, locate plates 0- $\frac{1}{16}$ " from outside edge of truss.

— This symbol indicates the required direction of slots in connector plates.

* Plate location details available in **MITek 2020** software or upon request.

PLATE SIZE

4 X 4


The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T or L bracing if indicated.

BEARING



Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number where bearings occur. Min size shown is for crushing only.

Industry Standards:

ANSI/TP1: National Design Specification for Metal

Plate Connected Wood Truss Construction.

DSB-89: Design Standard for Bracing.

BCSI: Building Component Safety Information,


Guide to Good Practice for Handling,

Installing & Bracing of Metal Plate

Connected Wood Trusses.

Numbering System

6-4-8 dimensions shown in ft-in-sixteenths (Drawings not to scale)

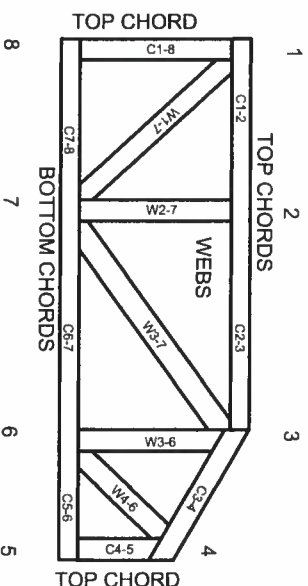

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

PRODUCT CODE APPROVALS

ICC-ES Reports:

ESR-1311, ESR-1352, ESR1988
ER-3907, ESR-2362, ESR-1397, ESR-3282

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.

Lumber design values are in accordance with ANSI/TP1 section 6.3 These truss designs rely on lumber values established by others.

© 2012 MITek® All Rights Reserved



MITek Engineering Reference Sheet: MIL-7473 rev. 10/03/2015

General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative T or L bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TP1 1.
7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TP1 1.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with ANSI/TP1 1 Quality Criteria.

Job shokat_house	Truss F01	Truss Type GABLE	Qty 2	Ply 1	Shokat house T18103994
---------------------	--------------	---------------------	----------	----------	---------------------------


Mayo Truss Company, Inc.,

Mayo, FL - 32066,

8.240 s Jul 14 2019 MiTek Industries, Inc. Thu Sep 12 14:40:07 2019 Page 1
ID:mctxLUw7X5_5IAekZojTb6yv8TZ-y7vG_zM09a954Qzx3cgJELuMJxrtzp8iysO4XDyeLPc

0-1-8

Scale = 1:20.7

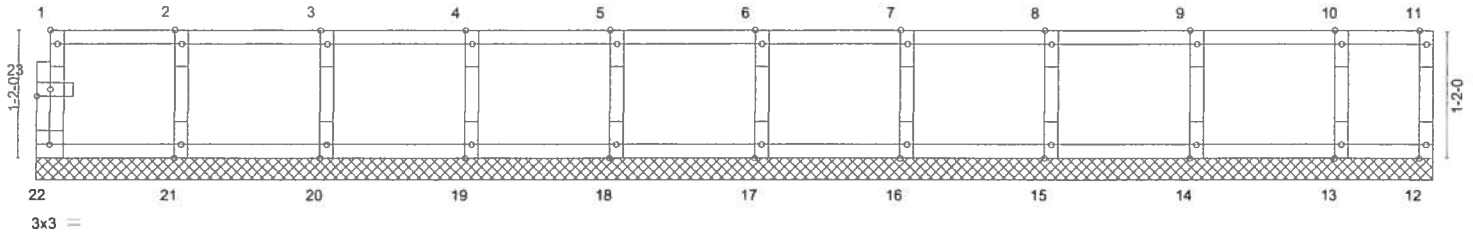

1-4-0	2-8-0	4-0-0	5-4-0	6-8-0	8-0-0	9-4-0	10-8-0	12-0-0	12-10-2
1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	0-10-2
Plate Offsets (X,Y) - [1:Edge,0-0-12], [23:0-1-8,0-0-12]									
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.08	Vert(LL)	n/a	-	n/a	999	MT20
TCDL 10.0	Lumber DOL	1.00	BC 0.02	Vert(CT)	n/a	-	n/a	999	244/190
BCLL 0.0	Rep Stress Incr	YES	WB 0.02	Horz(CT)	0.00	12	n/a	n/a	
BCDL 5.0	Code FBC2017/TPI2014		Matrix-R						
									Weight: 54 lb FT = 0%F, 0%E

LUMBER-
TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.2(flat)
OTHERS 2x4 SP No.2(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 12-10-2.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 22, 12, 21, 20, 19, 18, 17, 16, 15, 14, 13

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) All plates are 1.5x4 MT20 unless otherwise indicated.
- 2) Gable requires continuous bottom chord bearing.
- 3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- 4) Gable studs spaced at 1-4-0 oc.
- 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 6) CAUTION, Do not erect truss backwards.



Philip J. O'Regan PE No.58126
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

September 12,2019

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITTEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 218 N. Lee Street, Suite 312, Alexandria, VA 22314.




6904 Parke East Blvd.
Tampa, FL 36610

8.240 s Jul 14 2019 MiTek Industries, Inc. Thu Sep 12 14:40:08 2019 Page 1
ID:mcxbLUw7X5_5IAekZojTb6yv8TZ-QJTeBJMewuHyiaY7cJBmYQUAL3FiEfrBW8d4fyeLPb

6904 Parke East Blvd.
Tampa, FL 36610

8.240 s Jul 14 2019 MiTek Industries, Inc. Thu Sep 12 14:40:08 2019 Page 1
ID:mcxLUw7X5 5IAekZoiTb6vv8TZ-QJTebJMewuHviaY7cJBmYQUAL3FiEfrBW8d4fveLPb


Scale = 1:21.6

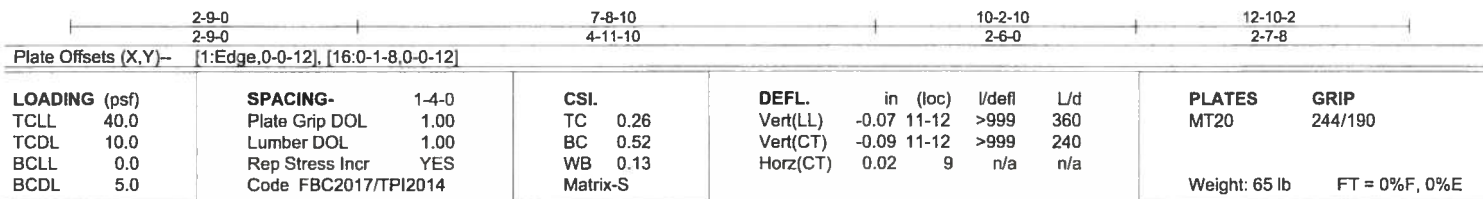

BRACING- TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-3=-900/0, 3-4=-1392/0, 4-5=-1392/0, 5-6=-1327/0, 6-7=-892/0
 14-15=0/567, 13-14=0/1220, 12-13=0/1392, 11-12=0/1392, 10-11=0/1223, 9-10=0/541
 BOT CHORD 7-9=-691/0, 2-15=-710/0, 7-10=0/457, 2-14=0/433, 6-10=-431/0, 3-14=-417/0, 3-13=0/320
 WEBS

- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are 3x3 MT20 unless otherwise indicated.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Recommend 2x6 strongbacks, on edge, spaced at 10'-0" o.c. and fastened to each truss with 3-10d (0.131" X 3") nails.
Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 5) CAUTION. Do not erect truss backwards.

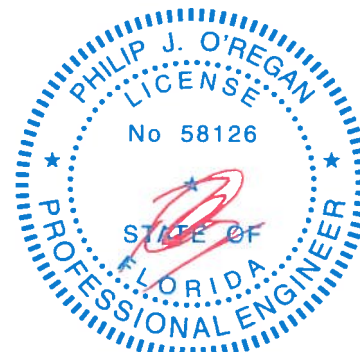

Philip J. O'Regan PE No.58126
MITek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

September 12.2019

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI Quality Criteria, DSB-99 and BCS Building Component Safety Information** available from Truss Plate Institute, 218 N. Lee Street, Suite 312, Alexandria, VA 22314.



6904 Parke East Blvd.
Tampa, FL 36610

Job shokat_house	Truss F04	Truss Type Floor	Qty 56	Ply 1	Shokat house T18103997
---------------------	--------------	---------------------	-----------	----------	---------------------------

Mayo Truss Company, Inc., Mayo, FL - 32066,


8.240 s Jul 14 2019 MiTek Industries, Inc. Thu Sep 12 14:40:09 2019 Page 1
ID:mctxLUw7X5_5IAekZojTb6yv8TZ-vV00PfNGhCPoJk7JA1inJmzgoIT2Rip?QAAtBc5yeLPa

0-1-8

1-3-0

1-0-10

Scale = 1:16.8

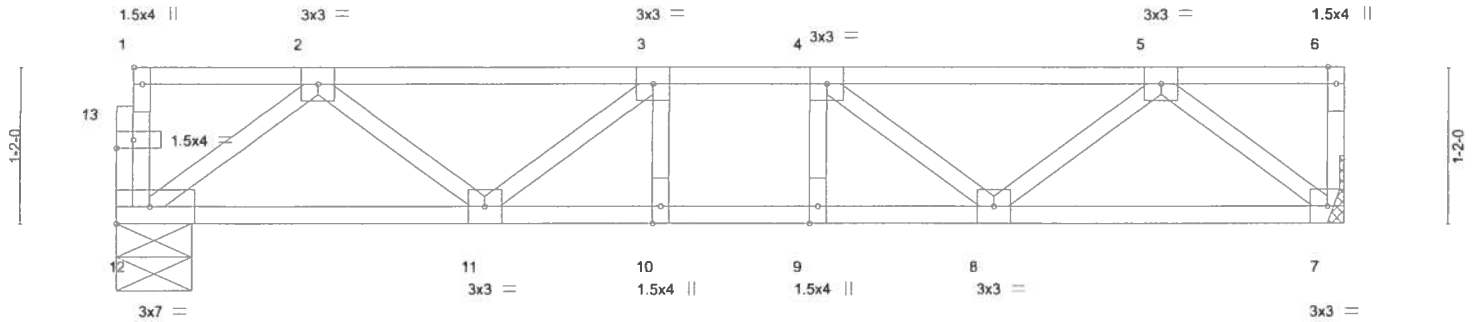

		2-9-0		6-6-10		9-2-2			
		2-9-0		3-9-10		2-7-8			
Plate Offsets (X,Y)– [1:Edge,0-0-12], [13:0-1-8,0-0-12]									
LOADING (psf)		SPACING- 1-4-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES GRIP	
TCLL	40.0	Plate Grip DOL 1.00		TC	0.21	Vert(LL)	-0.02 10-11 >999 360	MT20	244/190
TCDL	10.0	Lumber DOL 1.00		BC	0.29	Vert(CT)	-0.03 10-11 >999 240		
BCLL	0.0	Rep Stress Incr YES		WB	0.07	Horz(CT)	0.01 7 n/a n/a		
BCDL	5.0	Code FBC2017/TPI2014		Matrix-S				Weight: 47 lb	FT = 0%F, 0%E

LUMBER-
TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.2(flat)


BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 12=325/0-6-12, 7=330/Mechanical

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-564/0, 3-4=-720/0, 4-5=-556/0
BOT CHORD 11-12=0/394, 10-11=0/720, 9-10=0/720, 8-9=0/720, 7-8=0/380
WEBS 5-7=-485/0, 2-12=-493/0

NOTES-

- 1) Unbalanced floor live loads have been considered for this design.
- 2) Refer to girder(s) for truss to truss connections.
- 3) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 4) CAUTION, Do not erect truss backwards.

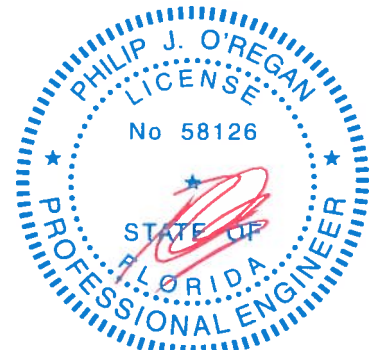

Philip J. O'Regan PE No.58126
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

September 12,2019

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITTEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 218 N. Lee Street, Suite 312, Alexandria, VA 22314.



6904 Parke East Blvd.
Tampa, FL 33610


Job	Truss	Truss Type	Qty	Ply	Shokat house
shokat_house	F05	GABLE	1	1	T18103998
Job Reference (optional)					

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.240 s Jul 14 2019 MiTek Industries, Inc. Thu Sep 12 14:40:10 2019 Page 1
ID:mctxLUw7X5_5IAekZojTb6yv8TZ-NiaOc?OuSVXfxuiWkkD0rzWtc9sbAAAt8fqdk8YyeLPZ

0-1-8

Scale = 1:30.0

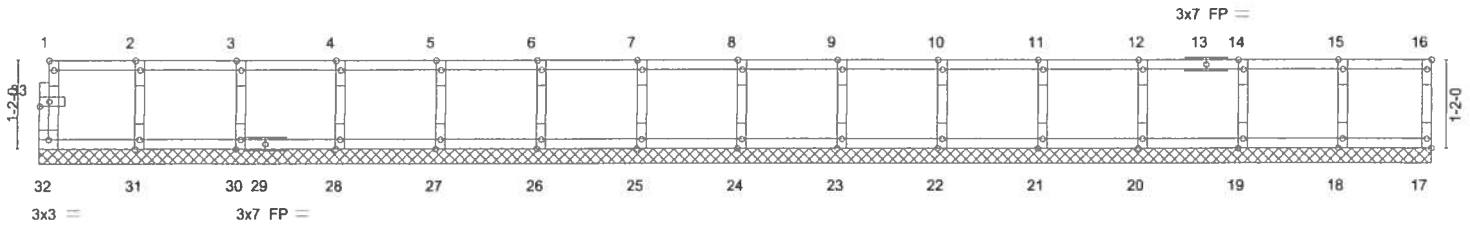

1-4-0	2-8-0	4-0-0	5-4-0	6-8-0	8-0-0	9-4-0	10-8-0	12-0-0	13-4-0	14-8-0	16-0-0	17-4-0	18-6-2
1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-2-2
Plate Offsets (X,Y)-- [1:Edge,0-0-12], [17:Edge,0-0-12], [33:0-1-8,0-0-12]													

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.08	Vert(LL)	n/a	-	n/a	999	MT20
TCDL 10.0	Lumber DOL	1.00	BC 0.01	Vert(CT)	n/a	-	n/a	999	244/190
BCLL 0.0	Rep Stress Incr	YES	WB 0.02	Horz(CT)	0.00	17	n/a	n/a	
BCDL 5.0	Code FBC2017/TPI2014		Matrix-R						
									Weight: 76 lb FT = 0%F, 0%E


LUMBER-
TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.2(flat)
OTHERS 2x4 SP No.2(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 18-6-2.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 32, 17, 31, 30, 28, 27, 26, 25, 24, 23, 22, 21, 20, 19, 18

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-
1) All plates are 1.5x4 MT20 unless otherwise indicated.
2) Gable requires continuous bottom chord bearing.
3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
4) Gable studs spaced at 1-4-0 oc.
5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails.
Strongbacks to be attached to walls at their outer ends or restrained by other means.
6) CAUTION, Do not erect truss backwards.

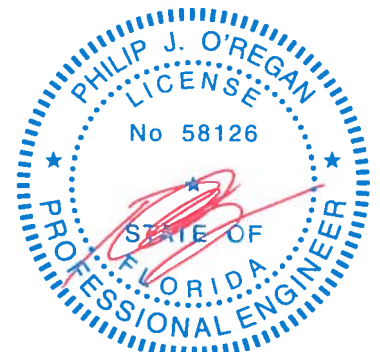

Philip J. O'Regan PE No.58126
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

September 12,2019

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 218 N. Lee Street, Suite 312, Alexandria, VA 22314.



6904 Parke East Blvd.
Tampa, FL 36610

8.240 s Jul 14 2019 MiTek Industries, Inc. Thu Sep 12 14:40:11 2019 Page 1
ID:mcxLUw7X5 5IAekZoiTb6vv8TZ-ru8mgLPXDpfWZ1HilSkFOB22MYCqvd7ltUMlq yeLPY

Scale = 1:30.0

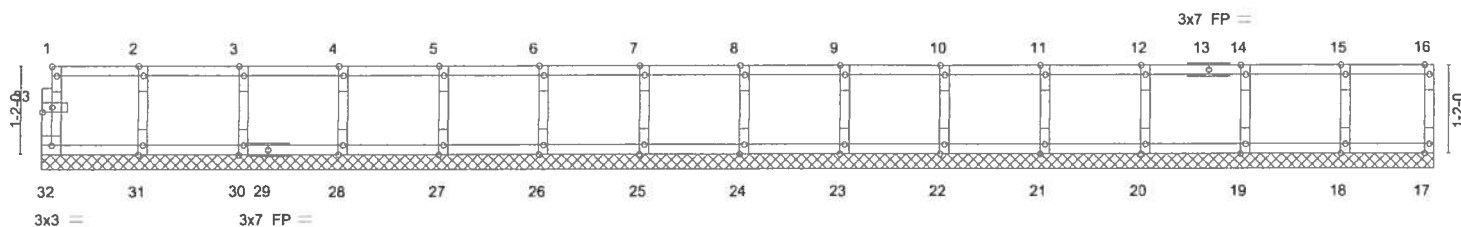

LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.08	Vert(LL) n/a -	n/a	999	MT20	244/190
TCDL 10.0	Lumber DOL 1.00	BC 0.01	Vert(CT) n/a -	n/a	999		
BCLL 0.0	Rep Stress Incr YES	WB 0.02	Horz(CT) 0.00 17	n/a	n/a		
BCDL 5.0	Code FBC2077/TPI2014	Matrix-R				Weight: 76 lb	FT = 0%F, 0%E


LUMBER-		BRACING-	
TOP CHORD	2x4 SP No.2(flat)	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD	2x4 SP No.2(flat)	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS	2x4 SP No.2(flat)		
OTHERS	2x4 SP No.2(flat)		

REACTIONS. All bearings 18-6-2.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 32, 17, 31, 30, 28, 27, 26, 25, 24, 23, 22, 21, 20, 19, 18

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) All plates are 1.5x4 MT20 unless otherwise indicated.
- 2) Gable requires continuous bottom chord bearing.
- 3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- 4) Gable studs spaced at 1-4-0 oc.
- 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 6) CAUTION. Do not erect truss backwards.

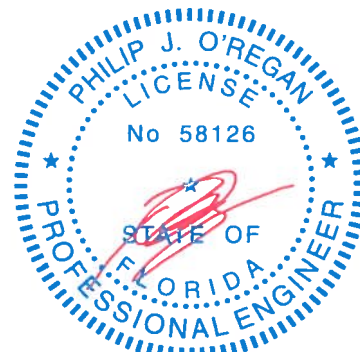

Philip J. O'Regan PE No.58126
MITek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

September 12, 2019

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCS1 Building Component Safety Information** available from Truss Plate Institute, 218 N. Lee Street, Suite 312, Alexandria, VA 22314.




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	Shokat house	T18104000
shokat_house	F07	Floor	17	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.240 s Jul 14 2019 MiTek Industries, Inc. Thu Sep 12 14:40:11 2019 Page 1
ID:mcblUw7X5_5IAekZojTb6yv8TZ-ru8mqLPXDpfWZ1HiiSkFOB2ynY1Tva0itUMlg_yeLPY

0-1-8 1-3-0 1-7-10 Scale = 1:31.3

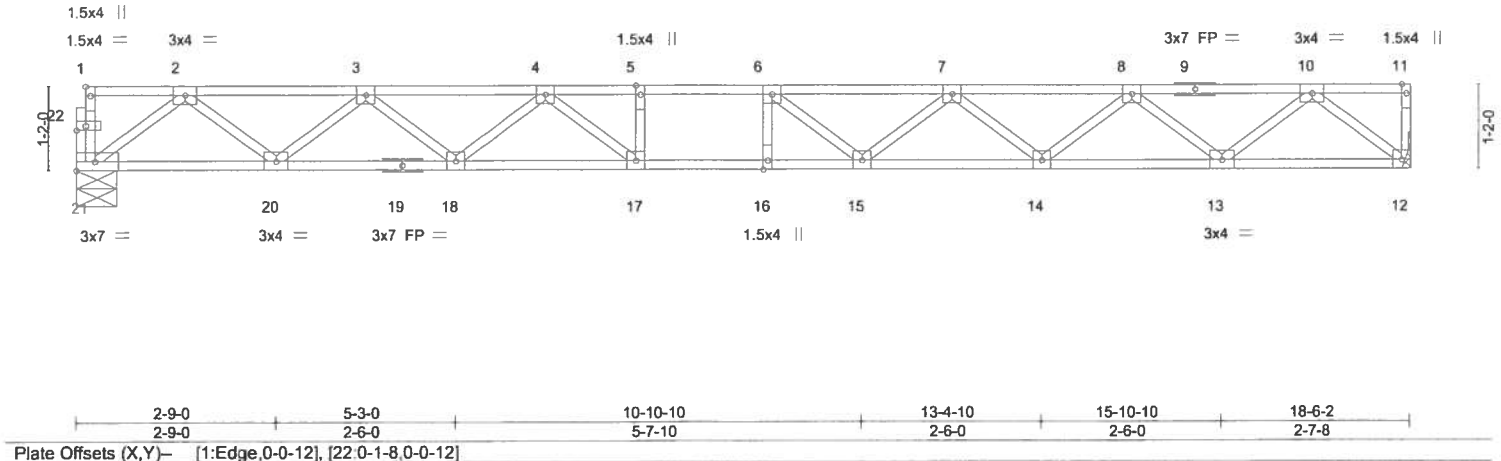


LOADING (psf)	SPACING-	CSL	DEFL.	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.50	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Lumber DOL 1.00	BC 0.74	Vert(LL) -0.25 16 >877 360		
BCLL 0.0	Rep Stress Incr YES	WB 0.22	Vert(CT) -0.34 16 >640 240		
BCDL 5.0	Code FBC2017/TPI2014	Matrix-S	Horz(CT) 0.05 12 n/a n/a		
				Weight: 91 lb	FT = 0%F, 0%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.2(flat) *Except*	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.2(flat)	

REACTIONS. (lb/size) 21=668/0-6-12, 12=672/Mechanical

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-1430/0, 3-4=-2346/0, 4-5=-2919/0, 5-6=-2919/0, 6-7=-2831/0, 7-8=-2340/0, 8-10=-1398/0
BOT CHORD 20-21=0/838, 18-20=0/1996, 17-18=0/2693, 16-17=0/2919, 15-16=0/2919, 14-15=0/2695, 13-14=0/1969, 12-13=0/805
WEBS 10-12=-1028/0, 2-21=-1049/0, 10-13=0/772, 2-20=0/771, 8-13=-742/0, 3-20=-736/0, 8-14=0/483, 3-18=0/455, 7-14=-463/0, 4-18=-453/0, 7-15=0/282, 4-17=-14/480, 6-15=-328/115

- NOTES-**
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) All plates are 3x3 MT20 unless otherwise indicated.
 - 3) Refer to girder(s) for truss to truss connections.
 - 4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 5) CAUTION, Do not erect truss backwards.

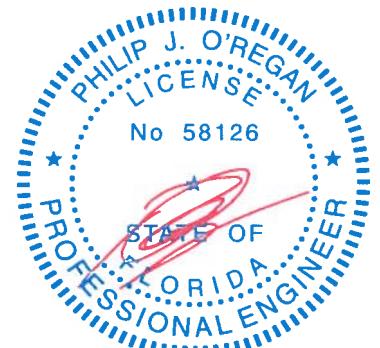

Philip J. O'Regan PE No.58126
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

September 12,2019

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev 10/03/2015 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI-1 Quality Criteria, DSB-89 and BCS Building Component Safety Information** available from Truss Plate Institute, 218 N. Lee Street, Suite 312, Alexandria, VA 22314.

MiTek
6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	Shokat house	T18104001
shokat_house	F08	Floor	1	1		


Mayo Truss Company, Inc.,

Mayo, FL - 32066,

8.240 s Jul 14 2019 MiTek Industries, Inc. Thu Sep 12 14:40:12 2019 Page 1
ID:mcblUw7X5_5IAekZojTb6yv8TZ-J4i91hQ9_7nNABsur9FUxOb7WyNie1GR686rDQyeLPX

0-1-8

Scale = 1:31.3

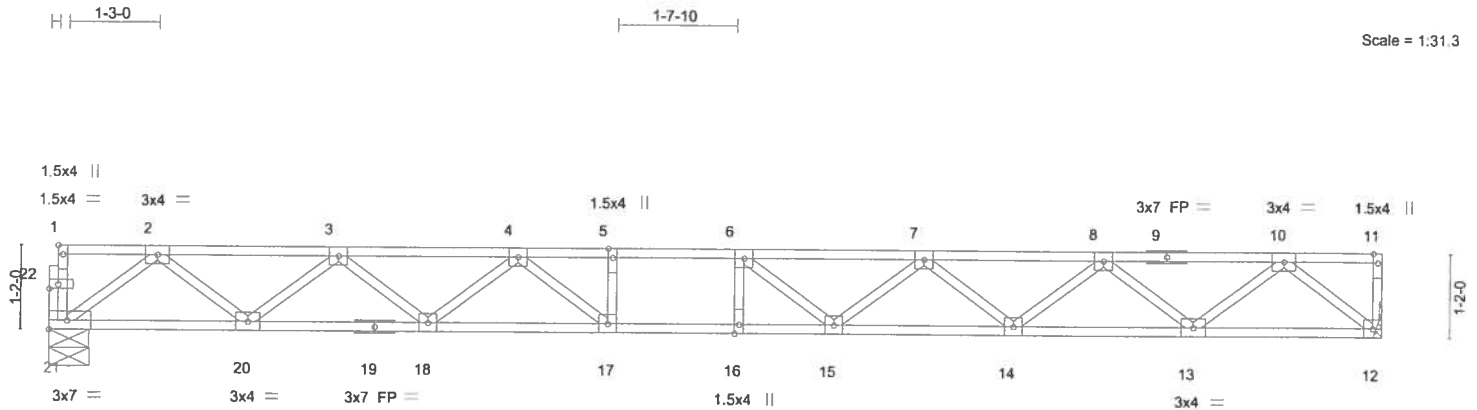

2-9-0		5-3-0		10-10-10		13-4-10		15-10-10		18-6-2	
2-9-0		2-6-0		5-7-10		2-6-0		2-6-0		2-7-8	
Plate Offsets (X,Y)– [1:Edge,0-0-12], [22:0-1-8,0-0-12]											
LOADING (psf)		SPACING- 1-4-0		CSI.		DEFL. in (loc) l/def L/d		PLATES		GRIP	
TCLL	40.0	Plate Grip DOL	1.00	TC	0.50	Vert(LL)	-0.25 16	>877	360	MT20	244/190
TCDL	10.0	Lumber DOL	1.00	BC	0.74	Vert(CT)	-0.34 16	>640	240		
BCLL	0.0	Rep Stress Incr	YES	WB	0.22	Horz(CT)	0.05 12	n/a	n/a		
BCDL	5.0	Code FBC2017/TPI2014		Matrix-S						Weight: 91 lb	FT = 0%F, 0%E

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat) *Except*
12-19: 2x4 SP No.1(flat)
WEBS 2x4 SP No.2(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS. (lb/size) 21=668/0-6-12, 12=672/Mechanical

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1430/0, 3-4=-2346/0, 4-5=-2919/0, 5-6=-2919/0, 6-7=-2831/0, 7-8=-2340/0, 8-10=-1398/0
BOT CHORD 20-21=0/838, 18-20=0/1996, 17-18=0/2693, 16-17=0/2919, 15-16=0/2919, 14-15=0/2695, 13-14=0/1969, 12-13=0/805
WEBS 10-12=-1028/0, 2-21=-1049/0, 10-13=0/772, 2-20=0/771, 8-13=-742/0, 3-20=-736/0, 8-14=0/483, 3-18=0/455, 7-14=-463/0, 4-18=-453/0, 7-15=0/282, 4-17=-14/480, 6-15=-328/115

NOTES-

- Unbalanced floor live loads have been considered for this design.
- All plates are 3x3 MT20 unless otherwise indicated.
- Refer to girder(s) for truss to truss connections.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.

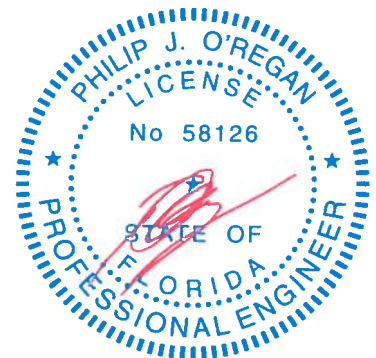

Philip J. O'Regan PE No.58126
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

September 12, 2019

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITTEK REFERENCE PAGE MII-7473 rev 10/03/2015 BEFORE USE

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see ANSUTPI® Quality Criteria, DSB-89 and BCS Building Component Safety Information available from Truss Plate Institute, 218 N. Lee Street, Suite 312, Alexandria, VA 22314.




6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	Shokat house	T18104002
shokat_house	M01	Monopitch Structural Gable	1	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.240 s Jul 14 2019 MiTek Industries, Inc. Thu Sep 12 14:40:15 2019 Page 1
ID:8PRRPEypUmK8mTrN2tGuZOyvXma-jfOHfS1G2Ay1faTXlpBY1Df8AZZrPeto5KVpIyeLPU

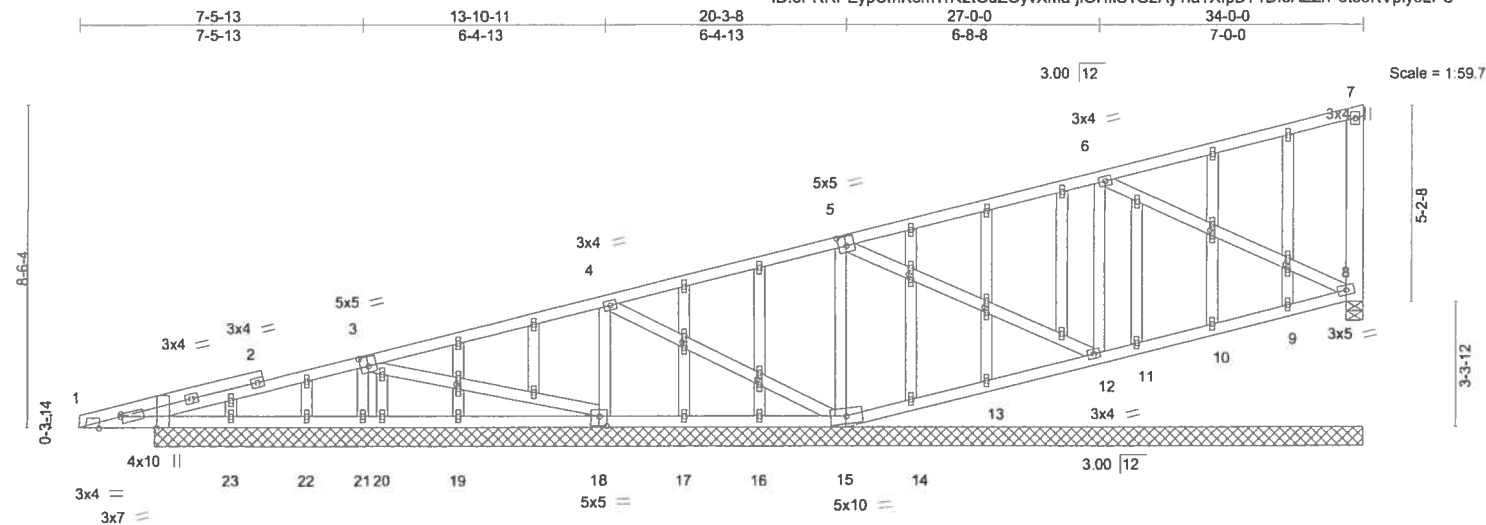

2-0-0	7-5-13	13-10-11	20-3-8	27-0-0	34-0-0
2-0-0	5-5-13	6-4-13	6-4-13	6-8-8	7-0-0

Plate Offsets (X,Y) - [1:0-3-8,Edge], [1:0-6-12,Edge], [1:0-0-4,0-0-12], [3:0-2-8,0-3-0], [5:0-2-8,0-3-0], [18:0-2-8,0-3-0], [25:0-1-14,0-0-12], [27:0-1-14,0-0-12], [32:0-1-13,0-0-12], [34:0-1-13,0-0-12], [36:0-1-15,0-0-12], [37:0-1-15,0-0-12], [41:0-1-9,0-0-12]


LOADING (psf)	SPACING-	CS.	DEFL.	in (loc)	V/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.41	Vert(LL) -0.01	45	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.09	Vert(CT) -0.02	45	>999	180		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.18	Horz(CT) -0.01	8	n/a	n/a		
BCDL 10.0	Code FBC2017/TPI2014	Matrix-AS					Weight: 237 lb	FT = 0%

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied.
WEBS 2x4 SP No.2 *Except*	
7-8: 2x6 SP No.2	
OTHERS 2x4 SP No.2	

REACTIONS.	All bearings 32-0-0.
(lb) - Max Horz	1=184(LC 9)
Max Uplift	All uplift 100 lb or less at joint(s) 1, 18, 15, 21, 12, 8
Max Grav	All reactions 250 lb or less at joint(s) 8, 9, 10, 11, 13, 14, 16, 17, 19, 20, 22, 23 except 1=326(LC 1), 18=440(LC 1), 15=416(LC 1), 21=421(LC 1), 12=490(LC 1), 1=326(LC 1)

FORCES.	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
BOT CHORD	1-23=-266/84, 22-23=-266/84, 21-22=-266/84, 20-21=-277/99, 19-20=-277/99, 18-19=-277/99
WEBS	3-21=-402/181, 4-18=-390/181, 5-15=-383/185, 6-12=-440/211

- NOTES-**
- 1) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=34ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - 2) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
 - 3) All plates are 1.5x4 MT20 unless otherwise indicated.
 - 4) Gable studs spaced at 2-0-0 oc.
 - 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - 7) Bearing at joint(s) 8 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 18, 15, 21, 12, 8, 1.
 - 9) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.

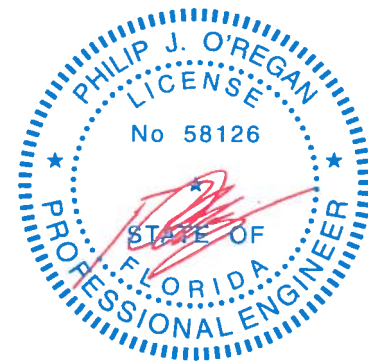

Philip J. O'Regan PE No.58126
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

September 12,2019

Mayo Truss Company, Inc., Mayo, FL - 32066, 8.240 s Jul 14 2019 MiTek Industries, Inc. Thu Sep 12 14:40:16 2019 Page 1
ID:8PRRPEypUmK8mTrN2tGuZOyvxMa-Bsyf2Tf1Llpp9f47KQ5EmoZlJkD1142MByeLPT

[illegible]

LUMBER-		BRACING-	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 2-11-15 oc purlins. Except: 6-0-0 oc bracing: 9-15
BOT CHORD	2x4 SP No.2		
WEBS	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 6-2-8 oc bracing.
OTHERS	2x6 SP No.2	WEBS	1 Row at midpt 6-9

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=272/0, 2-3=3050/581, 3-4=2762/548, 4-5=2034/419, 5-6=1458/315,
9-15=315/183

BOT CHORD 1-14=0/289, 13-14=394/452, 12-13=902/2921, 11-12=779/2639, 10-11=609/2011,
9-10=460/1427

WEBS 2-14=1307/436, 2-13=588/2641, 3-12=301/131, 4-12=0/334, 4-11=824/228,
5-10=637/188, 6-10=35/619, 6-9=1520/417

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=34ft; eave=4ft; Cat. II; Exp B; Encl. GCp=0.18; MWFRS (directional) and C-C Exterior(2) 0-0-0 to 36-0-7 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Bearing at joint(s) 9 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 9.
- 7) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



September 12, 2019

Design valid for use only with MiteK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCS1 Building Component Safety Information** available from Truss Plate Institute, 218 N. Lee Street, Suite 312, Alexandria, VA 22314.



Job	Truss	Truss Type	Qty	Ply	Shokat house	T18104004
shokat_house	M03	Monopitch	19	1		

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.240 s Jul 14 2019 MiTek Industries, Inc. Thu Sep 12 14:40:17 2019 Page 1

ID:8PRRPEypUmK8mTrN2tGuZOyvXma-g2V14OTlofQgHzkseirfdSI76zBeJCrAGPpcueyeLPS

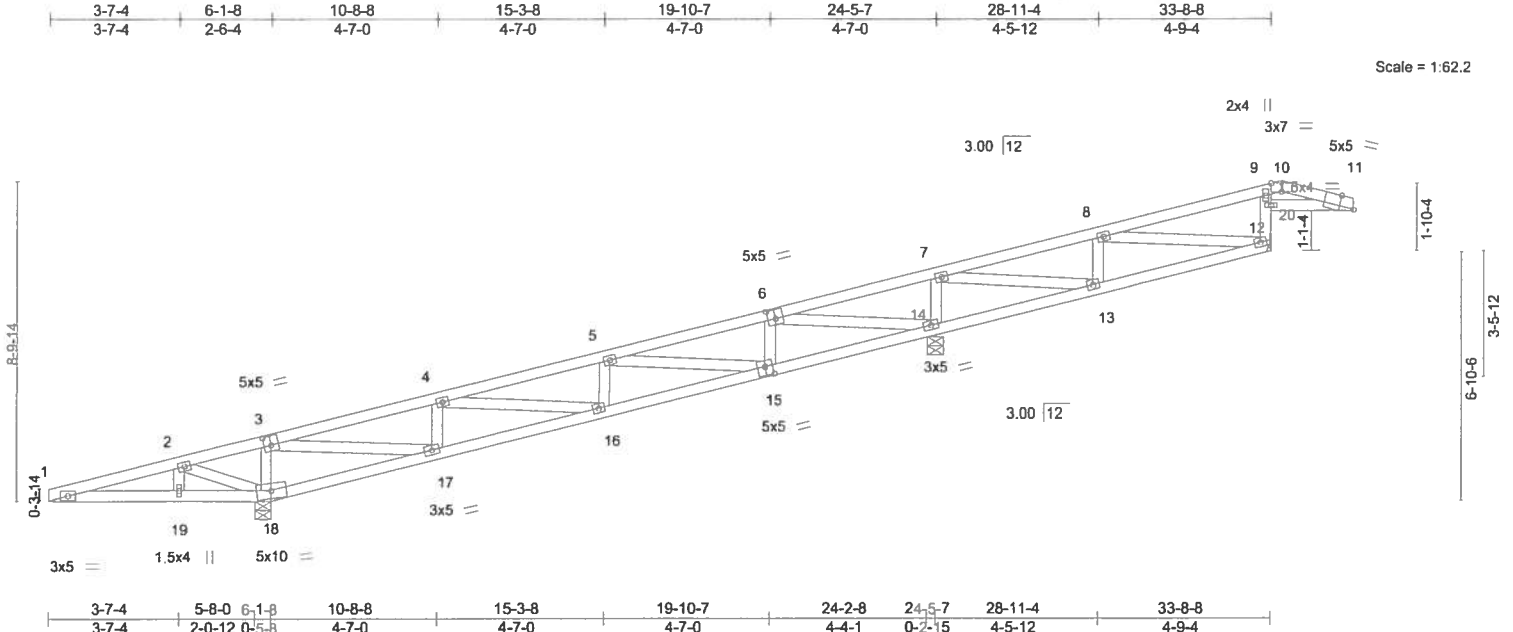


Plate Offsets (X,Y) -		[3:0-2-8,0-3-0], [6:0-2-8,0-3-0], [10:0-3-8,Edge], [11:0-5-0,Edge], [15:0-2-8,0-3-0]
LOADING (psf)	SPACING-	CSL
TCLL 20.0	Plate Grip DOL 1.25	TC 0.44
TCDL 10.0	Lumber DOL 1.25	BC 0.31
BCLL 0.0 *	Rep Stress Incr YES	WB 0.58
BCDL 10.0	Code FBC2017/TPI2014	Matrix-AS
		DEFL. in (loc) l/def L/d
		Vert(LL) -0.07 16 >999 240
		Vert(CT) -0.14 16 >999 180
		Horz(CT) 0.01 14 n/a n/a
		PLATES MT20
		GRIP 244/190
		Weight: 167 lb FT = 0%


LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD 2x4 SP No.2	Except:
WEBS 2x4 SP No.2	6-0-0 oc bracing: 12-20
	BOT CHORD Rigid ceiling directly applied.

REACTIONS. (lb/size) 12=340/Mechanical, 18=1209/0-5-8, 14=1284/0-5-8
Max Horz 18=169(LC 12)
Max Uplift 12=39(LC 12), 18=92(LC 12), 14=3(LC 12)
Max Grav 12=340(LC 1), 18=1209(LC 1), 14=1298(LC 21)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-2=320/504, 2-3=636/914, 3-4=767/0, 4-5=1255/141, 5-6=657/82, 6-7=292/1060,
12-20=303/160, 9-20=302/160
BOT CHORD 1-19=463/327, 18-19=463/327, 17-18=921/383, 16-17=162/764, 15-16=351/1232,
14-15=237/596, 13-14=1038/187
WEBS 2-18=427/359, 3-18=764/282, 3-17=470/1573, 4-17=440/220, 4-16=194/502,
5-15=585/115, 6-15=0/337, 6-14=1564/377, 7-14=641/221, 7-13=193/1005,
8-13=269/128

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=101mph; TCCL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=34ft; eave=4ft; Cal. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2) 0-0-0 to 36-0-7 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- All plates are 3x4 MT20 unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 12, 18, 14.
- Beveled plate or shim required to provide full bearing surface with truss chord at joint(s) 14.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.

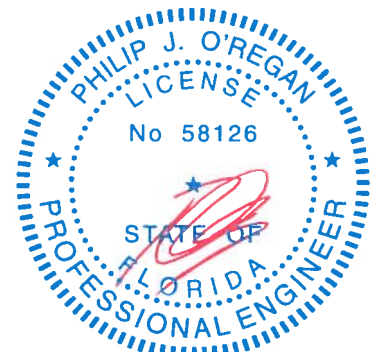

Philip J. O'Regan PE No.58126
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

September 12,2019

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-69 and BCSI Building Component Safety Information** available from Truss Plate Institute, 218 N. Lee Street, Suite 312, Alexandria, VA 22314.



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	Shokat house	T18104005
shokat_house	M05	MONOPITCH	6	1		

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.240 s Jul 14 2019 MiTek Industries, Inc. Thu Sep 12 14:40:18 2019 Page 1

ID:8PRRPEypUmK8mTrN2tGuZoYvXma-8E3QikUwZyYXu6J2CQMUAfr9GNQV2cOKU3Z9Q4yeLPR

Job Reference (optional)

2-2-12	8-7-0	14-11-4	21-3-8	27-6-0	34-0-0	36-0-0	2-0-0
2-2-12	6-4-4	6-4-4	6-4-4	6-2-8	6-6-0		

Scale = 1:62.8

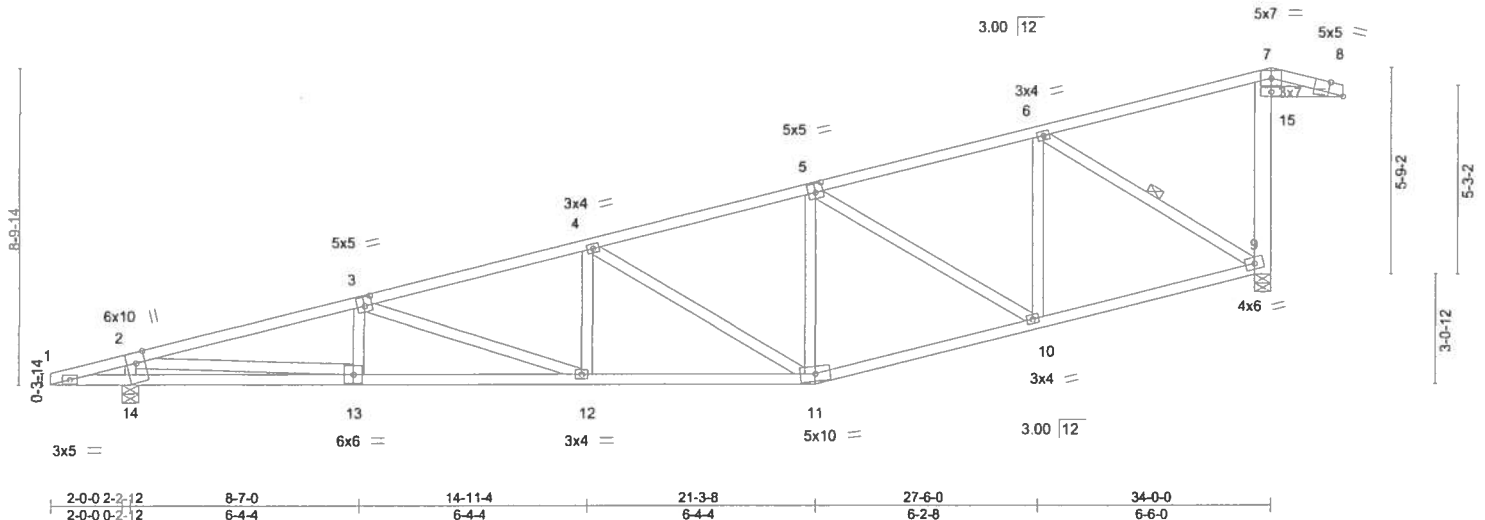


Plate Offsets (X,Y) - [3:0-2-8,0-3-0], [5:0-2-8,0-3-0], [8:0-5-0,Edge], [14:0-0-7,0-1-11]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/def	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.48	Vert(LL)	-0.18 12-13	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.72	Vert(CT)	-0.39 12-13	>969	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.82	Horz(CT)	0.02 9	n/a	n/a		
BCDL 10.0	Code	FBC2017/TPI2014	Matrix-AS					Weight: 195 lb	FT = 0%

LUMBER-				BRACING-	
TOP CHORD	2x4 SP No.2			TOP CHORD	Structural wood sheathing directly applied, except end verticals.
BOT CHORD	2x4 SP No.2				Except:
WEBS	2x4 SP No.2 *Except*				6-0-0 oc bracing: 9-15
	7-9; 2x6 SP No.2			BOT CHORD	Rigid ceiling directly applied.
				WEBS	1 Row at midpt 6-9


REACTIONS. (lb/size) 14=1441/0-5-8, 9=1396/0-5-8
Max Horz 14=181(LC 9)
Max Uplift 14=31(LC 12), 9=34(LC 12)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=300/0, 2-3=3045/630, 3-4=2692/597, 4-5=1893/454, 5-6=1289/339,
9-15=310/170
BOT CHORD 1-14=0/319, 13-14=327/423, 12-13=864/2921, 11-12=728/2569, 10-11=538/1863,
9-10=378/1259
WEBS 2-14=1315/458, 2-13=609/2598, 3-12=373/144, 4-12=0/363, 4-11=904/248,
5-10=683/207, 6-10=74/639, 6-9=1406/396

NOTES-

- 1) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf, BCDL=6.0psf, h=15ft; B=45ft; L=34ft; eave=4ft; Cat. II; Exp B; Encl. GCpi=0.18; MWFRS (directional) and C-C Exterior(2) 0-0-0 to 36-0-7 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Bearing at joint(s) 9 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 14, 9.
- 6) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- 7) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

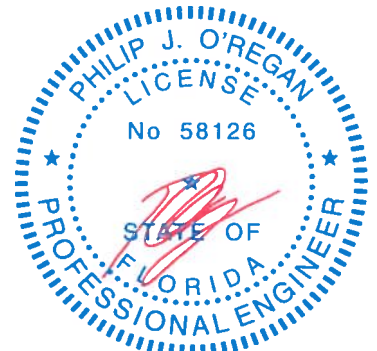

Philip J. O'Regan PE No.58126
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

September 12,2019

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see ANSI/TPI1 Quality Criteria, DSB-69 and BCSI Building Component Safety Information available from Truss Plate Institute, 218 N. Lee Street, Suite 312, Alexandria, VA 22314.




6904 Parke East Blvd.
Tampa, FL 36610

Job shokat_house	Truss M06	Truss Type Monopitch Structural Gable	Qty 1	Ply 1	Shokat house	T18104006
---------------------	--------------	--	----------	----------	--------------	-----------

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.240 s Jul 14 2019 MiTek Industries, Inc. Thu Sep 12 14:40:21 2019 Page 1

ID:8PRRPEypUmK8mTrN2tGuZOyvXma-YplYwmXosu5ma2dtYwboHTi9abGF72mA1np1PyeLPO

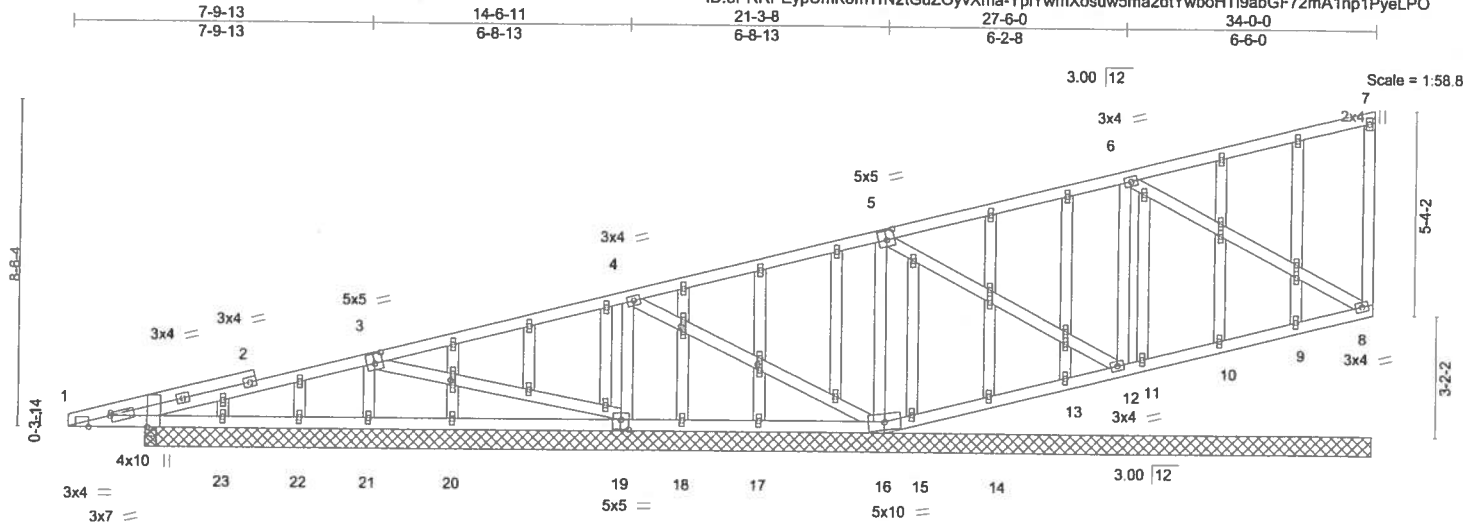

2-0-0	7-9-13	14-6-11	21-3-8	27-6-0	34-0-0
2-0-0	5-9-13	6-8-13	6-8-13	6-2-8	6-6-0
Plate Offsets (X,Y) - [1:0-3-8,Edge], [1:0-6-12,Edge], [1:0-0-4,0-0-12], [3:0-2-8,0-3-0], [5:0-2-8,0-3-0], [19:0-2-8,0-3-0], [37:0-1-15,0-0-12], [38:0-1-15,0-0-12], [44:0-1-9,0-0-12]					

LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 20.0	2-0-0	TC 0.38	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.25	BC 0.14	Vert(LL) -0.02 48 >999 240		
BCLL 0.0 *	Lumber DOL 1.25	WB 0.18	Vert(CT) -0.02 48 >999 180		
BCDL 10.0	Rep Stress Incr YES	Matrix-AS	Horz(CT) -0.01 8 n/a n/a		
	Code FBC2017/TPI2014			Weight: 246 lb	FT = 0%

LUMBER-
TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2
OTHERS 2x4 SP No.2


BRACING-
TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.

REACTIONS. All bearings 32-0-0.
(lb) - Max Horz 1=242(LC 9)
Max Uplift All uplift 100 lb or less at joint(s) 8, 1, 19, 16, 21, 12, 9, 10, 11, 13, 14, 15, 17, 18, 20, 22, 23
Max Grav All reactions 250 lb or less at joint(s) 8, 9, 10, 11, 13, 14, 15, 17, 18, 20, 22, 23 except
1=332(LC 1), 1=332(LC 1), 19=479(LC 1), 16=413(LC 1), 21=445(LC 1), 12=428(LC 1), 1=332(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
BOT CHORD 1-23=-413/69, 22-23=-413/69, 21-22=-413/69, 20-21=-424/84, 19-20=-424/84,
18-19=-332/97, 17-18=-332/97, 16-17=-332/97, 15-16=-300/79, 14-15=-279/88
WEBS 3-21=-421/185, 4-19=-415/208, 5-16=-370/202, 6-12=-409/218

NOTES-

- 1) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=101mph; TCCL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=34ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- 3) All plates are 1.5x4 MT20 unless otherwise indicated.
- 4) Gable studs spaced at 2-0-0 oc.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 7) Solid blocking is required on both sides of the truss at joint(s), 1.
- 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 8, 1, 19, 16, 21, 12, 9, 10, 11, 13, 14, 15, 17, 18, 20, 22, 23, 1.
- 9) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.

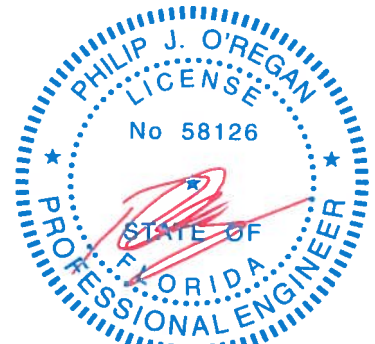

Philip J. O'Regan PE No.58126
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

September 12, 2019

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITTEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing Indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information available from Truss Plate Institute, 218 N. Lee Street, Suite 312, Alexandria, VA 22314.



6904 Parke East Blvd.
Tampa, FL 36610

RESIDENTIAL ENERGY CONSERVATION CODE DOCUMENTATION CHECKLIST


Florida Department of Business and Professional Regulation Simulated Performance Alternative (Performance) Method

Applications for compliance with the 2017 Florida Building Code, Energy Conservation via the residential Simulated Performance Method shall include:

- ☐ This checklist
- ☐ A Form R405 report that documents that the Proposed Design complies with Section R405.3 of the Florida Energy Code. This form shall include a summary page indicating home address, e-ratio and the pass or fail status along with summary areas and types of components, whether the home was simulated as a worst-case orientation, name and version of the compliance software tool, name of individual completing the compliance report (one page) and an input summary checklist that can be used for field verification (usually four pages/may be greater).
- ☐ Energy Performance Level (EPL) Display Card (one page)
- ☐ HVAC system sizing and selection based on ACCA Manual S or per exceptions provided in Section R403.7
- ☐ Mandatory Requirements (five pages)

Required prior to CO for the Performance Method:

- ☐ Air Barrier and Insulation Inspection Component Criteria checklist (Table R402.4.1.1 - one page)
- ☐ A completed Envelope Leakage Test Report (usually one page)
- ☐ If Form R405 duct leakage type indicates anything other than "default leakage", then a completed Form R405 Duct Leakage Test Report (usually one page)

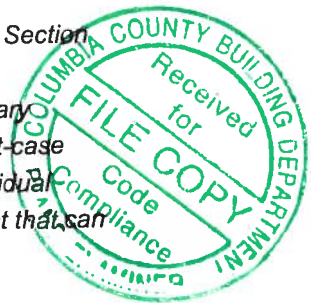

INPUT SUMMARY CHECKLIST REPORT

PROJECT

Title:	190196 Shokat	Bedrooms:	3	Address Type:	Lot Information
Building Type:	User	Conditioned Area:	1535	Lot #	23
Owner Name:	Shokat River House	Total Stories:	1	Block/Subdivision:	3 Rivers Est.
# of Units:	1	Worst Case:	Yes	PlatBook:	
Builder Name:		Rotate Angle:	90	Street:	
Permit Office:		Cross Ventilation:		County:	Columbia
Jurisdiction:		Whole House Fan:		City, State, Zip:	Fort White , FL ,
Family Type:	Single-family				
New/Existing:	New (From Plans)				
Comment:					

CLIMATE

✓	Design Location	TMY Site	Design Temp 97.5 % 2.5 %		Int Design Temp Winter Summer		Heating Degree Days	Design Moisture	Daily Temp Range
_____	FL, Gainesville	FL_GAINESVILLE_REGI	32	92	70	75	1305.5	51	Medium

BLOCKS

Number	Name	Area	Volume
1	Block1	1535	16117.5

SPACES

Number	Name	Area	Volume	Kitchen	Occupants	Bedrooms	Infil ID	Finished	Cooled	Heated
1	Main	1535	16117.5	Yes	6	3	1	Yes	Yes	Yes

FLOORS

✓	#	Floor Type	Space	Exposed PeriWall Ins.	R-Value	Area	Floor Joist R-Value	Tile	Wood	Carpet
_____	1	Crawlspace	Main	216 ft	0	1535 ft²	19	0.3	0.7	0

ROOF

✓	#	Type	Materials	Roof Area	Gable Area	Roof Color	Rad Barr	Solar Absor.	SA Tested	Emitt Tested	Deck Insul.	Pitch (deg)
_____	1	Gable or shed	Metal	1582 ft²	192 ft²	Dark	N	0.9	No	0.9	No	0 14

ATTIC

✓	#	Type	Ventilation	Vent Ratio (1 in)	Area	RBS	IRCC
_____	1	Partial cathedral cei	Vented	300	1535 ft²	N	N

CEILING

✓	#	Ceiling Type	Space	R-Value	Ins Type	Area	Framing Frac	Truss Type
_____	1	Under Attic (Vented)	Main	38	Blown	1674 ft²	0	Wood

INPUT SUMMARY CHECKLIST REPORT

WALLS

✓ #	Omt	Adjacent To	Wall Type	Space	Cavity R-Value	Width Ft	In	Height Ft	In	Area	Sheathing R-Value	Framing Fraction	Solar Absor.	Below Grade%
1	N=>E	Exterior	Frame - Wood	Main	19	13		12	4	160.3 ft²		0.23	0.75	0
2	E=>S	Exterior	Frame - Wood	Main	19	9	4	10		93.3 ft²		0.23	0.75	0
3	N=>E	Exterior	Frame - Wood	Main	19	13	8	37		505.7 ft²		0.23	0.75	0
4	W=>N	Exterior	Frame - Wood	Main	19	9	4	10		93.3 ft²		0.23	0.75	0
5	N=>E	Exterior	Frame - Wood	Main	19	13		12	4	160.3 ft²		0.23	0.75	0
6	E=>S	Exterior	Frame - Wood	Main	19	32		10		320.0 ft²		0.23	0.75	0
7	S=>W	Exterior	Frame - Wood	Main	19	13		9		117.0 ft²		0.23	0.75	0
8	W=>N	Exterior	Frame - Wood	Main	19	3	8	9		33.0 ft²		0.23	0.75	0
9	S=>W	Exterior	Frame - Wood	Main	19	37		9		333.0 ft²		0.23	0.75	0
10	E=>S	Exterior	Frame - Wood	Main	19	3	8	9		33.0 ft²		0.23	0.75	0
11	S=>W	Exterior	Frame - Wood	Main	19	13	0	9		117.0 ft²		0.23	0.75	0
12	W=>N	Exterior	Frame - Wood	Main	19	32		10		320.0 ft²		0.23	0.75	0

DOORS

✓ #	Omt	Door Type	Space	Storms	U-Value	Width Ft	In	Height Ft	In	Area
1	N=>E	Insulated	Main	None	.4	1		8		8 ft²
2	S=>W	Insulated	Main	None	.4	1		8		8 ft²
3	W=>N	Insulated	Main	None	.4	1		8		8 ft²

WINDOWS

Orientation shown is the entered orientation (=>) changed to Worst Case.

✓ #	Omt	Wall ID	Frame	Panes	NFRC	U-Factor	SHGC	Imp	Area	Overhang Depth	Separation	Int Shade	Screening
1	N=>E	1	Metal	Low-E Double	Yes	0.3	0.2	N	36.0 ft²	1 ft 6 in	9 ft 0 in	None	None
2	N=>E	3	Metal	Low-E Double	Yes	0.3	0.2	N	84.0 ft²	10 ft 10 in	9 ft 0 in	None	None
3	N=>E	3	Metal	Low-E Double	Yes	0.3	0.2	N	72.0 ft²	10 ft 10 in	5 ft 0 in	None	None
4	N=>E	3	Metal	Low-E Double	Yes	0.3	0.2	N	40.0 ft²	10 ft 10 in	9 ft 0 in	None	None
5	N=>E	5	Metal	Low-E Double	Yes	0.3	0.2	N	36.0 ft²	1 ft 6 in	9 ft 0 in	None	None
6	E=>S	6	Metal	Low-E Double	Yes	0.3	0.2	N	8.0 ft²	1 ft 6 in	6 ft 0 in	None	None
7	E=>S	6	Metal	Low-E Double	Yes	0.3	0.2	N	30.0 ft²	1 ft 6 in	3 ft 0 in	None	None
8	S=>W	9	Metal	Low-E Double	Yes	0.3	0.2	N	72.0 ft²	5 ft 2 in	1 ft 0 in	None	None
9	S=>W	9	Metal	Low-E Double	Yes	0.3	0.2	N	16.0 ft²	5 ft 2 in	1 ft 0 in	None	None
10	W=>N	12	Metal	Low-E Double	Yes	0.3	0.2	N	16.0 ft²	1 ft 6 in	3 ft 0 in	None	None

INFILTRATION

#	Scope	Method	SLA	CFM 50	ELA	EqLA	ACH	ACH 50
1	Wholehouse	Proposed ACH(50)	.000467	1880.4	103.23	194.14	.1959	7

INPUT SUMMARY CHECKLIST REPORT

HEATING SYSTEM

<input checked="" type="checkbox"/>	#	System Type	Subtype	Efficiency	Capacity	Block	Ducts
<input type="checkbox"/>	1	Electric Heat Pump/	None	HSPF:8.6	36 kBtu/hr	1	sys#1

COOLING SYSTEM

<input checked="" type="checkbox"/>	#	System Type	Subtype	Efficiency	Capacity	Air Flow	SHR	Block	Ducts
<input type="checkbox"/>	1	Central Unit/	None	SEER: 15	36 kBtu/hr	1080 cfm	0.75	1	sys#1

HOT WATER SYSTEM

<input checked="" type="checkbox"/>	#	System Type	SubType	Location	EF	Cap	Use	SetPnt	Conservation
<input type="checkbox"/>	1	Electric	None	Main	0.95	50 gal	60 gal	120 deg	None

SOLAR HOT WATER SYSTEM

<input checked="" type="checkbox"/>	FSEC Cert #	Company Name	System Model #	Collector Model #	Collector Area	Storage Volume	FEF
<input type="checkbox"/>	None	None			ft ²		

DUCTS

<input checked="" type="checkbox"/>	#	--- Supply --- Location	R-Value	Area	--- Return --- Location	Area	Leakage Type	Air Handler	CFM 25 TOT	CFM25 OUT	QN	RLF	HVAC # Heat	Cool
<input type="checkbox"/>	1	Attic	6	307 ft ²	Attic	76.75 ft	Default Leakage	Main	(Default)	(Default)			1	1

TEMPERATURES

Programable Thermostat: Y

Ceiling Fans:

Cooling	<input checked="" type="checkbox"/> Jan	<input checked="" type="checkbox"/> Feb	<input checked="" type="checkbox"/> Mar	<input type="checkbox"/> Apr	<input type="checkbox"/> May	<input checked="" type="checkbox"/> Jun	<input checked="" type="checkbox"/> Jul	<input checked="" type="checkbox"/> Aug	<input checked="" type="checkbox"/> Sep	<input type="checkbox"/> Oct	<input checked="" type="checkbox"/> Nov	<input checked="" type="checkbox"/> Dec
Heating	<input checked="" type="checkbox"/> Jan	<input checked="" type="checkbox"/> Feb	<input checked="" type="checkbox"/> Mar	<input checked="" type="checkbox"/> Apr	<input type="checkbox"/> May	<input type="checkbox"/> Jun	<input type="checkbox"/> Jul	<input type="checkbox"/> Aug	<input type="checkbox"/> Sep	<input checked="" type="checkbox"/> Oct	<input checked="" type="checkbox"/> Nov	<input checked="" type="checkbox"/> Dec
Venting	<input type="checkbox"/> Jan	<input type="checkbox"/> Feb	<input type="checkbox"/> Mar	<input type="checkbox"/> Apr	<input type="checkbox"/> May	<input type="checkbox"/> Jun	<input type="checkbox"/> Jul	<input type="checkbox"/> Aug	<input type="checkbox"/> Sep	<input type="checkbox"/> Oct	<input type="checkbox"/> Nov	<input type="checkbox"/> Dec

Thermostat Schedule: HERS 2006 Reference

Hours

Schedule Type		1	2	3	4	5	6	7	8	9	10	11	12
Cooling (WD)	AM	78	78	78	78	78	78	78	78	80	80	80	80
	PM	80	80	78	78	78	78	78	78	78	78	78	78
Cooling (WEH)	AM	78	78	78	78	78	78	78	78	78	78	78	78
	PM	78	78	78	78	78	78	78	78	78	78	78	78
Heating (WD)	AM	66	66	66	66	66	68	68	68	68	68	68	68
	PM	68	68	68	68	68	68	68	68	68	68	66	66
Heating (WEH)	AM	66	66	66	66	66	68	68	68	68	68	68	68
	PM	68	68	68	68	68	68	68	68	68	68	66	66

MASS

Mass Type	Area	Thickness	Furniture Fraction	Space
Default(8 lbs/sq.ft.)	0 ft ²	0 ft	0.3	Main

ENERGY PERFORMANCE LEVEL (EPL) DISPLAY CARD

ESTIMATED ENERGY PERFORMANCE INDEX* = 96

The lower the Energy Performance Index, the more efficient the home.

1. New home or, addition	1. <u>New (From Plans)</u>	12. Ducts, location & insulation level
2. Single-family or multiple-family	2. <u>Single-family</u>	a) Supply ducts R <u>6.0</u>
3. No. of units (if multiple-family)	3. <u>1</u>	b) Return ducts R <u>6.0</u>
4. Number of bedrooms	4. <u>3</u>	c) AHU location <u>Main</u>
5. Is this a worst case? (yes/no)	5. <u>Yes</u>	13. Cooling system: Capacity <u>36.0</u>
6. Conditioned floor area (sq. ft.)	6. <u>1535</u>	a) Split system SEER <u> </u>
7. Windows, type and area		b) Single package SEER <u> </u>
a) U-factor:(weighted average)	7a. <u>0.300</u>	c) Ground/water source SEER/COP <u> </u>
b) Solar Heat Gain Coefficient (SHGC)	7b. <u>0.200</u>	d) Room unit/PTAC EER <u> </u>
c) Area	7c. <u>410.0</u>	e) Other <u>15.0</u>
8. Skylights		14. Heating system: Capacity <u>36.0</u>
a) U-factor:(weighted average)	8a. <u>NA</u>	a) Split system heat pump HSPF <u> </u>
b) Solar Heat Gain Coefficient (SHGC)	8b. <u>NA</u>	b) Single package heat pump HSPF <u> </u>
9. Floor type, insulation level:		c) Electric resistance COP <u> </u>
a) Slab-on-grade (R-value)	9a. <u> </u>	d) Gas furnace, natural gas AFUE <u> </u>
b) Wood, raised (R-value)	9b. <u>19.0</u>	e) Gas furnace, LPG AFUE <u> </u>
c) Concrete, raised (R-value)	9c. <u> </u>	f) Other <u>8.60</u>
10. Wall type and insulation:		15. Water heating system
A. Exterior:		a) Electric resistance EF <u>0.95</u>
1. Wood frame (Insulation R-value)	10A1. <u>19.0</u>	b) Gas fired, natural gas EF <u> </u>
2. Masonry (Insulation R-value)	10A2. <u> </u>	c) Gas fired, LPG EF <u> </u>
B. Adjacent:		d) Solar system with tank EF <u> </u>
1. Wood frame (Insulation R-value)	10B1. <u> </u>	e) Dedicated heat pump with tank EF <u> </u>
2. Masonry (Insulation R-value)	10B2. <u> </u>	f) Heat recovery unit HeatRec% <u> </u>
11. Ceiling type and insulation level		g) Other <u> </u>
a) Under attic	11a. <u>38.0</u>	16. HVAC credits claimed (Performance Method)
b) Single assembly	11b. <u> </u>	a) Ceiling fans <u> </u>
c) Knee walls/skylight walls	11c. <u> </u>	b) Cross ventilation <u>No</u>
d) Radiant barrier installed	11d. <u>No</u>	c) Whole house fan <u>No</u>
		d) Multizone cooling credit <u> </u>
		e) Multizone heating credit <u> </u>
		f) Programmable thermostat <u>Yes</u>

*Label required by Section R303.1.3 of the Florida Building Code, Energy Conservation, if not DEFAULT.

I certify that this home has complied with the Florida Building Code, Energy Conservation, through the above energy saving features which will be installed (or exceeded) in this home before final inspection. Otherwise, a new EPL display card will be completed based on installed code compliant features.

Builder Signature: _____ Date: _____

Address of New Home: _____ City/FL Zip: Fort White, FL

Florida Building Code, Energy Conservation, 6th Edition (2017)

Mandatory Requirements for Residential Performance, Prescriptive and ERI Methods

ADDRESS:

Fort White , FL ,

Permit Number:

MANDATORY REQUIREMENTS See individual code sections for full details.



SECTION R401 GENERAL

- ☐ **R401.3 Energy Performance Level (EPL) display card (Mandatory).** The building official shall require that an energy performance level (EPL) display card be completed and certified by the builder to be accurate and correct before final approval of the building for occupancy. Florida law (Section 553.9085, Florida Statutes) requires the EPL display card to be included as an addendum to each sales contract for both presold and nonpresold residential buildings. The EPL display card contains information indicating the energy performance level and efficiencies of components installed in a dwelling unit. The building official shall verify that the EPL display card completed and signed by the builder accurately reflects the plans and specifications submitted to demonstrate code compliance for the building. A copy of the EPL display card can be found in Appendix RD.

- ☐ **R402.4 Air leakage (Mandatory).** The building thermal envelope shall be constructed to limit air leakage in accordance with the requirements of Sections R402.4.1 through R402.4.5.

Exception: Dwelling units of R-2 Occupancies and multiple attached single family dwellings shall be permitted to comply with Section C402.5.

- ☐ **R402.4.1 Building thermal envelope.** The building thermal envelope shall comply with Sections R402.4.1.1 and R402.4.1.2. The sealing methods between dissimilar materials shall allow for differential expansion and contraction.

- ☐ **R402.4.1.1 Installation.** The components of the building thermal envelope as listed in Table R402.4.1.1 shall be installed in accordance with the manufacturer's instructions and the criteria listed in Table R402.4.1.1, as applicable to the method of construction. Where required by the code official, an approved third party shall inspect all components and verify compliance.

- ☐ **R402.4.1.2 Testing.** The building or dwelling unit shall be tested and verified as having an air leakage rate not exceeding seven air changes per hour in Climate Zones 1 and 2, and three air changes per hour in Climate Zones 3 through 8. Testing shall be conducted in accordance with ANSI/RESNET/ICC 380 and reported at a pressure of 0.2 inch w.g. (50 pascals). Testing shall be conducted by either individuals as defined in Section 553.993(5) or (7), Florida Statutes, or individuals licensed as set forth in Section 489.105(3)(f), (g) or (i) or an approved third party. A written report of the results of the test shall be signed by the party conducting the test and provided to the code official. Testing shall be performed at any time after creation of all penetrations of the building thermal envelope.

Exception: Testing is not required for additions, alterations, renovations, or repairs, of the building thermal envelope of existing buildings in which the new construction is less than 85 percent of the building thermal envelope.

During testing:

1. Exterior windows and doors, fireplace and stove doors shall be closed, but not sealed, beyond the intended weatherstripping or other infiltration control measures.
2. Dampers including exhaust, intake, makeup air, backdraft and flue dampers shall be closed, but not sealed beyond intended infiltration control measures.
3. Interior doors, if installed at the time of the test, shall be open.
4. Exterior doors for continuous ventilation systems and heat recovery ventilators shall be closed and sealed.
5. Heating and cooling systems, if installed at the time of the test, shall be turned off.
6. Supply and return registers, if installed at the time of the test, shall be fully open.

- ☐ **R402.4.2 Fireplaces.** New wood-burning fireplaces shall have tight-fitting flue dampers or doors, and outdoor combustion air. Where using tight-fitting doors on factory-built fireplaces listed and labeled in accordance with UL 127, the doors shall be tested and listed for the fireplace. Where using tight-fitting doors on masonry fireplaces, the doors shall be listed and labeled in accordance with UL 907.

- ☐ **R402.4.3 Fenestration air leakage.** Windows, skylights and sliding glass doors shall have an air infiltration rate of no more than 0.3 cfm per square foot (1.5 L/s/m²), and swinging doors no more than 0.5 cfm per square foot (2.6 L/s/m²), when tested according to NFRC 400 or AAMA/WDMA/CSA 101/I.S.2/A440 by an accredited, independent laboratory and listed and labeled by the manufacturer.

Exception: Site-built windows, skylights and doors.

MANDATORY REQUIREMENTS - (Continued)

- ☐ **R402.4.4 Rooms containing fuel-burning appliances.** In Climate Zones 3 through 8, where open combustion air ducts provide combustion air to open combustion fuel burning appliances, the appliances and combustion air opening shall be located outside the building thermal envelope or enclosed in a room, isolated from inside the thermal envelope. Such rooms shall be sealed and insulated in accordance with the envelope requirements of Table R402.1.2, where the walls, floors and ceilings shall meet not less than the basement wall R-value requirement. The door into the room shall be fully gasketed and any water lines and ducts in the room insulated in accordance with Section R403. The combustion air duct shall be insulated where it passes through conditioned space to a minimum of R-8.

Exceptions:

1. Direct vent appliances with both intake and exhaust pipes installed continuous to the outside.
2. Fireplaces and stoves complying with Section R402.4.2 and Section R1006 of the Florida Building Code, Residential.

- ☐ **R402.4.5 Recessed lighting.** Recessed luminaires installed in the building thermal envelope shall be sealed to limit air leakage between conditioned and unconditioned spaces. All recessed luminaires shall be IC-rated and labeled as having an air leakage rate not more than 2.0 cfm (0.944 L/s) when tested in accordance with ASTM E283 at a 1.57 psf (75 Pa) pressure differential. All recessed luminaires shall be sealed with a gasket or caulk between the housing and the interior wall or ceiling covering.

SECTION R403 SYSTEMS

R403.1 Controls.

- ☐ **R403.1.1 Thermostat provision (Mandatory).** At least one thermostat shall be provided for each separate heating and cooling system.

- ☐ **R403.1.3 Heat pump supplementary heat (Mandatory).** Heat pumps having supplementary electric-resistance heat shall have controls that, except during defrost, prevent supplemental heat operation when the heat pump compressor can meet the heating load.

- ☐ **R403.3.2 Sealing (Mandatory)** All ducts, air handlers, filter boxes and building cavities that form the primary air containment passageways for air distribution systems shall be considered ducts or plenum chambers, shall be constructed and sealed in accordance with Section C403.2.9.2 of the Commercial Provisions of this code and shall be shown to meet duct tightness criteria below.

Duct tightness shall be verified by testing in accordance with ANSI/RESNET/ICC 380 by either individuals as defined in Section 553.993(5) or (7), Florida Statutes, or individuals licensed as set forth in Section 489.105(3)(f), (g) or (i), Florida Statutes, to be "substantially leak free" in accordance with Section R403.3.3.

- ☐ **R403.3.2.1 Sealed air handler.** Air handlers shall have a manufacturer's designation for an air leakage of no more than 2 percent of the design airflow rate when tested in accordance with ASHRAE 193.

- ☐ **R403.3.3 Duct testing (Mandatory).** Ducts shall be pressure tested to determine air leakage by one of the following methods:

1. Rough-in test: Total leakage shall be measured with a pressure differential of 0.1 inch w.g. (25 Pa) across the system, including the manufacturer's air handler enclosure if installed at the time of the test. All registers shall be taped or otherwise sealed during the test.
2. Postconstruction test: Total leakage shall be measured with a pressure differential of 0.1 inch w.g. (25 Pa) across the entire system, including the manufacturer's air handler enclosure. Registers shall be taped or otherwise sealed during the test.

Exceptions:

1. A duct air leakage test shall not be required where the ducts and air handlers are located entirely within the building thermal envelope.
2. Duct testing is not mandatory for buildings complying by Section 405 of this code.

A written report of the results of the test shall be signed by the party conducting the test and provided to the code official.

- ☐ **R403.3.5 Building cavities (Mandatory).** Building framing cavities shall not be used as ducts or plenums.

- ☐ **R403.4 Mechanical system piping insulation (Mandatory).** Mechanical system piping capable of carrying fluids above 105°F (41°C) or below 55°F (13°C) shall be insulated to a minimum of R-3.

- ☐ **R403.4.1 Protection of piping insulation.** Piping insulation exposed to weather shall be protected from damage, including that caused by sunlight, moisture, equipment maintenance and wind, and shall provide shielding from solar radiation that can cause degradation of the material. Adhesive tape shall not be permitted.

- ☐ **R403.5.1 Heated water circulation and temperature maintenance systems (Mandatory)** Heated water circulation systems shall be in accordance with Section R403.5.1.1. Heat trace temperature maintenance systems shall be in accordance with Section R403.5.1.2. Automatic controls, temperature sensors and pumps shall be accessible. Manual controls shall be readily accessible.

- ☐ **R403.5.1.1 Circulation systems.** Heated water circulation systems shall be provided with a circulation pump. The system return pipe shall be a dedicated return pipe or a cold water supply pipe. Gravity and thermosiphon circulation systems shall be prohibited. Controls for circulating hot water system pumps shall start the pump based on the identification of a demand for hot water within the occupancy. The controls shall automatically turn off the pump when the water in the circulation loop is at the desired temperature and when there is no demand for hot water.

- ☐ **R403.5.1.2 Heat trace systems.** Electric heat trace systems shall comply with IEEE 515.1 or UL 515. Controls for such systems shall automatically adjust the energy input to the heat tracing to maintain the desired water temperature in the piping in accordance with the times when heated water is used in the occupancy.

MANDATORY REQUIREMENTS - (Continued)

- ☐ **R403.5.5 Heat traps (Mandatory).** Storage water heaters not equipped with integral heat traps and having vertical pipe risers shall have heat traps installed on both the inlets and outlets. External heat traps shall consist of either a commercially available heat trap or a downward and upward bend of at least 3 ½ inches (89 mm) in the hot water distribution line and cold water line located as close as possible to the storage tank.

R403.5.6 Water heater efficiencies (Mandatory).

- ☐ **R403.5.6.1.1 Automatic controls.** Service water-heating systems shall be equipped with automatic temperature controls capable of adjustment from the lowest to the highest acceptable temperature settings for the intended use. The minimum temperature setting range shall be from 100°F to 140°F (38°C to 60°C).
- ☐ **R403.5.6.1.2 Shut down.** A separate switch or a clearly marked circuit breaker shall be provided to permit the power supplied to electric service systems to be turned off. A separate valve shall be provided to permit the energy supplied to the main burner(s) of combustion types of service water-heating systems to be turned off.
- ☐ **R403.5.6.2 Water-heating equipment.** Water-heating equipment installed in residential units shall meet the minimum efficiencies of Table C404.2 in Chapter 4 of the Florida Building Code, Energy Conservation, Commercial Provisions, for the type of equipment installed. Equipment used to provide heating functions as part of a combination system shall satisfy all stated requirements for the appropriate water-heating category. Solar water heaters shall meet the criteria of Section R403.5.6.2.1.
- ☐ **R403.5.6.2.1 Solar water-heating systems.** Solar systems for domestic hot water production are rated by the annual solar energy factor of the system. The solar energy factor of a system shall be determined from the Florida Solar Energy Center Directory of Certified Solar Systems. Solar collectors shall be tested in accordance with ISO Standard 9806, Test Methods for Solar Collectors, and SRCC Standard TM-1, Solar Domestic Hot Water System and Component Test Protocol. Collectors in installed solar water-heating systems should meet the following criteria:
1. Be installed with a tilt angle between 10 degrees and 40 degrees of the horizontal; and
 2. Be installed at an orientation within 45 degrees of true south.

- ☐ **R403.6 Mechanical ventilation (Mandatory).** The building shall be provided with ventilation that meets the requirements of the Florida Building Code, Residential, or Florida Building Code, Mechanical, as applicable, or with other approved means of ventilation including: Natural, Infiltration or Mechanical means. Outdoor air intakes and exhausts shall have automatic or gravity dampers that close when the ventilation system is not operating.

- ☐ **R403.6.1 Whole-house mechanical ventilation system fan efficacy.** When installed to function as a whole-house mechanical ventilation system, fans shall meet the efficacy requirements of Table R403.6.1.

Exception: Where whole-house mechanical ventilation fans are integral to tested and listed HVAC equipment, they shall be powered by an electronically commutated motor.

- ☐ **R403.6.2 Ventilation air.** Residential buildings designed to be operated at a positive indoor pressure or for mechanical ventilation shall meet the following criteria:
1. The design air change per hour minimums for residential buildings in ASHRAE 62.2, Ventilation for Acceptable Indoor Air Quality, shall be the maximum rates allowed for residential applications.
 2. No ventilation or air-conditioning system make-up air shall be provided to conditioned space from attics, crawlspaces, attached enclosed garages or outdoor spaces adjacent to swimming pools or spas.
 3. If ventilation air is drawn from enclosed space(s), then the walls of the space(s) from which air is drawn shall be insulated to a minimum of R-11 and the ceiling shall be insulated to a minimum of R-19, space permitting, or R-10 otherwise.

R403.7 Heating and cooling equipment (Mandatory).

- ☐ **R403.7.1 Equipment sizing.** Heating and cooling equipment shall be sized in accordance with ACCA Manual S based on the equipment loads calculated in accordance with ACCA Manual J or other approved heating and cooling calculation methodologies, based on building loads for the directional orientation of the building. The manufacturer and model number of the outdoor and indoor units (if split system) shall be submitted along with the sensible and total cooling capacities at the design conditions described in Section R302.1. This Code does not allow designer safety factors, provisions for future expansion or other factors that affect equipment sizing. System sizing calculations shall not include loads created by local intermittent mechanical ventilation such as standard kitchen and bathroom exhaust systems. New or replacement heating and cooling equipment shall have an efficiency rating equal to or greater than the minimum required by federal law for the geographic location where the equipment is installed.

**TABLE R403.6.1
WHOLE-HOUSE MECHANICAL VENTILATION SYSTEM FAN EFFICACY**

FAN LOCATION	AIRFLOW RATE MINIMUM (CFM)	MINIMUM EFFICACY ^a (CFM/WATT)	AIRFLOW RATE MAXIMUM (CFM)
Range hoods	Any	2.8 cfm/watt	Any
In-line fan	Any	2.8 cfm/watt	Any
Bathroom, utility room	10	1.4 cfm/watt	<90
Bathroom, utility room	90	2.8 cfm/watt	Any

For SI: 1 cfm = 28.3 L/min.

a. When tested in accordance with HVI Standard 916

MANDATORY REQUIREMENTS - (Continued)

- ☐ **R403.7.1.1 Cooling equipment capacity.** Cooling only equipment shall be selected so that its total capacity is not less than the calculated total load but not more than 1.15 times greater than the total load calculated according to the procedure selected in Section 403.7, or the closest available size provided by the manufacturer's product lines. The corresponding latent capacity of the equipment shall not be less than the calculated latent load.

The published value for AHRI total capacity is a nominal, rating-test value and shall not be used for equipment sizing. Manufacturer's expanded performance data shall be used to select cooling-only equipment. This selection shall be based on the outdoor design dry-bulb temperature for the load calculation (or entering water temperature for water-source equipment), the blower CFM provided by the expanded performance data, the design value for entering wet-bulb temperature and the design value for entering dry-bulb temperature.

Design values for entering wet-bulb and dry-bulb temperatures shall be for the indoor dry bulb and relative humidity used for the load calculation and shall be adjusted for return side gains if the return duct(s) is installed in an unconditioned space.

Exceptions:

1. Attached single- and multiple-family residential equipment sizing may be selected so that its cooling capacity is less than the calculated total sensible load but not less than 80 percent of that load.
2. When signed and sealed by a Florida-registered engineer, in attached single- and multiple-family units, the capacity of equipment may be sized in accordance with good design practice.

R403.7.1.2 Heating equipment capacity.

- ☐ **R403.7.1.2.1 Heat pumps.** Heat pump sizing shall be based on the cooling requirements as calculated according to Section R403.7.1.1, and the heat pump total cooling capacity shall not be more than 1.15 times greater than the design cooling load even if the design heating load is 1.15 times greater than the design cooling load.

- ☐ **R403.7.1.2.2 Electric resistance furnaces.** Electric resistance furnaces shall be sized within 4 kW of the design requirements calculated according to the procedure selected in Section R403.7.1.

- ☐ **R403.7.1.2.3 Fossil fuel heating equipment.** The capacity of fossil fuel heating equipment with natural draft atmospheric burners shall not be less than the design load calculated in accordance with Section R403.7.1.

- ☐ **R403.7.1.3 Extra capacity required for special occasions.** Residences requiring excess cooling or heating equipment capacity on an intermittent basis, such as anticipated additional loads caused by major entertainment events, shall have equipment sized or controlled to prevent continuous space cooling or heating within that space by one or more of the following options:

1. A separate cooling or heating system is utilized to provide cooling or heating to the major entertainment areas.
2. A variable capacity system sized for optimum performance during base load periods is utilized.

- ☐ **R403.8 Systems serving multiple dwelling units (Mandatory).** Systems serving multiple dwelling units shall comply with Sections C403 and C404 of the IECC—Commercial Provisions in lieu of Section R403.

- ☐ **R403.9 Snow melt and ice system controls (Mandatory)** Snow- and ice-melting systems, supplied through energy service to the building, shall include automatic controls capable of shutting off the system when the pavement temperature is above 50°F (10°C), and no precipitation is falling and an automatic or manual control that will allow shutoff when the outdoor temperature is above 40°F (4.8°C).

- ☐ **R403.10 Pools and permanent spa energy consumption (Mandatory).** The energy consumption of pools and permanent spas shall be in accordance with Sections R403.10.1 through R403.10.5.

- ☐ **R403.10.1 Heaters.** The electric power to heaters shall be controlled by a readily accessible on-off switch that is an integral part of the heater mounted on the exterior of the heater, or external to and within 3 feet (914 mm) of the heater. Operation of such switch shall not change the setting of the heater thermostat. Such switches shall be in addition to a circuit breaker for the power to the heater. Gas-fired heaters shall not be equipped with continuously burning ignition pilots.

- ☐ **R403.10.2 Time switches.** Time switches or other control methods that can automatically turn off and on according to a preset schedule shall be installed for heaters and pump motors. Heaters and pump motors that have built-in time switches shall be in compliance with this section.

Exceptions:

1. Where public health standards require 24-hour pump operation.
2. Pumps that operate solar- and waste-heat-recovery pool heating systems.
3. Where pumps are powered exclusively from on-site renewable generation.

- ☐ **R403.10.3 Covers.** Outdoor heated swimming pools and outdoor permanent spas shall be equipped with a vapor-retardant cover on or at the water surface or a liquid cover or other means proven to reduce heat loss.

Exception: Where more than 70 percent of the energy for heating, computed over an operation season, is from site-recovered energy, such as from a heat pump or solar energy source, covers or other vapor-retardant means shall not be required.

- ☐ **R403.10.4 Gas- and oil-fired pool and spa heaters.** All gas- and oil-fired pool and spa heaters shall have a minimum thermal efficiency of 82 percent for heaters manufactured on or after April 16, 2013, when tested in accordance with ANSI Z 21.56. Pool heaters fired by natural or LP gas shall not have continuously burning pilot lights.

- ☐ **R403.10.5 Heat pump pool heaters.** Heat pump pool heaters shall have a minimum COP of 4.0 when tested in accordance with AHRI 1160, Table 2, Standard Rating Conditions-Low Air Temperature. A test report from an independent laboratory is required to verify procedure compliance. Geothermal swimming pool heat pumps are not required to meet this standard.
- ☐ **R403.11 Portable spas (Mandatory)** The energy consumption of electric-powered portable spas shall be controlled by the requirements of APSP-14.

SECTION R404

ELECTRICAL POWER AND LIGHTING SYSTEMS

- ☐ **R404.1 Lighting equipment (Mandatory).** Not less than 75 percent of the lamps in permanently installed lighting fixtures shall be high-efficacy lamps or not less than 75 percent of the permanently installed lighting fixtures shall contain only high-efficacy lamps.
Exception: Low-voltage lighting.
R404.1.1 Lighting equipment (Mandatory) Fuel gas lighting systems shall not have continuously burning pilot lights.

2017 - AIR BARRIER AND INSULATION INSPECTION COMPONENT CRITERIA

**TABLE 402.4.1.1
AIR BARRIER AND INSULATION INSPECTION COMPONENT CRITERIA**

Project Name: 190196 Shokat Street: City, State, Zip: Fort White , FL , Owner: Shokat River House Design Location: FL, Gainesville			Builder Name: Permit Office: Permit Number: Jurisdiction:	CHECK
COMPONENT	AIR BARRIER CRITERIA	INSULATION INSTALLATION CRITERIA		
General requirements	A continuous air barrier shall be installed in the building envelope. The exterior thermal envelope contains a continuous air barrier. Breaks or joints in the air barrier shall be sealed.	Air-permeable insulation shall not be used as a sealing material.		
Ceiling/attic	The air barrier in any dropped ceiling/soffit shall be aligned with the insulation and any gaps in the air barrier shall be sealed. Access openings, drop down stairs or knee wall doors to unconditioned attic spaces shall be sealed.	The insulation in any dropped ceiling/soffit shall be aligned with the air barrier.		
Walls	The junction of the foundation and sill plate shall be sealed. The junction of the top plate and the top of exterior walls shall be sealed. Knee walls shall be sealed.	Cavities within corners and headers of frame walls shall be insulated by completely filling the cavity with a material having a thermal resistance of R-3 per inch minimum. Exterior thermal envelope insulation for framed walls shall be installed in substantial contact and continuous alignment with the air barrier.		
Windows, skylights and doors	The space between window/door jambs and framing, and skylights and framing shall be sealed.			
Rim joists	Rim joists shall include the air barrier.	Rim joists shall be insulated.		
Floors (including above-garage and cantilevered floors)	The air barrier shall be installed at any exposed edge of insulation.	Floor framing cavity insulation shall be installed to maintain permanent contact with the underside of subfloor decking, or floor framing cavity insulation shall be permitted to be in contact with the top side of sheathing, or continuous insulation installed on the underside of floor framing and extends from the bottom to the top of all perimeter floor framing members.		
Crawl space walls	Exposed earth in unvented crawl spaces shall be covered with a Class I vapor retarder with overlapping joints taped.	Where provided instead of floor insulation, insulation shall be permanently attached to the crawlspace		
Shafts, penetrations	Duct shafts, utility penetrations, and flue shafts opening to exterior or unconditioned space shall be sealed.			
Narrow cavities		Batts in narrow cavities shall be cut to fit, or narrow cavities shall be filled by insulation that on installation readily conforms to the available cavity spaces.		
Garage separation	Air sealing shall be provided between the garage and conditioned spaces.			
Recessed lighting	Recessed light fixtures installed in the building thermal envelope shall be sealed to the drywall.	Recessed light fixtures installed in the building thermal envelope shall be air tight and IC rated.		
Plumbing and wiring		Batt insulation shall be cut neatly to fit around wiring and plumbing in exterior walls, or insulation that on installation readily conforms to available space shall extend behind piping and wiring.		
Shower/tub on exterior wall	The air barrier installed at exterior walls adjacent to showers and tubs shall separate them from the showers and tubs.	Exterior walls adjacent to showers and tubs shall be insulated.		
Electrical/phone box on exterior walls	The air barrier shall be installed behind electrical or communication boxes or air-sealed boxes shall be installed.			
HVAC register boots	HVAC register boots that penetrate building thermal envelope shall be sealed to the sub-floor or drywall.			
Concealed sprinklers	When required to be sealed, concealed fire sprinklers shall only be sealed in a manner that is recommended by the manufacturer. Caulking or other adhesive sealants shall not be used to fill voids between fire sprinkler cover plates and walls or ceilings.			

a. In addition, inspection of log walls shall be in accordance with the provisions of ICC-400.

Envelope Leakage Test Report (Blower Door Test)

Residential Prescriptive, Performance or ERI Method Compliance

2017 Florida Building Code, Energy Conservation, 6th Edition

Jurisdiction: _____

Permit #: _____

Job Information

Builder: _____

Community: _____

Lot: 23

Address: _____

City: Fort White

State: FL

Zip: _____

Air Leakage Test Results

Passing results must meet either the Performance, Prescriptive, or ERI Method

☐ **PRESCRIPTIVE METHOD**-The building or dwelling unit shall be tested and verified as having an air leakage rate of not exceeding 7 air changes per hour at a pressure of 0.2 inch w.g. (50 Pascals) in Climate Zones 1 and 2.

☐ **PERFORMANCE or ERI METHOD**-The building or dwelling unit shall be tested and verified as having an air leakage rate of not exceeding the selected ACH(50) value, as shown on Form R405-2017 (Performance) or R406-2017 (ERI), section labeled as infiltration, sub-section ACH50.
ACH(50) specified on Form R405-2017-Energy Calc (Performance) or R406-2017 (ERI): 7.000

$$\frac{\text{CFM}(50)}{\text{Building Volume}} \times 60 \div \frac{16118}{\text{ACH}(50)} = \text{ACH}(50)$$

☒ **PASS**

☐ When ACH(50) is less than 3, Mechanical Ventilation installation must be verified by building department.

Method for calculating building volume:

- ☐ Retrieved from architectural plans
- ☒ Code software calculated
- ☐ Field measured and calculated

R402.4.1.2 Testing. Testing shall be conducted in accordance with ANSI/RESNET/ICC 380 and reported at a pressure of 0.2 inch w.g. (50 Pascals). Testing shall be conducted by either individuals as defined in Section 553.993(5) or (7), *Florida Statutes*, or individuals licensed as set forth in Section 489.105(3)(f), (g), or (i) or an approved third party. A written report of the results of the test shall be signed by the party conducting the test and provided to the code official. Testing shall be performed at any time after creation of all penetrations of the *building thermal envelope*.

During testing:

1. Exterior windows and doors, fireplace and stove doors shall be closed, but not sealed, beyond the intended weatherstripping or other infiltration control measures.
2. Dampers including exhaust, intake, makeup air, back draft and flue dampers shall be closed, but not sealed beyond intended infiltration control measures.
3. Interior doors, if installed at the time of the test, shall be open.
4. Exterior doors for continuous ventilation systems and heat recovery ventilators shall be closed and sealed.
5. Heating and cooling systems, if installed at the time of the test, shall be turned off.
6. Supply and return registers, if installed at the time of the test, shall be fully open.

Testing Company

Company Name: _____ Phone: _____

I hereby verify that the above Air Leakage results are in accordance with the 2017 6th Edition Florida Building Code Energy Conservation requirements according to the compliance method selected above.

Signature of Tester: _____ Date of Test: _____

Printed Name of Tester: _____

License/Certification #: _____ Issuing Authority: _____

Residential System Sizing Calculation

Summary

Shokat River House

Project Title:
190196 Shokat

Fort White, FL


2019-08-06

Location for weather data: Gainesville, FL - Defaults: Latitude(29.7) Altitude(152 ft.) Temp Range(M)			
Humidity data: Interior RH (50%) Outdoor wet bulb (77F) Humidity difference(51gr.)			
Winter design temperature(TMY3 99%)	30 F	Summer design temperature(TMY3 99%)	94 F
Winter setpoint	70 F	Summer setpoint	75 F
Winter temperature difference	40 F	Summer temperature difference	19 F
Total heating load calculation	22554 Btuh	Total cooling load calculation	30333 Btuh
Submitted heating capacity	% of calc Btuh	Submitted cooling capacity	% of calc Btuh
Total (Electric Heat Pump)	159.6 36000	Sensible (SHR = 0.75)	103.4 27000
Heat Pump + Auxiliary(0.0kW)	159.6 36000	Latent	212.7 9000
		Total (Electric Heat Pump)	118.7 36000

WINTER CALCULATIONS

Winter Heating Load (for 1535 sqft)


Load component		Load	
Window total	410 sqft	4920 Btuh	
Wall total	1852 sqft	5724 Btuh	
Door total	24 sqft	384 Btuh	
Ceiling total	1674 sqft	1699 Btuh	
Floor total	1535 sqft	2523 Btuh	
Infiltration	84 cfm	3687 Btuh	
Duct loss		3617 Btuh	
Subtotal		22554 Btuh	
Ventilation	0 cfm	0 Btuh	
TOTAL HEAT LOSS		22554 Btuh	

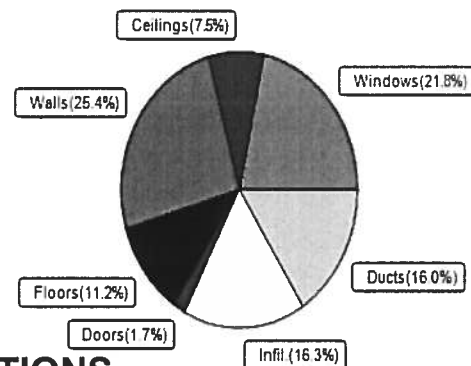

SUMMER CALCULATIONS

Summer Cooling Load (for 1535 sqft)

Load component		Load	
Window total	410 sqft	9539 Btuh	
Wall total	1852 sqft	3063 Btuh	
Door total	24 sqft	288 Btuh	
Ceiling total	1674 sqft	2294 Btuh	
Floor total		1206 Btuh	
Infiltration	63 cfm	1313 Btuh	
Internal gain		3780 Btuh	
Duct gain		4617 Btuh	
Sens. Ventilation	0 cfm	0 Btuh	
Blower Load		0 Btuh	
Total sensible gain		26101 Btuh	
Latent gain(ducts)		852 Btuh	
Latent gain(infiltration)		2180 Btuh	
Latent gain(ventilation)		0 Btuh	
Latent gain(internal/occupants/other)		1200 Btuh	
Total latent gain		4232 Btuh	
TOTAL HEAT GAIN		30333 Btuh	

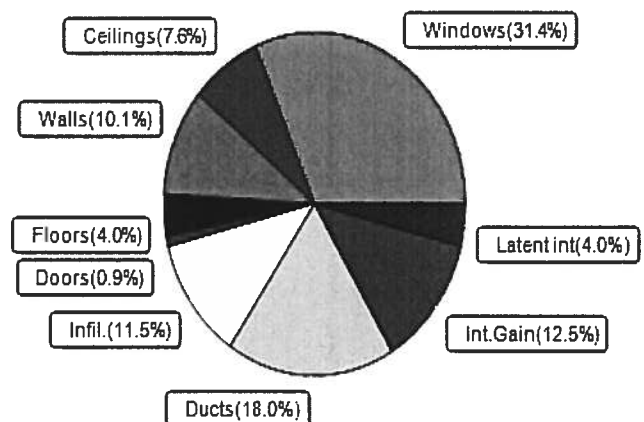

8th Edition

EnergyGauge® System Sizing
PREPARED BY: Evan Beamsley
DATE: 2019-08-06

System Sizing Calculations - Winter

Residential Load - Whole House Component Details

Shokat River House

Project Title:

190196 Shokat

Fort White, FL

Building Type: User

2019-08-06

Reference City: Gainesville, FL (Defaults) Winter Temperature Difference: 40.0 F (TMY3 99%)

This calculation is for Worst Case. The house has been rotated 270 degrees.

Component Loads for Whole House								
Window	Panes/Type	Frame	U	Orientation	Area(sqft)	X	HTM=	Load
1	2, NFRC 0.20	Metal	0.30	W	36.0		12.0	432 Btuh
2	2, NFRC 0.20	Metal	0.30	W	84.0		12.0	1008 Btuh
3	2, NFRC 0.20	Metal	0.30	W	72.0		12.0	864 Btuh
4	2, NFRC 0.20	Metal	0.30	W	40.0		12.0	480 Btuh
5	2, NFRC 0.20	Metal	0.30	W	36.0		12.0	432 Btuh
6	2, NFRC 0.20	Metal	0.30	N	8.0		12.0	96 Btuh
7	2, NFRC 0.20	Metal	0.30	N	30.0		12.0	360 Btuh
8	2, NFRC 0.20	Metal	0.30	E	72.0		12.0	864 Btuh
9	2, NFRC 0.20	Metal	0.30	E	16.0		12.0	192 Btuh
10	2, NFRC 0.20	Metal	0.30	S	16.0		12.0	192 Btuh
	Window Total					410.0(sqft)		4920 Btuh
Walls	Type	Ornt.	Ueff.	R-Value (Cav/Sh)	Area	X	HTM=	Load
1	Frame - Wood	- Ext	(0.077)	19.0/0.0	124		3.09	384 Btuh
2	Frame - Wood	- Ext	(0.077)	19.0/0.0	93		3.09	288 Btuh
3	Frame - Wood	- Ext	(0.077)	19.0/0.0	302		3.09	932 Btuh
4	Frame - Wood	- Ext	(0.077)	19.0/0.0	93		3.09	288 Btuh
5	Frame - Wood	- Ext	(0.077)	19.0/0.0	124		3.09	384 Btuh
6	Frame - Wood	- Ext	(0.077)	19.0/0.0	282		3.09	872 Btuh
7	Frame - Wood	- Ext	(0.077)	19.0/0.0	117		3.09	362 Btuh
8	Frame - Wood	- Ext	(0.077)	19.0/0.0	33		3.09	102 Btuh
9	Frame - Wood	- Ext	(0.077)	19.0/0.0	237		3.09	733 Btuh
10	Frame - Wood	- Ext	(0.077)	19.0/0.0	33		3.09	102 Btuh
11	Frame - Wood	- Ext	(0.077)	19.0/0.0	117		3.09	362 Btuh
12	Frame - Wood	- Ext	(0.077)	19.0/0.0	296		3.09	915 Btuh
	Wall Total					1852(sqft)		5724 Btuh
Doors	Type	Storm	Ueff.		Area	X	HTM=	Load
1	Insulated - Exterior, n		(0.400)		8		16.0	128 Btuh
2	Insulated - Exterior, n		(0.400)		8		16.0	128 Btuh
3	Insulated - Exterior, n		(0.400)		8		16.0	128 Btuh
	Door Total					24(sqft)		384Btuh
Ceilings	Type/Color/Surface		Ueff.	R-Value	Area	X	HTM=	Load
1	Vented Attic/D/Metal		(0.025)	38.0/0.0	1674		1.0	1699 Btuh
	Ceiling Total					1674(sqft)		1699Btuh
Floors	Type		Ueff.	R-Value	Size	X	HTM=	Load
1	Stem/Crawlsp(Wood)(v)		(0.052)	19.0/0.0	1535.0	sqft	1.6	2523 Btuh
	Floor Total					1535	sqft	2523 Btuh
	Envelope Subtotal:							15251 Btuh

Manual J Winter Calculations

Residential Load - Component Details (continued)

Shokat River House

Project Title:

190196 Shokat

Fort White, FL

Building Type: User

2019-08-06

Infiltration	Type Natural	Wholehouse ACH 0.31	Volume(cuft) 16118	Wall Ratio 1.00	CFM= 84.2	3687 Btuh
Duct load	Average sealed, R6.0, Supply(Att), Return(Att) (DLM of 0.191)					3617 Btuh
All Zones	Sensible Subtotal All Zones					22554 Btuh

WHOLE HOUSE TOTALS

Totals for Heating	Subtotal Sensible Heat Loss Ventilation Sensible Heat Loss Total Heat Loss	22554 Btuh 0 Btuh 22554 Btuh
---------------------------	--	------------------------------------

EQUIPMENT

1. Electric Heat Pump	#	36000 Btuh
-----------------------	---	------------

Key: Window types - NFRC (Requires U-Factor and Shading coefficient(SHGC) of glass as numerical values)
or - Glass as 'Clear' or 'Tint' (Uses U-Factor and SHGC defaults)

U - (Window U-Factor)

HTM - (ManualJ Heat Transfer Multiplier)



Version 8

System Sizing Calculations - Summer

Residential Load - Whole House Component Details

Shokat River House

Project Title:
190196 Shokat

Fort White, FL

2019-08-06

Reference City: Gainesville, FL Temperature Difference: 19.0F(TMY3 99%) Humidity difference: 51gr.
This calculation is for Worst Case. The house has been rotated 270 degrees.

Component Loads for Whole House

Window	Type*						Overhang		Window Area(sqft)			HTM		Load		
	Panes	SHGC	U	InSh	IS	Omt	Len	Hgt	Gross	Shaded	Unshaded	Shaded	Unshaded			
1	2 NFRC	0.20, 0.30	No	No	W	1.5ft.	9.0ft.		36.0	0.0	36.0	10	25	899	Btuh	
2	2 NFRC	0.20, 0.30	No	No	W	10.8f	9.0ft.		84.0	0.0	84.0	10	25	2098	Btuh	
3	2 NFRC	0.20, 0.30	No	No	W	10.8f	5.0ft.		72.0	71.8	0.2	10	25	716	Btuh	
4	2 NFRC	0.20, 0.30	No	No	W	10.8f	9.0ft.		40.0	0.0	40.0	10	25	999	Btuh	
5	2 NFRC	0.20, 0.30	No	No	W	1.5ft.	9.0ft.		36.0	0.0	36.0	10	25	899	Btuh	
6	2 NFRC	0.20, 0.30	No	No	N	1.5ft.	6.0ft.		8.0	0.0	8.0	10	10	79	Btuh	
7	2 NFRC	0.20, 0.30	No	No	N	1.5ft.	3.0ft.		30.0	0.0	30.0	10	10	297	Btuh	
8	2 NFRC	0.20, 0.30	No	No	E	5.2ft.	1.0ft.		72.0	39.5	32.5	10	25	1204	Btuh	
9	2 NFRC	0.20, 0.30	No	No	E	5.2ft.	1.0ft.		16.0	6.6	9.4	10	25	301	Btuh	
10	2 NFRC	0.20, 0.30	No	No	S	1.5ft.	3.0ft.		16.0	11.0	5.0	10	11	166	Btuh	
	Excursion													1880	Btuh	
	Window Total								410 (sqft)						9539	Btuh
Walls	Type	U-Value				R-Value		Area(sqft)			HTM		Load			
							Cav/Sheath									
1	Frame - Wood - Ext					0.08	19.0/0.0		124.3		1.7		206	Btuh		
2	Frame - Wood - Ext					0.08	19.0/0.0		93.3		1.7		154	Btuh		
3	Frame - Wood - Ext					0.08	19.0/0.0		301.7		1.7		499	Btuh		
4	Frame - Wood - Ext					0.08	19.0/0.0		93.3		1.7		154	Btuh		
5	Frame - Wood - Ext					0.08	19.0/0.0		124.3		1.7		206	Btuh		
6	Frame - Wood - Ext					0.08	19.0/0.0		282.0		1.7		466	Btuh		
7	Frame - Wood - Ext					0.08	19.0/0.0		117.0		1.7		193	Btuh		
8	Frame - Wood - Ext					0.08	19.0/0.0		33.0		1.7		55	Btuh		
9	Frame - Wood - Ext					0.08	19.0/0.0		237.0		1.7		392	Btuh		
10	Frame - Wood - Ext					0.08	19.0/0.0		33.0		1.7		55	Btuh		
11	Frame - Wood - Ext					0.08	19.0/0.0		117.0		1.7		193	Btuh		
12	Frame - Wood - Ext					0.08	19.0/0.0		296.0		1.7		489	Btuh		
	Wall Total								1852 (sqft)					3063	Btuh	
Doors	Type	U-Value				R-Value		Area (sqft)			HTM		Load			
1	Insulated - Exterior								8.0		12.0		96	Btuh		
2	Insulated - Exterior								8.0		12.0		96	Btuh		
3	Insulated - Exterior								8.0		12.0		96	Btuh		
	Door Total								24 (sqft)					288	Btuh	
Ceilings	Type/Color/Surface	U-Value				R-Value		Area(sqft)			HTM		Load			
1	Vented Attic/DarkMetal					0.025	38.0/0.0		1674.0		1.37		2294	Btuh		
	Ceiling Total								1674 (sqft)					2294	Btuh	
Floors	Type	U-Value				R-Value		Size			HTM		Load			
1	Stem/Crawlsp(v)						19.0		1535 (sqft)		0.8		1206	Btuh		
	Floor Total								1535.0 (sqft)					1206	Btuh	
	Envelope Subtotal:													16390 Btuh		

Manual J Summer Calculations

Residential Load - Component Details (continued)

Shokat River House

Project Title:
190196 Shokat

Climate:FL_GAINESVILLE_REGIONAL_A

Fort White, FL

2019-08-06

Infiltration	Type Natural	Average ACH 0.24	Volume(cuft) 16118	Wall Ratio 1	CFM= 63.1	Load 1313 Btuh
Internal gain		Occupants 6	Btuh/occupant X 230	Appliance +	2400	Load 3780 Btuh
					Sensible Envelope Load:	21484 Btuh
Duct load	Average sealed, Supply(R6.0-Attic), Return(R6.0-Attic)				(DGM of 0.215)	4617 Btuh
					Sensible Load All Zones	26101 Btuh

Manual J Summer Calculations

Residential Load - Component Details (continued)

Shokat River House

Project Title:
190196 Shokat

Climate:FL_GAINESVILLE_REGIONAL_A

Fort White, FL

2019-08-06

WHOLE HOUSE TOTALS

Whole House Totals for Cooling	Sensible Envelope Load All Zones	21484 Btuh
	Sensible Duct Load	4617 Btuh
	Total Sensible Zone Loads	26101 Btuh
	Sensible ventilation	0 Btuh
	Blower	0 Btuh
	Total sensible gain	26101 Btuh
	Latent infiltration gain (for 51 gr. humidity difference)	2180 Btuh
	Latent ventilation gain	0 Btuh
	Latent duct gain	852 Btuh
	Latent occupant gain (6.0 people @ 200 Btuh per person)	1200 Btuh
	Latent other gain	0 Btuh
	Latent total gain	4232 Btuh
	TOTAL GAIN	30333 Btuh

EQUIPMENT

1. Central Unit	#	36000 Btuh
-----------------	---	------------

*Key: Window types (Panels - Number and type of panes of glass)
 (SHGC - Shading coefficient of glass as SHGC numerical value)
 (U - Window U-Factor)
 (InSh - Interior shading device: none(No), Blinds(B), Draperies(D) or Roller Shades(R))
 - For Blinds: Assume medium color, half closed
 For Draperies: Assume medium weave, half closed
 For Roller shades: Assume translucent, half closed
 (IS - Insect screen: none(N), Full(F) or Half(½))
 (Ornt - compass orientation)



Version 8