

General Notes

A. CONCRETE & FOUNDATION DESIGN:

1. ALL CONCRETE GRADE BEAMS AND FOOTINGS SHALL BE 3000 PSI MINIMUM.
2. ALL CONCRETE FILLED SUPPORTED SLABS SHALL BE 2500 PSI MINIMUM, 3 1/2" NOMINAL THICKNESS.
3. FIBERMESH (3/4" PER CUBIC YARD MIN.) MEETING APPROPRIATE ACI AND ASTM REQUIREMENTS MAY BE USED IN LIEU OF WELDED WIRE MESH
4. ALL SLABS ON GRADE SHALL BE 4" THICK WITH FIBERMESH.
5. ALL REINFORCING SHALL CONFORM TO ASTM A615, BE GRADE 60 (60 KSI MIN.) DEFORMED BARS, #3 BARS MAY BE GRADE 40
6. ALL OVER POUR CONCRETE FILLED SUPPORTED SLABS SHALL BE 3000 PSI MIN., 2" MINIMUM THICKNESS.
7. SOIL BEARING PRESSURE SHALL BE A MINIMUM OF 1500 PSF.
8. THE CONCRETE SHALL CONFORM TO ASTM C94 FOR THE FOLLOWING:  
OPC (PORTLAND CEMENT TYPE 1,- ASTM C 150),  
AGGREGATES - #6 STONE, ASTM C 33 SIZE NO. 67 LESS THAN 3/4".
- AIR ENTRAINING +/- 1% - ASTM C 260,  
WATER REDUCING AGENT - ASTM C 494,  
CLEAN POTABLE WATER.
- OTHER ADMIXTURES SHALL NOT BE PERMITTED.
9. METAL WELDED WIRE SHALL CONFORM TO ASTM A 185.
10. PREPARE & PLACE CONCRETE ACCORDING TO AMERICAN CONCRETE INSTITUTE MANUAL STANDARD PRACTICE, PART 1, 2, & 3 ALONG WITH HOT WEATHER CONDITIONS RECOMMENDATIONS.
11. IF UTILIZING EXISTING CONCRETE FOR FOUNDATION, CONCRETE SHALL BE A MINIMUM OF 4" IN THICKNESS, VISIBLY FREE OF ANY STRUCTURAL EXCESSIVE CRACKING, SPALLING OR OTHER DETERIORATION.

B. MASONRY:

1. CONCRETE MASONRY UNITS (CMU) SHALL BE STANDARD HOLLOW UNITS AND SHALL BE 1900 PSI MINIMUM BASED ON TYPE M OR S MORTAR.
2. ALL MORTAR SHALL BE OF TYPE M OR S.
3. ALL GROUT SHALL BE 2000 PSI MINIMUM AND HAVE MAXIMUM COARSE AGGREGATE SIZE OF 3/8".
4. PROVIDE CLEAN-OUTS FOR REINFORCED CELLS CONTAINING REINFORCEMENT WHEN GROUT POUR EXCEEDS 5'-0" IN HEIGHT.

C. ALUMINUM:

1. ALL STRUCTURAL ALUMINUM SHALL CONFORM TO THE MINIMUM REQUIREMENTS OF 6005-T5 FOR ALLOY WITH A MINIMUM THICKNESS OF 0.040" FOR SUPPORTING MEMBERS.
2. WHERE KICK PLATES ARE USED A MINIMUM THICKNESS OF 0.024" SHALL APPLY.
3. STRUCTURAL ALUMINUM DESIGN CONFORMS TO "PART 1-A - SPECIFICATIONS FOR ALUMINUM STRUCTURES - ALLOWABLE STRESS DESIGN" OR "PART 1-B - SPECIFICATIONS FOR ALUMINUM STRUCTURES - BUILDING LOAD AND RESISTANCE FACTOR DESIGN" OF THE ALUMINUM DESIGN MANUAL PREPARED BY THE ALUMINUM ASSOCIATION, INC. WASHINGTON D.C. THE *FLORIDA BUILDING CODE 7TH EDITION* ( CHAPTER 16 STRUCTURAL DESIGN & CHAPTER 20 ALUMINUM).
4. WHERE ALUMINUM COMES INTO CONTACT WITH STEEL, OR PRESSURE TREATED LUMBER PROVIDE DIELECTRIC SEPARATION.
5. ALUMINUM MEMBERS SHALL BE STITCHED WITH NO LESS THAN #10 SMS 6" FROM THE ENDS AND 12" ON CENTER, IF USING #12 SPACING MAY BE 24" ON CENTER.
6. VINYL AND ACRYLIC PANELS SHALL BE REMOVABLE. THEY SHALL BE IDENTIFIED WITH A DECAL ESSENTIALLY STATING "REMOVABLE PANEL SHALL BE REMOVED WHEN WIND SPEEDS EXCEED 75 MPH". DECAL SHALL BE PLACED SO IT IS VISIBLE WHEN PANEL IS INSTALLED.
7. 1"x2"x0.045" NON-STRUCTURAL MEMBERS SHALL BE ATTACHED TO HOST WITH 1/4"x1.3-1/4" EMBEDMENT & 24" O.C. MASONRY SCREW FOR CONCRETE & EQUIVALENT SIZE WOOD SCREW WHEN IN WOOD & #10X 1/2" EMBEDMENT SMS OR TEK SCREWS IN ALUMINUM MEMBERS TYPICAL.

D. FASTENERS:

1. ALL LAG BOLTS SHALL CONFORM TO STAINLESS STEEL TYPE 300 18-8, WITH STANDARD FLAT WASHER UNLESS MANUFACTURER GALVANIZES BOLTS SPECIFIES FOR USE WITH ACO PRESSURE TREATED WOOD.

2. HEX BOLTS HAS TO BE ASTM A 325, PLATED WITH STANDARD FLAT WASHERS AND NUTS.
3. ALL CONCRETE SCREWS SHALL BE, SIMPSON, HILTI, RAWL, TAPCON, REDHEAD, DYNABOLT, FORTECT OR APPROVED EQUAL.
4. ALL METAL TIES AND ASSOCIATED ACCESSORIES SHALL BE HOT DIPPED GALVANIZED.
5. ALL LAG BOLTS SHALL HAVE A MINIMUM EMBEDMENT OF 8X BOLT DIAMETER INTO STRUCTURAL FRAMING (G=42 MIN.).
6. LAG BOLTS AND SCREWS INTO WOOD FRAMING SHALL BE PROVIDED WITH PILOT HOLES HAVING A DIAMETER NOT GREATER THAN 70 PERCENT OF THE THREAD DIAMETER OF THE BOLT OR SCREW. ALL LAG BOLTS AND SCREWS SHALL BE INSERTED IN PILOT HOLES BY TURNING AND UNDER NO CIRCUMSTANCES BY DRIVING WITH A HAMMER.
7. ALL EXPANSION ANCHORS SHALL BE DESIGNED IN ACCORDANCE WITH THE SPECIFIC MANUFACTURER'S REQUIREMENTS AND ALLOWABLE LOADS AND SHALL ONLY BE APPLIED IN CONDITIONS ACCEPTABLE TO MANUFACTURER. FASTENERS SHALL BE A MINIMUM OF SAE GRADE #5 OR BETTER ZINC PLATED.
8. ALL FASTENERS CONNECTING ALUMINUM COMPONENTS OR PRESSURE TREATED LUMBER ARE STAINLESS STEEL TYPE 300 18-8, UNLESS MANUFACTURER GALVANIZED BOLTS SPECIFIES FOR USE WITH ACO PRESSURE TREATED WOOD, OR OTHERWISE NOTED ON PLANS.
9. ALL FASTENERS SHALL COMPLY WITH ASTM A153.
10. ALL CONNECTORS SHALL COMPLY WITH ASTM A653 CLASS G-185.
11. FOR SMS, THE MINIMUM CENTER-TO-CENTER SPACING SHALL BE 3/4" AND MINIMUM CENTER-TO-EDGE SHALL BE 1/2" UNLESS NOTED OTHER WISE.

E. REFERENCE STANDARDS:

- ASTM E 119  
ASTM E 1300  
CURRENT ASCE 7  
CURRENT ALUMINUM DESIGN MANUAL-AA ASM35, AND SPEC. FOR ALUMINUM PART 1-A, & 1-B  
ASTM C94  
ASTM C150  
ASTM C33  
ASTM C360  
ASTM C694  
ASTM A615  
ASTM A185  
*FLORIDA BUILDING CODE 7TH EDITION* (CHAPTERS 16, 20 & 23).

F. ABBREVIATIONS:

THE FOLLOWING LIST OF ABBREVIATIONS IS NOT INTENDED TO REPRESENT ALL THOSE USED ON THESE DRAWINGS, BUT TO SUPPLEMENT THE MORE COMMON ABBREVIATIONS.

1. TYP -- TYPICAL  
2. SIM -- SIMILAR  
3. UON -- UNLESS OTHERWISE NOTED  
4. CONT -- CONTINUOUS  
5. VIF -- VERIFY IN FIELD

G. RESPONSIBILITY:


1. ALL SITE WORK SHALL BE PERFORMED BY A LICENSED CONTRACTOR IN ACCORDANCE WITH APPLICABLE BUILDING CODES, LOCAL ORDINANCES, ETC.
2. CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND DETAILS, NOTIFYING ENGINEER OF ANY DISCREPANCIES BETWEEN DRAWINGS, FABRICATED ITEMS, OR ACTUAL FIELD CONDITIONS.
3. THESE DRAWINGS REPRESENT THE ACCEPTABILITY OF THE SUNROOM ROOM ADDITION ELEMENTS AS PROVIDED BY THE CONTRACTOR.
4. ALL DETAILS ON THESE DRAWINGS ARE ENGINEERED BASED ON INFORMATION PROVIDED BY THE CONTRACTOR AND MANUFACTURER.
5. ANY DETAILS NOT SHOWN ARE TO BE ENGINEERED BY A LICENSED P.E. IN ACCORDANCE WITH STANDARD ENGINEERING PRACTICES.

H. MISCELLANEOUS:

1. ALUMINUM ADDITIONS ARE NOT TO BE INSTALLED ON A MANUFACTURED HOME, TRAILER HOME, OR PRE-FAB HOME. IF THE EXISTING STRUCTURE IS ONE OF THESE, A SEPARATE 4TH WALL SUPPORT SYSTEM MUST BE ENGINEERED SO THAT NO

ADDITIONAL LOADING IS PLACED ON THE MANUFACTURED HOME.

2. IF ENCLOSURE CONTAINS A SWIMMING POOL OR SPA, THE ENCLOSURE SHALL COMPLY WITH RESIDENTIAL SWIMMING BARRIER REQUIREMENTS OF THE FBC 7TH EDITION R 4501.17 IN ITS ENTIRETY.
3. DOOR LOCATIONS MAY BE DETERMINED IN THE FIELD BY CONTRACTOR.
4. IF PAVERS ARE UNDER ALUMINUM MEMBERS THEY SHALL HAVE EPOXY ADHESIVE TO CONCRETE OR IF USING GROUT, ENSURE BONDING AGENT IS USED FIRST AND ADHERED WITH MINIMUM 3000 PSI GROUT.
5. SCREENING MATERIAL SHALL BE 18X14X0.013 OR EQUIVALENT DENSITY SCREEN MESH ONLY UNLESS NOTED ON DRAWING S-2.

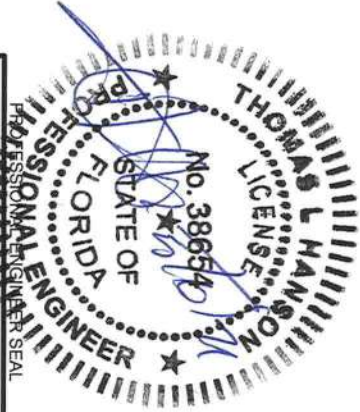

ENGINEER OF RECORD:

David W. Smith P.E.

FLORIDA LICENSE: 53608

Thomas L. Hanson P.E.

FLORIDA LICENSE: 38654

Myron Max Neal P.E.

FLORIDA LICENSE: 86663

Joel Falardeau P.E.

FLORIDA LICENSE: 70667

Erik Stuart P.E.

FLORIDA LICENSE: 77605

**FBC Plans & Engineering Services, Inc.**

6272 Abbott Station Dr. Unit 101

Zephyrhills, FL 33542

Ph# (813)788-5314

Fax# 1-(866)824-7894

E-mail-ertb@fbcpplans.com

Website-www.fbcpplans.com

C.O.A.-#29054

DATE: 04/26/2021

DRAWN BY: ST

REVISION: DATE:

RO 1

RO 2

RO 3

RO 4

Job# 21\_0426\_501

PROJECT ADDRESS:

**MODER**

198 SW DEPOT WAY

FORT WHITE, FL 32038

CONTRACTOR:

LAKESIDE ALUMINUM, INC.

NOTES

S-1

ALUMINUM STRUCTURAL MEMBERS

HOLLOW SECTIONS

- 2 x 2:-----2" x 2" x 0.044"  
2 x 3:-----2" x 3" x 0.050"  
2 x 4:-----2" x 4" x 0.050"  
2 x 5:-----2" x 5" x 0.050"  
3 x 3:-----3" x 3" x 0.125"

OPEN BACK SECTIONS

- 1 x 2:-----1" x 2" x 0.040"  
1 x 3:-----1" x 3" x 0.045"

SNAP SECTIONS

- 2 x 2 SMS:-----2" x 2" x 0.045"  
2 x 3 SMS:-----2" x 3" x 0.072"  
2 x 4 SMS:-----2" x 4" x 0.045"  
3 x 3 SMS:-----3" x 3" x 0.090"

SELF MATING (SMB)

- 2 x 4 SMB:-----2" x 4" x 0.044" x 0.100"  
2 x 5 SMB:-----2" x 5" x 0.050" x 0.118"  
2 x 6 SMB:-----2" x 6" x 0.050" x 0.120"  
2 x 7 SMB:-----2" x 7" x 0.057" x 0.120"  
2 x 8 SMB:-----2" x 8" x 0.072" x 0.224"  
2 x 9 SMB:-----2" x 9" x 0.072" x 0.224"  
2 x 10 SMB:-----2" x 10" x 0.092" x 0.374"

TUBE SECTIONS

- 2 x 2:-----2" x 2" x 0.090"

DESIGN DATA:

1. ULTIMATE DESIGN WIND SPEED Vult, (3 SECOND GUST): 130 MPH
2. NOMINAL DESIGN WIND SPEED Vast: 101 MPH
3. RISK CATEGORY: 1
4. WIND EXPOSURE: B
5. WIND LOADS:  
SCREEN ROOF: 6 PSF  
SCREEN WALLS: 23 PSF  
SOLID ROOF (SCREEN WALL): N/A
6. FACTOR APPLIED TO SCREEN WIND LOADS FOR ALLOWABLE STRESS DESIGN: 0.6
7. OR EQUIVALENT DENSITY SCREEN MESH: 0.88
8. FACTOR APPLIED TO SCREEN WIND LOADS FOR ALLOWABLE STRESS DESIGN: 0.6
9. LIVE LOAD: 300 lb. VERTICAL DOWNLOAD ON PRIMARY SCREEN ENCLOSURE MEMBERS, 200 lb. VERTICAL DOWNLOAD ON SCREEN ENCLOSURE PURLINS, 10 PSF VERTICAL DOWNLOAD ON SOLID ROOF.
10. EXISTING SLAB AND FOOTING (MIN. 12"x12" FOOTING 4" SLAB) MEETS THE REQUIREMENTS TO RESIST THE UPLIFTS FOR THE PROPOSED STRUCTURE.
9. SCREEN ROOF TYPE : HIPPED GABLE
10. SOLID ROOF TYPE: 3"x48"x0.024" ELITE EPS COMPOSITE PANEL ROOF 1lb FOAM DENSITY, FLORIDA PRODUCT APPROVAL, FL 7561-R5.

INDEX:

- S-1 GENERAL NOTES  
S-2 DRAWING  
S-3 DETAILS  
S-4 DETAILS  
S-5 DETAILS



PROFESSIONAL ENGINEER SEAL

**FBC Plans & Engineering  
Services, Inc.**

C.O.A.-#29054

DRAWN BY: ST

R01

R02

R03


Job# 21\_0426\_501

**MOSER**


FORT WHITE, FL 320

LAKE SIDE ALUMINUM,

S-2

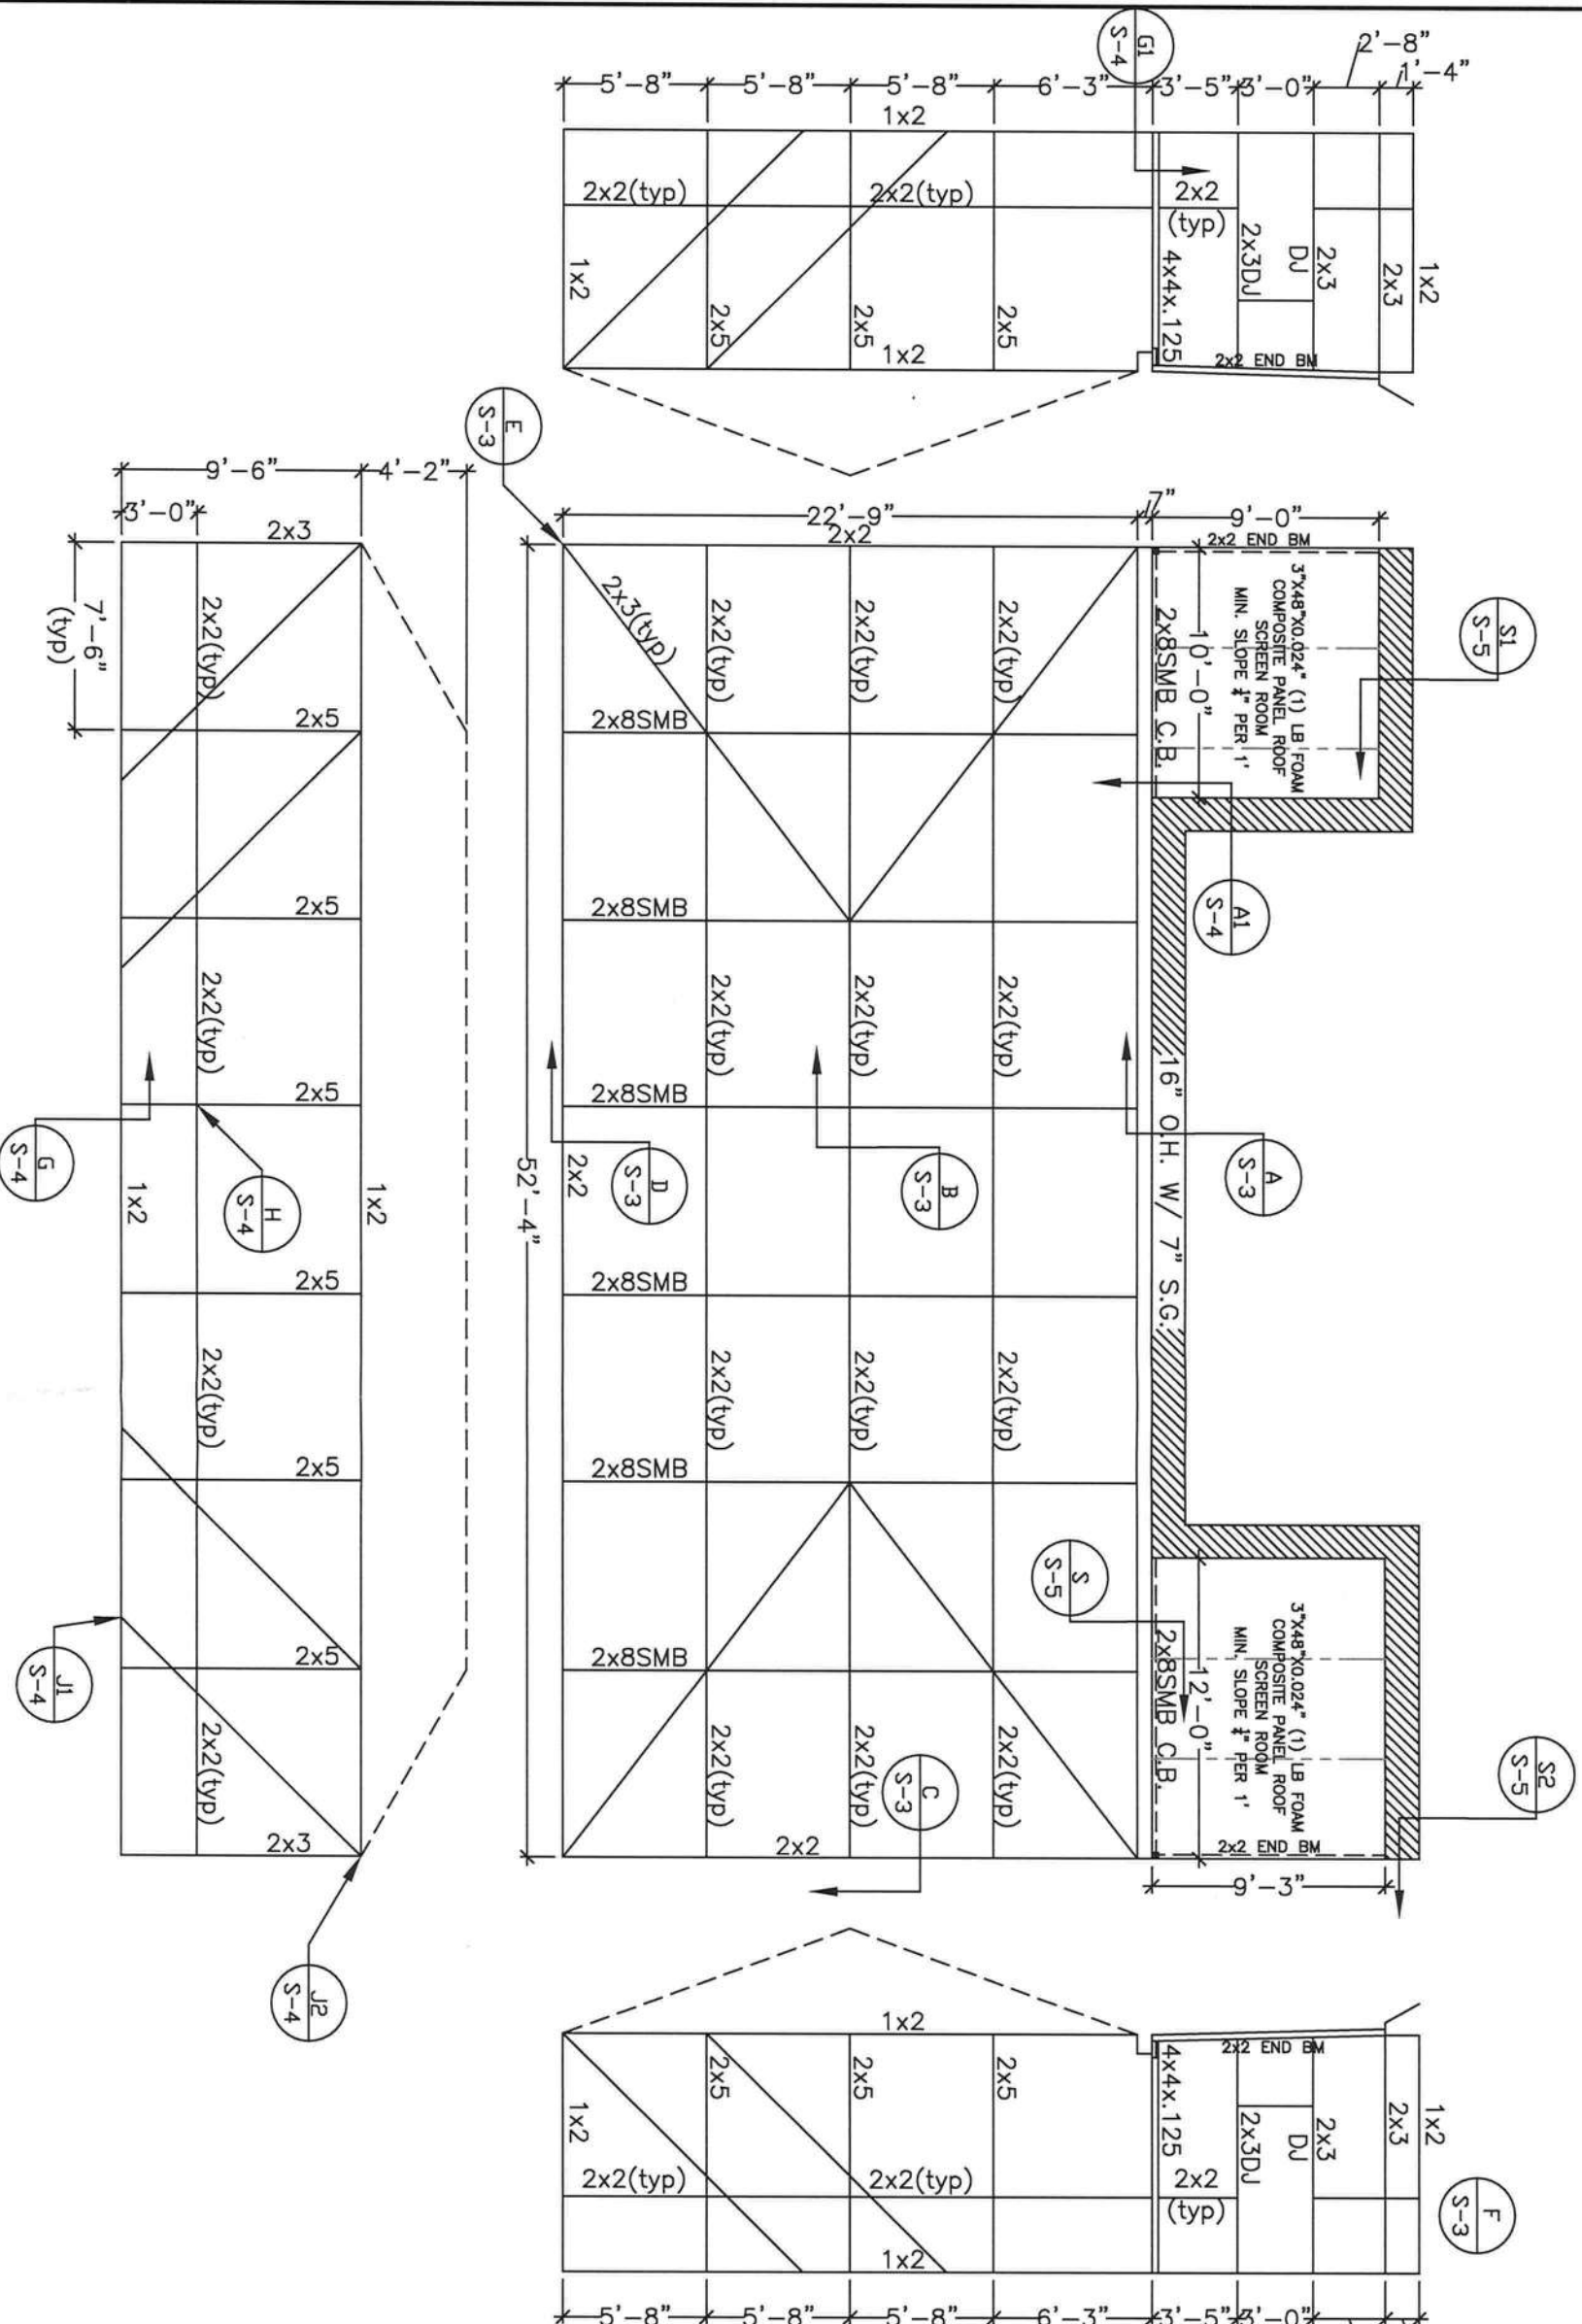






NOTE: 2X4 SMB BEAM ONLY REQUIRES 4\"/>

5' OR 7' x 6' WIDTH x 0.250\"/>

1\"/>


2\"/>

A GUTTER BRACKET & BEAM ATTACHMENT DETAIL  
NTS

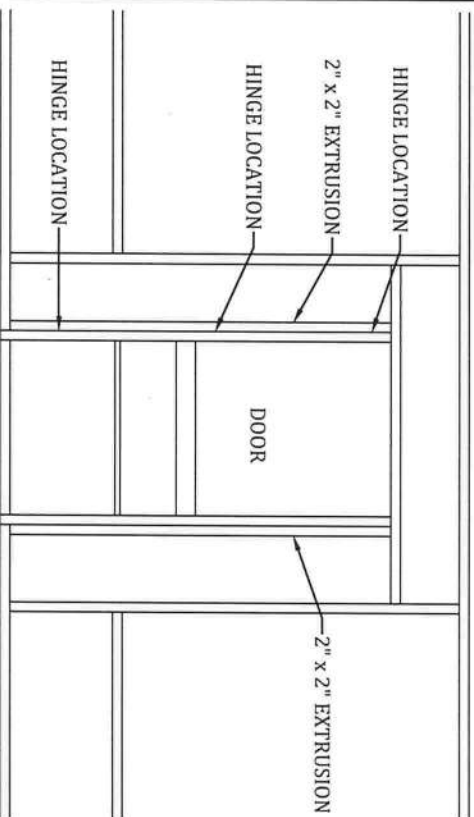

- NOTES:
1. HINGES SHALL BE ATTACHED TO STRUCTURE W/ (4) #10 x 5/8\"/>
  2. DOOR SHALL BE ATTACHED TO ENCLOSURE W/(2) HINGES MINIMUM.
  3. HINGES SHALL BE ATTACHED TO DOOR WITH (3)#10 x 5/8\"/>


F TYPICAL SCREEN DOOR CONNECTION DETAIL  
SCALE: NTS

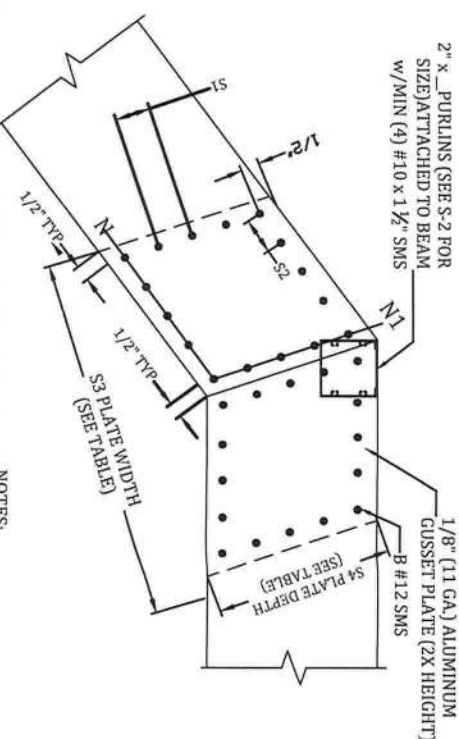



BEAM	"B"	"N"	"N1"	"S1"	"S2"	"S3"	"S4"
2X4	14	4	4	1"	1"	8"	4"
2X5	16	5	4	1 3/8"	1 1/4"	10"	5"
2X6	18	6	5	1"	1 3/8"	12"	6"
2X7	20	6	6	1"	1"	14"	7"
2X8	24	7	7	1 3/8"	1 3/8"	16"	8"
2X9	32	10	8	1 5/8"	1 3/4"	18"	9"
2X9 H	32	10	8	1 5/8"	1 3/4"	18"	9"
2X10	40	13	9	1 7/8"	7/8"	20"	10"

- NOTES:
1. "N" NUMBER OF SCREWS IN ANY DIRECTION.
  2. TOTAL NUMBER OF SCREWS PER JOINT EQUALS 4 TIMES "B".
  3. PLATE WIDTH SHALL BE DETERMINED FROM ANGLE OF BEAM AND MIN. SPACE REQUIRED.
  4. GUSSET PLATES EXTERNAL.
  5. INTERNAL SCREWS FOR PURLIN CONNECTION MAY BE INCLUDED IN TOTAL NUMBER OF SCREWS.
  6. CABLE SPLICE WILL HAVE THE SAME PATTERN.


B #12 SMS BEAM SPLICE GUSSET DETAIL  
SCALE: NTS

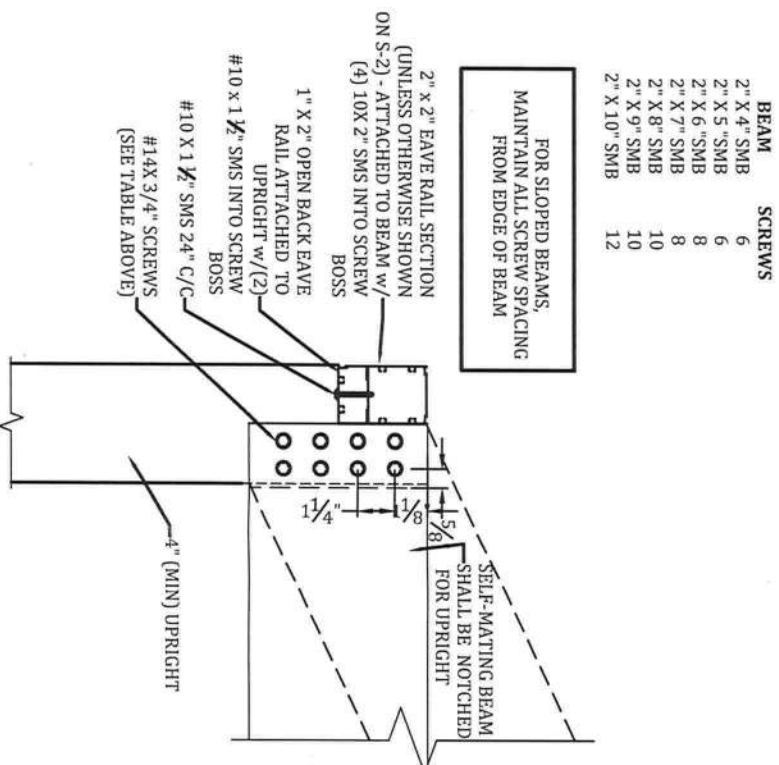


D UPRIGHT TO BEAM CONNECTION - ALL WIND ZONES  
SCALE: NTS

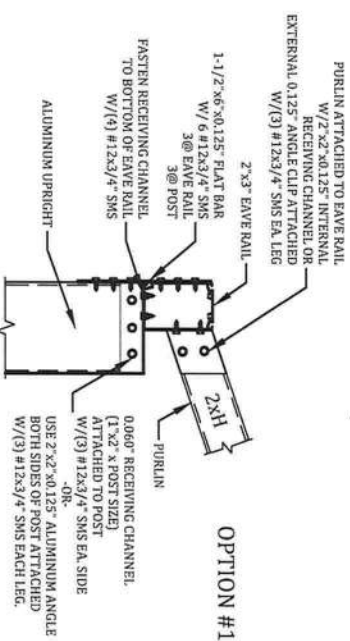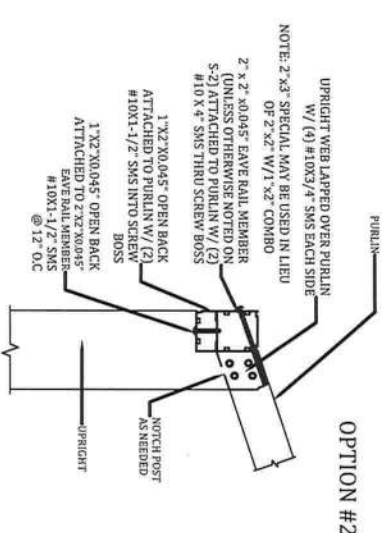

C SLOPED OR FLAT PURLIN UPRIGHT LAP DETAIL  
SCALE: NTS

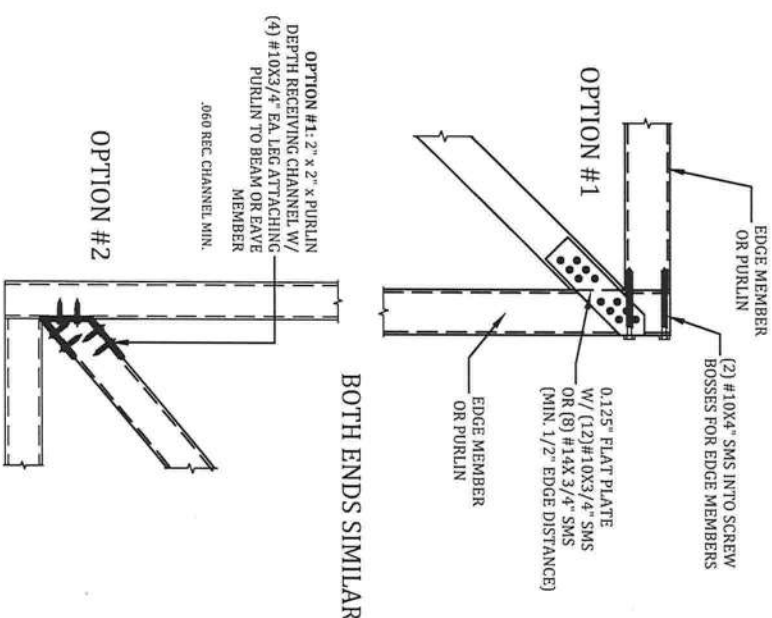

E ROOF BRACING CONNECTION DETAIL  
SCALE: NTS

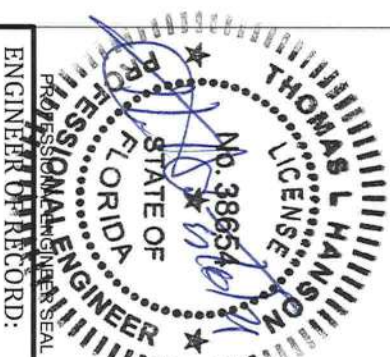

ENGINEER OF RECORD:

David W. Smith P.E.

FLORIDA LICENSE: 53608

Thomas L. Hanson P.E.

FLORIDA LICENSE: 38654

Myron Max Neal P.E.

FLORIDA LICENSE: 86663

Joel Falardeau P.E.

FLORIDA LICENSE: 70667

Erik Stuart P.E.

FLORIDA LICENSE: 77605

**FBC Plans & Engineering Services, Inc.**

6272 Abbott Station Dr. Unit 101

Zephyrhills, FL 33542

Ph# (813)788-5314

Fax# 1-(866)824-7894

E-mail: [erb@fbcpplans.com](mailto:erb@fbcpplans.com)

Website: [www.fbcpplans.com](http://www.fbcpplans.com)

C.O.A.-#29054

DATE: 04/26/2021

DRAWN BY: ST

REVISION: DATE:

RO 1

RO 2

RO 3

RO 4

Job# 21\_0426\_501

PROJECT ADDRESS:

**MOSER**

198 SW DEPOT WAY

FORT WHITE, FL 32038

CONTRACTOR:


LAKE SIDE ALUMINUM, INC.

DETAILS

S-3




**NOTE:** MINIMUM EMBEDMENT OF ANCHORS INTO CONCRETE FOOTING SHALL BE 2'-3/4" AT ALL POST LOCATIONS. ALL SCREW LENGTHS AT POST CONNECTIONS SHALL BE OF SUFFICIENT LENGTH FOR REQUIRED EMBEDMENT INTO CONCRETE FOOTING WHEN A PAVER DECK IS PRESENT.

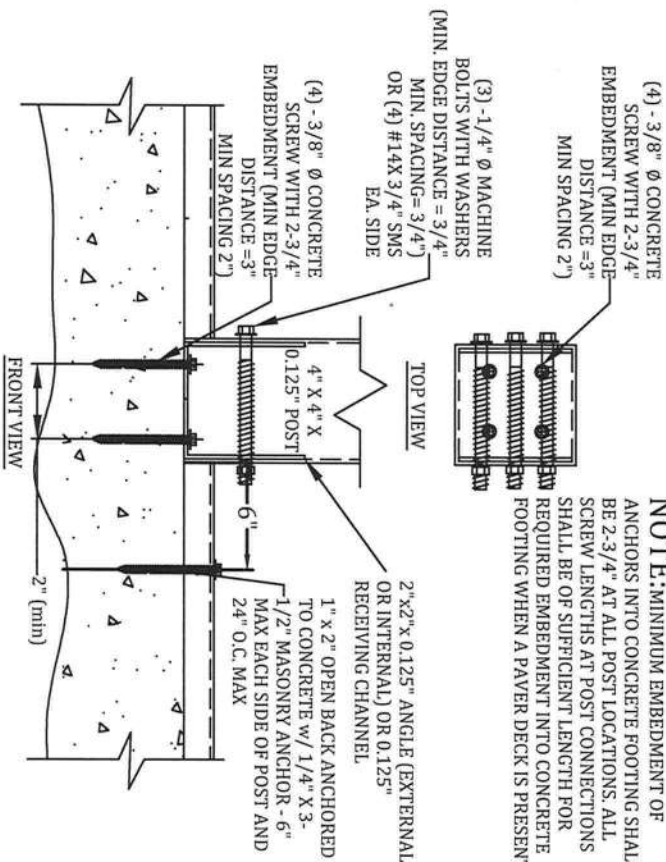

NOTE: CONCRETE SCREW ANCHOR DESIGNS ARE BASED ON TITEN HD 3/8" Ø SCREW ANCHORS. OTHER SIZE OR TYPE OF ANCHORS SHALL NOT BE USED.

**G1** 4"x4"x0.125" POST CONNECTION DETAIL  
SCALE: NTS

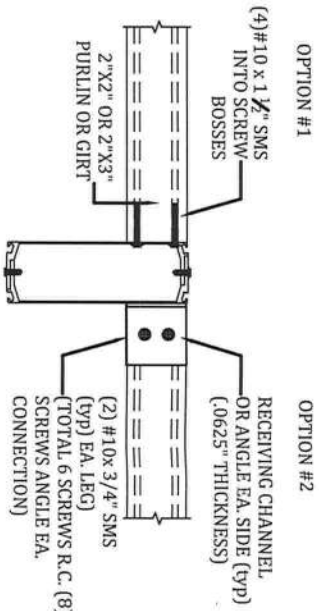



**H** PURLIN OR GIRT TO BEAM OR POST DETAIL  
SCALE: NTS

Column Size	1/4" & 3/8" Ø Concrete Screw Anchor	
	B	Min. Spa
2x3-1/4"	0	0"
2x4-1/4"	1	3"
2x5-1/4"	1	3"
2x6-3/8"	1	4"
2x7-3/8"	1	5"
2x8-3/8"	2	3"
2x9-3/8"	2	4"
2x10-3/8"	2	4.5"


NOTES:

1. NUMBER OF ANCHORS "B" IS EACH SIDE INTO THE SECONDARY ANGLE AND DOES NOT INCLUDE THE ANCHOR INTO THE 1X2.
2. MINIMUM EMBEDMENT OF ANCHORS INTO CONCRETE FOOTING SHALL BE 2'-3/4" AT ALL UPRIGHT LOCATIONS. ALL SCREW LENGTHS AT UPRIGHT CONNECTIONS SHALL BE OF SUFFICIENT LENGTH FOR REQUIRED EMBEDMENT INTO CONCRETE FOOTING WHEN A PAVER DECK IS PRESENT.
3. CONCRETE SCREW ANCHOR DESIGNS ARE BASED ON THOSE LISTED ON S-1, D. FASTENERS, OTHER BRAND & TYPE SHALL BE APPROVED BY ENGINEER.
4. 2X3W/1X2 CORNER POST SHALL REQUIRE SAME BASE CONNECTIONS AS 2X4 SHOWN IN TABLE.
5. IF FOR AN IN-FILL, TOP OF COLUMN CONNECTION SIMILAR IF CONCRETE LINTEL. IF WOOD LINTEL, SUBSTITUTE 1/4" Ø X 3" LAG SCREW FOR 3/8" Ø LDT FOR BOTH PRIMARY & SECONDARY ANGLES.
6. 2X2X.045 DOOR JAMB MEMBER SHALL CONNECT SIMILAR TO 2X3 MEMBER.


**G** 2' x 3' OR LARGER UPRIGHT TO CONCRETE W/ TWO PAVER DETAILS  
SCALE: NTS

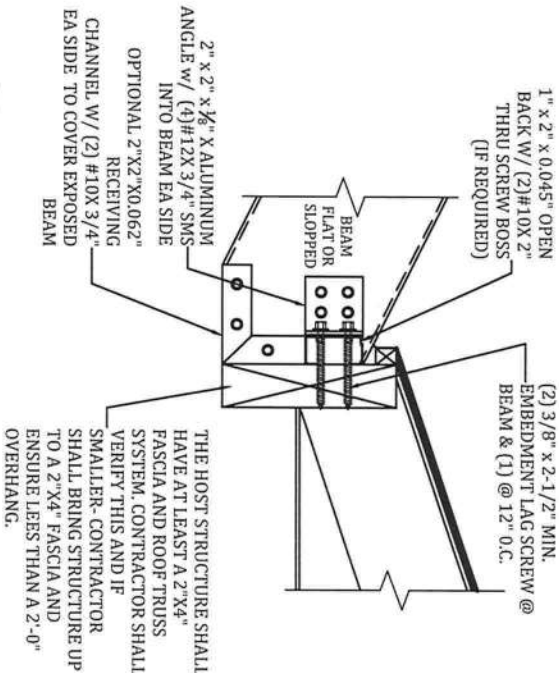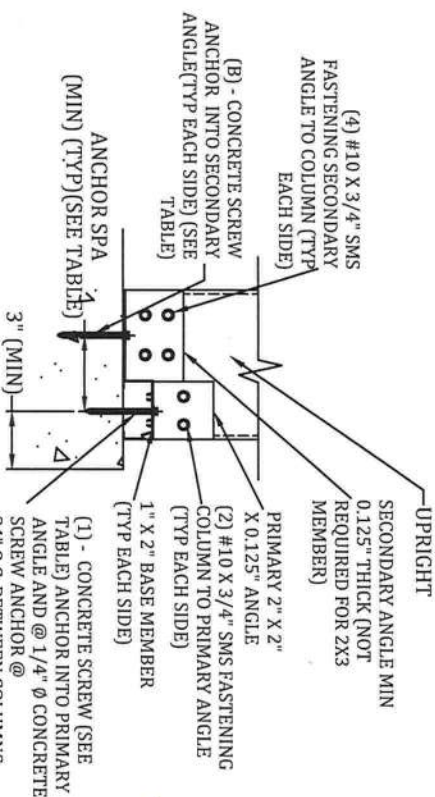


**A1** ROOF BEAMS TO FASCIA ATTACHMENT DETAIL  
NTS

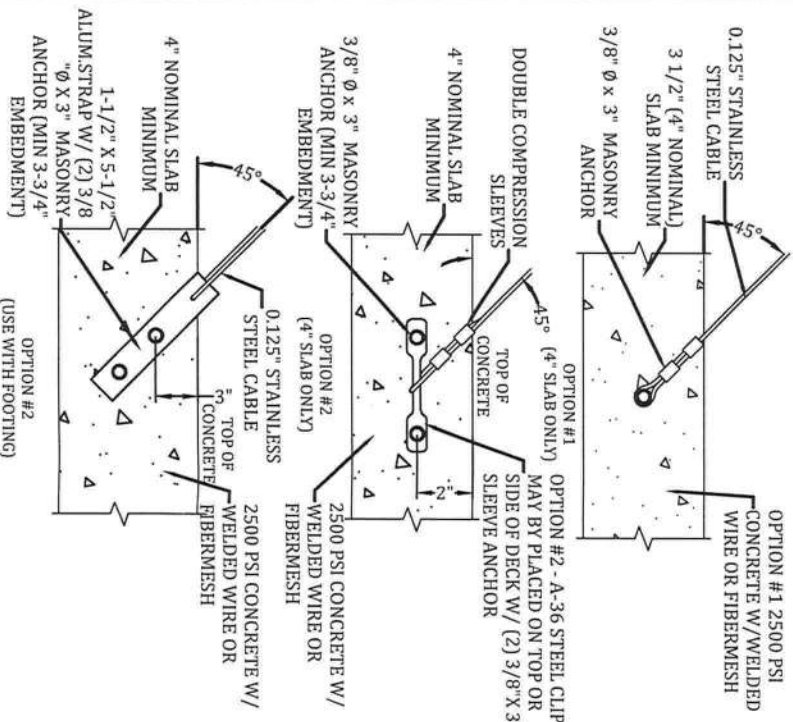

**J1** CABLE TO FOUNDATION CONNECTION DETAIL  
SCALE: NTS

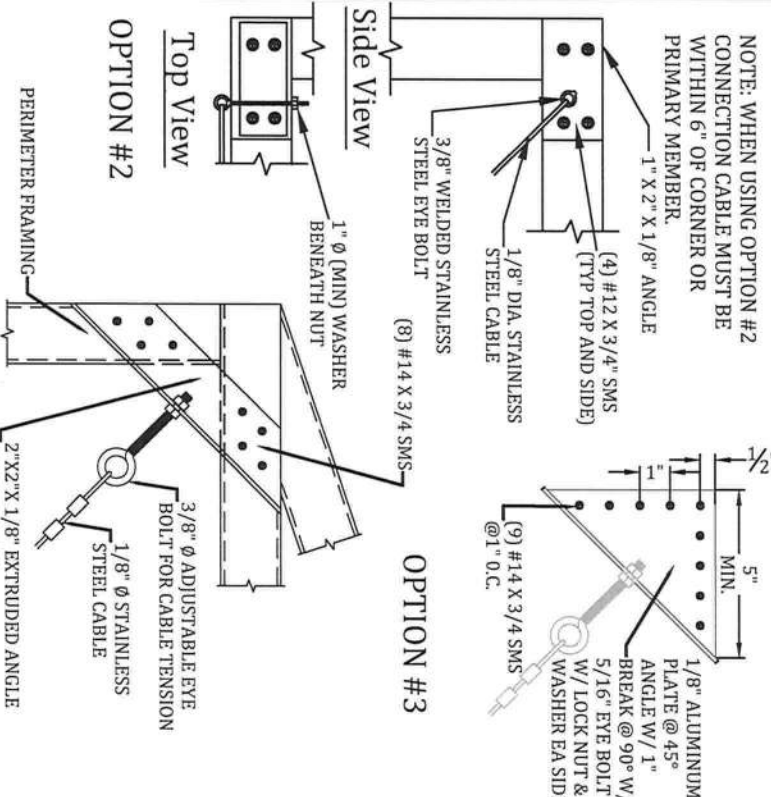

**J2** CABLE CONNECTION AT CORNER  
SCALE: NTS

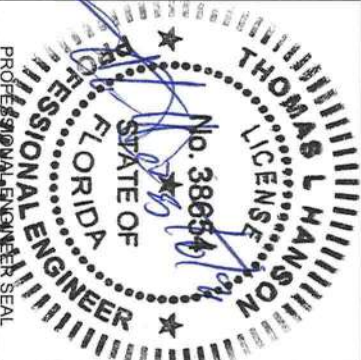

PROFESSIONAL ENGINEER SEAL

ENGINEER OF RECORD:

David W. Smith P.E.

FLORIDA LICENSE: 53608

Thomas L. Hanson P.E.

FLORIDA LICENSE: 38654

Myron Max Neal P.E.

FLORIDA LICENSE: 86663

Joel Falardeau P.E.

FLORIDA LICENSE: 70667

Erik Stuart P.E.

FLORIDA LICENSE: 77605

**FBC Plans & Engineering Services, Inc.**

6272 Abbott Station Dr. Unit 101

Zephyrhills, FL 33542

Ph# (813)788-5314

Fax# 1-(866)824-7894

E-mail: [erb@fbcpplans.com](mailto:erb@fbcpplans.com)

Website: [www.fbcpplans.com](http://www.fbcpplans.com)

C.O.A. #29054

DATE: 04/26/2021

DRAWN BY: ST

REVISION: DATE:

RO 1

RO 2

RO 3

RO 4

Job# 21\_0426\_501

**PROJECT ADDRESS:**

**MOSER**

198 SW DEPOT WAY


FORT WHITE, FL 32038

**CONTRACTOR:**


LAKEIDE ALUMINUM, INC.

DETAILS  
**S-4**



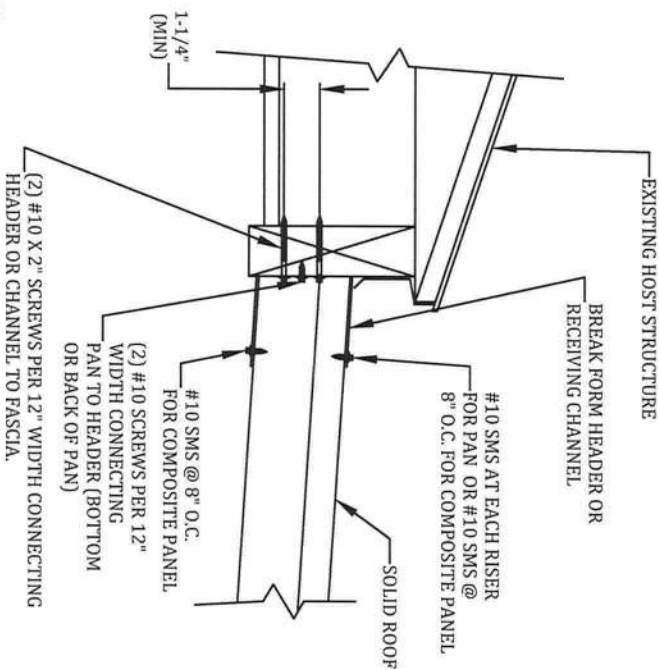


**S1** ROOF PANEL TO FASCIA CONNECTION DETAILS  
**S-5** SCALE: NTS

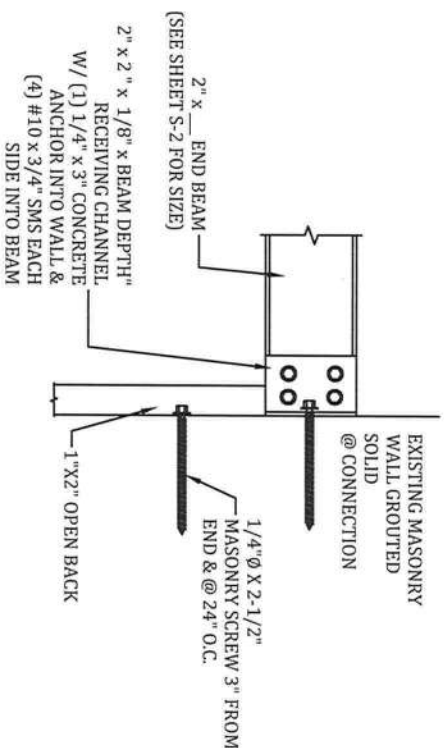

**S2** END BEAM TO HOST STRUCTURE DETAIL  
**S-5** SCALE: NTS

NOTE: WHEN ATTACHING TO WOOD STRUCTURES, WOOD LAG SCREW ANCHOR DESIGNS SHALL BE OF IDENTICAL SIZE AND EMBEDMENT AS THAT OF MASONRY ANCHOR SCREWS.

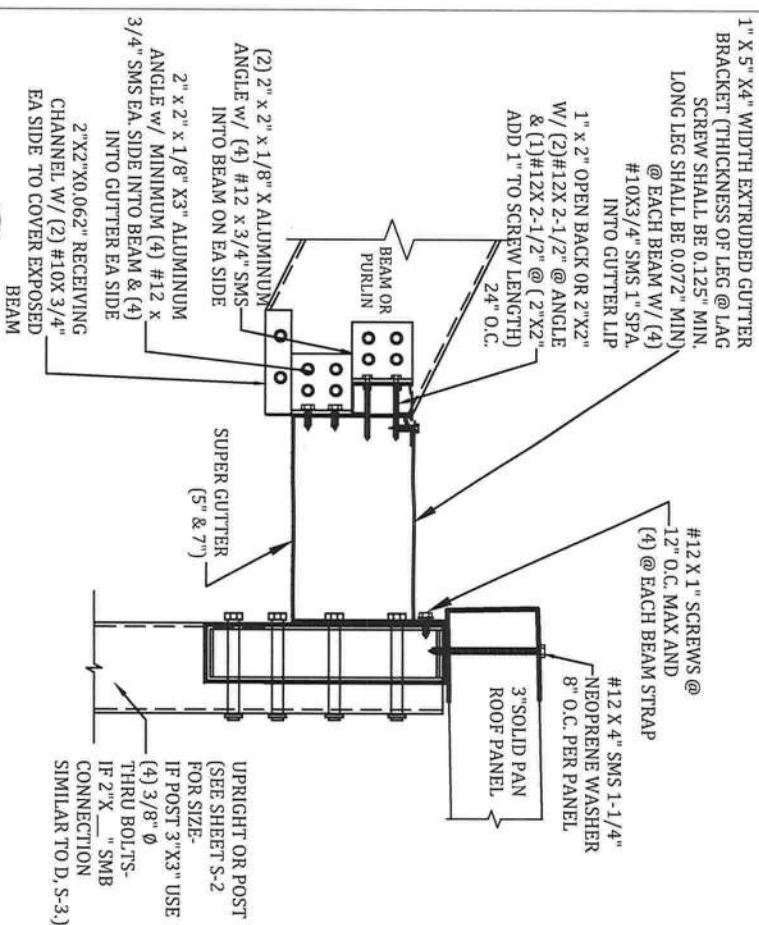

**S** GUTTER BRACE & BEAM ATTACHMENT DETAIL  
**S-5** N.T.S.



ENGINEER OF RECORD:  
**David W. Smith P.E.**  
 FLORIDA LICENSE: 53608  
**Thomas L. Hanson P.E.**  
 FLORIDA LICENSE: 38654  
**Myron Max Neal P.E.**  
 FLORIDA LICENSE: 86663  
**Joel Falardeau P.E.**  
 FLORIDA LICENSE: 70667  
**Erik Stuart P.E.**  
 FLORIDA LICENSE: 77605

**FBC Plans & Engineering Services, Inc.**

6272 Abbott Station Dr. Unit 101  
 Zephyrhills, FL 33542  
 Ph# (813) 788-5314  
 Fax# 1-(866) 824-7894  
 E-mail-erb@fbcpplans.com  
 Website-www.fbcplans.com  
 C.O.A.-#29054

DATE:	04/26/2021
DRAWN BY:	ST
REVISION:	DATE:
RO 1	
RO 2	
RO 3	
RO 4	

Job# 21\_0426\_501  
**PROJECT ADDRESS:**  
**MOSER**  
 198 SW DEPOT WAY  
 FORT WHITE, FL 32038

**CONTRACTOR:**  
 LAKESIDE ALUMINUM, INC.