

ROMMY DAVIS
NEW GRID-INTERACTIVE PHOTOVOLTAIC SYSTEM
DC SYSTEM SIZE (5.6KW)



978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315

ENGINEER OF RECORD

ROMMY DAVIS



158 NW MICHELLE PL, LAKE CITY,
FL 32055, USA

SYSTEM DETAILS	
DESCRIPTION	NEW GRID-INTERACTIVE PHOTOVOLTAIC SYSTEM WITH NO BATTERY STORAGE
DC RATING OF SYSTEM	SYSTEM SIZE :5.6 KW DC STC
AC RATING OF SYSTEM	4.06 KW AC
AC OUTPUT CURRENT	16.94 A
NO. OF MODULES	(14) REC N-PEAK 3 REC400NP3 BLACK (400W) SOLAR MODULE
NO. OF INVERTERS	(14) ENPHASE IQ8PLUS-72-2-US MICROINVERTERS
POINT OF CONNECTION	BACKFEED BREAKER IN THE MMC
ARRAY STRINGING	(2) BRANCHES OF 07 MODULES

SITE DETAILS	
ASHRAE EXTREME LOW	-5°C
ASHRAE 2% HIGH	34°C
GROUND SNOW LOAD	0 PSF
WIND SPEED	117MPH (ASCE 7-16)
RISK CATEGORY	I
WIND EXPOSURE CATEGORY	C

GOVERNING CODES	
FLORIDA RESIDENTIAL CODE, 7TH EDITION 2020 (FRC)	
FLORIDA BUILDING CODE, 7TH EDITION 2020 (FBC)	
FLORIDA FIRE PREVENTION CODE, 7TH EDITION 2020 (FFPC)	
NATIONAL ELECTRICAL CODE, NEC 2017 CODE BOOK, NFPA 70	


SHEET INDEX	
SHEET NO.	SHEET NAME
A - 00	SITE MAP & VICINITY MAP
A - 01	ROOF PLAN & MODULES
S - 01	ARRAY LAYOUT
S - 02	STRUCTURAL ATTACHMENT DETAIL
E - 01	ELECTRICAL LINE DIAGRAM
E - 02	WIRING CALCULATIONS
E - 03	SYSTEM LABELING
DS - 01	MODULE DATASHEET
DS - 02	INVERTER DATASHEET
DS - 03	COMBINER DATASHEET
DS - 04	ATTACHMENT DATASHEET
DS - 05	RACKING DATASHEET

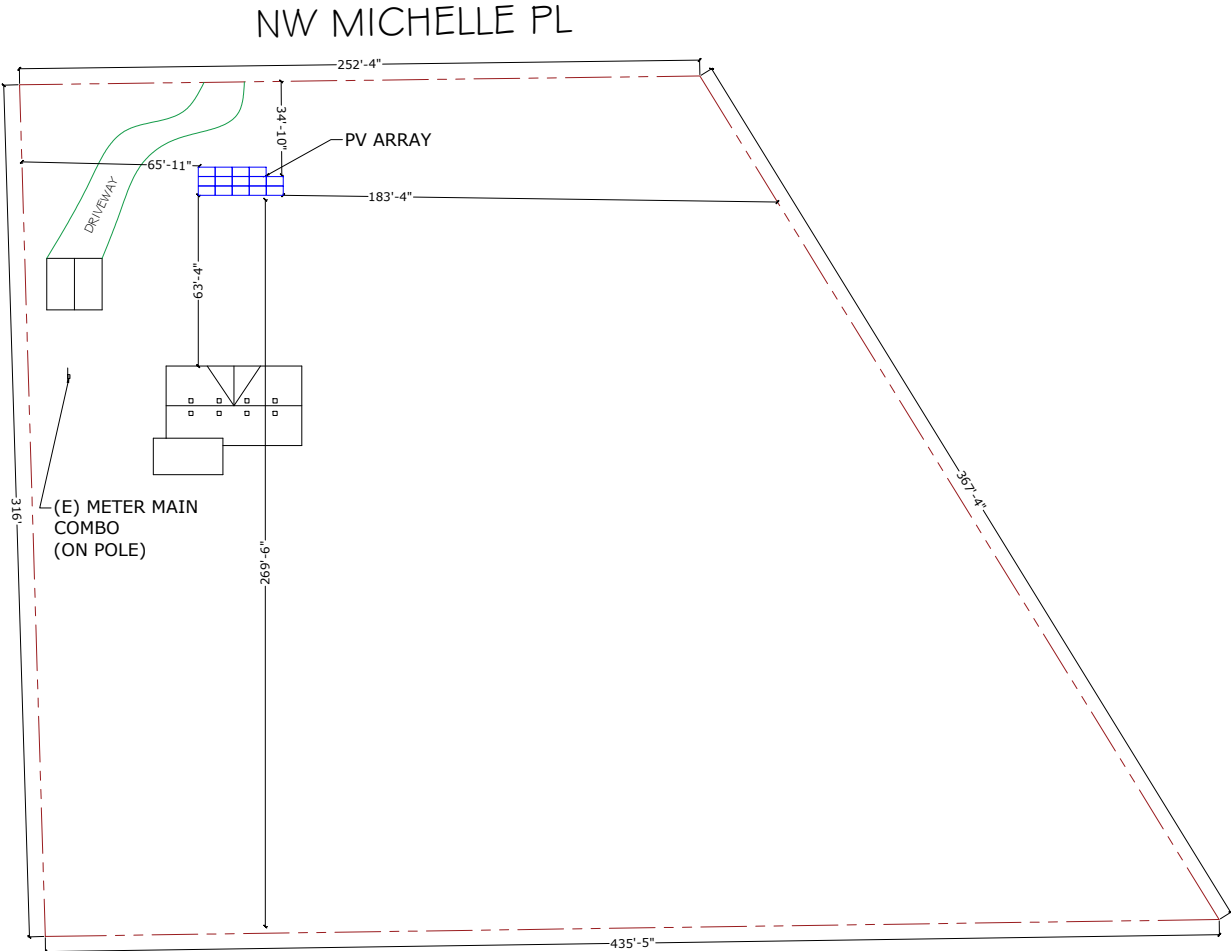


SITE MAP



VICINITY MAP

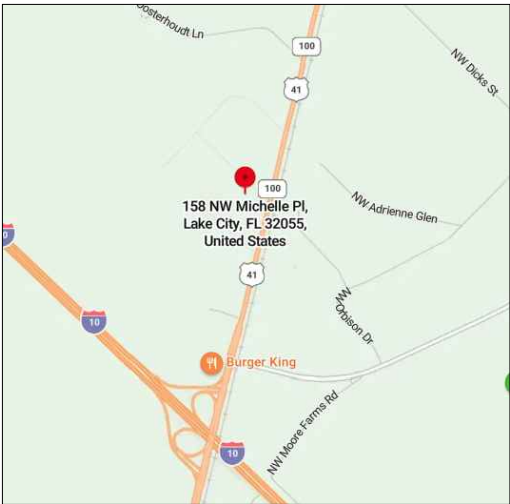

WIND FLOW MAP

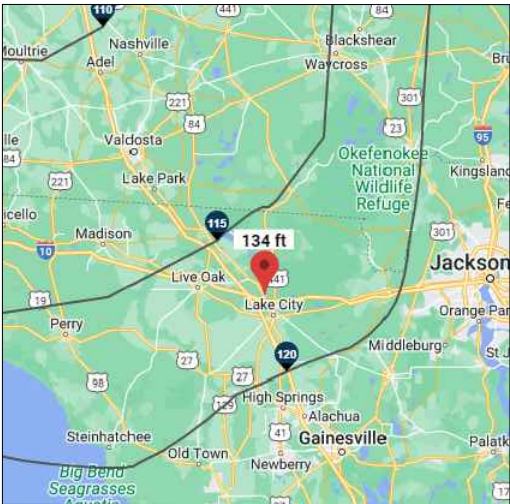

REVISIONS

REV	ENG.	DESCRIPTION	DATE

PERMIT DEVELOPER


DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME

SITE MAP &
VICINITY MAP

SHEET NUMBER

A-00



MODULE TYPE, DIMENSIONS & WEIGHT

NUMBER OF MODULES = 14 MODULES
MODULE TYPE = REC N-PEAK 3 REC400NP3 BLACK (400W) SOLAR MODULE
WEIGHT = 48.06 LBS / 21.8 KG.
MODULE DIMENSIONS = 74.8" X 40.9" = 21.25 SF

NUMBER OF INVERTER = 14 INVERTER
INVERTER TYPE = ENPHASE IQ8PLUS-72-2-US MICROINVERTERS

DC SYSTEM SIZE: 5.6 KW
AC SYSTEM SIZE: 4.06 KW



978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315

ENGINEER OF RECORD

ROMMY DAVIS

158 NW MICHELLE PL., LAKE CITY,
FL 32055, USA

REVISIONS	DATE				
	DESCRIPTION				
	REV	ENGG.			

PERMIT DEVELOPER

DATE	06/08/2023
DESIGNER	OSB
REVIEWER	


SHEET NAME

ROOF PLAN
& MODULES

SHEET NUMBER

A-01

(E) FRONT YARD

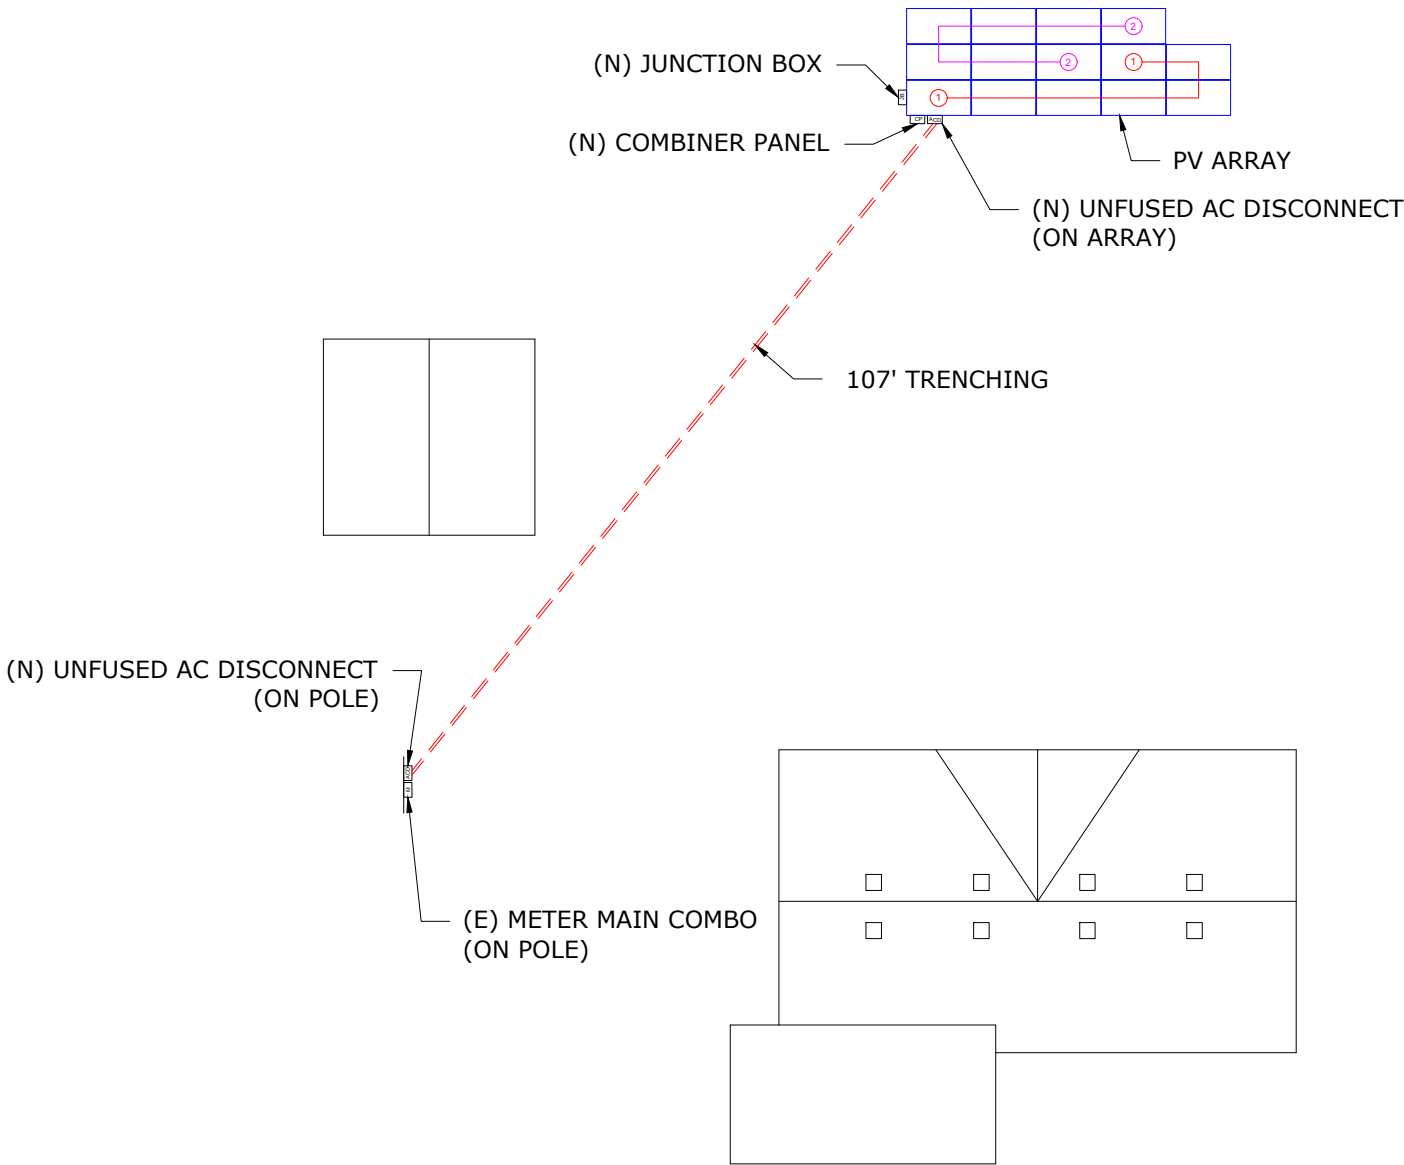

(E) BACK YARD


- ① - MODULE STRING
② - MODULE STRING

LEGENDS

- M - METER MAIN COMBO
JB - JUNCTION BOX
INV - INVERTER
ACD - AC DISCONNECT
[Hatched Box] - FIRE SETBACK
① - STRING TAG
[Circle with X] - VENT, ATTIC FAN (ROOF OBSTRUCTION)
--- - CONDUIT
--- - TRENCHING

(ARRAY #1)

MODULES - 14
GROUND TILT - 20°
GROUND AZIMUTH - 180°

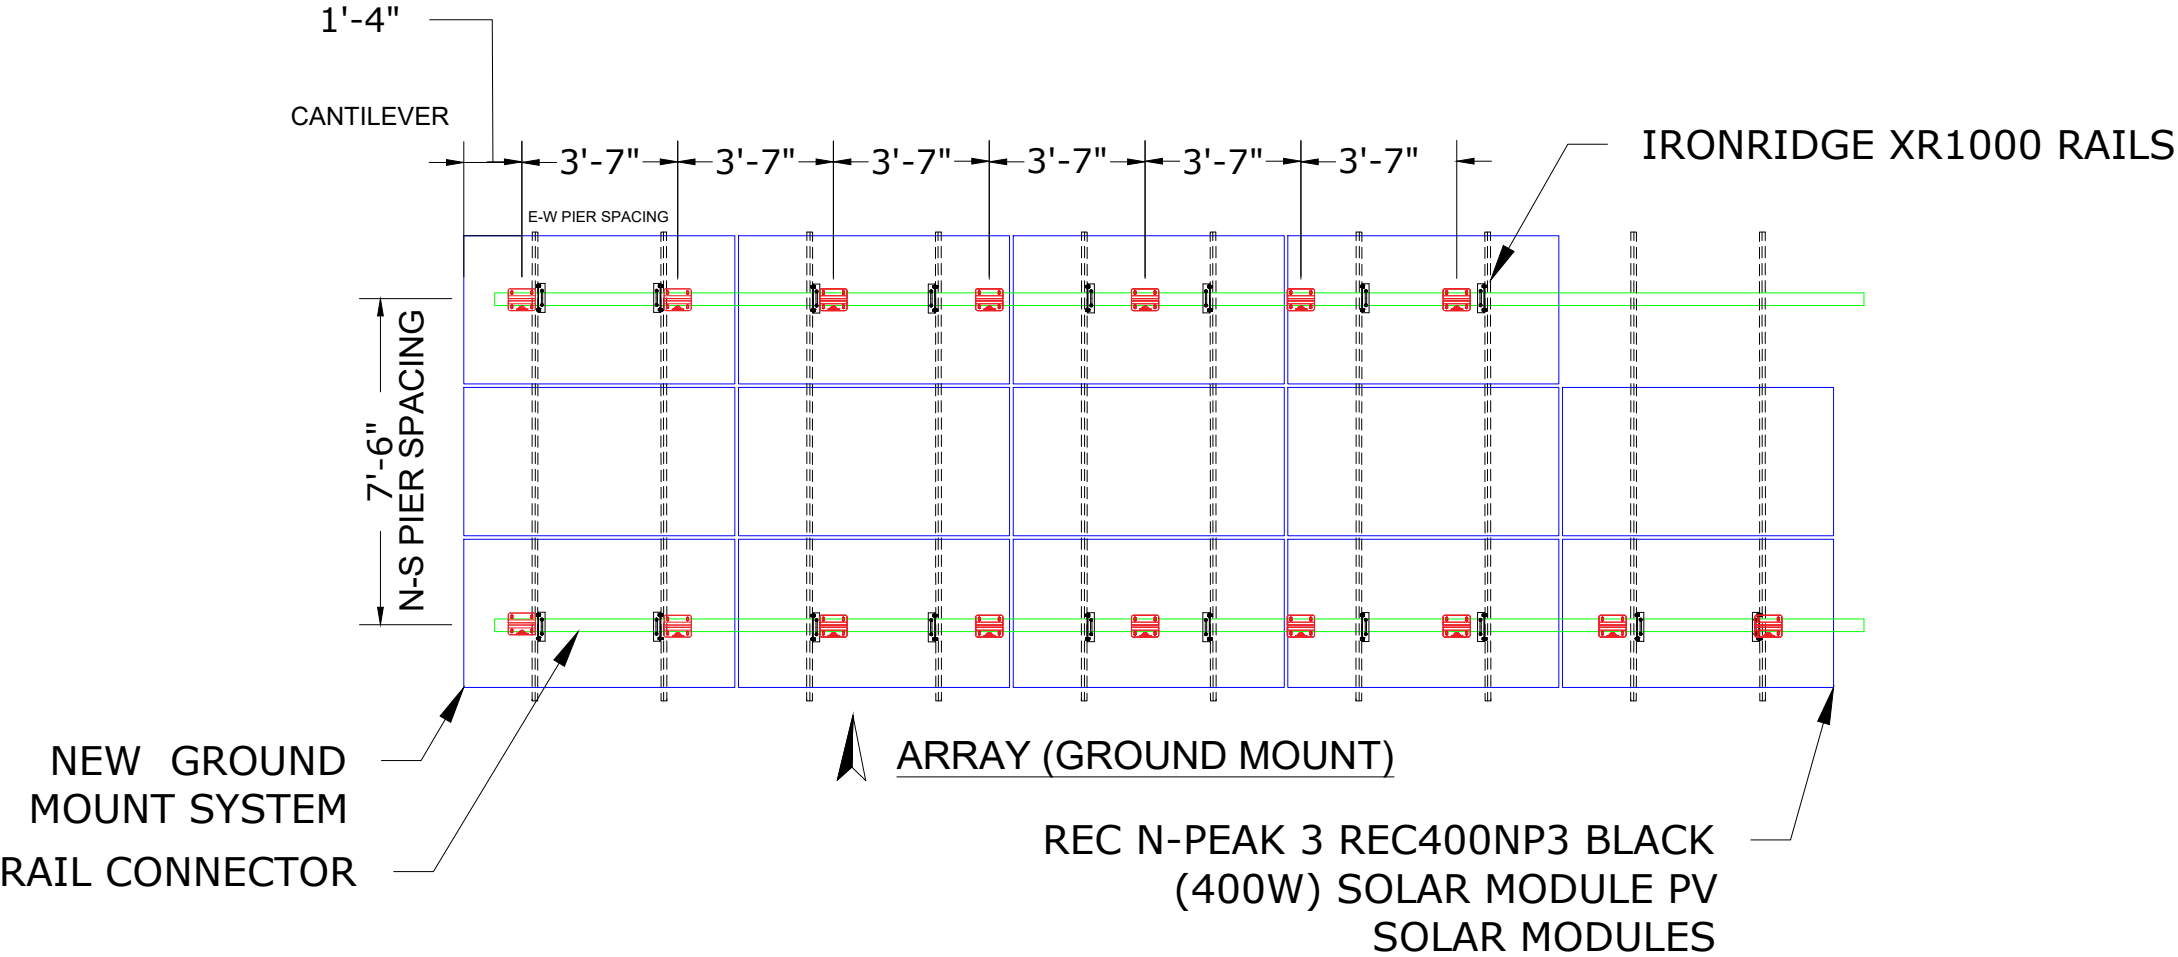

LEGENDS

-  - RAIL CONNECTOR
-  - IRONRIDGE TOP CAPS
-  - RAIL
-  - PIPE



978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315

ENGINEER OF RECORD

ROMMY DAVIS


158 NW MICHELLE PL, LAKE CITY ,
FL 32055, USA

REVISIONS	DATE				
	DESCRIPTION				
	REV	ENGG.			

PERMIT DEVELOPER	
DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME
ARRAY LAYOUT

SHEET NUMBER
S-01

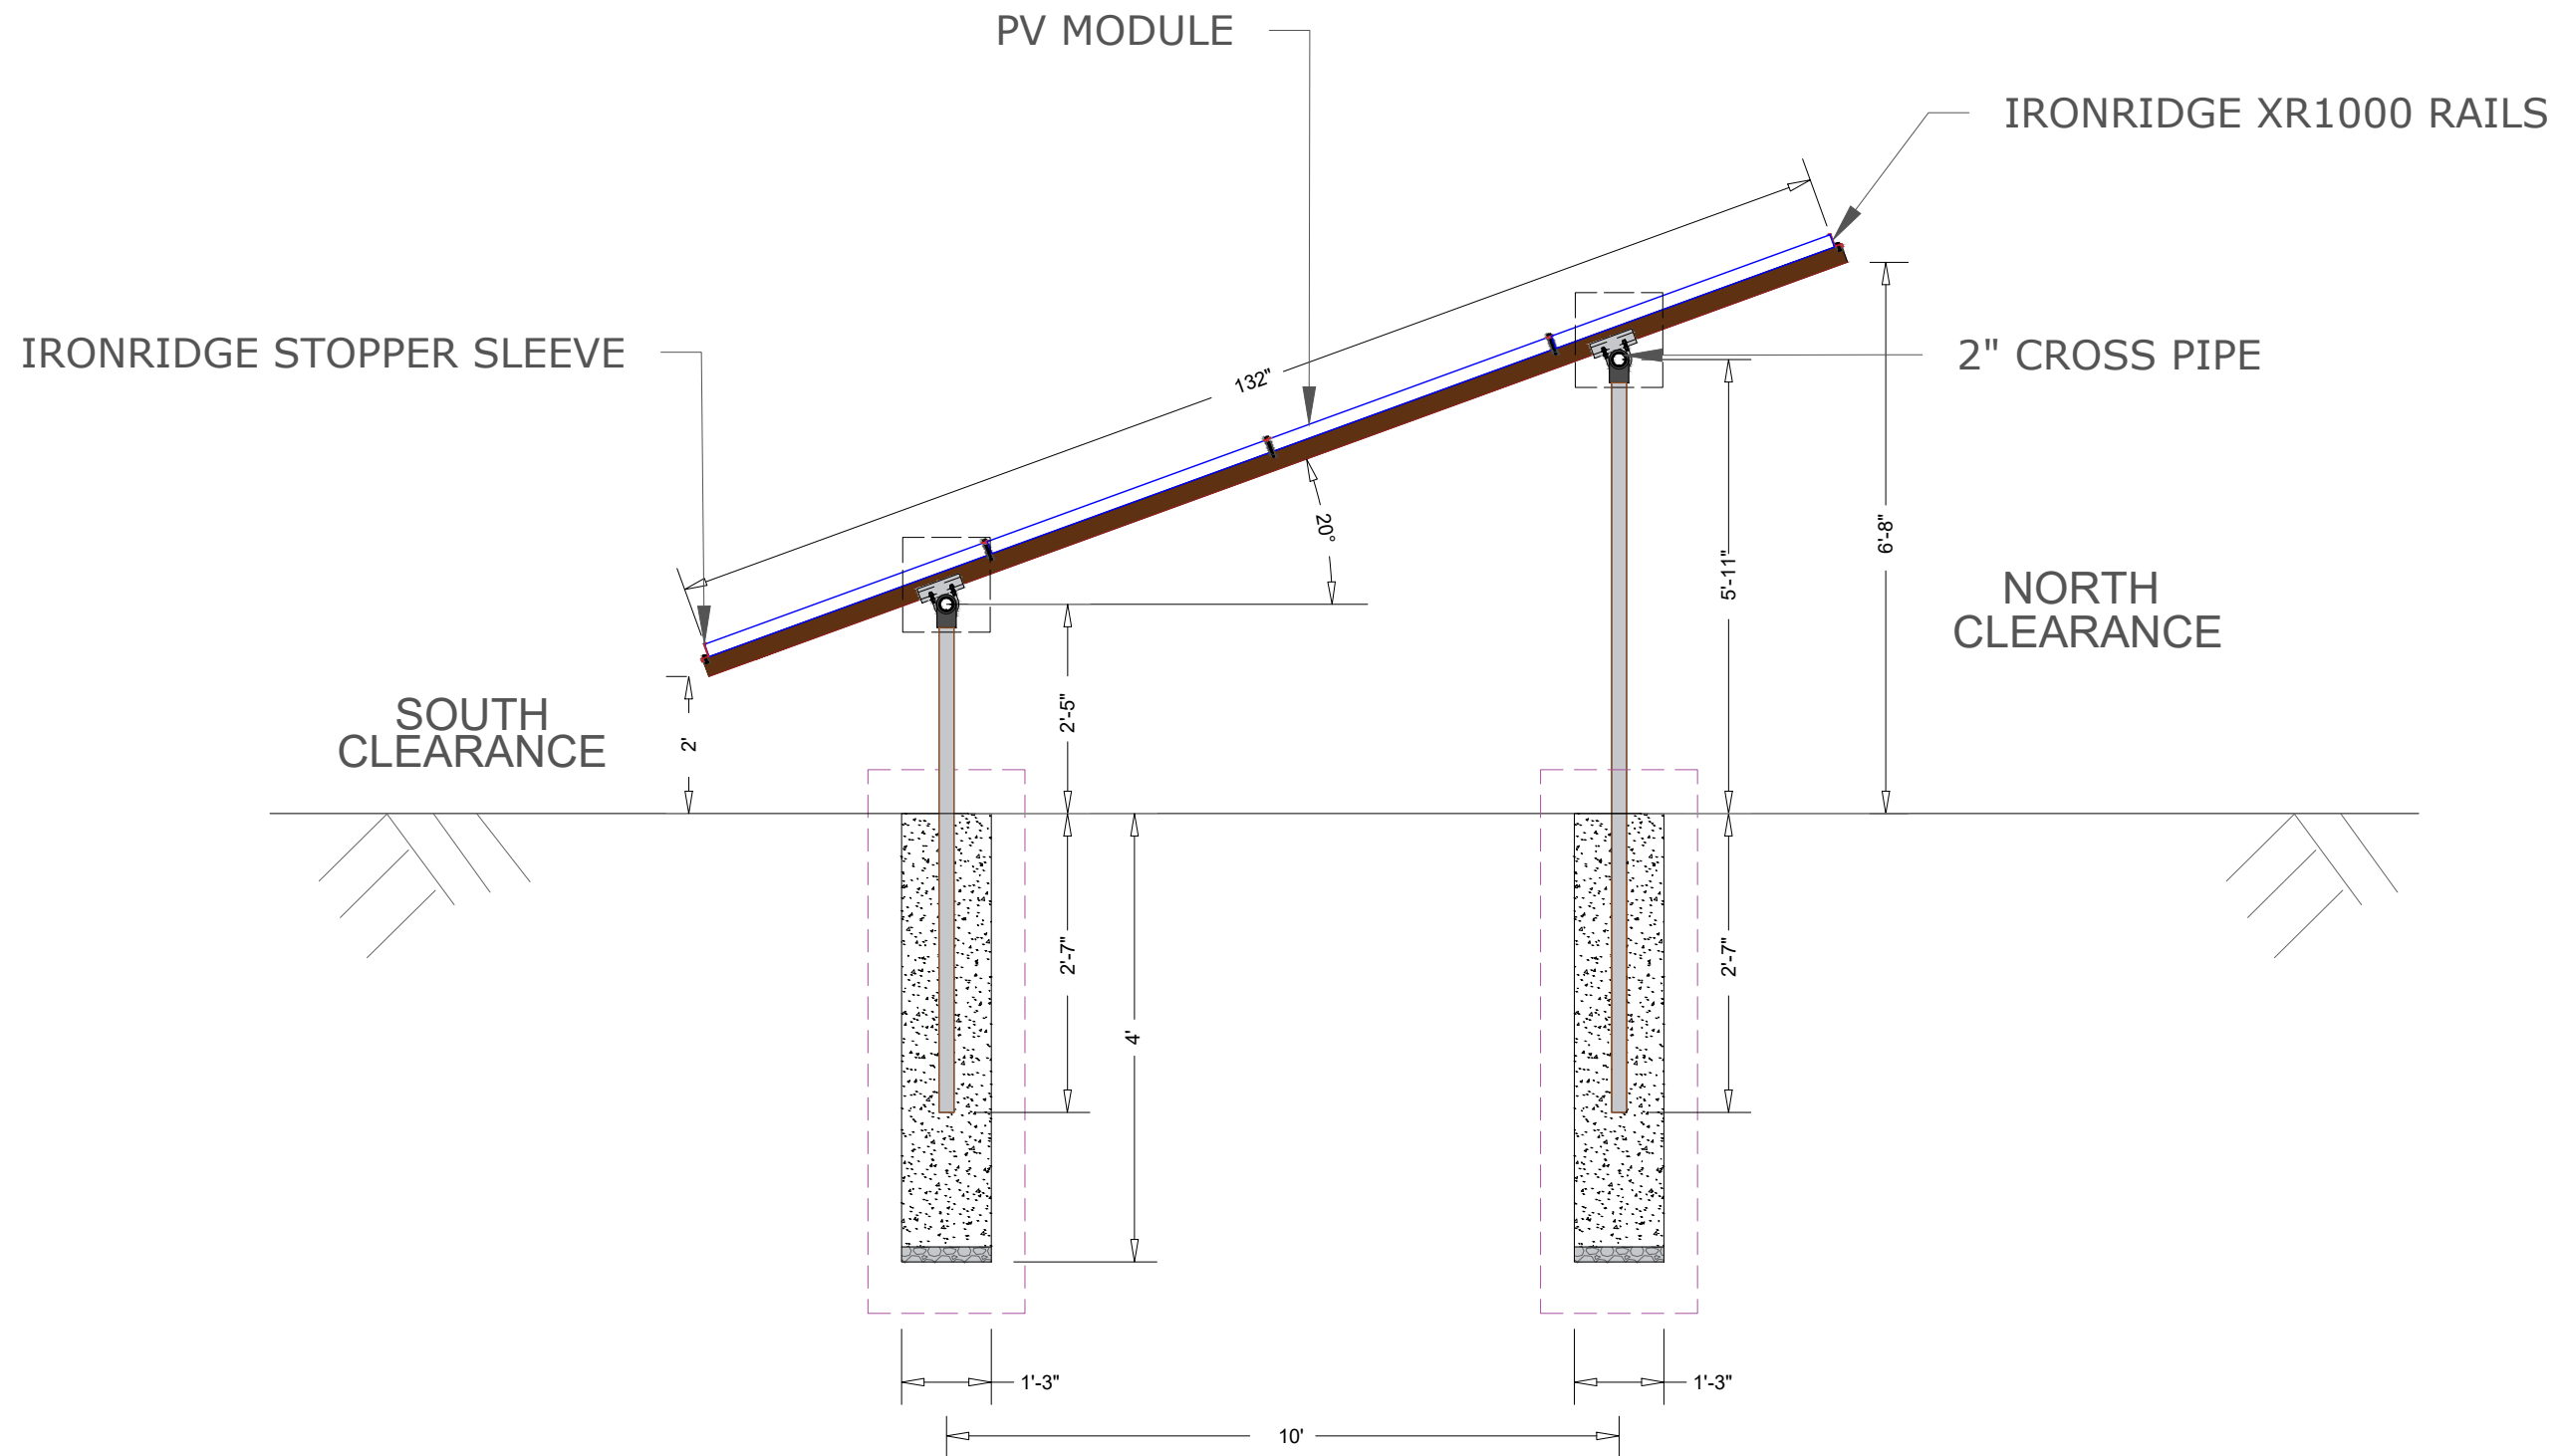

STRUCTURAL ATTACHMENT DETAILS FOR GROUND MOUNT



978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315

ENGINEER OF RECORD

ROMMY DAVIS


158 NW MICHELLE PL, LAKE CITY,
FL 32055, USA

REVISIONS	DATE		DESCRIPTION	REV	ENG.				

PERMIT DEVELOPER	
DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME	
STRUCTURAL ATTACHMENT DETAILS	


SHEET NUMBER	
S-02	

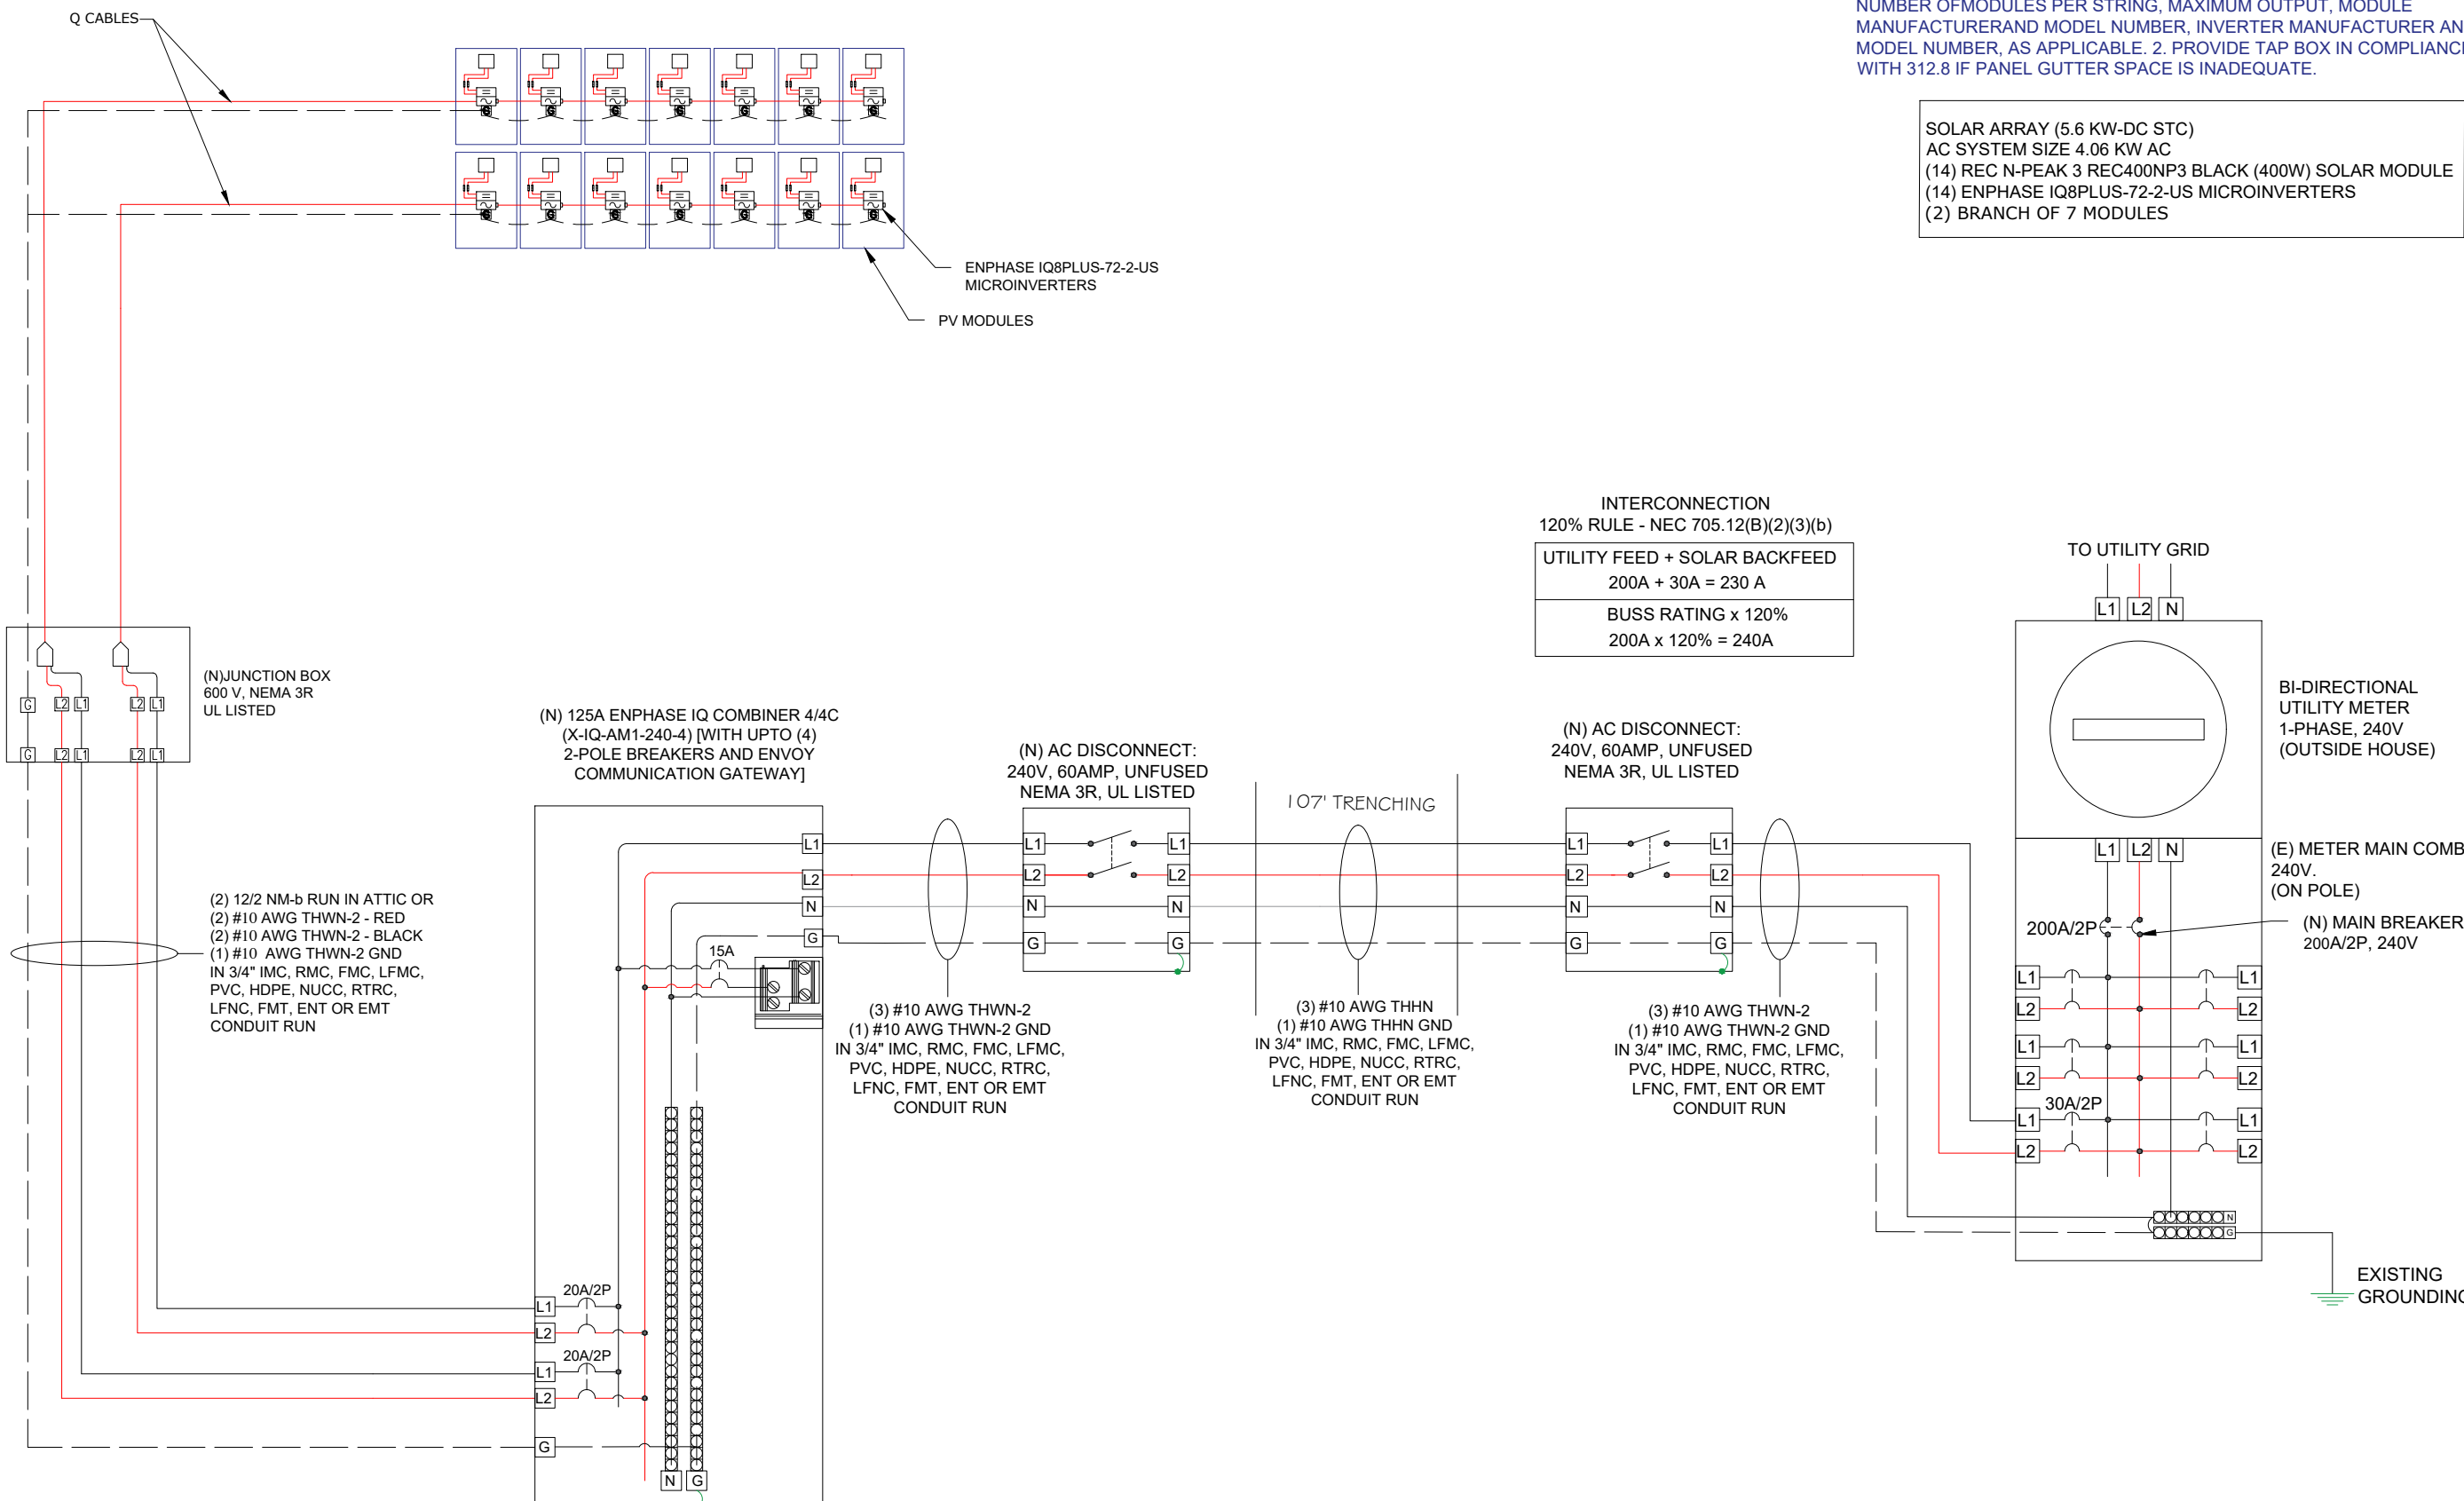

NOTE:
SUBJECT PV SYSTEMS HAS BEEN DESIGNED TO MEET THEREQUIREMENTS OF THE NEC 2017, NFPA 70 AND THOSE SET FORTH BYTHE FLORIDA SOLAR ENERGY CENTER CERTIFICATION, INCLUDINGMAXIMUM NUMBER OF MODULE STRINGS, MAXIMUM NUMBER OFMODULES PER STRING, MAXIMUM OUTPUT, MODULE MANUFACTURERAND MODEL NUMBER, INVERTER MANUFACTURER AND MODEL NUMBER, AS APPLICABLE. 2. PROVIDE TAP BOX IN COMPLIANCE WITH 312.8 IF PANEL GUTTER SPACE IS INADEQUATE.

SOLAR ARRAY (5.6 KW-DC STC)
AC SYSTEM SIZE 4.06 KW AC
(14) REC N-PEAK 3 REC400NP3 BLACK (400W) SOLAR MODULE
(14) ENPHASE IQ8PLUS-72-2-US MICROINVERTERS
(2) BRANCH OF 7 MODULES

INTERCONNECTION
120% RULE - NEC 705.12(B)(2)(3)(b)
UTILITY FEED + SOLAR BACKFEED
200A + 30A = 230 A
BUSS RATING x 120%
200A x 120% = 240A

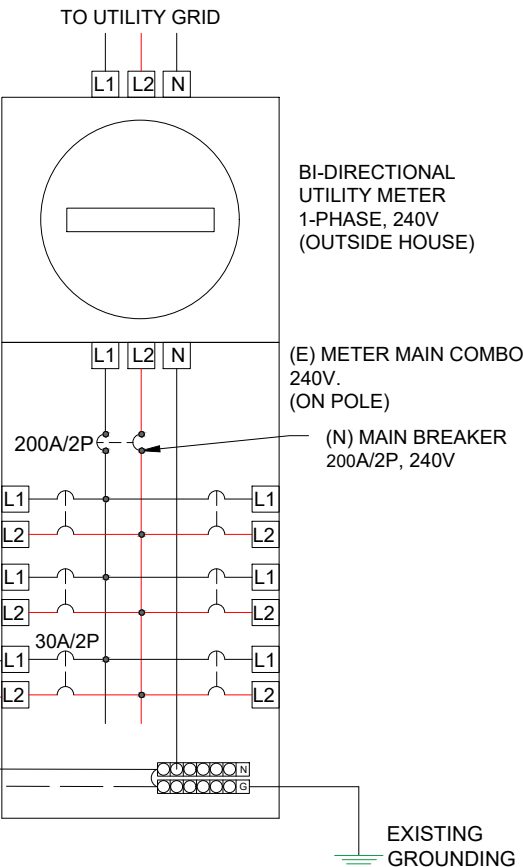

EnLightEnergy
978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315

ENGINEER OF RECORD

ROMMY DAVIS
158 NW MICHELLE PL, LAKE CITY ,
FL 32055, USA

REV	ENG	DESCRIPTION	DATE			
			1	2	3	4

PERMIT DEVELOPER	
DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME	
ELECTRICAL LINE DIAGRAM	
SHEET NUMBER	
E-01	

ELECTRICAL NOTES

ELECTRICAL CALCULATIONS:

1. CURRENT CARRYING CONDUCTOR

BEFORE IQ COMBINER PANEL

AMBIENT TEMPERATURE = 34°C
CONDUIT INSTALLED AT DISTANCE OF 7/8 INCHES ABOVE ROOFNEC 310.15(B)(3)(c)
TEMPERATURE DERATE FACTOR - 0.96 ...NEC 310.15(B)(2)(a)
GROUPING FACTOR - 0.8...NEC 310.15(B)(3)(a)

CONDUCTOR AMPACITY
= (OPT O/P CURRENT) x 1.56 / A.T.F / G.F ...NEC 690.8(B)
= [(7 x 1.21) x 1.25] / 0.96 / 0.8
= 13.79 A
SELECTED CONDUCTOR - #10 THHN ...NEC 310.15(B)(16)

AFTER IQ COMBINER PANEL

TEMPERATURE DERATE FACTOR - 0.96
GROUPING FACTOR - 1

CONDUCTOR AMPACITY
=(TOTAL INV O/P CURRENT) x 1.25 / 0.96 / 1 ...NEC 690.8(B)
=[14 x 1.25] /0.96 / 1
=22.06 A
SELECTED CONDUCTOR - #10 THHN...NEC 310.15(B)(16)

2. PV OVER CURRENT PROTECTION ..NEC 690.9(B)
=TOTAL INVERTER O/P CURRENT x 1.25
=(14 x 1.21 x1.25) = 21.18 A
SELECTED OCPD = 30A

SELECTED EQUIPMENT GROUND CONDUCTOR (EGC) = #10 THHN... NEC 250.122(A)

MODULE SPECIFICATION	
MODEL NO.	REC N-PEAK 3 REC400NP3 BLACK
PEAK POWER	400W
RATED VOLTAGE (Vmpp)	37.6 V
RATED CURRENT (Imp)	10.64 A
OPEN CIRCUIT VOLTAGE (Voc)	45 V
SHORT CIRCUIT CURRENT (Isc)	11.39 A

MAX VOLTAGE DROP CALCULATION						
CABLE SIZE	CABLE DESCRIPTION	ONE WAY DISTANCE IN FEET (D)	BRANCH CURRENT (I)	RESISTANCE OF CONDUCTOR(R)	VOLTAGE (V)	% VOLTAGE DROP=(0.2*D*I*R)/V
#8 THWN-2	UNFUSED AC DISCONNECT TO UNFUSED AC DISCONNECT	107	21	0.778	240	1.45

1. ALL EQUIPMENT TO BE LISTED BY UL OR OTHER NRTL AND LABELED FOR ITS APPLICATION.
2. COPPER CONDUCTORS SHALL BE RATED FOR 600 V AND 90 DEGREE C WET ENVIRONMENT.THE TERMINALS ARE RATED FOR 75 DEGREE C ROMEX/NM-B (NONMETALLIC-SHEATHED) CABLE MAY BE USED FOR BOTH EXPOSED AND CONCEALED WORK IN NORMALLY DRY LOCATIONS AT TEMPERATURES NOT TO EXCEED 90°C (WITH AMPACITY LIMITED TO THAT FOR 60°C CONDUCTORS) AS SPECIFIED IN THE NATIONAL ELECTRICAL CODE. VOLTAGE RATING FOR NM-B CABLE IS 600 VOLTS.
3. WORKING CLEARANCES AROUND ALL NEW AND EXISTING ELECTRICAL EQUIPMENT SHALL COMPLY WITH NEC 110.265. WORKING CLEARANCES AROUND ALL NEW AND EXISTING
4. DRAWINGS INDICATE THE GENERAL ARRANGEMENT OF SYSTEMS CONTRACTOR SHALL FURNISH ALL NECESSARY OUTLETS, SUPPORTS, FITTINGS AND ACCESSORIES TO FULFILL APPLICABLE CODES AND STANDARDS.
5. WHERE SIZES OF JUNCTION BOXES, RACEWAYS, AND CONDUITS ARE NOT SPECIFIED, THE CONTRACTOR SHALL SIZE THEM ACCORDINGLY.
6. ALL WIRE TERMINATIONS SHALL BE APPROPRIATELY LABELED AND READILY VISIBLE.
7. MODULE GROUNDING CLIPS TO BE INSTALLED BETWEEN MODULE FRAME AND MODULE SUPPORT RAIL, PER THE GROUNDING CLIP MANUFACTURER'S INSTRUCTION.
8. MODULE SUPPORT RAIL TO BE BONDED TO CONTINUOUS COPPER G.E.C. VIA WEEB LUG OR ILSCO GBL-4DBT LAY-IN LUG.
9. THE POLARITY OF THE GROUNDED CONDUCTORS IS NEGATIVE.
10. UTILITY HAS 24-HR UNRESTRICTED ACCESS TO ALL PHOTOVOLTAIC SYSTEM COMPONENTS LOCATED AT THE SERVICE ENTRANCE.
11. MODULES CONFORM TO AND ARE LISTED UNDER UL 1703.
12. RACKING CONFORMS TO AND IS LISTED UNDER UL 2703.
13. CONDUCTORS EXPOSED TO SUNLIGHT SHALL BE LISTED AS SUNLIGHT RESISTANT PER NEC ARTICLE 300.6 (C) (1) AND ARTICLE 310.10 (D).
14. CONDUCTORS EXPOSED TO WET LOCATIONS SHALL BE SUITABLE FOR USE IN WET LOCATIONS PER NEC ARTICLE 310.10 (C).

INVERTER SPECIFICATIONS	
MANUFACTURER	ENPHASE
MODEL NO.	IQ8PLUS-72-2-US
MAX DC INPUT VOLTAGE	60 V
MAX OUTPUT POWER	290 VA
NOMINAL AC OUTPUT VOLTAGE	240 V
NOMINAL AC OUTPUT CURRENT	1.21 A



978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315

ENGINEER OF RECORD

ROMMY DAVIS

158 NW MICHELLE PL, LAKE CITY,
FL 32055, USA

REVISIONS	DATE				
	DESCRIPTION				
	REV	ENGG.			

PERMIT DEVELOPER	
DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME	
WIRING CALCULATIONS	
SHEET NUMBER	
E-02	

⚠

WARNING

ELECTRIC SHOCK HAZARD

DO NOT TOUCH TERMINALS
TERMINALS ON BOTH LINE AND
LOAD SIDES MAY BE ENERGIZED
IN THE OPEN POSITION

LABEL LOCATION:
AC DISCONNECT, POINT OF INTERCONNECTION,
COMBINER PANEL
(PER CODE: NEC 690.13(B))

WARNING PHOTOVOLTAIC
POWER SOURCE

LABEL LOCATION:
CONDUIT RUNWAY
(PER CODE: NEC690.31(G)(3)(4))

⚠

WARNING DUAL POWER SOURCE

SECOND SOURCE IS PHOTOVOLTAIC SYSTEM

LABEL LOCATION:
MAIN SERVICE DISCONNECT
(NEC 705.12(B)(3-4) & NEC 690.59)

ADHESIVE FASTENED SIGNS:
·ANSI Z535.4-2011 PRODUCT SAFETY SIGNS AND LABELS, PROVIDES
GUIDELINES FOR SUITABLE FONT SIZES, WORDS, COLORS, SYMBOLS, AND
LOCATION REQUIREMENTS FOR LABELS. NEC 110.21(B)(1)
·THE LABEL SHALL BE OF SUFFICIENT DURABILITY TO WITHSTAND THE
ENVIRONMENT INVOLVED. NEC 110.21(B)(3)
·ADHESIVE FASTENED SIGNS MAY BE ACCEPTABLE IF PROPERLY
ADHERED. VINYL SIGNS SHALL BE WEATHER RESISTANT. IFC 605.11.1.3

PHOTOVOLTAIC SYSTEM AC DISCONNECT

RATED AC OPERATING CURRENT 16.94 AMPS
AC NOMINAL OPERATING VOLTAGE 240 VOLTS

LABEL LOCATION:
AC DISCONNECT, INVERTER
(PER CODE: NEC 690.54)

WARNING

INVERTER OUTPUT CONNECTION DO NOT
RELOCATE THIS OVERCURRENT DEVICE

LABEL LOCATION:
POINT OF INTERCONNECTION, MAIN SERVICE DISCONNECT
(PER CODE: NEC 705.12 (B)(2)(c))
[Not required if panelboard is rated not less than sum of ampere ratings
of all overcurrent devices supplying it]

DATA PER PANEL

NOMINAL OPERATING AC VOLTAGE -	240	V
NOMINAL OPERATING AC FREQUENCY-	60	Hz
MAXIMUM AC POWER-	290	VA
MAXIMUM AC CURRENT-	1.21	A
MAXIMUM OVERCURRENT DEVICE RATING FOR AC MODULE PROTECTION PER CIRCUIT-	20	A

PHOTOVOLTAIC SYSTEM
EQUIPPED WITH RAPID
SHUTDOWN

LABEL LOCATION:
AC DISCONNECT, DC DISCONNECT, POINT OF
INTERCONNECTION
(PER CODE: NEC 690.56(C)(3))

⚠

WARNING

INVERTER OUTPUT CONNECTION
DO NOT RELOCATE THIS
OVERCURRENT DEVICE

EMERGENCY CONTACT

727-571-4141

⚠

WARNING

DEDICATED SOLAR PANELS DO
NOT CONNECT ANY OTHER LOADS

EMERGENCY RESPONDER THIS
SOLAR PV SYSTEM IS EQUIPPED
WITH RAPID SHUTDOWN

TURN RAPID SHUTDOWN
SWITCH TO THE
"OFF" POSITION TO
SHUTDOWN PV SYSTEM.

SOLAR ELECTRIC
PV PANELS

NEC690.56(C)(1) AND NFPA 111.12.2.1.1.1.1, 11.12.2.1.4

EnLightEnergy

978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315

ENGINEER OF RECORD

ROMMY DAVIS

158 NW MICHELLE PL, LAKE CITY,
FL 32055, USA

REV	ENG	DESCRIPTION	DATE				

PERMIT DEVELOPER

DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME

SYSTEM LABELING

SHEET NUMBER

E-03

REC N-PEAK 3 BLACK SERIES

PREMIUM FULL BLACK MONO N-TYPE SOLAR PANELS



MONO N-TYPE: THE MOST EFFICIENT C-SI TECHNOLOGY



NO LIGHT INDUCED DEGRADATION



SUPER-STRONG FRAME UP TO 7000 PA SNOW LOAD



FLEXIBLE INSTALLATION OPTIONS



FEATURING REC'S PIONEERING TWIN DESIGN



BIFACIAL CELLS CAN PRODUCE ENERGY FROM BOTH SIDES

400 WP POWER




SOLAR'S MOST TRUSTED



REC N-PEAK 3 BLACK SERIES PRODUCT SPECIFICATIONS

GENERAL DATA

Cell type:	132 half-cut mono c-Si n-type cells 6 strings of 22 cells in series
Glass:	0.13 in solar glass with anti-reflective surface treatment in accordance with EN12150
Backsheet:	Highly resistant polymer (black)
Frame:	Anodized aluminum (black) with silver support bars
Junction box:	3-part, 3 bypass diodes, lead-free IP68 rated, in accordance with IEC 62730
Connectors:	Stäubli MC4 PV-KBT4/KST4 (12 AWG) in accordance with IEC 62852, IP68 only when connected
Cable:	12 AWG PV wire, 47.2 ± 47.2 in in accordance with EN50618
Dimensions:	74.8 x 40.9 x 1.2 in (19.7 sq-ft)
Weight:	48.0 lbs
Origin:	Made in Singapore

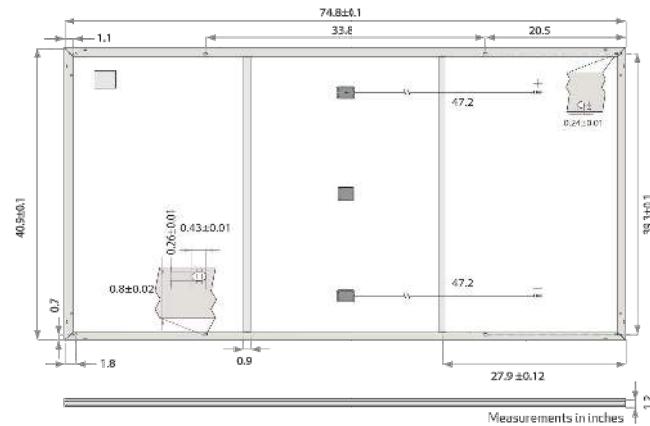

ELECTRICAL DATA

Product Code: RECxxNP3 Black

Power Output - P_{max} (Wp)	390	400
Watt Class Sorting - (W)	0/+10	0/+10
Nominal Power Voltage - V_{MPP} (V)	36.8	37.6
Nominal Power Current - I_{MPP} (A)	10.60	10.64
Open Circuit Voltage - V_{OC} (V)	44.8	45.0
Short Circuit Current - I_{SC} (A)	11.31	11.39
Panel Efficiency (%)	19.5	20.3
Power Output - P_{max} (Wp)	295	302
Nominal Power Voltage - V_{MPP} (V)	34.4	35.2
Nominal Power Current - I_{MPP} (A)	8.56	8.59
Open Circuit Voltage - V_{OC} (V)	41.9	42.1
Short Circuit Current - I_{SC} (A)	9.13	9.20

Values at standard test conditions (STC: air mass AM1.5, irradiance 1000 W/m², temperature 25°C), based on a production spread with a tolerance of P_{max} , V_{OC} & I_{SC} ±3% within one watt class. Nominal module operating temperature (NMOT: air mass AM1.5, irradiance 800 W/m², temperature 70°C, windspeed 1 m/s). *Where xxx indicates the nominal power class (P_{max}) at STC above.

MAXIMUM RATINGS

Operational temperature:	-40 ... +185°F
Maximum system voltage:	1000 V
Maximum test load (front):	+7000 Pa (146 lbs/sq-ft)
Maximum test load (rear):	-4000 Pa (83.5 lbs/sq-ft)
Max series fuse rating:	25 A
Max reverse current:	25 A

*See installation manual for mounting instructions.
Design load = Test load / 1.5 (safety factor)

WARRANTY

	Standard	REC ProTrust
Installed by an REC Certified Solar Professional	No	Yes
System Size	All	≤25 kW 25-500 kW
Product Warranty (yrs)	20	25
Power Warranty (yrs)	25	25
Labor Warranty (yrs)	0	25
Power in Year 1	98%	98%
Annual Degradation	0.25%	0.25%
Power in Year 25	92%	92%

The REC ProTrust Warranty is only available on panels purchased through an REC Certified Solar Professional. Installation Warranty conditions apply. See www.recgroup.com for more details.

CERTIFICATIONS

IEC 61215:2016, IEC 61730:2016, UL 61730
IEC 62804 PID
IEC 61701 Salt Mist
IEC 62716 Ammonia Resistance
UL 61730 Fire Type Class 2
UL 790 Fire Class Type C
IEC 62782 Dynamic Mechanical Load
IEC 61215-2:2016 Hailstone (1.37in)
ISO 14001, ISO 9001, IEC 45001, IEC 62941



TEMPERATURE RATINGS*

Nominal Module Operating Temperature:	44.3°C (±2°C)
Temperature coefficient of P_{max} :	-0.34 %/°C
Temperature coefficient of V_{OC} :	-0.26 %/°C
Temperature coefficient of I_{SC} :	0.04 %/°C


*The temperature coefficients stated are linear values

DELIVERY INFORMATION

Panels per pallet:	33
Panels per 40ft GP/high cube container:	792 (24 pallets)
Panels per 53ft truck:	TBD

LOW LIGHT BEHAVIOUR

Typical low irradiance performance of module at STC:



Rev: Rev 11-1122 Specifications subject to change without notice.

Available from:

Founded in 1996, REC Group is an international pioneering solar energy company dedicated to empowering consumers with clean, affordable solar power. As Solar's Most Trusted, REC is committed to high quality, innovation, and a low carbon footprint in the solar materials and solar panels it manufactures. Headquartered in Norway with operational headquarters in Singapore, REC also has regional hubs in North America, Europe, and Asia-Pacific.

REC Solar PTE. LTD.
20 Tuas South Ave. 14
Singapore 637312
post@recgroup.com



978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315

ENGINEER OF RECORD

ROMMY DAVIS

158 NW MICHELLE PL, LAKE CITY,
FL 32055, USA

REVISIONS

REV	ENG.	DESCRIPTION	DATE

PERMIT DEVELOPER

DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME

MODULE DATASHEET

SHEET NUMBER

DS-01



DATA SHEET



IQ8 Series Microinverters

Our newest IQ8 Microinverters are the industry's first microgrid-forming, software-defined microinverters with split-phase power conversion capability to convert DC power to AC power efficiently. The brain of the semiconductor-based microinverter is our proprietary application-specific integrated circuit (ASIC) which enables the microinverter to operate in grid-tied or off-grid modes. This chip is built in advanced 55nm technology with high speed digital logic and has super-fast response times to changing loads and grid events, alleviating constraints on battery sizing for home energy systems.



Part of the Enphase Energy System, IQ8 Series Microinverters integrate with the Enphase IQ Battery, Enphase IQ Gateway, and the Enphase App monitoring and analysis software.



Connect PV modules quickly and easily to IQ8 Series Microinverters using the included Q-DCC-2 adapter cable with plug-n-play MC4 connectors.



IQ8 Series Microinverters redefine reliability standards with more than one million cumulative hours of power-on testing, enabling an industry-leading limited warranty of up to 25 years.



IQ8 Series Microinverters are UL Listed as PV Rapid Shut Down Equipment and conform with various regulations, when installed according to manufacturer's instructions.

© 2021 Enphase Energy. All rights reserved. Enphase, the Enphase logo, IQ8 microinverters, and other names are trademarks of Enphase Energy, Inc. Data subject to change.

IQ8SE-DS-0001-01-EN-US-2021-10-19

Easy to install

- Lightweight and compact with plug-n-play connectors
- Power Line Communication (PLC) between components
- Faster installation with simple two-wire cabling

High productivity and reliability

- Produce power even when the grid is down
- More than one million cumulative hours of testing
- Class II double-insulated enclosure
- Optimized for the latest high-powered PV modules

Microgrid-forming

- Complies with the latest advanced grid support
- Remote automatic updates for the latest grid requirements
- Configurable to support a wide range of grid profiles
- Meets CA Rule 21 (UL 1741-SA) requirements

IQ8 Series Microinverters

INPUT DATA (DC)		IQ8-60-2-US	IQ8PLUS-72-2-US	IQ8M-72-2-US	IQ8A-72-2-US	IQ8H-240-72-2-US	IQ8H-208-72-2-US
Commonly used module pairings ²	W	235 – 350	235 – 440	260 – 460	295 – 500	320 – 540+	295 – 500+
Module compatibility		60-cell/120 half-cell and 72-cell/144 half-cell					
MPPT voltage range	V	27 – 37	29 – 45	33 – 45	36 – 45	38 – 45	38 – 45
Operating range	V	25 – 48	25 – 58				
Min/max start voltage	V	30 / 48	30 / 58				
Max input DC voltage	V	50	60				
Max DC current ³ [module Isc]	A	15					
Overvoltage class DC port		II					
DC port backfeed current	mA	0					
PV array configuration		1x1 Ungrounded array; No additional DC side protection required; AC side protection requires max 20A per branch circuit					
OUTPUT DATA (AC)		IQ8-60-2-US	IQ8PLUS-72-2-US	IQ8M-72-2-US	IQ8A-72-2-US	IQ8H-240-72-2-US	IQ8H-208-72-2-US
Peak output power	VA	245	300	330	366	384	366
Max continuous output power	VA	240	290	325	349	380	360
Nominal (L-L) voltage/range ⁴	V	240 / 211 – 264					208 / 183 – 250
Max continuous output current	A	1.0	1.21	1.35	1.45	1.58	1.73
Nominal frequency	Hz	60					
Extended frequency range	Hz	50 – 68					
Max units per 20 A (L-L) branch circuit ⁵		16	13	11	11	10	9
Total harmonic distortion		<5%					
Overvoltage class AC port		III					
AC port backfeed current	mA	30					
Power factor setting		1.0					
Grid-tied power factor (adjustable)		0.85 leading – 0.85 lagging					
Peak efficiency	%	97.5	97.6	97.6	97.6	97.6	97.4
CEC weighted efficiency	%	97	97	97	97.5	97	97
Night-time power consumption	mW	60					
MECHANICAL DATA							
Ambient temperature range		-40°C to +60°C (-40°F to +140°F)					
Relative humidity range		4% to 100% (condensing)					
DC Connector type		MC4					
Dimensions (HxWxD)		212 mm (8.3") x 175 mm (6.9") x 30.2 mm (1.2")					
Weight		1.08 kg (2.38 lbs)					
Cooling		Natural convection – no fans					
Approved for wet locations		Yes					
Acoustic noise at 1 m		<60 dBA					
Pollution degree		PD3					
Enclosure		Class II double-insulated, corrosion resistant polymeric enclosure					
Environ. category / UV exposure rating		NEMA Type 6 / outdoor					
COMPLIANCE							
Certifications		CA Rule 21 (UL 1741-SA), UL 62109-1, UL1741/IEEE1547, FCC Part 15 Class B, ICES-0003 Class B, CAN/CSA-C22.2 NO. 107.1-01 This product is UL Listed as PV Rapid Shut Down Equipment and conforms with NEC 2014, NEC 2017, and NEC 2020 section 690.12 and C22.1-2018 Rule 64-218 Rapid Shutdown of PV Systems, for AC and DC conductors, when installed according to manufacturer's instructions.					

(1) The IQ8H-208 variant will be operating in grid-tied mode only at 208V AC. (2) No enforced DC/AC ratio. See the compatibility calculator at <https://link.enphase.com/module-compatibility> (3) Maximum continuous input DC current is 10.6A (4) Nominal voltage range can be extended beyond nominal if required by the utility. (5) Limits may vary. Refer to local requirements to define the number of microinverters per branch in your area.

IQ8SE-DS-0001-01-EN-US-2021-10-19



978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315

ENGINEER OF RECORD

ROMMY DAVIS

158 NW MICHELLE PL, LAKE CITY,
FL 32055, USA

REVISIONS	DATE					
	REV	ENG	DESCRIPTION			

PERMIT DEVELOPER	
DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME
INVERTER DATASHEET
SHEET NUMBER
DS-02

IQ Combiner 4/4C



X-IQ-AM1-240-4C
X2-IQ-AM1-240-4C (IEEE 1547:2018)



To learn more about Enphase offerings, visit enphase.com
IQ-C-4-4C-DS-0103-EN-US-12-29-2022

The **IQ Combiner 4/4C** with IQ Gateway and integrated LTE-M1 cell modem (included only with IQ Combiner 4C) consolidates interconnection equipment into a single enclosure. It streamlines IQ Microinverters and storage installations by providing a consistent, pre-wired solution for residential applications. It offers up to four 2-pole input circuits and Eaton BR series busbar assembly.

Smart

- Includes IQ Gateway for communication and control
- Includes Mobile Connect cellular modem (CELLMODEM-M1-06-SP-05), included only with IQ Combiner 4C
- Includes solar shield to match Enphase IQ Battery aesthetics and deflect heat
- Supports Wi-Fi, Ethernet, or cellular connectivity
- Optional AC receptacle available for PLC bridge
- Provides production metering and consumption monitoring

Simple

- Mounts on single stud with centered brackets
- Supports bottom, back and side conduit entry
- Allows up to four 2-pole branch circuits for 240VAC plug-in breakers (not included)
- 80A total PV or storage branch circuits

Reliable

- Durable NRTL-certified NEMA type 3R enclosure
- Five-year limited warranty
- Two years labor reimbursement program coverage included for both the IQ Combiner SKU's
- UL listed
- X2-IQ-AM1-240-4 and X2-IQ-AM1-240-4C comply with IEEE 1547:2018 (UL 1741-SB, 3rd Ed.)



IQ Combiner 4/4C

MODEL NUMBER	
IQ Combiner 4 X-IQ-AM1-240-4 X2-IQ-AM1-240-4 (IEEE 1547:2018)	IQ Combiner 4 with IQ Gateway printed circuit board for integrated revenue grade PV production metering (ANSI C12.20 ± 0.5%) and consumption monitoring (± 2.5%). Includes a silver solar shield to match the IQ Battery and IQ System Controller 2 and to deflect heat.
IQ Combiner 4C X-IQ-AM1-240-4C X2-IQ-AM1-240-4C (IEEE 1547:2018)	IQ Combiner 4C with IQ Gateway printed circuit board for integrated revenue grade PV production metering (ANSI C12.20 ± 0.5%) and consumption monitoring (± 2.5%). Includes Mobile Connect cellular modem (CELLMODEM-M1-06-SP-05), a plug-and-play industrial-grade cell modem for systems up to 60 microinverters. (Available in the US, Canada, Mexico, Puerto Rico, and the US Virgin Islands, where there is adequate cellular service in the installation area.) Includes a silver solar shield to match the IQ Battery and IQ System Controller and to deflect heat.
ACCESSORIES AND REPLACEMENT PARTS (not included, order separately)	
Supported microinverters	IQ6, IQ7, and IQ8. (Do not mix IQ6/7 Microinverters with IQ8)
Communications Kit COMMS-CELLMODEM-M1-06 CELLMODEM-M1-06-SP-05 CELLMODEM-M1-06-AT-05	- Includes COMMS-KIT-01 and CELLMODEM-M1-06-SP-05 with 5-year Sprint data plan - 4G based LTE-M1 cellular modem with 5-year Sprint data plan - 4G based LTE-M1 cellular modem with 5-year AT&T data plan
Circuit Breakers BRK-10A-2-240V BRK-15A-2-240V BRK-20A-2P-240V BRK-15A-2P-240V-B BRK-20A-2P-240V-B	Supports Eaton BR210, BR215, BR220, BR230, BR240, BR250, and BR260 circuit breakers. Circuit breaker, 2 pole, 10A, Eaton BR210 Circuit breaker, 2 pole, 15A, Eaton BR215 Circuit breaker, 2 pole, 20A, Eaton BR220 Circuit breaker, 2 pole, 15A, Eaton BR215B with hold down kit support Circuit breaker, 2 pole, 20A, Eaton BR220B with hold down kit support
XA-SOLARSHIELD-ES	Replacement solar shield for IQ Combiner 4/4C
XA-PLUG-120-3	Accessory receptacle for Power Line Carrier in IQ Combiner 4/4C (required for EPLC-01)
X-IQ-NA-HD-125A	Hold-down kit for Eaton circuit breaker with screws
Consumption monitoring CT (CT-200-SPLIT/CT-200-CLAMP)	A pair of 200A split core current transformers
ELECTRICAL SPECIFICATIONS	
Rating	Continuous duty
System voltage	120/240VAC, 60 Hz
Eaton BR series busbar rating	125A
Max. continuous current rating	65A
Max. continuous current rating (input from PV/storage)	64A
Max. fuse/circuit rating (output)	90A
Branch circuits (solar and/or storage)	Up to four 2-pole Eaton BR series Distributed Generation (DG) breakers only (not included)
Max. total branch circuit breaker rating (input)	80A of distributed generation/95A with IQ Gateway breaker included
IQ Gateway breaker	10A or 15A rating GE/Siemens/Eaton included
Production metering CT	200A solid core pre-installed and wired to IQ Gateway
MECHANICAL DATA	
Dimensions (WxHxD)	37.5 cm x 49.5 cm x 16.8 cm (14.75 in x 19.5 in x 6.63 in). Height is 53.5 cm (21.06 in) with mounting brackets.
Weight	7.5 kg (16.5 lbs)
Ambient temperature range	-40°C to +46°C (-40°F to 115°F)
Cooling	Natural convection, plus heat shield
Enclosure environmental rating	Outdoor, NRTL-certified, NEMA type 3R, polycarbonate construction
Wire sizes	• 20A to 50A breaker inputs: 14 to 4 AWG copper conductors • 60A breaker branch input: 4 to 1/0 AWG copper conductors • Main lug combined output: 10 to 2/0 AWG copper conductors • Neutral and ground: 14 to 1/0 copper conductors • Always follow local code requirements for conductor sizing.
Altitude	Up to 3,000 meters (9,842 feet)
INTERNET CONNECTION OPTIONS	
Integrated Wi-Fi	IEEE 802.11b/g/n
Cellular	CELLMODEM-M1-06-SP-05, CELLMODEM-M1-06-AT-05 (4G based LTE-M1 cellular modem). Note that an Mobile Connect cellular modem is required for all Enphase Energy System installations.
Ethernet	Optional, IEEE 802.3, Cat5E (or Cat6) UTP Ethernet cable (not included)
COMPLIANCE	
Compliance, IQ Combiner	CA Rule 21 (UL 1741-SA) IEEE 1547:2018 - UL 1741-SB, 3 rd Ed. (X2-IQ-AM1-240-4 and X2-IQ-AM1-240-4C) CAN/CSA C22.2 No. 107.1, Title 47 CFR, Part 15, Class B, ICES 003 Production metering: ANSI C12.20 accuracy class 0.5 (PV production) Consumption metering: accuracy class 2.5
Compliance, IQ Gateway	UL 60601-1/CANCSA 22.2 No. 61010-1

© 2022 Enphase Energy. All rights reserved. Enphase, the Enphase logo, IQ Combiner 4/4C, and other names are trademarks of Enphase Energy, Inc. Data subject to change.

IQ-C-4-4C-DS-0103-EN-US-12-29-2022



978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315

ENGINEER OF RECORD

ROMMY DAVIS

158 NW MICHELLE PL, LAKE CITY,
FL 32055, USA

REVISIONS	DESCRIPTION	DATE				
	REV	ENG				

PERMIT DEVELOPER	
DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME	
COMBINER DATASHEET	
SHEET NUMBER	
DS-03	



Ground Mount System

Datasheet



Mount on all terrains, in no time.

The IronRidge Ground Mount System combines our XR1000 rails with locally-sourced steel pipes, or mechanical tubing, to create a cost-effective structure capable of handling any site or terrain challenge.

Installation is simple with only a few structural components and no drilling, welding, or heavy machinery required. In addition, the system works with a variety of foundation options, including concrete piers and driven piles.



Rugged Construction

Engineered steel and aluminum components ensure durability.



PE Certified

Pre-stamped engineering letters available in most states.



Simple Assembly

Just a few simple components and no heavy equipment.



Design Software

Online tool generates engineering values and bill of materials.



Flexible Architecture

Multiple foundation and array configuration options.



20 Year Warranty

Twice the protection offered by competitors.



360° Product Tour
Visit [ironridge.com](https://www.ironridge.com)


Substructure

Top Caps



Connect vertical and cross pipes.

Rail Connectors



Attach Rail Assembly to horizontal pipes.

Diagonal Braces



Optional Brace provides additional support.

Cross Pipe & Piers



Steel pipes or mechanical tubing for substructure.

Rail Assembly

XR1000 Rails



Curved rails increase spanning capabilities.

Top-Down Clamps



Secure modules to rails and substructure.

Under Clamps



Alternative clamps for pre-attaching modules to rails.

Accessories



Wire Clips and End Caps provide a finished look.

Resources



Design Assistant

Go from rough layout to fully engineered system. For free.
Go to [ironridge.com/gm](https://www.ironridge.com/gm)



NABCEP Certified Training

Earn free continuing education credits, while learning more about our systems.
Go to [ironridge.com/training](https://www.ironridge.com/training)

© 2014 IronRidge, Inc. All rights reserved. Visit www.ironridge.com or call 1-800-227-9523 for more information. Version 1.12



978 SW 2ND AVE GAINESVILLE, FL 32601
CONTACT: (800) 798-0315

ENGINEER OF RECORD

ROMMY DAVIS

158 NW MICHELLE PL, LAKE CITY, FL 32055, USA

REV	ENG	DESCRIPTION	DATE				

PERMIT DEVELOPER

DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME

ATTACHMENT DATASHEET

SHEET NUMBER

DS-04




XR Rail Family

Tech Brief

Solar Is Not Always Sunny

Over their lifetime, solar panels experience countless extreme weather events. Not just the worst storms in years, but the worst storms in 40 years. High winds capable of ripping panels from a roof, and snowfalls weighing enough to buckle a panel frame.

XR Rails are the structural backbone preventing these results. They resist uplift, protect against buckling and safely and efficiently transfer loads into the building structure. Their superior spanning capability requires fewer roof attachments, reducing the number of roof penetrations and the amount of installation time.

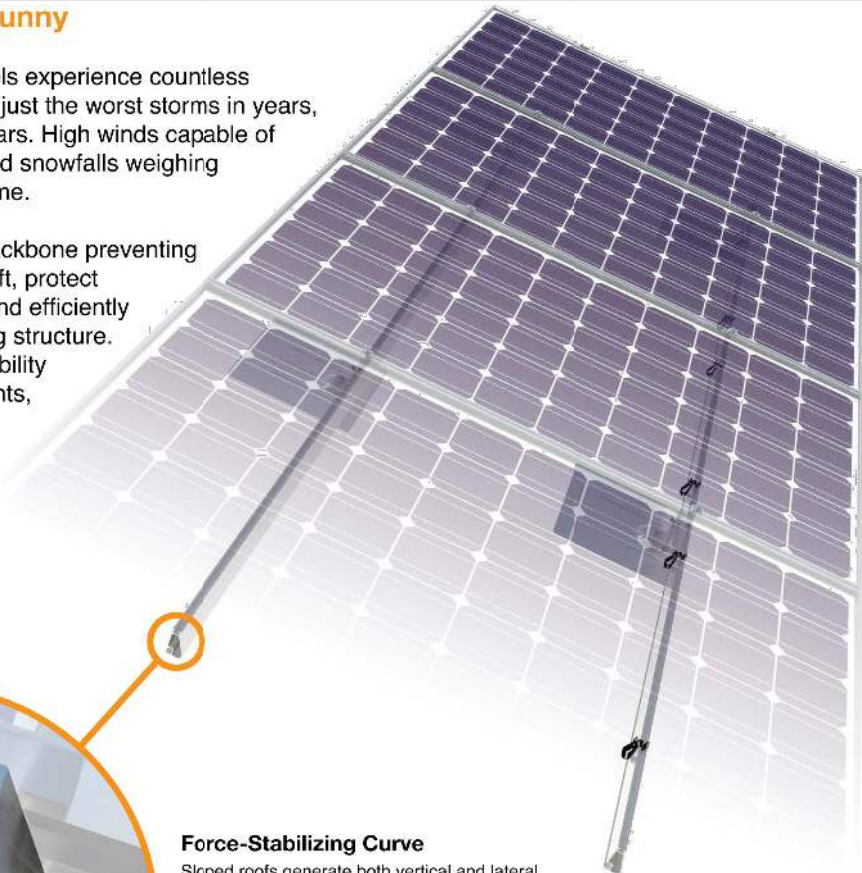

Force-Stabilizing Curve

Sloped roofs generate both vertical and lateral forces on mounting rails which can cause them to bend and twist. The curved shape of XR Rails is specially designed to increase strength in both directions while resisting the twisting. This unique feature ensures greater security during extreme weather and a longer system lifetime.

Compatible with Flat & Pitched Roofs



XR Rails are compatible with FlashFoot and other pitched roof attachments.



IronRidge offers a range of tilt leg options for flat roof mounting applications.

Corrosion-Resistant Materials

All XR Rails are made of marine-grade aluminum alloy, then protected with an anodized finish. Anodizing prevents surface and structural corrosion, while also providing a more attractive appearance.



XR Rail Family

The XR Rail Family offers the strength of a curved rail in three targeted sizes. Each size supports specific design loads, while minimizing material costs. Depending on your location, there is an XR Rail to match.

Tech Brief



XR10

XR10 is a sleek, low-profile mounting rail, designed for regions with light or no snow. It achieves 6 foot spans, while remaining light and economical.

- 6' spanning capability
- Moderate load capability
- Clear anodized finish
- Internal splices available



XR100

XR100 is the ultimate residential mounting rail. It supports a range of wind and snow conditions, while also maximizing spans up to 8 feet.

- 8' spanning capability
- Heavy load capability
- Clear & black anodized finish
- Internal splices available



XR1000

XR1000 is a heavyweight among solar mounting rails. It's built to handle extreme climates and spans 12 feet or more for commercial applications.

- 12' spanning capability
- Extreme load capability
- Clear anodized finish
- Internal splices available

Rail Selection

The following table was prepared in compliance with applicable engineering codes and standards. Values are based on the following criteria: ASCE 7-10, Roof Zone 1, Exposure B, Roof Slope of 7 to 27 degrees and Mean Building Height of 30 ft. Visit IronRidge.com for detailed span tables and certifications.

Load		Rail Span					
Snow (PSF)	Wind (MPH)	4'	5' 4"	6'	8'	10'	12'
None	100	XR10		XR100		XR1000	
	120						
	140						
	160						
10-20	100						
	120						
	140						
	160						
30	100						
	160						
40	100						
	160						
50-70	160						
80-90	160						



978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT: (800) 798-0315

ENGINEER OF RECORD

ROMMY DAVIS

158 NW MICHELLE PL, LAKE CITY,
FL 32055, USA

REVISIONS	DATE				
	DESCRIPTION				
	REV	ENG.			

PERMIT DEVELOPER

DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME

RACKING
DATASHEET

SHEET NUMBER

DS-5