APPLICABLE CODES, REGULATIONS, & STANDARDS


- A. THE 2023 FLORIDA BUILDING CODE
- B. ASCE/SEI 7-22 MINIMUM DESIGN LOADS ON BUILDINGS AND OTHER STRUCTURES
- C. ACI 318-19 BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE
- D. AISC STEEL CONSTRUCTION MANUAL (15TH EDITION)
- E. AWS D1.1: STRUCTURAL WELDING
- 1. THESE PLANS BELONG EXCLUSIVELY TO THE STRUCTURE, INCLUDING MAIN WIND FORCE RESISTING SYSTEM (MWFRS), COMPONENTS AND CLADDING (C&C), AND BASE RAIL ANCHORAGE. OTHER DESIGN ISSUES, INCLUDING BUT NOT LIMITED TO PROPERTY SET-BACKS, ELECTRICAL, PLUMBING, INGRESS/EGRESS, FINISH FLOOR SLOPES AND ELEVATIONS, OR OTHER LOCAL ZONING REQUIREMENTS ARE THE LIABILITY OF OTHERS.
- 2. THESE STRUCTURES ARE ENGINEERED AS (RISK CATEGORY I) CAPABLE OF SUPPORTING DEAD LOAD OF THE STRUCTURE AND LIVE AND WIND LOADS. UPGRADES NOT SPECIFICALLY ADDRESSED HEREIN, SUCH AS WINDOWS, DOORS, OR ANOTHER COMPONENT NOT LISTED IN THE BUILDING CODE APROVED PRODUCT LIST, AND NOT PROVIDED AND INSTALLED BY THE CONTRACTOR, WHICH CAUSE ADDITIONAL LOADS ON THE STRUCTURE SHALL BE AT THE OWNER'S RISK. THE ENGINEER SHALL NOT BE RESPONSIBLE FOR FAILURE OR STRUCTURAL DAMAGE DUE TO THE EXTRA LOAD.
- 3. ALL STEEL TUBING SHALL BE 50 KSI GALVANIZED STEEL. ALL FASTENERS SHALL BE ZINC COATED HARDWARE.
- 4. SPECIFICATIONS APPLICABLE TO METAL PANELS FASTENED DIRECTLY TO TUBE STEEL (TS) FRAMING MEMBERS FOR VERTICAL PANELS, METAL PANELS SHALL BE FASTENED TO HAT CHANNELS (UNLESS OTHERWISE NOTED).

DESIGN LOAD NOTES:

- 1. BASIC WIND SPEED = 160 MPH EXPOSURE CATEGORY = C RISK CATEGORY = I
- 2. DESIGN LIVE LOAD = 12 PSF
- 3. THESE STRUCTURES HAVE BEEN DESIGNED TO WITHSTAND A MAXIMUM WIND SPEED OF 160 MPH IN EXPOSURE CATEGORY C.

ENCLOSED METAL BUILDING DESIGN
MAXIMUM 30'-0" WIDE X 14'-0" EAVE HEIGHT
A-FRAME & REGULAR STYLE

THE ENGINEERING ON THESE PLANS IS SITE SPECIFIC FOR (1) STRUCTURE ONLY AT THE PROVIDED ADDRESS(ES).

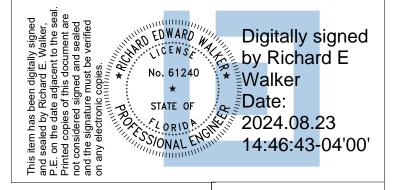

MEMBER LEGEND

- 1. POST = 2.5"X2.5"X14GA TUBE W/ 2.25"X2.25"X14GA TUBE INSERT
- 2. ROOF GABLE BEAM = 2.5"X2.5"X14GA TUBE
- 3. BASE RAIL = 2.5"X2.5"X14GA TUBE
- 4. PEAK BRACE = 2.5"X2.5"X14GA TUBE/2.5"X1.5"X18GA CHANNEL
- 5. KNEE BRACE = 2.5"X1.5"X14GA CHANNEL
- 6. CONNECTOR SLEEVE = 2.25"X2.25"X12GA TUBE
- 7. BASE ANGLE = 2"X2"X3"X3/16" ANGLE
- 8. PURLIN = 4.25"X1.5"X18GA / 14GA HAT CHANNEL
- 9. GIRT = 4.25"X1.5"X18GA / 14GA HAT CHANNEL
- 10. SHEATHING = 29 GA CORRUGATED SHEET
- 11. END WALL POST = 2.5"X2.5"X14GA TUBE
- 12. DOOR POST = 2.5"X2.5"X14GA TUBE
- 13. SINGLE HEADER = 2.5"X2.5"X14GA TUBE
- 14. DOUBLE HEADER = (2) 2.5"X2.5"X14GA TUBE
- 15. SERVICE DOOR / WINDOW FRAMING = 2.5"X2.5"X14GA TUBE
- 16. ANGLE BRACKET = 2"X2"X2"X14GA ANGLE
- 17. STRAIGHT BRACKET = 2"X2"X4"X14GA PLATE
- 18. PB SUPPORT = 2.5"X2.5"X14GA TUBE
- 19. DIAGONAL BRACE = 2"X2"X14GA TUBE
- 20. GABLE BRACE = 2"X2"X14GA TUBE
- 21. DB BRACKET = 2.25"X2.25"X6"X14GA ANGLE
- 22. TRUSS SPACER = 2.5"X2.5"X14GA TUBE
- 23. ALL FASTENERS = #12X1" SDS (ESR-2196 OR EQ.)

FRAMING NOTES:

- 1. MAX POST SPACING = 4'-0" O.C.
- 2. MAX ROOF SLOPE = 3V:12H
- 3. ALL SHOP CONNECTIONS SHALL BE WELDED CONNECTIONS.
- 5. ALL FIELD CONNECTIONS SHALL BE #12X1" SDS (ESR-2196 OR EQUIVALENT).
- 6. STEEL SHEATHING SHALL BE 29GA CORRUGATED GALVANIZED OR PAINTED STEEL MAIN RIB HEIGHT $\frac{3}{4}$ " (80 KSI YIELD STRENGTH) OR EQUIVALENT.
- 7. ALL STRUCTURAL LIGHT GAUGE TUBING AND CHANNELS SHALL BE GRADE 50 STEEL.
- 8. STRUCTURAL TUBE TS 2.5"X2.5"X14GA IS EQUIVALENT TO TS
- 2.25"X2.25"X12GA AND EITHER MAY BE USED IN LIEU OF THE OTHER.

FLORIDA ENGINEERING LL(4161 TAMIAMI TRAIL, UNIT 10 PORT CHARLOTTE, FLORIDA 33952

4161 TA PORT CH

24232107

PROJECT NO.

MARTINEZ CARPORTS LLC
PROJECT DESCRIPTION:
SMITHEY
PID #19-3S-16-02181-007
LAKE CITY, FL.


DESIGN DATE: 08/20/2024


REVISION 1: DATE

REVISION 2: DATE

DRAWN BY: JS

SCALE: NTS

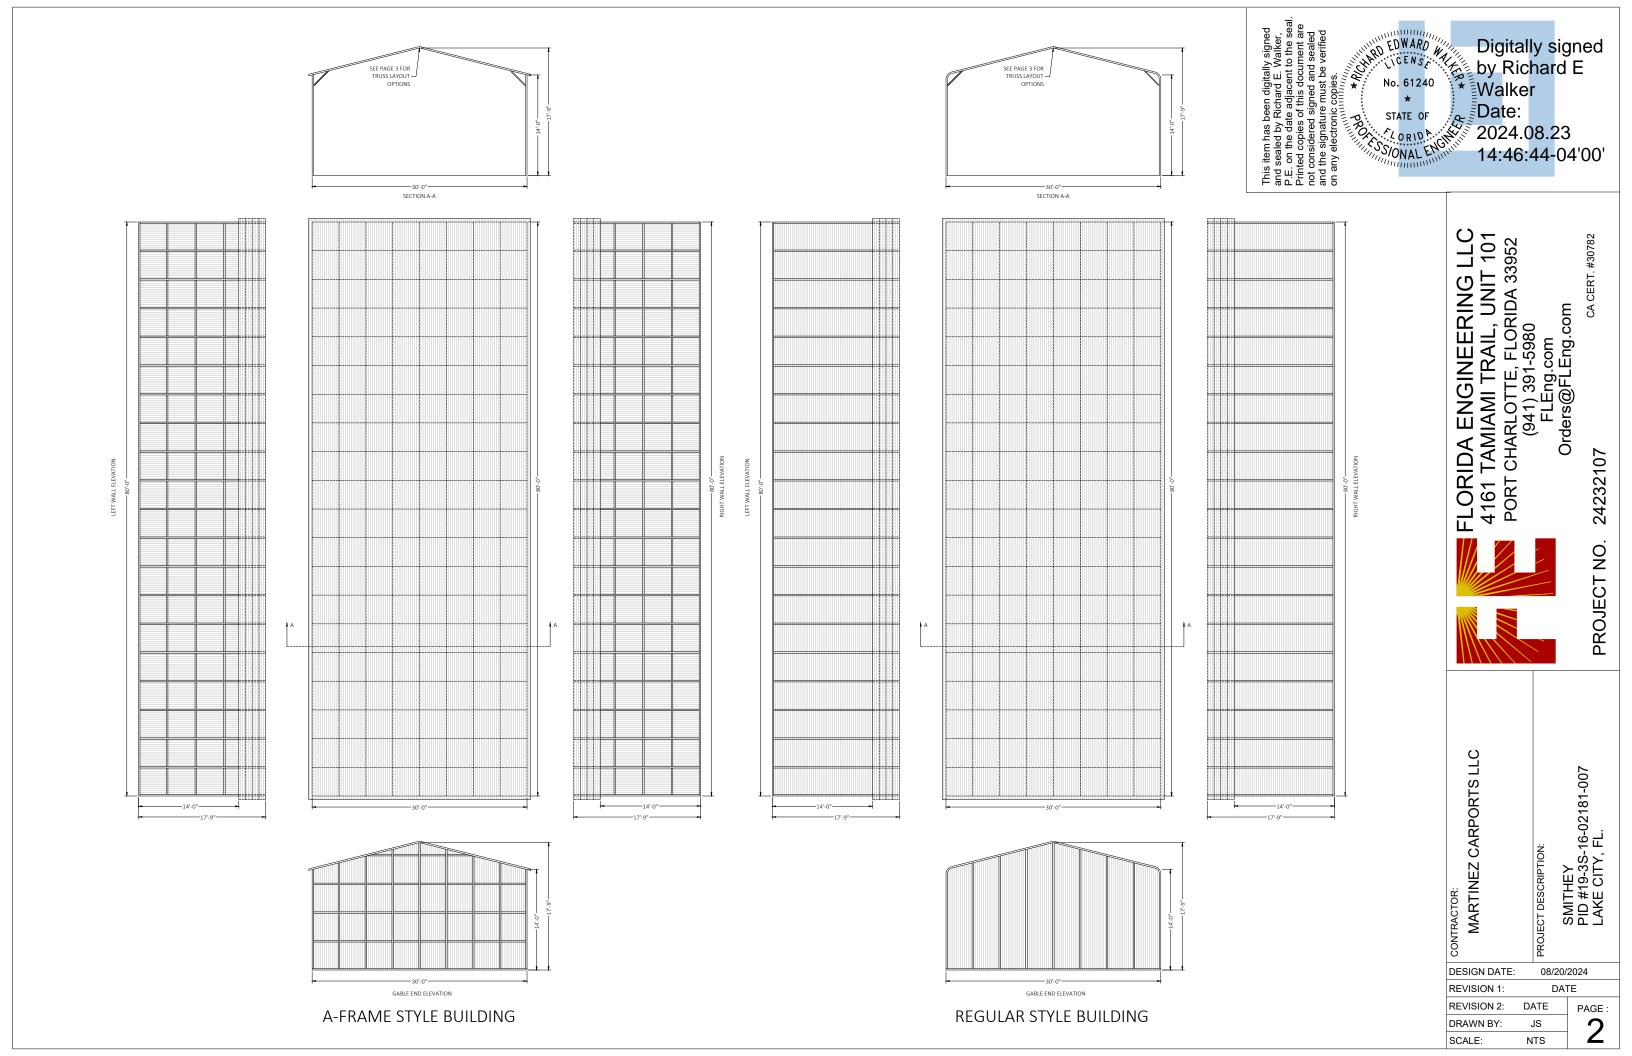

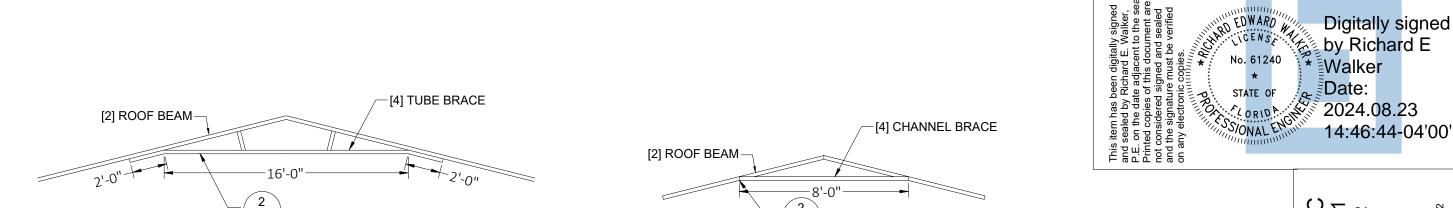

TUBE BRACE TRUSS DETAIL SCALE: N.T.S.

E.Q. E.Q.

1. EAVE DETAIL OPTIONS

[2] ROOF BEAM-

[4] PEAK BRACE 1/8" 1"-12" 1/8" 1"-12"

- [5] KNEE BRACE - ATTACH W/ (2) [23] FASTENERS E.S.

[6] 6" LG. CONNECTOR SLEEVE - FIELD BOLT W/ (8) [23] FASTENERS

-[1] COLUMN POST

REGULAR FRAME

3


[4] PEAK BRACE 1/8" 1"-12" 1/8" 1"-12"


[5] KNEE BRACE - ATTACH W/ (2) [23] FASTENERS E.S.

[6] 6" LG. CONNECTOR SLEEVE - FIELD BOLT W/ (8) [23] FASTENERS


-[1] COLUMN POST

A-FRAME

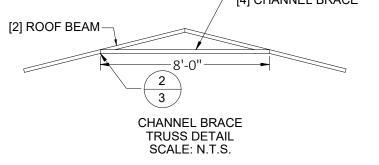

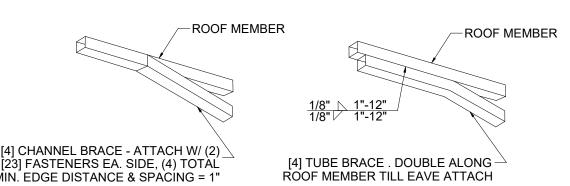

2. PEAK BRACE CONNECTION DETAILS

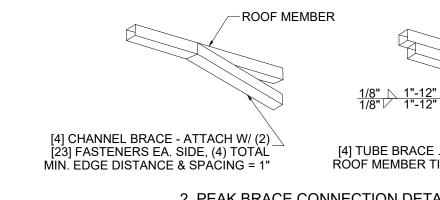

[1] COLUMN POST - FIELD — BOLT W/ [23] FASTENERS @12" STAGGERED [6] 6" LG. CONNECTOR SLEEVE --FIELD BOLT W/ (8) [23] FASTENERS -[6] FULL LENGTH INS POST -FIELD BOLT W/ [23] FASTENERS 12" O.C. STAGGERED [3] BASE RAIL 1/2" RETURN 1/8"

3. BASE DETAIL

4. PB SUPPORT DETAIL

[2] ROOF BEAM 1/2" RETURN 1/8" [18] PB SUPPORT [4] PEAK BRACE

NOTE : COLUMN POST MAY BE ADJUSTED +/- 1" FOR LEVELING. MANUFACTURER IS NOT RESPONSIBLE FOR LEVELING OF GROUND AND/OR CONCRETE SURFACE PROVIDED BY OTHERS.

DESIGN DATE: REVISION 1: DATE **REVISION 2:** PAGE: DRAWN BY: SCALE:

FLORIDA ENGINEERING LLC 4161 TAMIAMI TRAIL, UNIT 101 PORT CHARLOTTE, FLORIDA 33952 (941) 391-5980 FLEng.com Orders@FLEng.com

FLORIDA

24232107

PROJECT NO.




MARTINEZ CARPORTS LLC

SMITHEY PID #19-3S-16-02181-007 LAKE CITY, FL. PROJECT DESCRIPTION:

() BRACKETS DENOTE QUANTITY [] BRACKETS DENOTE MEMBER, SEE LEGEND ON PG. 1


[2] ROOF BEAM-

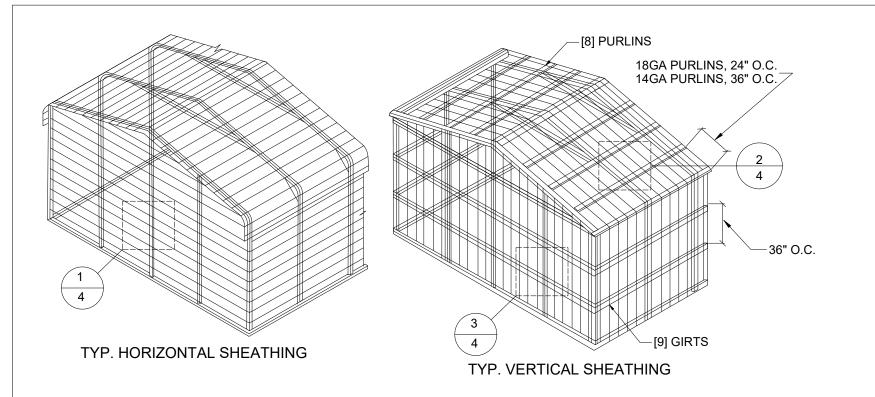

GENERAL SHEATHING NOTES: 1. REGULAR STYLE BUILDING CAN ONLY HAVE HORIZONTAL SHEATHING ON ROOF AND WALLS.

2. A FRAME STYLE BUILDING CAN HAVE ANY COMBINATION OF HORIZONTAL OR VERTICAL SHEATHING ON ROOF AND **WALLS**

3. BOTH HORIZONTAL AND VERTICAL ROOF SHEATHING CAN HAVE MAX. 6" OVERHANG. 4. USING VERTICAL SHEATHING MAY ALLOW FOR GREATER FRAME SPACING. 5. VERTICAL SHEATHING RECOMMENDED FOR 40'-0" WIDE BUILDING.

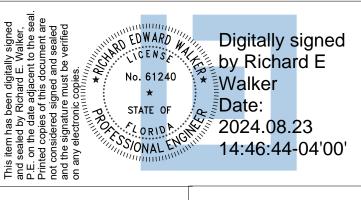





2423210

PROJECT NO.





MARTINEZ CARPORTS LLC SMITHEY PID #19-3S-16-02181-007 LAKE CITY, FL. PROJECT DESCRIPTION

DESIGN DATE: 08/20/2024 **REVISION 1:** DATE REVISION 2: DATE PAGE: DRAWN BY:

EDGE LAP MAX. 4.5' MAX.9" SIDE LAP MIN. (1) [23] -6" PANEL LAP ELSEWHERE [10] SHEATHING-[11] END WALL POST -CORNER

1. TYP. HORIZONTAL SHEATHING DETAILS

ATTACH GIRT TO POSTS W/ (2) [23] FASTENERS [10] SHEATHING-CORNER PANELS, 9" O.C. SIDE LAPS, (1) MIN EDGE LAPS, 4.5" O.C. ELSEWHERE, 9" O.C. [9] GIRT

3. WALL VERTICAL SHEATHING-TUBE DETAILS

() BRACKETS DENOTE QUANTITY [] BRACKETS DENOTE MEMBER, SEE LEGEND ON PG. 1

TYP. SHEATHING FASTENER SCHEDULE

[16] ANGLE CLIP. SECURE TO DOOR POST AND BASE RAIL

W/ (4) [23] FASTENERS E.S.

[10] SHEATHING


SIDE LAPS, (1) MIN EDGE LAPS, 4.5" O.C. ELSEWHERE, 9" O.C.


[9A] END WALL GIRT

CORNER PANELS, 9" O.C.

3. WALL VERTICAL SHEATHING- HAT CHANNEL DETAILS


CORNER PANELS, 9" O.C. SIDE LAPS, (1) MIN EDGE LAPS, 4.5" O.C. ELSEWHERE, 9" O.C. [10] SHEATHING-ATTACH PURLINS TO-ROOF BEAMS W/ (2) [23] FASTENERS [8] PURLINS 2. ROOF VERTICAL SHEATHING DETAILS

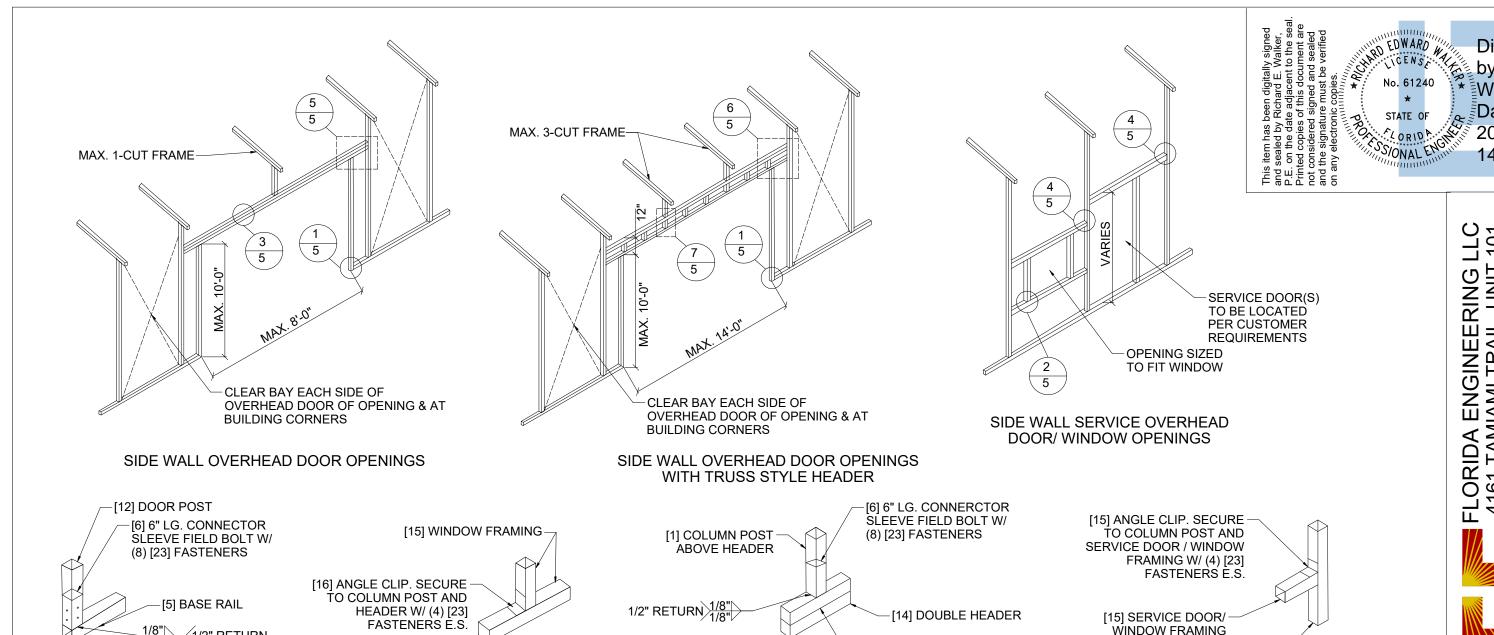




 \prec 1/2" RETURN

[5] BASE RAIL

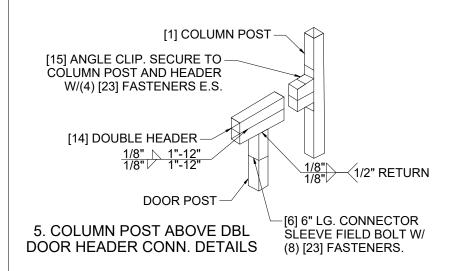

() BRACKETS DENOTE QUANTITY [] BRACKETS DENOTE MEMBER, SEE LEGEND ON PG. 1 3. COLUMN POST ABOVE DBL. DOOR HEADER CONN. DETAIL

[14] DOUBLE HEADER

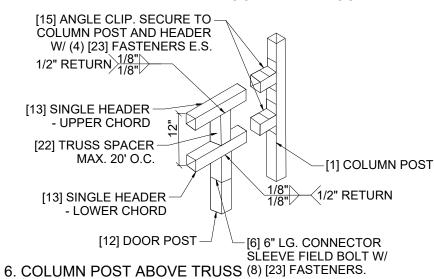

DOOR HEADER CONN. DETAILS

1/2" RETURN 1/8"

- [6] 6" LG. CONNECTOR SLEEVE FIELD BOLT W/ (8) [23] FASTENERS. [1] COLUMN POST ABOVE HEADER 1/2" RETURN 1/8" [13] SINGLE HEADER - UPPER & LOWER CHORD [22] TRUSS SPACER MAX 20" O.C. 1/8" 1/2" RETURN

> 7. COLUMN POST ABOVE TRUSS DOOR HEADER CONN. DETAILS

4. TYP. SERVICES DOOR/ WINDOW FRAMING CONN. DETAILS

[1] COLUMN POST

[15] SERVICE DOOR/-WINDOW FRAMING

MARTINEZ CARPORTS LLC

DESIGN DATE: 08/20/2024 DATE

Digitally signed by Richard E

14:46:45-04'00'

CA CERT. #

2423210

PROJECT NO.


Walker Date:

2024.08.23

FLORIDA ENGINEERING LLC
4161 TAMIAMI TRAIL, UNIT 101
PORT CHARLOTTE, FLORIDA 33952
(941) 391-5980
FLEng.com
Orders@FLEng.com

SMITHEY PID #19-3S-16-02181-007 LAKE CITY, FL. PROJECT DESCRIPTION

REVISION 1: REVISION 2: PAGE DRAWN BY:

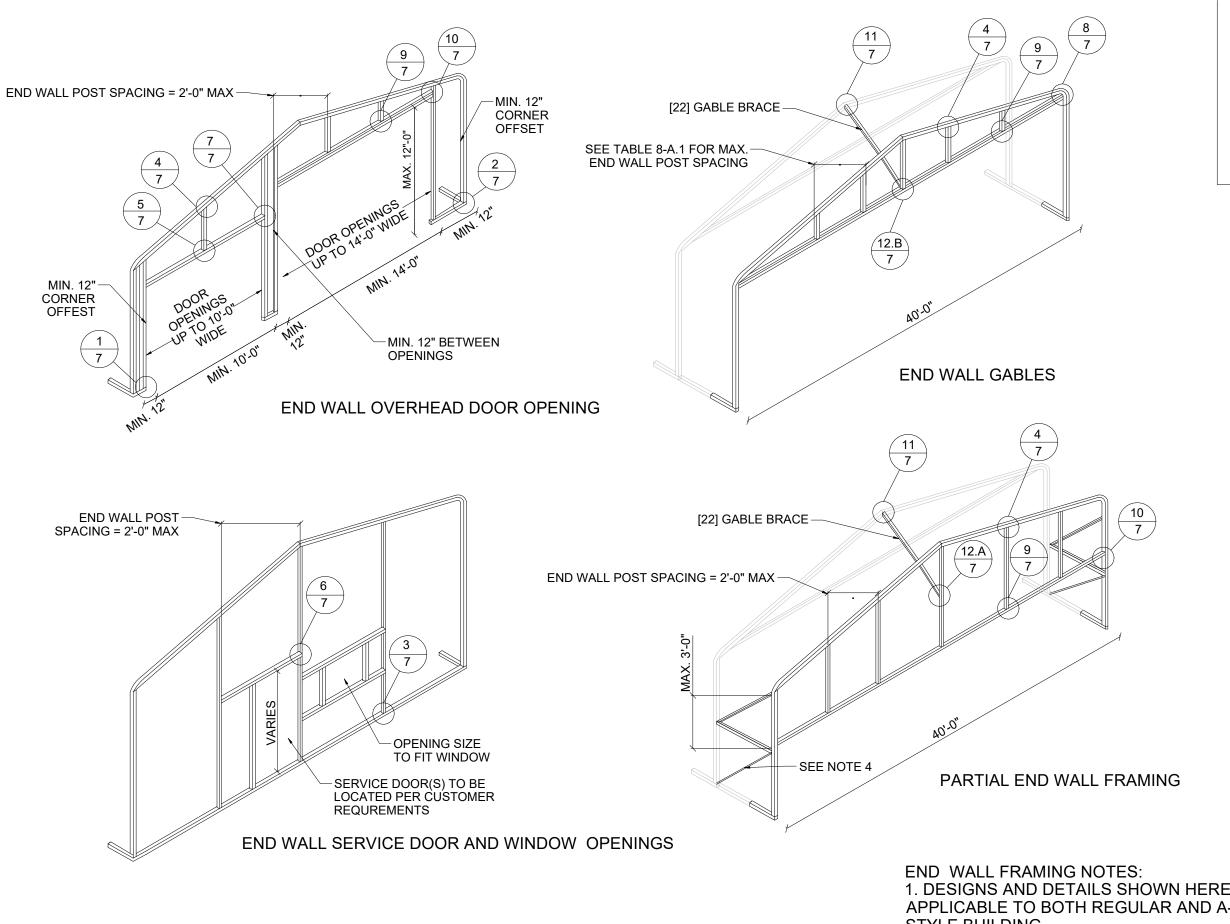

1. DESIGNS AND DETAILS SHOWN HERE ARE APPLICABLE TO BOTH REGULAR AND A- FRAME STYLE BUILDING. 2. MIN. 12" CLEARANCE MUST BE MAINTAINED BETWEEN ANY TWO OPENING (OVERHEAD DOOR OR SERVICE DOOR) AND FROM CORNERS. 3. SERVICE DOOR AND WINDOW CAN BE PLACED AS NEEDED.

EDWARD WALL CENS Digitally signed by Richard E Walker Date: STATE OF TO A CHANGE 2024.08.23 14:46:45-04'00'

CA CERT. #30782

24232107

PROJECT NO.

STATE OF

4161 TAMIAMI TRAIL, UNIT 101
PORT CHARLOTTE, FLORIDA 33952
(941) 391-5980
FLEng.com
Orders@FLEng.com FLORIDA ENGINEERING LLC







MARTINEZ CARPORTS LLC SMITHEY PID #19-3S-16-02181-007 LAKE CITY, FL. PROJECT DESCRIPTION: CONTRACTOR


08/20/2024 DESIGN DATE: REVISION 1: DATE **REVISION 2:** DATE PAGE: 6 DRAWN BY: SCALE: NTS

() BRACKETS DENOTE QUANTITY [] BRACKETS DENOTE MEMBER, SEE LEGEND ON PG. 1

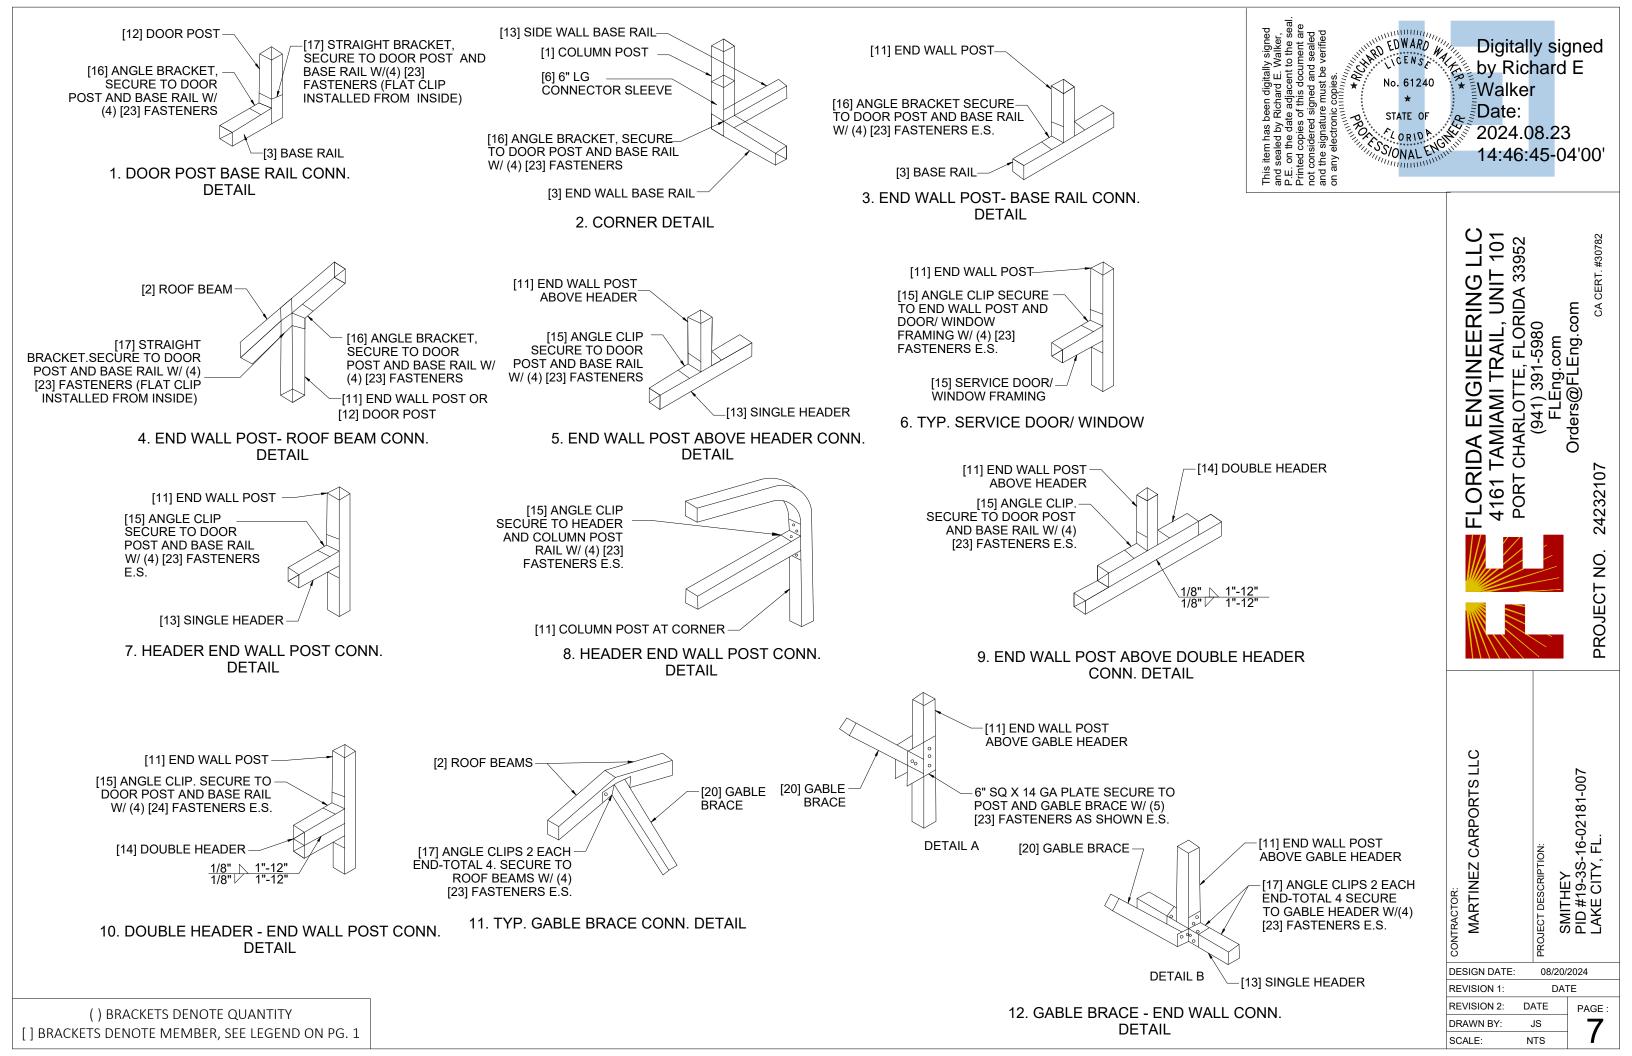

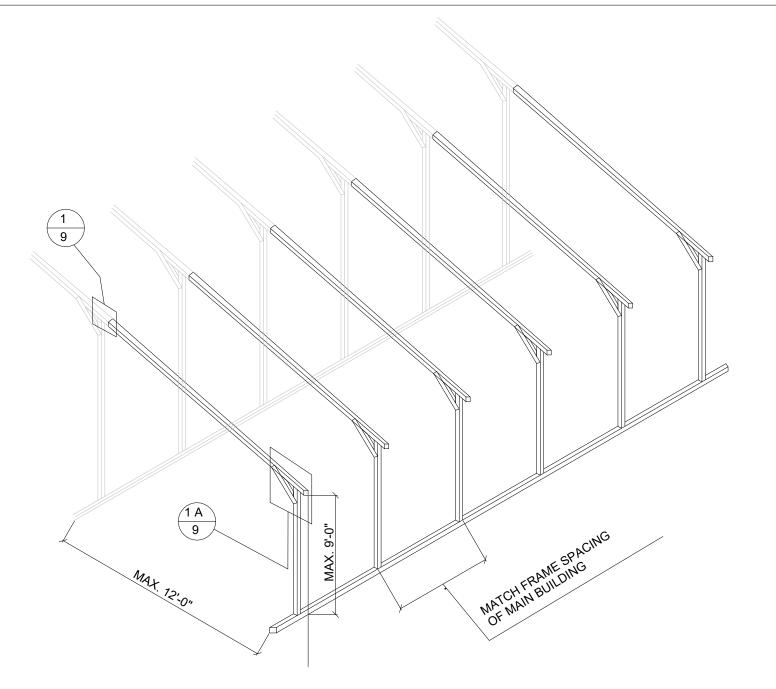

OPTIONAL LEAN-TO ADDITION

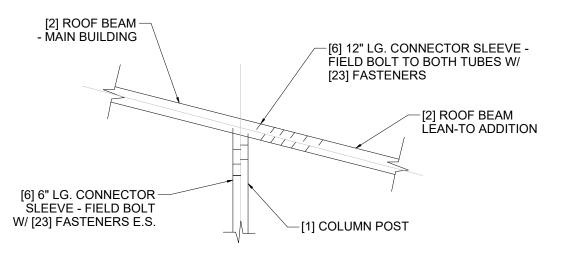

LEAN-TO ATTACHMENT DETAIL

() BRACKETS DENOTE QUANTITY
[] BRACKETS DENOTE MEMBER, SEE LEGEND ON PG. 1

LEAN-TO ADDITION NOTES:

- 1. LEAN-TO ADDITION CAN BE ADDED ON EITHER OR BOTH SIDES OF THE BUILDING.
- 2. ROOF SLOPE, PURLIN, GIRT AND FREAM SPACING OF THE ADDITION HAVE TO MATCH THAT OF THE MAIN STRUCTURE.
 3. IF THE LEAN-TO ADDITION IS "OPEN" (BOTH END WALLS OR SIDE WALL IS NOT ENCLOSED), THE DESIGN OF THE MAIN BUILDING HAS TO USE THE FRAME SPACING OF 4'-0" MAX.

Digitally signed as sealed by Richard E. on the date adjacent to the seal on the signature must be verified any electronic copies.

STATE OF Walker

A Walker

A Walker

Date:

2024.08.23

14:46:46-04'00'

FLORIDA ENGINEERING LLC
4161 TAMIAMI TRAIL, UNIT 101
PORT CHARLOTTE, FLORIDA 33952
(941) 391-5980
FLEng.com
Orders@FLEng.com



24232107

PROJECT NO.




MARTINEZ CARPORTS LLC
PROJECT DESCRIPTION:
SMITHEY
PID #19-3S-16-02181-007
LAKE CITY, FL.


DESIGN DATE: 08/20/2024
REVISION 1: DATE
REVISION 2: DATE
DRAWN BY: JS
SCALE: NTS


CONCRETE SLAB FOUNDATION NOTES: SLAB FOUNDATION NOTES

- 1. DESIGN SHOWN ON THIS SHEET ARE FOR CONCRETE SLAB FOUNDATION.
 2. CONCRETE ANCHORS SHALL BE LOCATED NEXT TO EVERY POST AND ON EITHER SIDE OF OPENINGS. TWO ANCHORS SHALL BE INSTALLED AT CORNERS OF ENCLOSED BUILDING WITH END WALLS. ONE ON EACH BASE RAIL. IN LOCATIONS REQUIRING TWO ANCHORS DUE TO WIND, ONE ANCHOR IS TO BE ON EACH SIDE OF THE COLUMN POST.
- 3. ANCHORS IN CLOSE PROXIMITY TO EACH OTHER MUST HAVE A MIN. 4" SPACING.
 4. MIN. NUMBER OF CONCRETE ANCHOR PER POST SHALL BE AS SHOWN.
 5. THE SIZE OF THE SLAB SHALL BE THE SIZE (WIDTH AND LENGTH) OF THE


- BUILDING PLUS 5 $\frac{1}{2}$ " FOR 14GA MATERIAL. AND 5 $\frac{3}{4}$ " FOR 12GA MATERIAL.
- 6. DEPTH OF SLAB TURN DOWN FOOTING SHALL BE GREATER THAN FROST DEPTH SPECIFIED PER LOCAL CODE.
- 7. CONTROL JOINTS SHALL BE PLACED SO AS TO LIMIT MAX. SLAB SPANS TO 20' IN EACH DIRECTION.
- 8. ASSUMED SOIL BEARING CAPACITY IS TO BE A MIN. OF 1500 PSF.
- 9. CONCRETE STRENGTH TO BE A MIN. OF 2500 PSI @ 28 DAYS.
- 10. ANCHORS ARE TO BE 1/2" CONCRETE WEDGE OR EXPANSION ANCHORS.
- 11. MIN. EMBEDMENT DEPTH TO BE 2 $\frac{7}{8}$ "
- 12. ANCHORS TO BE SPACED NO MORE THAN 6" FROM POSTS

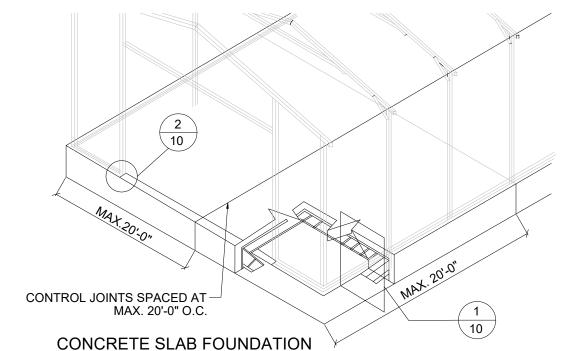

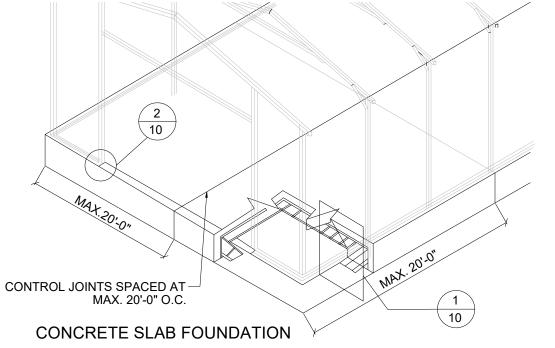


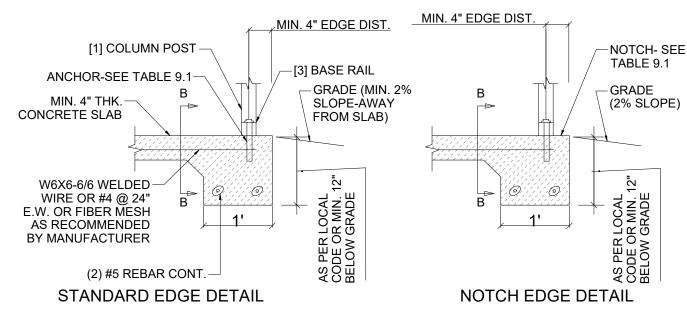



1. EDGE OFFSET DETAIL

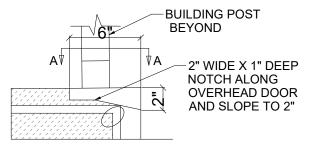

2. OVERHEAD DOOR NOTCH DETAIL

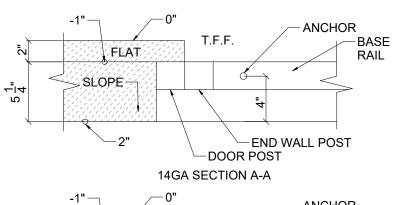

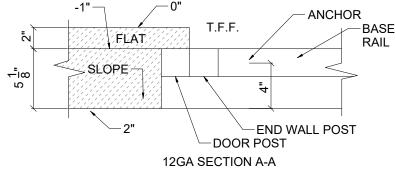

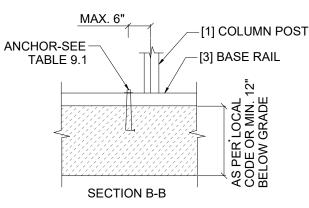

TARLE 9.1: NOTCH WIDTH

TABLE 3.1. NOTOH WIDTH				
HORIZOI	NTAL/OPEN	VERTICAL		
14GA	12GA	14GA	12GA	
2.75"	2.875"	1.75"	1.875"	

NOTE: DEPTH IS TO BE 1 1/2"

O EDWARD WALL by by Richard E Walker Date: STATE OF This item has be and sealed by F and sealed by F P.E. on the date Printed copies o not considered and the signatur on any electronic STATE OF TO A CHANGE 2024.08.23 14:46:46-04'00'

Digitally signed

CA CERT. #30782

24232107

PROJECT NO.

4161 TAMIAMI TRAIL, UNIT 101
PORT CHARLOTTE, FLORIDA 33952
(941) 391-5980
FLEng.com
Orders@FLEng.com ORIDA ENGINEERING LLC





MARTINEZ CARPORTS LLC SMITHEY PID #19-3S-16-02181-007 LAKE CITY, FL. PROJECT DESCRIPTION: CONTRACTOR

DESIGN DATE: 08/20/2024 **REVISION 1:** DATE DATE PAGE:

REVISION 2: DRAWN BY: SCALE: NTS

() BRACKETS DENOTE QUANTITY [] BRACKETS DENOTE MEMBER, SEE LEGEND ON PG. 1

