



Lumber design values are in accordance with ANSI/TPI 1 section 6.3
These truss designs rely on lumber values established by others.

RE: Scott_Kremser - Scott Kremser

MiTek USA, Inc.

16023 Swingley Ridge Rd
Chesterfield, MO 63017

Site Information:

Customer Info: SCOTT KREMSER Project Name: . Model: .
Lot/Block: . Subdivision: .
Address: ., .
City: FT. WHITE State: FL

Name Address and License # of Structural Engineer of Record, If there is one, for the building.

Name: License #:
Address:
City: State:

General Truss Engineering Criteria & Design Loads (Individual Truss Design Drawings Show Special Loading Conditions):

Design Code: FBC2020/TPI2014 Design Program: MiTek 20/20 8.5
Wind Code: ASCE 7-16 Wind Speed: 130 mph
Roof Load: 40.0 psf Floor Load: N/A psf

This package includes 45 individual, Truss Design Drawings and 0 Additional Drawings.

With my seal affixed to this sheet, I hereby certify that I am the Truss Design Engineer and this index sheet conforms to 61G15-31.003, section 5 of the Florida Board of Professional Engineers Rules.

No.	Seal#	Truss Name	Date	No.	Seal#	Truss Name	Date
1	T28825352	A01	9/20/22	23	T28825374	CJ03	9/20/22
2	T28825353	A02	9/20/22	24	T28825375	G01	9/20/22
3	T28825354	A03	9/20/22	25	T28825376	G02	9/20/22
4	T28825355	A04	9/20/22	26	T28825377	H02	9/20/22
5	T28825356	A05	9/20/22	27	T28825378	H03	9/20/22
6	T28825357	A06	9/20/22	28	T28825379	H04	9/20/22
7	T28825358	A07	9/20/22	29	T28825380	J01	9/20/22
8	T28825359	A08	9/20/22	30	T28825381	J02	9/20/22
9	T28825360	A09	9/20/22	31	T28825382	J03	9/20/22
10	T28825361	A10	9/20/22	32	T28825383	J04	9/20/22
11	T28825362	A11	9/20/22	33	T28825384	J05	9/20/22
12	T28825363	A12	9/20/22	34	T28825385	M01	9/20/22
13	T28825364	A13	9/20/22	35	T28825386	M02	9/20/22
14	T28825365	B01	9/20/22	36	T28825387	M03	9/20/22
15	T28825366	B02	9/20/22	37	T28825388	M04	9/20/22
16	T28825367	B03	9/20/22	38	T28825389	PB01	9/20/22
17	T28825368	B04	9/20/22	39	T28825390	PB02	9/20/22
18	T28825369	B05	9/20/22	40	T28825391	PB03	9/20/22
19	T28825370	B06	9/20/22	41	T28825392	PB04	9/20/22
20	T28825371	B07	9/20/22	42	T28825393	PB05	9/20/22
21	T28825372	CJ01	9/20/22	43	T28825394	PB06	9/20/22
22	T28825373	CJ02	9/20/22	44	T28825395	PB07	9/20/22

The truss drawing(s) referenced above have been prepared by MiTek USA, Inc.
under my direct supervision based on the parameters
provided by Mayo Truss Company, Inc..

Truss Design Engineer's Name: Lee, Julius


My license renewal date for the state of Florida is February 28, 2023.

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek or TRENCO. Any project specific information included is for MiTek's or TRENCO's customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek or TRENCO has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20, 2022



RE: Scott_Kremser - Scott Kremser

MiTek USA, Inc.
16023 Swingley Ridge Rd
Chesterfield, MO 63017

Site Information:

Customer Info: SCOTT KREMSER Project Name: . Model: .
Lot/Block: . Subdivision: .
Address: ., .
City: FT. WHITE State: FL

No.	Seal#	Truss Name	Date
45	T28825396	PB08	9/20/22

16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser
SCOTT_KREMSER	A01	ROOF SPECIAL GIRDER	1	2	T28825352

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:21:43 2022 Page 2
ID:ntfuDs1oaMOdQOhYkWF01Oyc2L8-O0KGbsSkD2_HfDSAZ5lcfTsDfzJYEKkaZSoCUqybp4c

NOTES-

- 10) This truss has large uplift reaction(s) @ jt. 2 from gravity load case(s). Proper connection is required to secure truss against upward movement at the bearings. Building designer must provide for uplift reactions indicated.
- 11) Use MiTek HJC26 (With 16-16d nails into Girder & 10d nails into Truss) or equivalent at 7-0-6 from the left end to connect truss(es) to back face of bottom chord.
- 12) Use MiTek JUS26 (With 4-10d nails into Girder & 2-10d nails into Truss) or equivalent spaced at 2-0-0 oc max. starting at 9-0-12 from the left end to 15-0-12 to connect truss(es) to back face of bottom chord.
- 13) Use MiTek THD26-2 (With 18-16d nails into Girder & 12-10d nails into Truss) or equivalent at 16-10-8 from the left end to connect truss(es) to back face of bottom chord.
- 14) Fill all nail holes where hanger is in contact with lumber.
- 15) "NAILED" indicates 3-10d (0.148"x3") or 3-12d (0.148"x3.25") toe-nails per NDS guidelines.
- 16) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 368 lb down and 84 lb up at 7-0-0, and 669 lb down and 456 lb up at 16-10-8 on top chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
 - Uniform Loads (plf)
 - Vert: 1-4=-60, 4-9=-60, 9-10=-60, 10-11=-60, 11-13=-60, 19-26=-20, 14-18=-20
 - Concentrated Loads (lb)
 - Vert: 4=-123(B) 23=-615(B) 31=-68(B) 32=-68(B) 33=-68(B) 35=-68(B) 36=-241(B) 39=-272(B) 40=-272(B) 41=-272(B) 42=-272(B) 43=-969(B)



Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825353
SCOTT_KREMSER	A02	Hip	1	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:21:45 2022 Page 1

ID:ntfuDs1oaMOdQOhYkWF01Oyc2L8-KPR10YT_kfE?vXcZhVK4luya5MPJiAw0mHJZjybp4a

1-4-0	4-7-0	8-10-8	10-2-12	17-6-5	24-8-2	31-9-15	39-1-8	40-0-0
1-4-0	4-7-0	4-3-8	1-4-4	7-3-9	7-1-13	7-1-13	7-3-9	0-10-8

Scale = 1:70.7

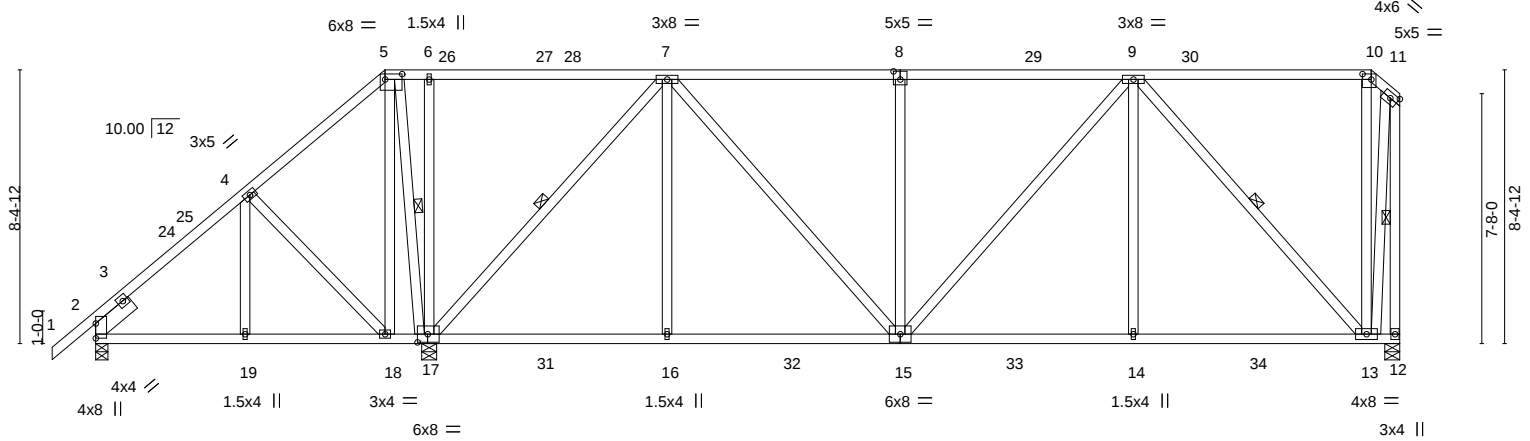


Plate Offsets (X,Y)--	[5:0-6-4,0-2-0], [8:0-2-8,0-3-0], [10:0-3-4,0-2-0], [17:0-3-12,0-3-0]
-----------------------	---

LOADING (psf)	SPACING-	CSL	DEFL.	in (loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.59	Vert(LL)	-0.14 14-15	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.77	Vert(CT)	-0.26 14-15	>999	180		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.89	Horz(CT)	0.04 12	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-AS					Weight: 311 lb	FT = 20%


LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied.
WEBS 2x4 SP No.2	WEBS 1 Row at midpt 5-17, 7-17, 9-13, 11-12
SLIDER Left 2x6 SP No.2 1-6-0	

REACTIONS. (size) 2=0-4-8, 17=0-5-8, 12=0-5-8
Max Horz 2=247(LC 11)
Max Uplift 2=-65(LC 22), 12=-6(LC 12)
Max Grav 2=176(LC 21), 17=2350(LC 17), 12=1258(LC 17)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-4=-70/258, 4-5=-9/516, 5-6=0/450, 6-7=0/448, 7-8=-1077/94, 8-9=-1077/94,
10-11=-289/168, 11-12=-1336/51
BOT CHORD 17-18=-448/83, 16-17=-76/725, 15-16=-76/725, 14-15=-54/992, 13-14=-54/992
WEBS 4-18=-428/104, 5-18=-19/383, 5-17=-701/60, 6-17=-389/94, 7-17=-1677/0, 7-16=0/494,
7-15=0/545, 8-15=-332/66, 9-14=0/464, 9-13=-1233/11, 11-13=-62/1223

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=40ft; eave=5ft; Cat. II; Exp B; Encl., GCp=0.18; MWFRS (directional) and C-C Exterior(2E) -1-4-0 to 2-8-0, Interior(1) 2-8-0 to 8-10-8, Exterior(2R) 8-10-8 to 14-6-6, Interior(1) 14-6-6 to 39-1-8, Exterior(2E) 39-1-8 to 39-10-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 65 lb uplift at joint 2 and 6 lb uplift at joint 12.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825354
SCOTT_KREMSER	A03	Hip	1	1	Job Reference (optional)	


Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:21:47 2022 Page 1

ID:ntfuDs1oaModQOhYkWF01Oyc2L8-HnZnREVFGGuj8qlxowMYqJ1wjA5iACMAU4mQdbybp4Y

1-4-0	5-7-0	10-2-12	10-10-8	17-6-2	24-0-0	30-5-14	37-1-8	40-0-0
1-4-0	5-7-0	4-7-12	0-7-12	6-7-10	6-5-14	6-5-14	6-7-10	2-10-8

Scale = 1:76.8

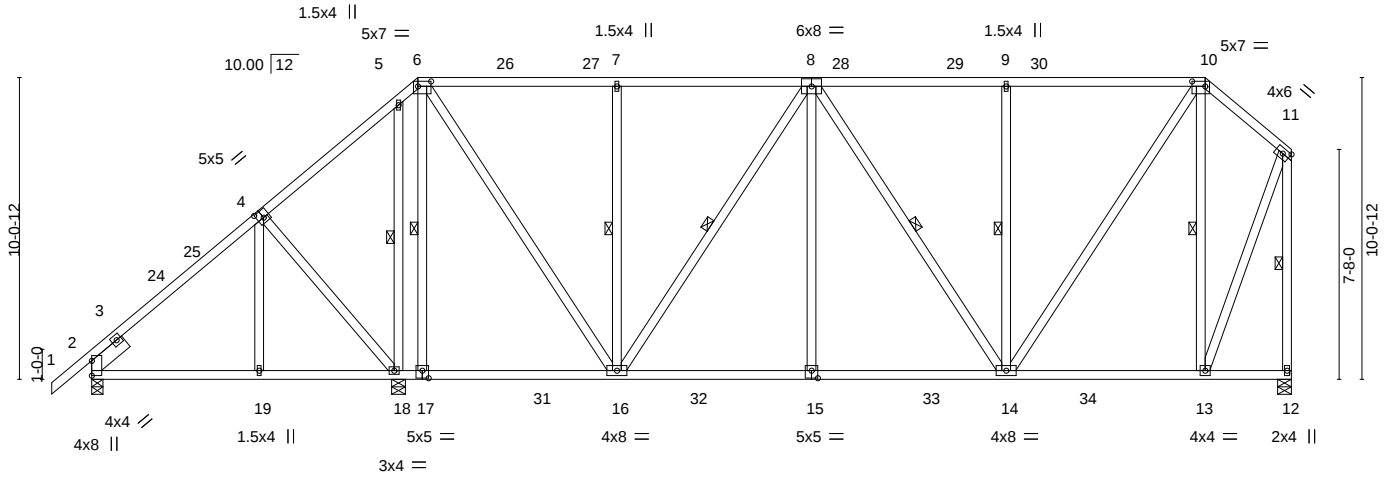

5-7-0	10-2-12	10-10-8	17-6-2	24-0-0	30-5-14	37-1-8	40-0-0
5-7-0	4-7-12	0-7-12	6-7-10	6-5-14	6-5-14	6-7-10	2-10-8

Plate Offsets (X,Y)-- [4:0-2-8,0-3-0], [6:0-5-4,0-2-0], [10:0-5-4,0-2-0], [15:0-2-8,0-3-0], [17:0-2-8,0-3-0]

LOADING (psf)	SPACING-	CSL	DEFL.	in (loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.59	Vert(LL)	-0.14 14-15	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.71	Vert(CT)	-0.24 14-15	>999	180		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.38	Horz(CT)	0.04 12	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-AS					Weight: 323 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2
SLIDER Left 2x6 SP No.2 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.
WEBS 1 Row at midpt 6-17, 7-16, 8-16, 8-14, 9-14, 10-13, 11-12, 5-18

REACTIONS.


(size) 2=0-4-8, 12=0-5-8, 18=0-5-8
Max Horz 2=282(LC 11)
Max Uplift 2=-33(LC 12), 12=-3(LC 12)
Max Grav 2=835(LC 17), 12=1485(LC 18), 18=1485(LC 17)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-801/65, 4-5=-575/126, 5-6=-936/137, 6-7=-1093/115, 7-8=-1093/115,
8-9=-1103/108, 9-10=-1103/108, 10-11=-653/133, 11-12=-1485/34
BOT CHORD 2-19=-149/633, 18-19=-149/632, 17-18=-95/464, 16-17=-96/461, 15-16=-49/1267,
14-15=-49/1267, 13-14=-58/439
WEBS 6-17=-252/0, 6-16=0/1218, 7-16=-495/87, 8-16=-304/0, 8-15=0/290, 8-14=-326/5,
9-14=-470/94, 10-14=-5/1176, 10-13=-875/105, 11-13=-27/1163, 5-18=-825/109,
4-18=-257/93

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=40ft; eave=5ft; Cat. II; Exp B; Encl., GCp=0.18; MWFRS (directional) and C-C Exterior(2E) -1-4-0 to 2-8-0, Interior(1) 2-8-0 to 10-10-8, Exterior(2R) 10-10-8 to 16-6-6, Interior(1) 16-6-6 to 37-1-8, Exterior(2E) 37-1-8 to 39-10-4 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 33 lb uplift at joint 2 and 3 lb uplift at joint 12.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.

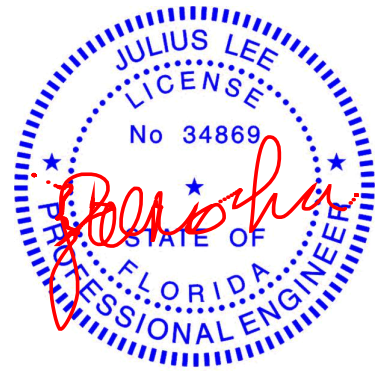

Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20, 2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825355
SCOTT_KREMSER	A04	Hip	1	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:21:49 2022 Page 1

ID:ntfuDs1oaModQOhYkWF01Oyc2L8-DAhXsvWVoukQN8vKwLP0vk6Ei_kne1NSxOFXiUybp4W

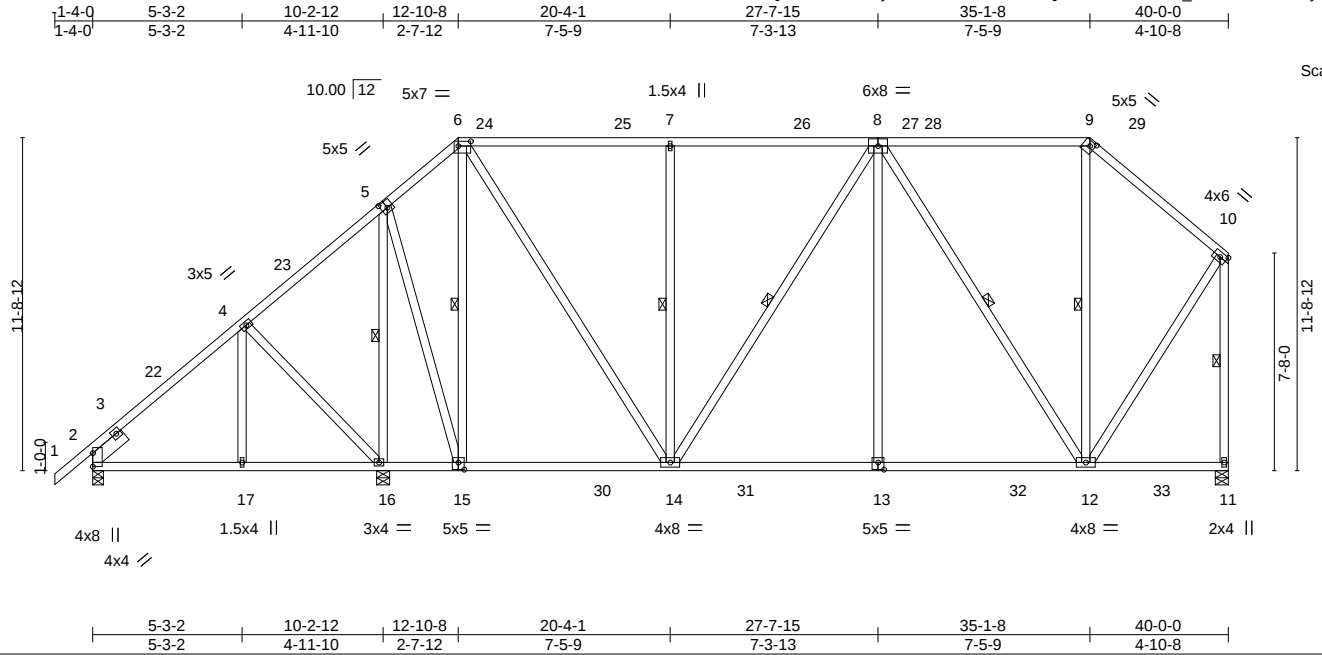


Plate Offsets (X,Y)-- [5:0-2-8,0-3-0], [6:0-5-4,0-2-0], [9:0-2-0,0-2-0], [13:0-2-8,0-3-0], [15:0-2-8,0-3-0]

LOADING (psf)	SPACING-	CSL	DEFL.	in (loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.75	Vert(LL) -0.20	12-13	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.86	Vert(CT) -0.32	12-13	>999	180		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.60	Horz(CT) 0.03	11	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-AS					Weight: 327 lb	FT = 20%


LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied.
WEBS 2x4 SP No.2	WEBS 1 Row at midpt 5-16, 6-15, 7-14, 8-14, 8-12, 9-12, 10-11
SLIDER Left 2x6 SP No.2 1-6-0	

REACTIONS. (size) 2=0-4-8, 16=0-5-8, 11=0-5-8
Max Horz 2=317(LC 11)
Max Uplift 2=-36(LC 12), 11=-4(LC 12)
Max Grav 2=622(LC 17), 16=1775(LC 17), 11=1444(LC 18)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-4=-557/62, 4-5=-292/127, 5-6=-535/160, 6-7=-954/133, 7-8=-954/133, 8-9=-611/130, 9-10=-833/130, 10-11=-1385/33
BOT CHORD 2-17=-177/492, 16-17=-177/492, 14-15=-97/460, 13-14=-62/968, 12-13=-62/968
WEBS 4-16=-419/89, 5-16=-1305/27, 5-15=0/962, 6-15=-774/0, 6-14=0/1026, 7-14=-531/104, 8-13=0/336, 8-12=-732/7, 10-12=-15/1006

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCCL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=40ft; eave=5ft; Cat. II; Exp B; Encl., GCp=0.18; MWFRS (directional) and C-C Exterior(2E) -1-4-0 to 2-8-0, Interior(1) 2-8-0 to 12-10-8, Exterior(2R) 12-10-8 to 18-6-6, Interior(1) 18-6-6 to 35-1-8, Exterior(2E) 35-1-8 to 39-10-4 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 36 lb uplift at joint 2 and 4 lb uplift at joint 11.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825356
SCOTT_KREMSE	A05	PIGGYBACK BASE	4	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:21:51 2022 Page 1

ID:ntfuDs1oaModQOhYkWF01Oyc2L8-9ZpIGbYIKV_8dS3i1mRU_9CXdnOB6wolPikdmNybp4U

1-4-0 5-3-2 10-2-12 12-0-0 20-0-9 27-11-7 36-0-0 40-0-0
1-4-0 5-3-2 4-11-10 1-9-4 8-0-9 7-10-13 8-0-9 4-0-0
TOP CHORD UNDER PIGGYBACKS TO BE Laterally Braced
BY PURLINS AT 2-0-0 OC. MAX. (TYPICAL)

Scale = 1:78.0

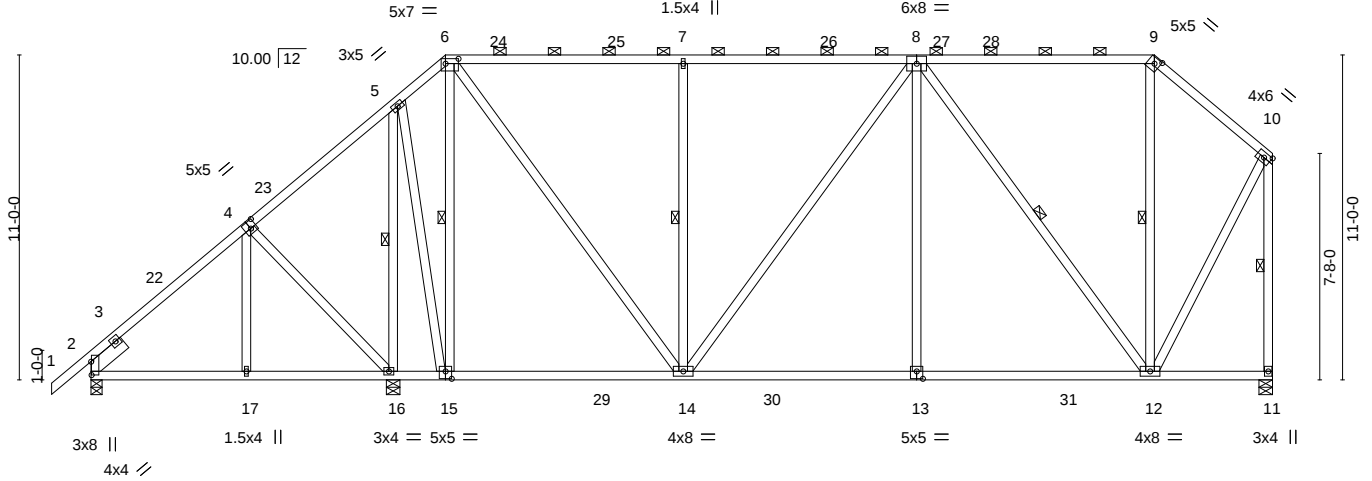


Plate Offsets (X,Y)-- [2:0-5-7,0-0-3], [4:0-2-8,0-0-3], [6:0-5-4,0-2-0], [9:0-2-4,0-2-4], [13:0-2-8,0-0-3-0], [15:0-2-8,0-0-3-0]

LOADING (psf)	SPACING-	CSL	DEFL.	in (loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.91	Vert(LL)	-0.26 12-13	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.99	Vert(CT)	-0.43 12-13	>833	180		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.67	Horz(CT)	0.04 11	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-AS					Weight: 320 lb	FT = 20%

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2 *Except* 8-9: 2x4 SP No.1	TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (2-2-0 max.): 6-9.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied.
WEBS 2x4 SP No.2	WEBS 1 Row at midpt 5-16, 6-15, 7-14, 8-12, 9-12, 10-11
SLIDER Left 2x6 SP No.2 1-6-0	

REACTIONS. (size) 2=0-4-8, 16=0-5-8, 11=0-5-8
Max Horz 2=302(LC 11)
Max Uplift 2=-64(LC 12), 11=-14(LC 12)
Max Grav 2=687(LC 17), 16=1689(LC 17), 11=1424(LC 18)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-4=-595/89, 4-5=-315/158, 5-6=-544/200, 6-7=-1035/142, 7-8=-1035/142,
8-9=-571/123, 9-10=-760/130, 10-11=-1432/35
BOT CHORD 2-17=-190/516, 16-17=-190/514, 15-16=-148/284, 14-15=-122/443, 13-14=-71/1041,
12-13=-71/1041
WEBS 4-16=-340/61, 5-16=-1269/15, 5-15=0/958, 6-15=-817/0, 6-14=0/1122, 7-14=-569/113,
8-13=0/362, 8-12=-850/20, 10-12=-29/1100

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=40ft; eave=5ft; Cat. II; Exp B; Encl., GCp=0.18; MWFRS (directional) and C-C Exterior(2E) -1-4-0 to 2-8-0, Interior(1) 2-8-0 to 12-0-0, Exterior(2R) 12-0-0 to 17-7-14, Interior(1) 17-7-14 to 36-0-0, Exterior(2E) 36-0-0 to 39-10-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- The Fabrication Tolerance at joint 9 = 0%
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 64 lb uplift at joint 2 and 14 lb uplift at joint 11.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see


ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Mayo Truss Company, Inc., Mayo, FL - 32066, 8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:21:53 2022 Page 1
 ID:ntfuDs1oaMQOYhKWFO1Oyc2L8-5xw2hZH?S6FssID59BTy3aHt7b4Warv2s0DkrFybp4S
 1-4-0 5-3-2 10-2-12 12-0-0 20-0-9 27-11-7 36-0-0 40-10-8
 1-4-0 5-3-2 4-11-10 1-9-4 8-0-9 7-10-13 8-0-9 4-10-8

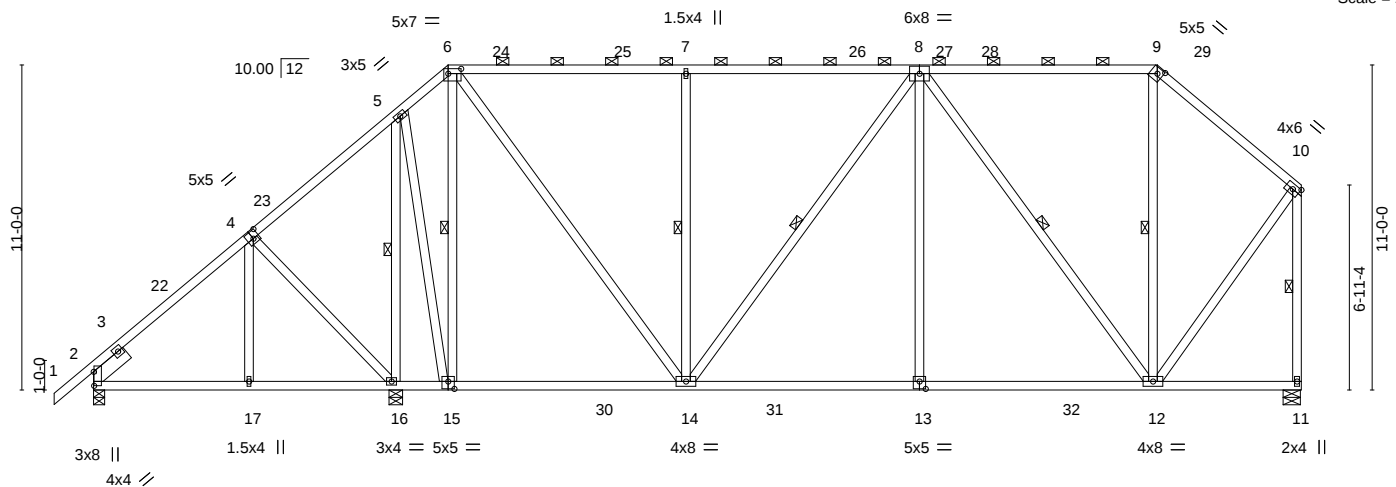

LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc)	L/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.91	Vert(LL) -0.27 12-13	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 1.00	Vert(CT) -0.43 12-13	>850	180		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.63	Horz(CT) 0.04 11	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-AS				Weight: 321 lb	FT = 20%

REACTIONS. (size) 2=0-4-8, 16=0-5-8, 11=0-7-0
 Max Horz 2=296(LC 11)
 Max Uplift 2=-65(LC 12), 11=-13(LC 12)
 Max Grav 2=691(LC 17), 16=1726(LC 17), 11=1467(LC 18)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD	2-4=-598/89, 4-5=-318/159, 5-6=-557/201, 6-7=-1074/144, 7-8=-1074/144, 8-9=-670/124, 9-10=-903/118, 10-11=-1441/37
BOT CHORD	2-17=-171/521, 16-17=-172/519, 15-16=-134/290, 14-15=-107/454, 13-14=-59/1112, 12-13=-59/1112
WEBS	4-16=-339/61, 5-16=-1305/14, 5-15=0/989, 6-15=-848/0, 6-14=0/1173, 7-14=-569/113, 8-13=0/363, 8-12=-800/19, 10-12=-14/1054

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCFL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=41ft; eave=5ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) -1-4-0 to 2-9-1, Interior(1) 2-9-1 to 12-0-0, Exterior(2R) 12-0-0 to 17-9-6, Interior(1) 17-9-6 to 36-0-0, Exterior(2E) 36-0-0 to 40-8-12 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 4) Provide adequate drainage to prevent water ponding.
- 5) The Fabrication Tolerance at joint 9 = 0%
- 6) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 7) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 65 lb uplift at joint 2 and 13 lb uplift at joint 11.
- 9) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- 10) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20, 2022

16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825359
SCOTT_KREMSE	A08	PIGGYBACK BASE	1	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:21:57 2022 Page 1

ID:ntfuDs1oaMOdQOhykWF01Oyc2L8-jAZXfdWwLILNWsO1YuEQSauCTwWbOeneBy_0ybp4O

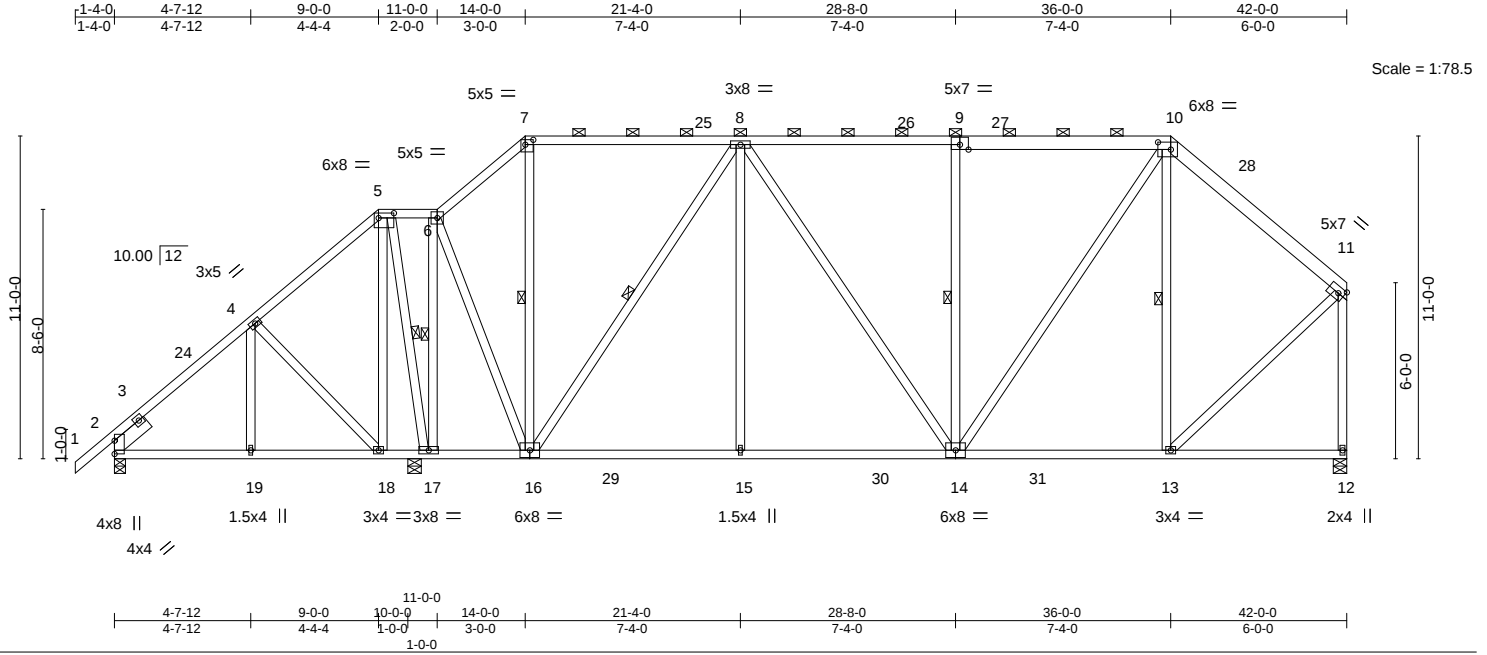


Plate Offsets (X,Y)-- [5:0-6-4,0-2-0], [7:0-3-4,0-2-0], [10:0-5-4,0-3-0]

LOADING (psf)	SPACING-	CSL.	DEFL.	in (loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.80	Vert(LL)	-0.17 13-14	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.84	Vert(CT)	-0.28 13-14	>999	180		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.86	Horz(CT)	0.03 12	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-AS					Weight: 354 lb	FT = 20%


LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2 *Except* 10-11,9-10: 2x6 SP No.2	TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (4-9-6 max.): 5-6, 7-10.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied.
WEBS 2x4 SP No.2	WEBS 1 Row at midpt 5-17, 6-17, 7-16, 8-16, 9-14, 10-13
SLIDER Left 2x6 SP No.2 1-6-0	

REACTIONS. (size) 2=0-4-8, 17=0-5-8, 12=0-5-8
Max Horz 2=285(LC 11)
Max Uplift 2=35(LC 12), 12=2(LC 12)
Max Grav 2=422(LC 17), 17=2140(LC 17), 12=1415(LC 18)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-4=-294/56, 6-7=-451/149, 7-8=-327/139, 8-9=-1025/124, 9-10=-1032/124,
10-11=-1012/104, 11-12=-1347/37
BOT CHORD 2-19=-163/301, 18-19=-163/301, 15-16=-26/994, 14-15=-26/994, 13-14=-35/701
WEBS 4-18=-382/110, 5-18=-32/316, 5-17=-581/78, 6-17=-1412/21, 6-16=0/1168,
8-16=-1153/0, 8-15=0/514, 9-14=-355/67, 10-14=-2/582, 10-13=-374/101, 11-13=0/931

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCCL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=42ft; eave=5ft; Cat. II; Exp B; Encl. GCPI=0.18; MWFRS (directional) and C-C Exterior(2E) -1-4-0 to 2-10-6, Interior(1) 2-10-6 to 9-0-0, Exterior(2E) 9-0-0 to 11-0-0, Interior(1) 11-0-0 to 14-0-0, Exterior(2R) 14-0-0 to 19-11-4, Interior(1) 19-11-4 to 36-0-0, Exterior(2E) 36-0-0 to 41-10-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 35 lb uplift at joint 2 and 2 lb uplift at joint 12.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

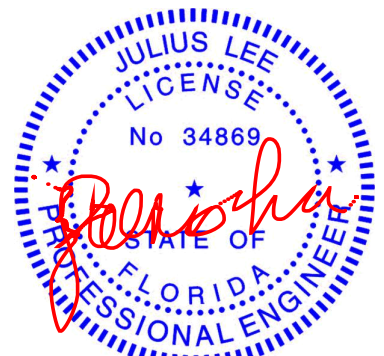

Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825360
SCOTT_KREMSE	A09	PIGGYBACK BASE	1	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:21:59 2022 Page 1

ID:ntfuDs1oaMOdQOhYkWF01Oyc2L8-w5lJyKemRy?0aggFVSaMJrXwO097_WoxEyg22vybp4M

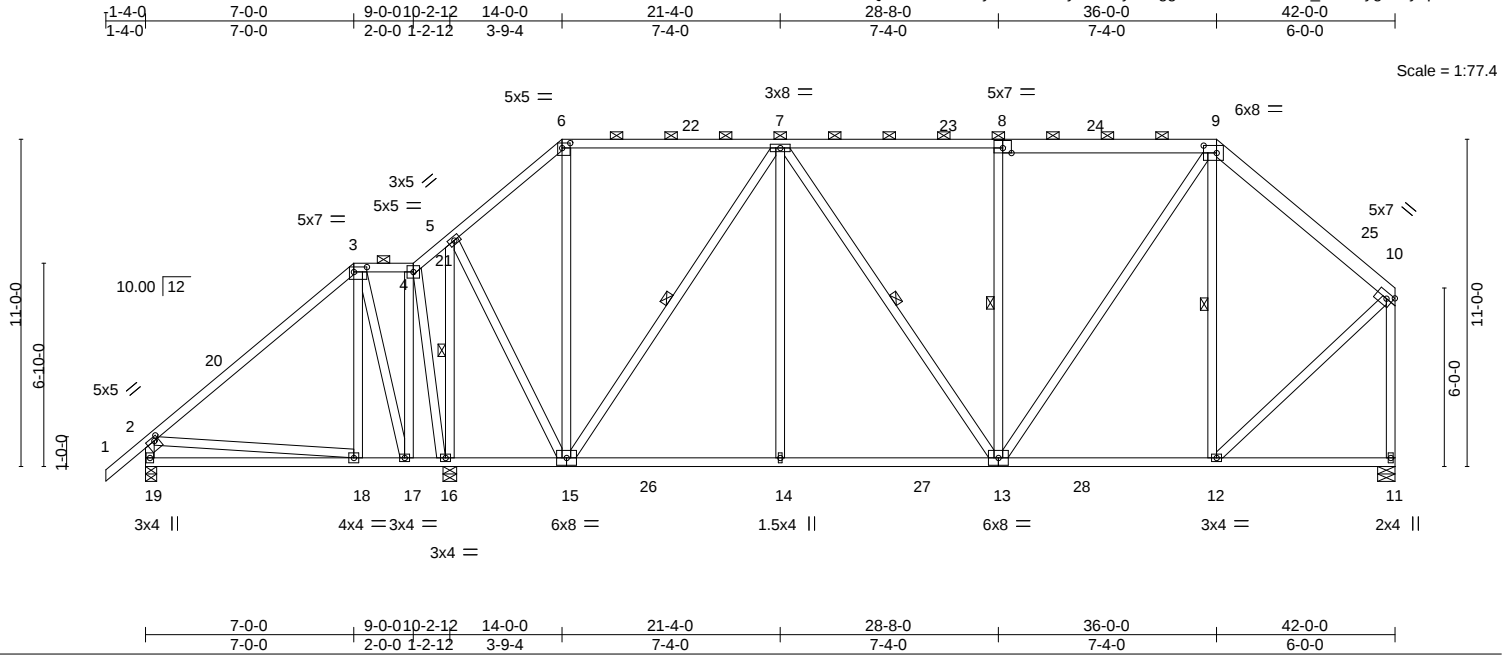


Plate Offsets (X,Y)-- [2:0-1-12,0-1-8], [3:0-5-4,0-2-0], [6:0-3-4,0-2-0], [9:0-5-4,0-3-0], [10:0-2-8,0-2-4]

LOADING (psf)	SPACING-	CSL	DEFL.	in (loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.80	Vert(LL)	-0.17 12-13	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.86	Vert(CT)	-0.28 12-13	>999	180		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.80	Horz(CT)	0.04 11	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-AS					Weight: 358 lb	FT = 20%


LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2 *Except* 9-10,8-9: 2x6 SP No.2	TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (4-6-6 max.): 3-4, 6-9.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied.
WEBS 2x4 SP No.2	WEBS 1 Row at midpt 7-15, 7-13, 8-13, 9-12, 5-16

REACTIONS. (size) 19=0-4-8, 11=0-7-0, 16=0-5-8
Max Horz 19=291(LC 11)
Max Uplift 19=-31(LC 12), 16=-4(LC 12)
Max Grav 19=513(LC 17), 11=1479(LC 18), 16=1971(LC 17)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-351/51, 5-6=-692/157, 6-7=-511/151, 7-8=-1104/161, 8-9=-1110/161,
9-10=-1059/136, 2-19=-428/91, 10-11=-1411/65
BOT CHORD 18-19=-348/539, 17-18=-135/275, 14-15=-65/1131, 13-14=-65/1131, 12-13=-49/739
WEBS 3-18=0/311, 3-17=-485/86, 4-17=-113/288, 7-15=-1075/15, 7-14=0/514, 8-13=-354/76,
9-13=-20/667, 9-12=-407/115, 2-18=-272/223, 10-12=-19/986, 5-16=-1419/84,
4-16=-317/63, 5-15=0/1008

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCCL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=42ft; eave=5ft; Cat. II; Exp B; Encl., GCPI=0.18; MWFRS (directional) and C-C Exterior(2E) -1-4-0 to 2-10-6, Interior(1) 2-10-6 to 7-0-0, Exterior(2E) 7-0-0 to 9-0-0, Interior(1) 9-0-0 to 14-0-0, Exterior(2R) 14-0-0 to 18-2-6, Interior(1) 18-2-6 to 36-0-0, Exterior(2R) 36-0-0 to 40-2-6, Interior(1) 40-2-6 to 41-10-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 31 lb uplift at joint 19 and 4 lb uplift at joint 16.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

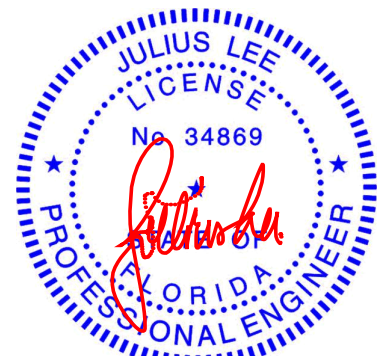

Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825363
SCOTT_KREMSE	A12	Roof Special Girder	1	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:05 2022 Page 1

ID:ntfuDs1oaModQOhYkWF01Oyc2L8-IFaCOjX1ol9lb7PshimY5nyFQD4OFvptd8NGZybp4G

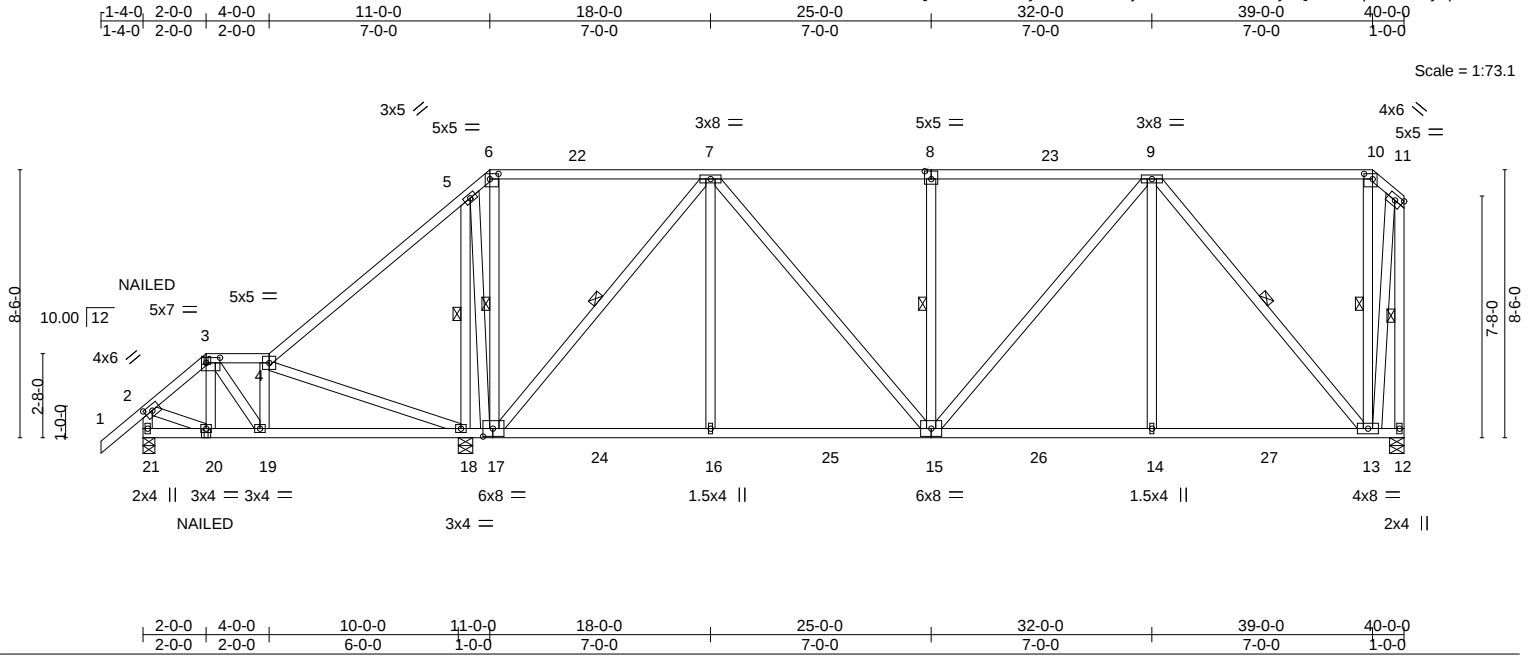

LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 20.0	2-0-0	TC 0.77	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.25	BC 0.82	Vert(LL) -0.14 14-15 >999 240		
BCDL 0.0 *	Lumber DOL 1.25	WB 0.76	Vert(CT) -0.25 14-15 >999 180		
BCDL 10.0	Rep Stress Incr NO	Matrix-MS	Horz(CT) 0.04 12 n/a n/a		
	Code FBC2020/TPI2014			Weight: 314 lb	FT = 20%


LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 4-7-10 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.
WEBS 2x4 SP No.2	WEBS 1 Row at midpt 6-17, 7-17, 8-15, 9-13, 10-13, 11-12, 5-18

REACTIONS. (size) 21=0-4-8, 12=0-5-8, 18=0-5-8
Max Horz 21=255(LC 7)
Max Uplift 21=-90(LC 8), 18=-64(LC 8)
Max Grav 21=368(LC 37), 12=1320(LC 27), 18=2171(LC 36)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-257/104, 4-5=-113/452, 7-8=-1189/80, 8-9=-1189/80, 10-11=-314/123, 2-21=-326/105, 11-12=-1386/29
BOT CHORD 17-18=-293/99, 16-17=-25/921, 15-16=-25/921, 14-15=-35/1024, 13-14=-35/1024
WEBS 7-17=-1489/7, 7-16=0/475, 7-15=-12/412, 8-15=-322/64, 9-14=0/452, 9-13=-1288/1, 11-13=-5/1255, 5-18=-1623/114, 4-18=-448/107, 5-17=0/1126

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCCL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=40ft; eave=5ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 90 lb uplift at joint 21 and 64 lb uplift at joint 18.
 - "NAILED" indicates 3-10d (0.148"x3") or 2-12d (0.148"x3.25") toe-nails per NDS guidelines.
 - In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard
1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-2=-60, 2-3=-60, 3-4=-60, 4-6=-60, 6-10=-60, 10-11=-60, 12-21=-20
Concentrated Loads (lb)
Vert: 3=-29(F) 20=86(F)

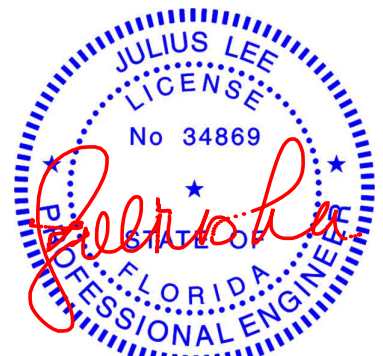

Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022


WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

MiTek
16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825364
SCOTT_KREMSER	A13	Roof Special Girder	1	2	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:09 2022 Page 1
ID:ntfuDs1oaModQOhYkWF01Oyc2L8-d0u52lm251GbnDRA5Ymijx122daK1LPYV6aPKybp4C

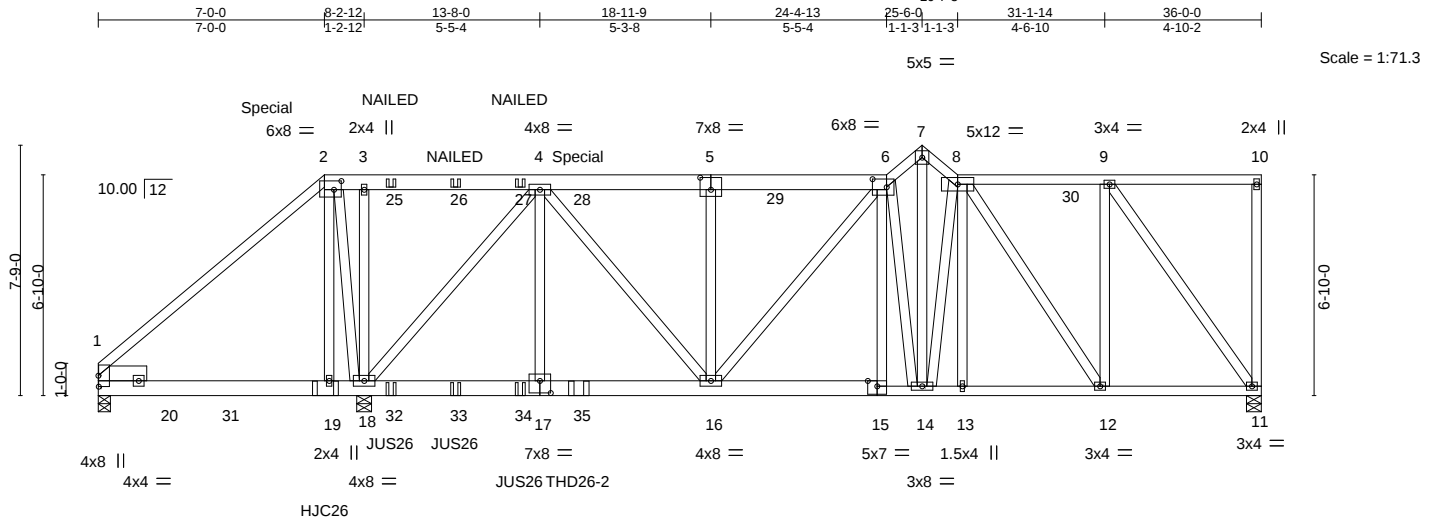

---	--	--	--	--	--	--	--	--	--

LUMBER-

TOP CHORD 2x4 SP No.2 *Except*
2-5,5-6: 2x6 SP No.2
BOT CHORD 2x6 SP No.2 *Except*
11-15: 2x4 SP No.2
WEBS 2x4 SP No.2
SLIDER Left 2x6 SP No.2 1-6-0

REACTIONS.

(size) 1=0-4-8, 11=0-5-8, 18=0-5-8
Max Horz 1=210(LC 7)
Max Uplift 1=-296(LC 32), 11=-112(LC 8), 18=-1308(LC 8)
Max Grav 1=287(LC 13), 11=1432(LC 36), 18=4851(LC 37)


FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-145/705, 2-3=-73/669, 3-4=-73/671, 4-5=-1902/364, 5-6=-1903/365,
6-7=-1725/280, 7-8=-1708/279, 8-9=-943/146
BOT CHORD 1-19=-595/487, 18-19=-585/181, 17-18=-378/1489, 16-17=-378/1489, 15-16=-201/1669,
14-15=-202/1666, 13-14=-166/1479, 12-13=-165/1481, 11-12=-105/931
WEBS 2-19=-67/510, 2-18=-1199/138, 3-18=-583/70, 4-18=-3208/623, 4-17=-403/1079,
4-16=-32/836, 5-16=-352/80, 6-16=-299/496, 8-12=-963/131, 9-12=-56/971,
9-11=-1556/139, 7-14=-303/1864, 6-14=-1444/276, 8-14=-425/71

NOTES-

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=36ft; eave=5ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 296 lb uplift at joint 1, 112 lb uplift at joint 11 and 1308 lb uplift at joint 18.

Continued on page 2



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser
SCOTT_KREMSER	A13	Roof Special Girder	1	2	T28825364

Mayo Truss Company, Inc.,
 Mayo, FL - 32066,
 8.530 s Aug 11 2022 MiTek Industries, Inc.

Tue Sep 20 07:22:10 2022
 Page 2
 ID:ntfuDs1oaM0dQOhYkWF01Oyc2L8-6DSTG5ngsLOSPN0MeFHxF9UwnRzp3UbYm9r8xmybp4B

- NOTES-**
- 10) Use MiTek HJC26 (With 16-16d nails into Girder & 10d nails into Truss) or equivalent at 7-0-6 from the left end to connect truss(es) to front face of bottom chord.
 - 11) Use MiTek JUS26 (With 4-10d nails into Girder & 2-10d nails into Truss) or equivalent spaced at 2-0-0 oc max. starting at 9-0-12 from the left end to 13-0-12 to connect truss(es) to front face of bottom chord.
 - 12) Use MiTek THD26-2 (With 18-16d nails into Girder & 12-10d nails into Truss) or equivalent at 14-10-8 from the left end to connect truss(es) to front face of bottom chord.
 - 13) Fill all nail holes where hanger is in contact with lumber.
 - 14) "NAILED" indicates 3-10d (0.148"x3") or 3-12d (0.148"x3.25") toe-nails per NDS guidelines.
 - 15) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 368 lb down and 84 lb up at 7-0-0, and 638 lb down and 282 lb up at 14-10-8 on top chord. The design/selection of such connection device(s) is the responsibility of others.

- LOAD CASE(S)** Standard
- 1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
 - Uniform Loads (plf)
 - Vert: 1-2=-60, 2-6=-60, 6-7=-60, 7-8=-60, 8-10=-60, 11-21=-20
 - Concentrated Loads (lb)
 - Vert: 2=-123(F) 19=-615(F) 25=-68(F) 26=-68(F) 27=-68(F) 28=-257(F) 32=-272(F) 33=-272(F) 34=-272(F) 35=-945(F)

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825365
SCOTT_KREMSER	B01	HIP GIRDER	2	2	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:12 2022 Page 1

ID:ntfuDs1oaModQOhYkWF01Oyc2L8-2baEgnowNyeAegAlmgJPLaZBqFdHXVrETKF0fybp49

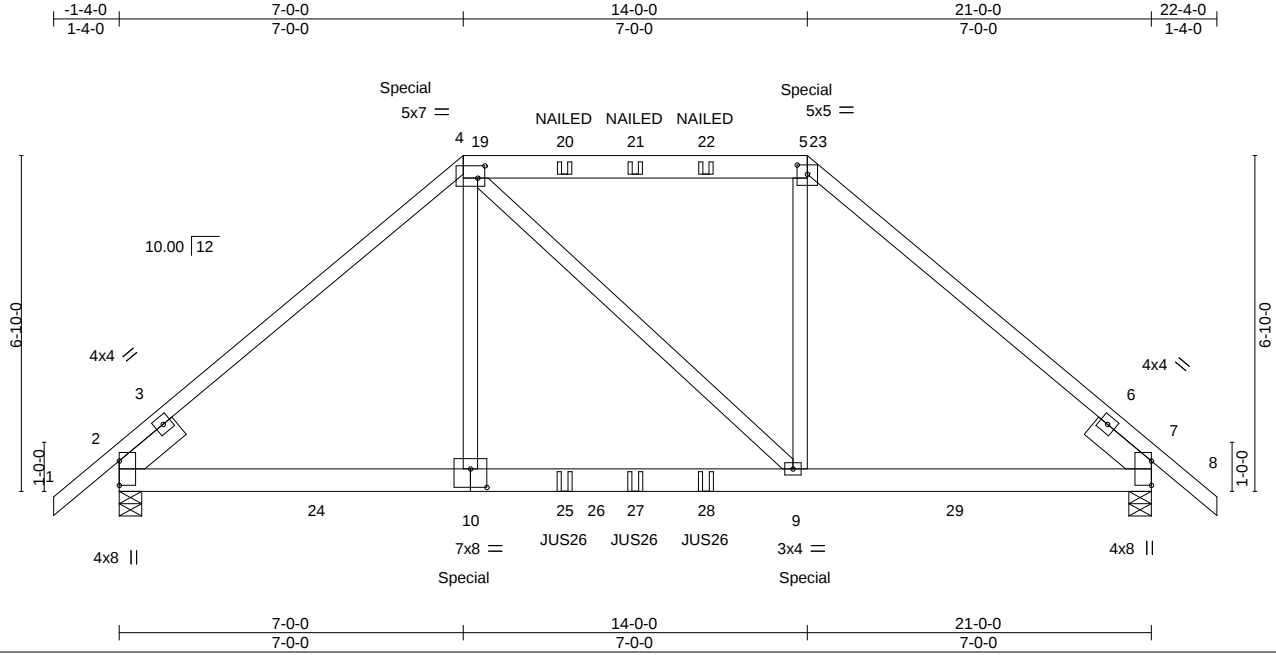


Plate Offsets (X,Y)-- [4:0-1-12,0-3-0], [5:0-2-8,0-2-4], [10:0-4-0,0-4-8]

LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 20.0	2-0-0	TC 0.69	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.25	BC 0.72	Vert(LL) 0.16 9-10 >999 240		
BCLL 0.0 *	Lumber DOL 1.25	WB 0.13	Vert(CT) -0.20 9-10 >999 180		
BCDL 10.0	Rep Stress Incr NO	Matrix-MS	Horz(CT) 0.05 7 n/a n/a		
	Code FBC2020/TP12014			Weight: 272 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2 *Except*
4-5: 2x6 SP No.2
BOT CHORD 2x6 SP No.2
WEBS 2x4 SP No.2
SLIDER Left 2x6 SP No.2 1-6-0, Right 2x6 SP No.2 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-11-3 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 2=0-5-8, 7=0-5-8
Max Horz 2=138(LC 31)
Max Uplift 2=-759(LC 8), 7=-759(LC 8)
Max Grav 2=2251(LC 36), 7=2243(LC 37)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-2753/1086, 4-5=-2124/920, 5-7=-2827/1134
BOT CHORD 2-10=-741/2089, 9-10=-756/2115, 7-9=-741/2103
WEBS 4-10=-669/1139, 5-9=-737/1253

NOTES-

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 759 lb uplift at joint 2 and 759 lb uplift at joint 7.
- Use MiTek JUS26 (With 4-10d nails into Girder & 2-10d nails into Truss) or equivalent spaced at 1-5-4 oc max. starting at 9-0-12 from the left end to 11-11-4 to connect truss(es) to front face of bottom chord.
- Fill all nail holes where hanger is in contact with lumber.
- "NAILED" indicates 3-10d (0.148"x3") or 3-12d (0.148"x3.25") toe-nails per NDS guidelines.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825365
SCOTT_KREMSER	B01	HIP GIRDER	2	2	Job Reference (optional)	

Mayo Truss Company, Inc.,
 Mayo, FL - 32066,
 8.530 s Aug 11 2022
 MiTek Industries, Inc.
 Tue Sep 20 07:22:12 2022
 Page 2
 ID:ntfuDs1oaM0dQ0hYkWF01Oyc2L8-2baEgnowNyeAegAlmgJPLaZBqFdHXYVrETKF0fybp49

NOTES-

13) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 368 lb down and 84 lb up at 7-0-0, and 368 lb down and 84 lb up at 14-0-0 on top chord, and 615 lb down and 474 lb up at 7-0-0, and 615 lb down and 474 lb up at 13-11-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard

1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25

Uniform Loads (plf)

Vert: 1-4=-60, 4-5=-60, 5-8=-60, 11-15=-20

Concentrated Loads (lb)

Vert: 4=-123(F) 5=-123(F) 10=-615(F) 9=-615(F) 20=-68(F) 21=-68(F) 22=-68(F) 25=-272(F) 27=-272(F) 28=-272(F)

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825366
SCOTT_KREMSER	B02	Roof Special	1	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:14 2022 Page 1

ID:ntfuDs1oaMODQOhYkWF01Oyc2L8-_i_5TqAvZutt_K7i5LtQ?fbK3N??Pz8hnpL4Xybp47

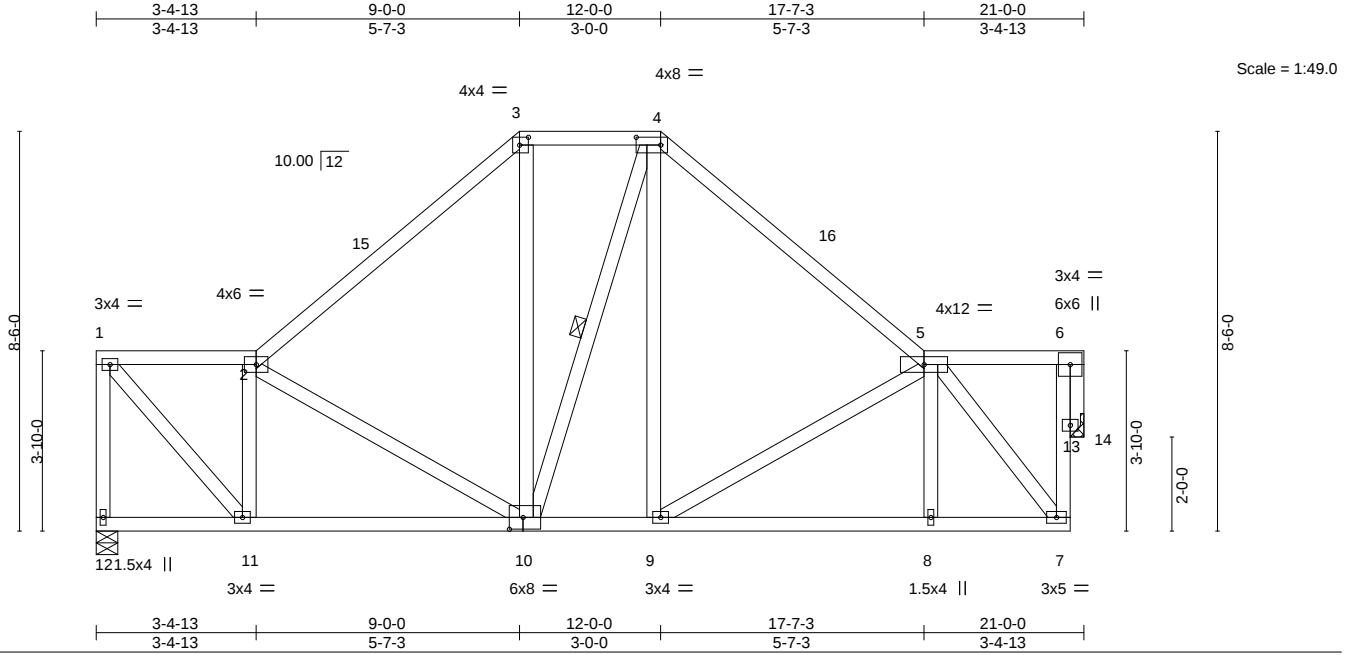


Plate Offsets (X,Y)-- [3:0-2-4,0-2-0], [4:0-6-4,0-2-0], [10:0-3-8,0-3-0]

LOADING (psf)	SPACING-	CSL	DEFL.	in (loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.37	Vert(LL)	-0.05 10-11	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.39	Vert(CT)	-0.11 10-11	>999	180		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.32	Horz(CT)	0.03 14	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-AS					Weight: 157 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2
OTHERS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.
WEBS 1 Row at midpt 4-10

REACTIONS.


(size) 12=0-5-8, 14=Mechanical
Max Horz 12=-182(LC 10)
Max Uplift 14=-4(LC 12)
Max Grav 12=828(LC 1), 14=805(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-12=-810/28, 1-2=-654/61, 2-3=-787/100, 3-4=-523/127, 4-5=-793/98, 7-13=-37/755,
6-13=-37/755
BOT CHORD 10-11=-106/709, 9-10=-28/530, 8-9=-60/675, 7-8=-57/678
WEBS 1-11=-34/979, 2-11=-625/102, 4-9=0/280, 5-7=-941/52, 6-14=-818/36

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) 0-1-12 to 3-4-13, Interior(1) 3-4-13 to 9-0-0, Exterior(2E) 9-0-0 to 12-0-0, Exterior(2R) 12-0-0 to 15-0-0, Interior(1) 15-0-0 to 20-6-12 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 4 lb uplift at joint 14.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.

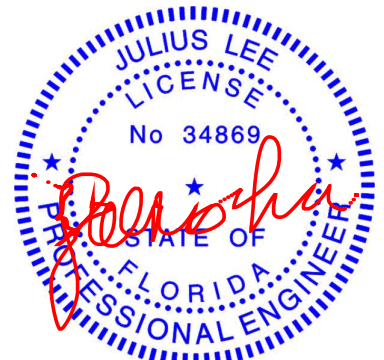

Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825367
SCOTT_KREMSER	B03	Roof Special	1	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:15 2022 Page 1

ID:ntfuDs1oaMOdQOhYkWF01Oyc2L8-SAFMJJoqpgt0kV8uKRpt6yCBnAsk5kuGHwRZvc_ybp46

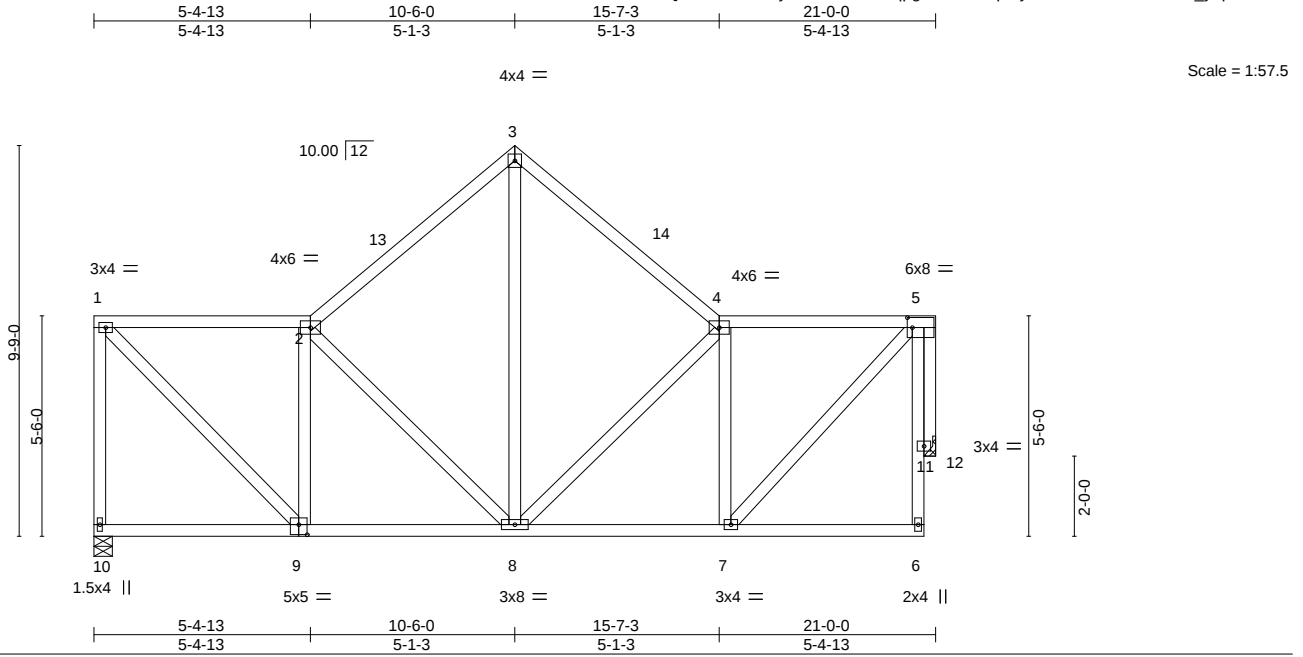


Plate Offsets (X,Y)-- [5:0-1-8,0-3-0], [9:0-2-8,0-3-0]

LOADING (psf)	SPACING-	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.30	Vert(LL) -0.04	8-9	>999	240		MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.33	Vert(CT) -0.09	8-9	>999	180			
BCLL 0.0 *	Rep Stress Incr YES	WB 0.26	Horz(CT) 0.03	12	n/a	n/a			
BCDL 10.0	Code FBC2020/TPI2014	Matrix-AS							
								Weight: 156 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2
OTHERS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.


(size) 10=0-5-8, 12=Mechanical
Max Horz 10=-209(LC 10)
Max Uplift 12=-11(LC 12)
Max Grav 10=828(LC 1), 12=805(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-10=-771/62, 1-2=-611/68, 2-3=-710/93, 3-4=-709/104, 4-5=-632/32
BOT CHORD 8-9=-112/660, 7-8=-64/646
WEBS 1-9=-52/857, 2-9=-537/94, 2-8=-271/98, 3-8=-18/485, 4-8=-269/51, 4-7=-522/102, 5-7=-49/832, 5-12=-809/40

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) 0-1-12 to 3-1-12, Interior(1) 3-1-12 to 10-6-0, Exterior(2R) 10-6-0 to 13-6-0, Interior(1) 13-6-0 to 20-6-12 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 11 lb uplift at joint 12.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.

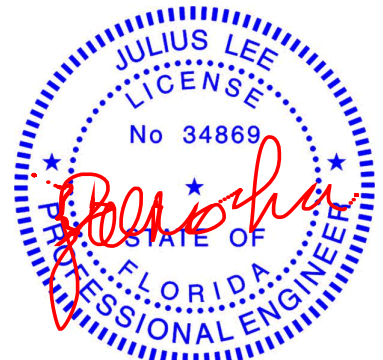

Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601


 16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Mayo Truss Company, Inc., Mayo, FL - 32066, 8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:18 2022 Page 1
ID:ntfuDs1oaModQOHykWF01Oyc2L8-tlxVxqthzoOJMbvd6xQparrDxgkExDrkcPnZDlbybp43
7-4-13 10-6-0 13-7-3 21-0-0
7-4-13 3-1-3 3-1-3 7-4-13
4x4 = Scale = 1:46.5

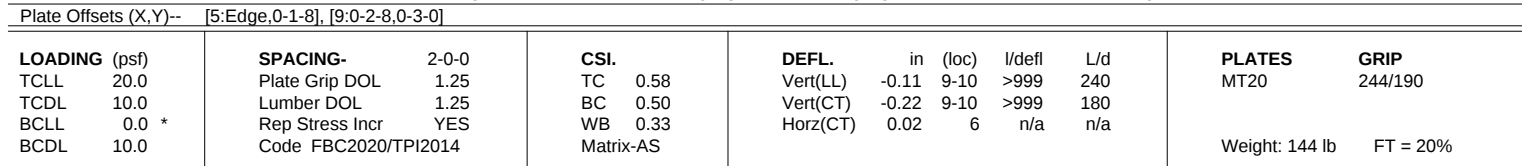

LUMBER-

TOP CHORD	2x4 SP No.2
BOT CHORD	2x4 SP No.2
WEBS	2x4 SP No.2

BRACING-

TOP CHORD	Structural wood sheathing directly applied, except end verticals.
BOT CHORD	Rigid ceiling directly applied.
WEBS	1 Row at midpt 4-6

REACTIONS.

(size) 10=0-5-8, 6=Mechanical
Max Horz 10=-187(LC 10)
Max Grav 10=828(LC 1), 6=828(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-10=-747/78, 1-2=-803/52, 2-3=-837/83, 3-4=-838/85
BOT CHORD 8-9=-144/829, 7-8=-97/842, 6-7=-95/845
WEBS 1-9=-62/924, 2-9=-441/94, 4-7=0/255, 4-6=-967/67, 3-8=-61/854, 4-8=-487/61,
2-8=-463/87

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpI=0.18; MWFRS (directional) and C-C Exterior(2E) 0-1-12 to 3-1-12, Interior(1) 3-1-12 to 10-6-0, Exterior(2E) 10-6-0 to 13-7-3, Interior(1) 13-7-3 to 20-10-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 4) Provide adequate drainage to prevent water ponding.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 7) Refer to girder(s) for truss to truss connections.
- 8) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20, 2022



Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Code**

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825370
SCOTT_KREMSE	B06	Roof Special	1	1	Job Reference (optional)	

Mayo Truss Company, Inc.,

Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:19 2022 Page 1
ID:ntfuDs1oaModQOhYkWF01Oyc2L8-Lxv19AuJk6WA_IC5gex272MTL45Cgg2tr3X6mlybp42

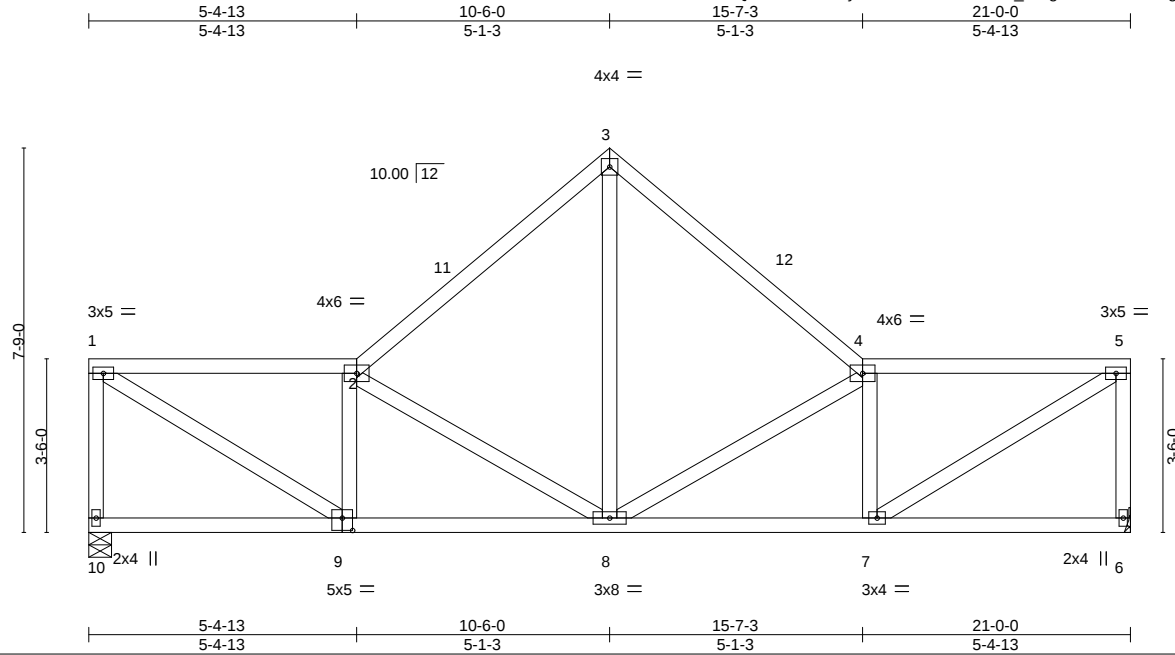

Scale = 1:46.5

Plate Offsets (X,Y)-- [9:0-2-8,0-3-0]

LOADING (psf)	SPACING-	CSL.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.29	Vert(LL)	-0.05	8-9	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.39	Vert(CT)	-0.11	8-9	>999	180		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.33	Horz(CT)	0.02	6	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-AS						Weight: 129 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 10=0-5-8, 6=Mechanical
Max Horz 10=-174(LC 10)
Max Grav 10=828(LC 1), 6=828(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-10=-769/61, 1-2=-990/55, 2-3=-875/82, 3-4=-875/82, 4-5=-1025/49, 5-6=-774/55
BOT CHORD 8-9=-123/1039, 7-8=-74/1049
WEBS 1-9=-63/1132, 2-9=-534/88, 2-8=-517/88, 3-8=0/680, 4-8=-529/78, 4-7=-526/95, 5-7=-53/1165

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) 0-1-12 to 3-1-12, Interior(1) 3-1-12 to 10-6-0, Exterior(2R) 10-6-0 to 13-6-0, Interior(1) 13-6-0 to 20-10-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825371
SCOTT_KREMSER	B07	Roof Special	1	1	Job Reference (optional)	

Mayo Truss Company, Inc.,

Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:21 2022 Page 1

ID:ntfuDs1oaModQOhYkWF01Oyc2L8-HKdeZsvZGjmuD3MT03zWCTRootmk8XTAIN0Dqdybp40

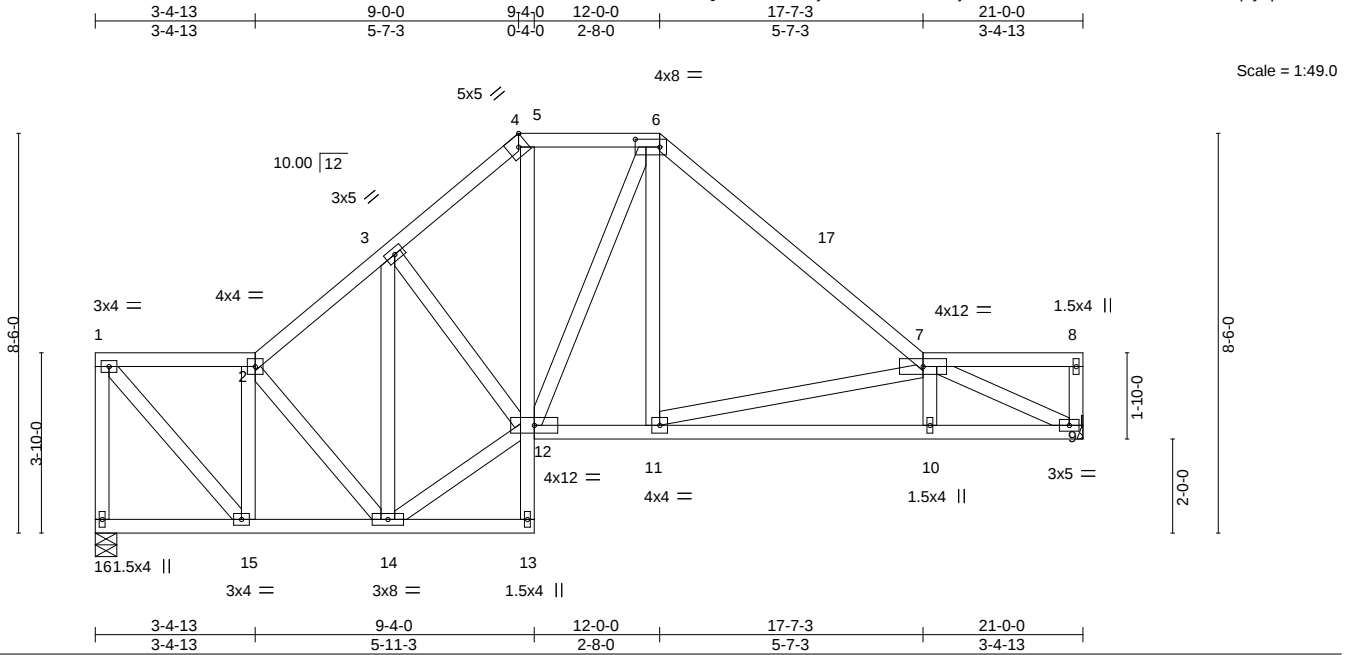


Plate Offsets (X,Y)-- [4:0-2-4,Edge], [6:0-6-4,0-2-0]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.35	Vert(LL)	-0.05 10-11	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.45	Vert(CT)	-0.13 10-11	>999	180		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.53	Horz(CT)	0.04 9	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-AS					Weight: 157 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.


(size) 16=0-5-8, 9=Mechanical
Max Horz 16=-180(LC 10)
Max Uplift 9=-2(LC 12)
Max Grav 16=828(LC 1), 9=828(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-16=-792/41, 1-2=-624/55, 2-3=-849/80, 3-4=-927/134, 4-5=-669/127, 5-6=-674/126,
6-7=-1010/103
BOT CHORD 14-15=-93/676, 5-12=-47/428, 11-12=-28/705, 10-11=-99/1512, 9-10=-93/1519
WEBS 1-15=-34/922, 2-15=-642/70, 6-11=0/389, 7-11=-844/87, 7-9=-1628/90, 3-14=-295/48,
12-14=-80/727

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) 0-1-12 to 3-4-13, Interior(1) 3-4-13 to 9-0-0, Exterior(2E) 9-0-0 to 12-0-0, Exterior(2R) 12-0-0 to 15-0-0, Interior(1) 15-0-0 to 20-10-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 2 lb uplift at joint 9.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.

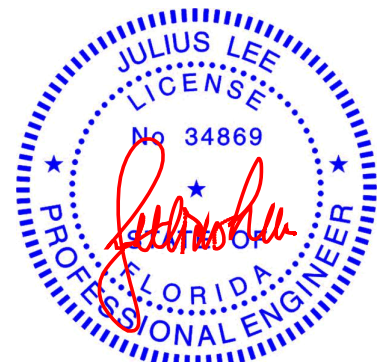

Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825372
SCOTT_KREMSER	CJ01	Diagonal Hip Girder	5	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:23 2022 Page 1

ID:ntfuDs1oaMOdQOhykWF01Oyc2L8-Djko_YxqoK1cSMWsvU0_HuX6NhRtbVsTmhVkvWybp4_

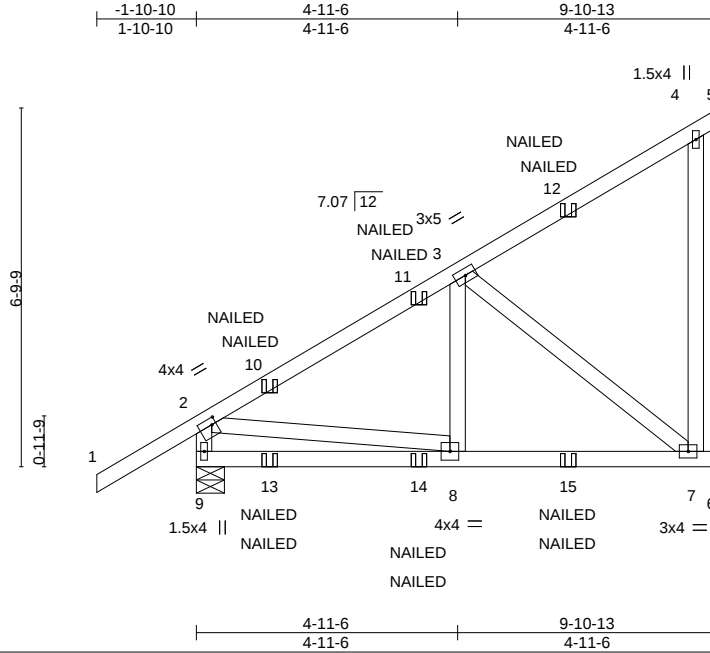

Scale = 1:43.6

Plate Offsets (X,Y)-- [2:0-1-0,0-1-8]									
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	I/defl	L/d
TCLL 20.0		Plate Grip DOL	1.25	TC 0.47		Vert(LL)	-0.04 7-8	>999	240
TCDL 10.0		Lumber DOL	1.25	BC 0.47		Vert(CT)	-0.08 7-8	>999	180
BCLL 0.0 *		Rep Stress Incr	NO	WB 0.28		Horz(CT)	-0.01 5	n/a	n/a
BCDL 10.0		Code FBC2020/TPI2014		Matrix-MS					
								PLATES	GRIP
								MT20	244/190
								Weight: 65 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.

(size) 9=0-6-6, 5=Mechanical, 6=Mechanical
Max Horz 9=195(LC 8)
Max Uplift 9=-118(LC 8), 6=-201(LC 8)
Max Grav 9=495(LC 30), 5=178(LC 3), 6=385(LC 28)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-9=-462/122, 2-3=-505/98
BOT CHORD 7-8=-121/395
WEBS 2-8=-17/485, 3-7=-503/154

NOTES-

- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 118 lb uplift at joint 9 and 201 lb uplift at joint 6.
- "NAILED" indicates 3-10d (0.148"x3") or 2-12d (0.148"x3.25") toe-nails per NDS guidelines.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-2=-60, 2-5=-60, 6-9=-20
Concentrated Loads (lb)
Vert: 10=78(F=39, B=39) 12=-82(F=-41, B=-41) 14=1(F=1, B=1) 15=-48(F=-24, B=-24)



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825373
SCOTT_KREMSER	CJ02	Diagonal Hip Girder	3	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:24 2022 Page 1

ID:ntfuDs1oaModQOhYKWF01Oyc2L8-hvImCtXsZe9T4W42TCXDq63H75n6Ky6c_LEtQyybp3z

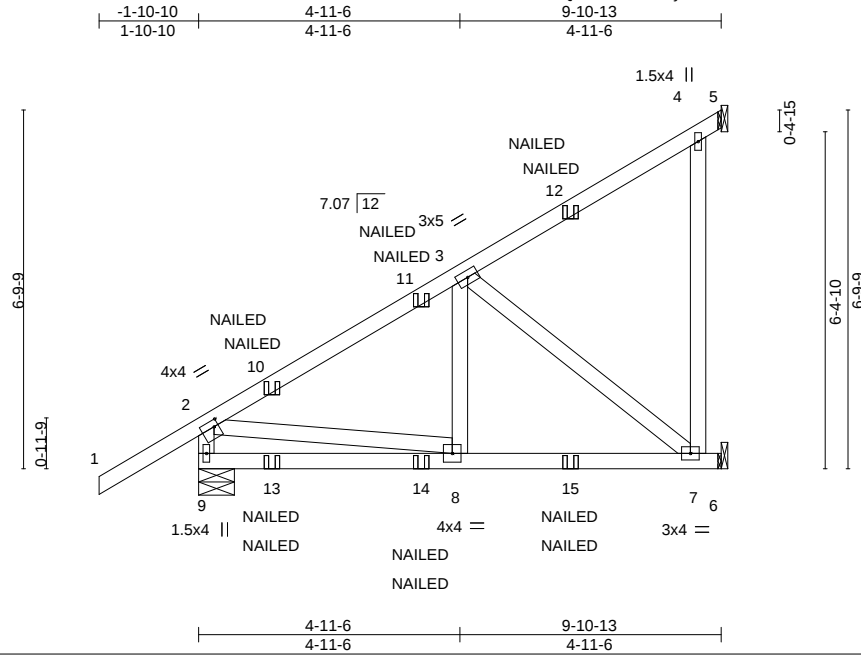


Plate Offsets (X,Y)-- [2:0-1-0,0-1-8]

LOADING (psf)	SPACING-		CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.47	Vert(LL)	-0.04	7-8	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.47	Vert(CT)	-0.08	7-8	>999	180		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.28	Horz(CT)	-0.01	5	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS						Weight: 65 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.

(size) 9=0-8-2, 5=Mechanical, 6=Mechanical
Max Horz 9=195(LC 8)
Max Uplift 9=-118(LC 8), 6=-201(LC 8)
Max Grav 9=495(LC 30), 5=178(LC 3), 6=385(LC 28)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.


TOP CHORD 2-9=-462/122, 2-3=-505/98
BOT CHORD 7-8=-121/395
WEBS 2-8=-17/485, 3-7=-503/154

NOTES-

- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 118 lb uplift at joint 9 and 201 lb uplift at joint 6.
- "NAILED" indicates 3-10d (0.148"x3") or 2-12d (0.148"x3.25") toe-nails per NDS guidelines.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-2=-60, 2-5=-60, 6-9=-20
Concentrated Loads (lb)
Vert: 10=78(F=39, B=39) 12=-82(F=-41, B=-41) 14=1(F=1, B=1) 15=-48(F=-24, B=-24)

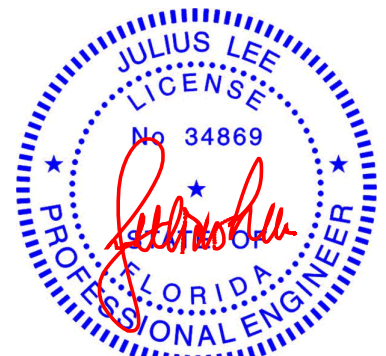

Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingle Ridge Rd. Chesterfield, MO 63017
Date:

September 20, 2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingle Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825374
SCOTT_KREMSE	CJ03	Diagonal Hip Girder	1	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:25 2022 Page 1

ID:ntfuDs1oaMOdQOhYkWF01Oyc2L8-95s8PDy4KyHJigfF1v2SMJcVNUCI3TyID?_RyPybp3y

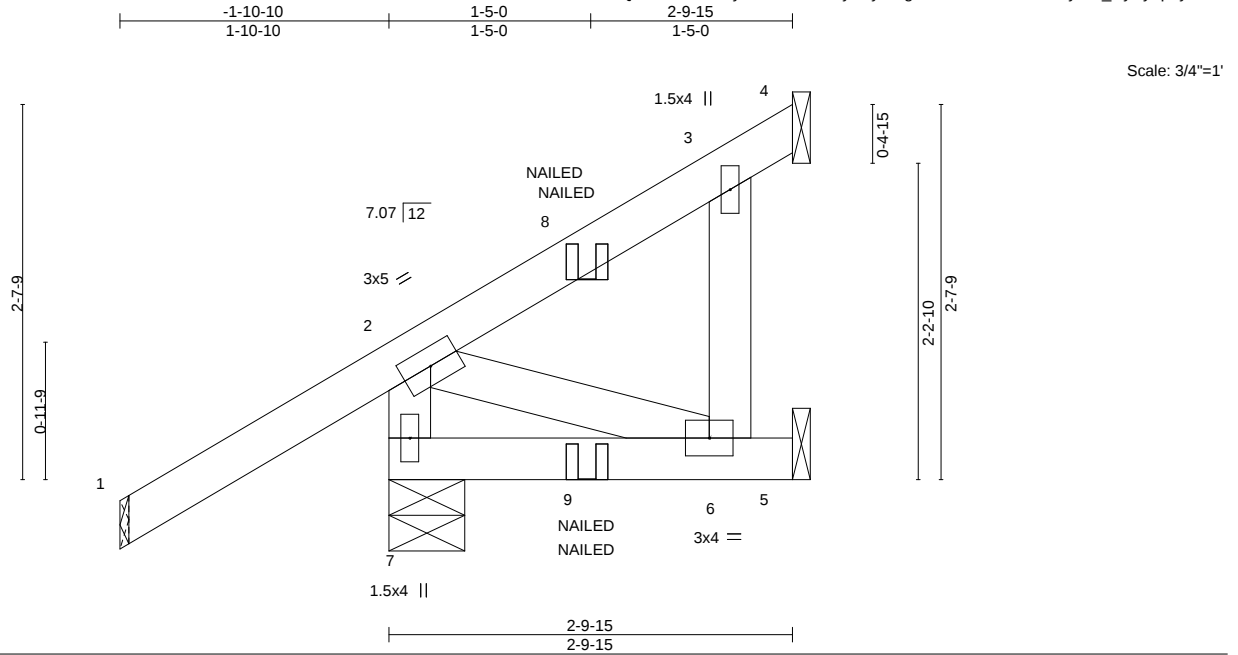

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.31	Vert(LL) 0.01	6-7	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.15	Vert(CT) 0.01	6-7	>999	180		
BCLL 0.0 *	Rep Stress Incr NO	WB 0.05	Horz(CT) -0.00	4	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-MP					Weight: 19 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-9-15 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 7=0-6-6, 4=Mechanical, 5=Mechanical
Max Horz 7=95(LC 8)
Max Uplift 7=-89(LC 8), 4=-32(LC 8), 5=-178(LC 17)
Max Grav 7=233(LC 1), 4=113(LC 17), 5=57(LC 24)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 89 lb uplift at joint 7, 32 lb uplift at joint 4 and 178 lb uplift at joint 5.
- "NAILED" indicates 3-10d (0.148"x3") or 2-12d (0.148"x3.25") toe-nails per NDS guidelines.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-2=-60, 2-4=-60, 5-7=-20
Concentrated Loads (lb)
Vert: 8=77(F=39, B=39)



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see


Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Mayo Truss Company, Inc., Mayo, FL - 32066, 8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:26 2022 Page 1
ID:ntfuDs1oaMODQOHYkWF01Oyc2L8-elQXdZzi4FPAJqERacZhvX8dBUp2ouVvSej_Urybp3x



LUMBER-		BRACING-	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD	2x6 SP SS		
WEBS	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-7=-308/0, 3-4=-311/420
WEBS 3-6=-717/790

- 1) 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
- 2) All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- 3) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plie gird DOL=1.60
- 4) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 7) Refer to girder(s) for truss to truss connections.
- 8) Refer to girder(s) for truss to truss connections.
- 9) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 1 lb uplift at joint 7, 468 lb uplift at joint 4 and 310 lb uplift at joint 5.
- 10) Use MiTek JUS26 (With 4-10d nails into Girder & 4-10d nails into Truss) or equivalent spaced at 2-0-0 oc max. starting at 1-0-12 from the left end to 5-0-12 to connect truss(es) to back face of bottom chord.
- 11) Fill all nail holes where hanger is in contact with lumber.


1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-2=-60, 2-4=-60, 5-7=-20



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20, 2022

Continued on page 2



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825375
SCOTT_KREMSER	G01	Jack-Open Girder	1	2	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:27 2022 Page 2
ID:ntfuDs1oaMOdQOhYkWF01Oyc2L8-6U_vqv_KrZX1x_pd8K4wSkhoxlIHXLk2glTX1Hybp3w


LOAD CASE(S) Standard
Concentrated Loads (lb)
Vert: 8=-786(B) 9=-785(B) 10=-808(B)

Job	Truss	Truss Type	Qty	Ply	Scott Kremser
SCOTT_KREMSE	G02	Jack-Open Girder	1	2	T28825376

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:28 2022 Page 1

ID:ntfuDs1oaMOdQOHyKWf01Oyc2L8-agYH1F?yctfuZ8Oqi1b9_yEzui5eGoNCvyC5Zjybp3v

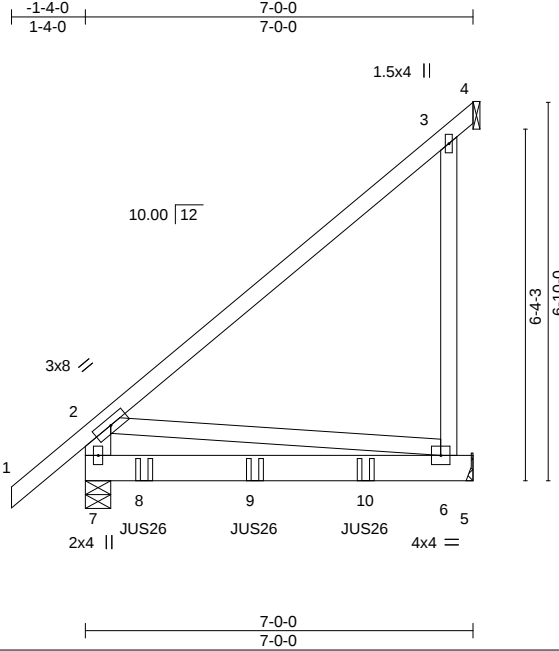

Scale = 1:41.6

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.49	Vert(LL) -0.13	6-7	>636	240	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.68	Vert(CT) -0.25	6-7	>318	180		
BCLL 0.0 *	Rep Stress Incr NO	WB 0.07	Horz(CT) 0.01	4	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-MP					Weight: 103 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x6 SP SS
WEBS 2x4 SP No.2 *Except*
2-7: 2x6 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 7=0-5-8, 4=Mechanical, 5=Mechanical
Max Horz 7=197(LC 8)
Max Uplift 4=-290(LC 13), 5=-205(LC 8)
Max Grav 7=1775(LC 1), 4=626(LC 21), 5=979(LC 25)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-7=-313/0, 3-4=-198/400
WEBS 3-6=-526/755

NOTES-

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 290 lb uplift at joint 4 and 205 lb uplift at joint 5.
- Use MiTek JUS26 (With 4-10d nails into Girder & 4-10d nails into Truss) or equivalent spaced at 2-0-0 oc max. starting at 1-0-12 from the left end to 5-0-12 to connect truss(es) to front face of bottom chord.
- Fill all nail holes where hanger is in contact with lumber.

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20, 2022

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825376
SCOTT_KREMSER	G02	Jack-Open Girder	1	2	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:28 2022 Page 2
ID:ntfuDs1oaMOdQOhYkWF01Oyc2L8-agYH1F?yctfuZ8Oqi1b9_yEzui5eGoNCvyC5Zjybp3v


LOAD CASE(S) Standard
Uniform Loads (plf)
Vert: 1-2=-60, 2-4=-60, 5-7=-20
Concentrated Loads (lb)
Vert: 8=-810(F) 9=-808(F) 10=-808(F)

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825377
SCOTT_KREMSER	H02	Half Hip Girder	1	2	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:29 2022 Page 1

ID:ntfuDs1oaMODQOhYkWF01Oyc2L8-2t6fFb?bNAnIaHz0GI7OX9mC?6XL?GzL8cye5Aypb3u



Special

Scale = 1:54.7

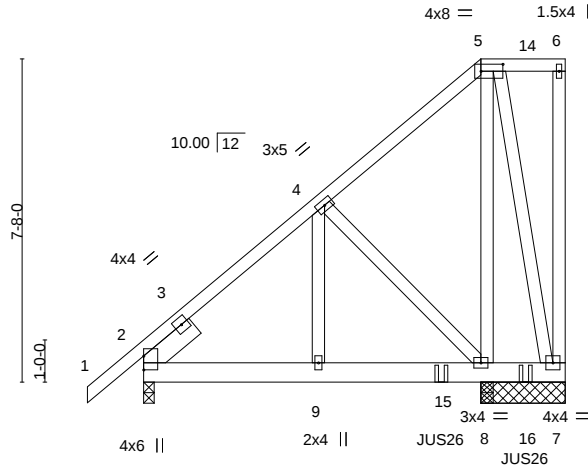


Plate Offsets (X,Y)-- [5:0-6-4,0-2-0]

LOADING (psf)	SPACING-		CSL.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	2-0-0	TC 0.15	Vert(LL)	-0.01	8-9	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.27	Vert(CT)	-0.01	8-9	>999	180		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.05	Horz(CT)	-0.00	2	n/a	n/a		
BCDL 10.0	Code FBC2020/TP12014		Matrix-MS						Weight: 185 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x6 SP No.2
WEBS 2x4 SP No.2
SLIDER Left 2x6 SP No.2 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.

All bearings 2-0-0 except (jt=length) 2=0-3-0.

(lb) - Max Horz 2=230(LC 7)

Max Uplift All uplift 100 lb or less at joint(s) 2 except 7=153(LC 14), 8=723(LC 8)

Max Grav All reactions 250 lb or less at joint(s) 7 except 2=483(LC 1), 8=1777(LC 36), 8=1771(LC 1)


FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-435/62
BOT CHORD 2-9=-135/320, 8-9=-135/320
WEBS 4-9=-61/295, 4-8=-406/123

NOTES-

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2 except (jt=lb) 7=153, 8=723.
- Use MiTek JUS26 (With 4-10d nails into Girder & 4-10d nails into Truss) or equivalent at 7-0-12 from the left end to connect truss(es) to front face of bottom chord.
- Use MiTek JUS26 (With 4-10d nails into Girder & 2-10d nails into Truss) or equivalent at 9-0-12 from the left end to connect truss(es) to front face of bottom chord.
- Fill all nail holes where hanger is in contact with lumber.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 298 lb down and 126 lb up at joint(s) 2 on top chord. The design/selection of such connection device(s) is the responsibility of others.

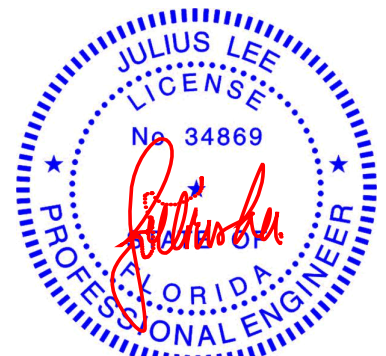

Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825377
SCOTT_KREMSER	H02	Half Hip Girder	1	2	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:29 2022 Page 2
ID:ntfuDs1oaMOdQOhYkWF01Oyc2L8-2t6fFb?bNAnlAHz0GI7OX9mC?6XL?GzL8cye5Ayp3u

LOAD CASE(S) Standard

1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25

Uniform Loads (plf)

Vert: 1-5=-60, 5-6=-60, 7-10=-20

Concentrated Loads (lb)

Vert: 14=-95(F) 15=-971(F) 16=-346(F)



Job	Truss	Truss Type	Qty	Ply	Scott Kremser
SCOTT_KREMSE	H03	Half Hip Girder	1	2	T28825378

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:31 2022 Page 1

ID:ntfuDs1oaModQOhYkWF01Oyc2L8-_FDQgH1rvo1TQb7ONA9scasYVvDpTATebwRIA2ybp3s

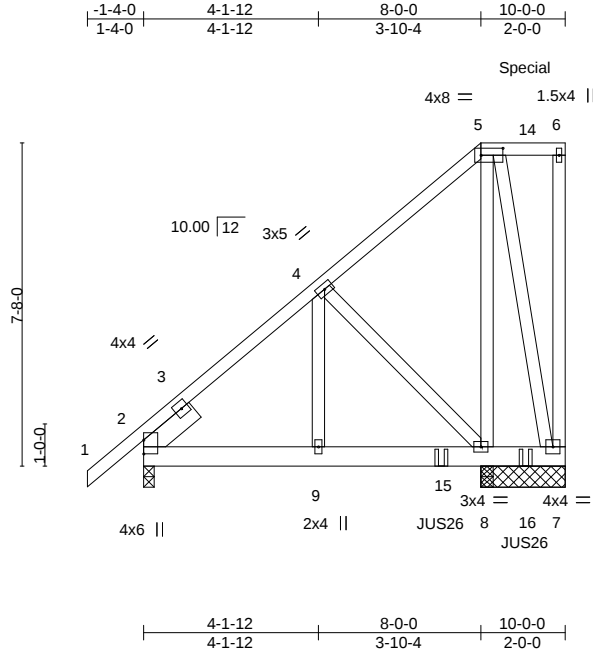


Plate Offsets (X,Y)-- [5:0-6-4,0-2-0]									
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.15	Vert(LL)	-0.01	8-9	>999	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.27	Vert(CT)	-0.01	8-9	>999		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.05	Horz(CT)	-0.00	2	n/a		
BCDL 10.0	Code FBC2020/TP12014		Matrix-MS						
								Weight: 185 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x6 SP No.2
WEBS 2x4 SP No.2
SLIDER Left 2x6 SP No.2 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.


All bearings 2-0-0 except (jt=length) 2=0-3-0.
(lb) - Max Horz 2=230(LC 7)
Max Uplift All uplift 100 lb or less at joint(s) 2 except 7=153(LC 14), 8=723(LC 8)
Max Grav All reactions 250 lb or less at joint(s) 7 except 2=483(LC 1), 8=1777(LC 36), 8=1771(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-4=-435/62
BOT CHORD 2-9=-135/320, 8-9=-135/320
WEBS 4-9=-61/295, 4-8=-406/123

NOTES-

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2 except (jt=lb) 7=153, 8=723.
- Use MiTek JUS26 (With 4-10d nails into Girder & 4-10d nails into Truss) or equivalent at 7-0-12 from the left end to connect truss(es) to back face of bottom chord.
- Use MiTek JUS26 (With 4-10d nails into Girder & 2-10d nails into Truss) or equivalent at 9-0-12 from the left end to connect truss(es) to back face of bottom chord.
- Fill all nail holes where hanger is in contact with lumber.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 298 lb down and 126 lb up at joint(s) 2 except 7=153, 8=723. The design/selection of such connection device(s) is the responsibility of others.

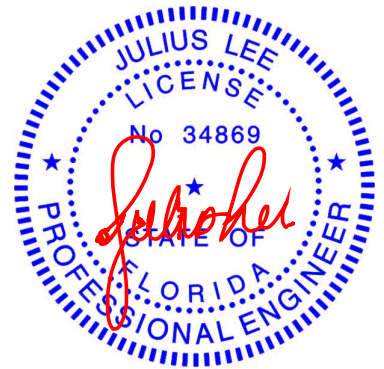

Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825378
SCOTT_KREMSER	H03	Half Hip Girder	1	2	Job Reference (optional)	

Mayo Truss Company, Inc.,
 Mayo, FL - 32066,
 8.530 s Aug 11 2022
 MiTek Industries, Inc.
 Tue Sep 20 07:22:31 2022
 Page 2
 ID:ntfuDs1oaModQOhYkWF01Oyc2L8-_FDQgH1rvo1TQb7ONA9scasYVvDpTATebwRIA2ybp3s

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
- Uniform Loads (plf)
- Vert: 1-5=-60, 5-6=-60, 7-10=-20
- Concentrated Loads (lb)
- Vert: 14=-95(B) 15=-971(B) 16=-346(B)

Job	Truss	Truss Type	Qty	Ply	Scott Kremser
SCOTT_KREMSER	H04	HALF HIP GIRDER	2	1	T28825379

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:32 2022 Page 1

ID:ntfuDs1oaModQOhYkWF01Oyc2L8-SSnotc2Tg59K1libxtg59oOb6JYUCP4nqaAliVyb3r

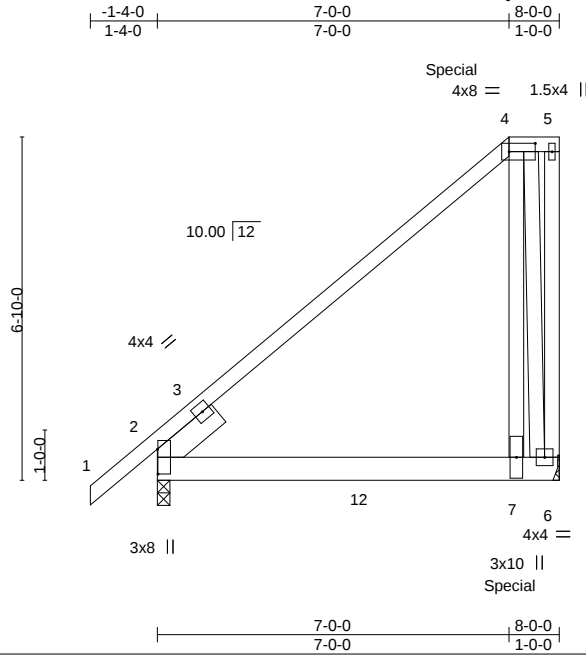


Plate Offsets (X,Y)-- [2:0-5-15,0-0-2], [4:0-6-4,0-2-0]

LOADING (psf)	SPACING-		CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	2-0-0	TC 0.67	Vert(LL)	-0.06	7-10	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.37	Vert(CT)	-0.10	7-10	>959	180		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.92	Horz(CT)	0.03	2	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MP						Weight: 67 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x6 SP No.2
WEBS 2x4 SP No.2
SLIDER Left 2x6 SP No.2 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 6=Mechanical, 2=0-3-0
Max Horz 2=204(LC 7)
Max Uplift 6=-424(LC 5), 2=-59(LC 8)
Max Grav 6=1091(LC 28), 2=512(LC 29)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-513/707
WEBS 4-7=-366/1067, 4-6=-1304/349

NOTES-

- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2 except (jt=lb) 6=424.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 376 lb down and 73 lb up at 7-0-0 on top chord, and 623 lb down and 466 lb up at 7-0-0 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-4=-60, 4-5=-60, 6-8=-20
Concentrated Loads (lb)
Vert: 4=-131(F) 7=-623(F)



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser
SCOTT_KREMSER	J01	Jack-Open	21	1	T28825380

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:33 2022 Page 1

ID:ntfuDs1oaModQOhYkWF01Oyc2L8-weLA5y25RPHBfvGnVbBKh?xo3jrlx2?x3EwsExybp3q

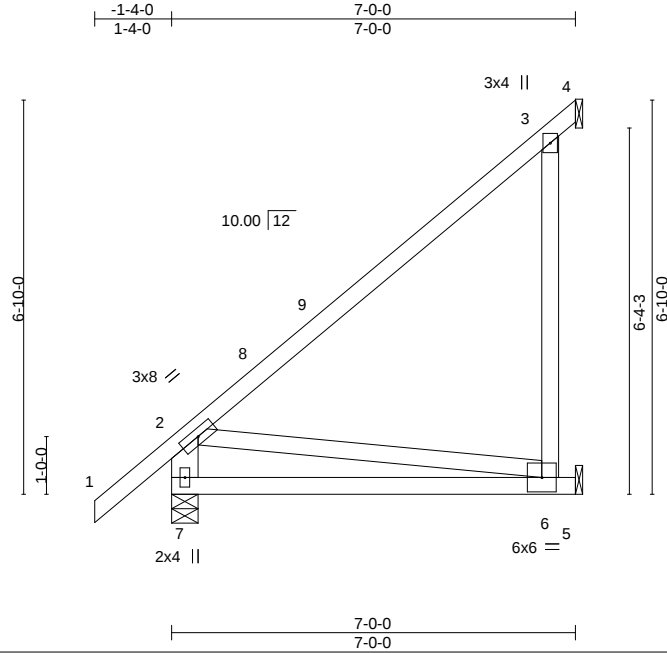

Scale = 1:39.9

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	L/defl	L/d	PLATES	GRIP
TCLL 20.0	2-0-0	TC 0.53	Vert(LL) 0.10	6-7	>829	240	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.25	BC 0.50	Vert(CT) -0.20	6-7	>406	180		
BCLL 0.0 *	Lumber DOL 1.25	WB 0.17	Horz(CT) -0.01	4	n/a	n/a		
BCDL 10.0	Rep Stress Incr YES	Matrix-AS					Weight: 46 lb	FT = 20%
	Code FBC2020/TPI2014							

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2 *Except*
2-7: 2x6 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.


(size) 7=0-5-8, 4=Mechanical, 5=Mechanical
Max Horz 7=199(LC 12)
Max Uplift 4=-49(LC 17), 5=-224(LC 12)
Max Grav 7=373(LC 1), 4=238(LC 3), 5=330(LC 17)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-7=-293/34
BOT CHORD 6-7=-307/139
WEBS 3-6=-270/533, 2-6=-140/310

NOTES-

- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) -1-4-0 to 1-8-0, Interior(1) 1-8-0 to 6-11-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 4 except (jt=lb) 5=224.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825381
SCOTT_KREMSER	J02	Jack-Open	18	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,


8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:34 2022 Page 1

ID:ntfuDs1oaMOdQOhYkWF01Oyc2L8-PqvYI13jCjP2H3rz2liZEDU2W7I9gXy4HufPmNybp3p

-1-4-0
1-4-0

1-0-0
1-0-0

Scale = 1:12.2

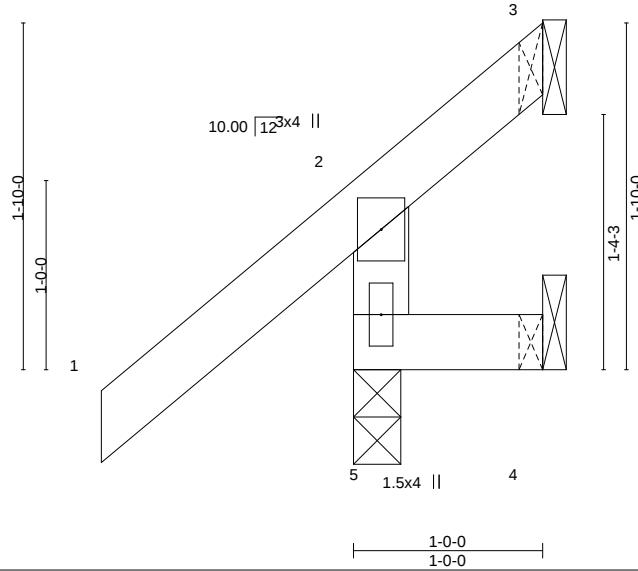

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	2-0-0	TC 0.22	Vert(LL)	0.00	5	>999	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.25	BC 0.04	Vert(CT)	0.00	5	>999		
BCLL 0.0 *	Lumber DOL 1.25	WB 0.00	Horz(CT)	-0.00	3	n/a		
BCDL 10.0	Rep Stress Incr YES	Matrix-MR					Weight: 7 lb	FT = 20%
	Code FBC2020/TPI2014							

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 1-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 5=0-3-0, 3=Mechanical, 4=Mechanical
Max Horz 5=77(LC 12)
Max Uplift 5=-29(LC 12), 3=-33(LC 1), 4=-14(LC 12)
Max Grav 5=200(LC 1), 3=10(LC 8), 4=11(LC 10)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5, 3, 4.

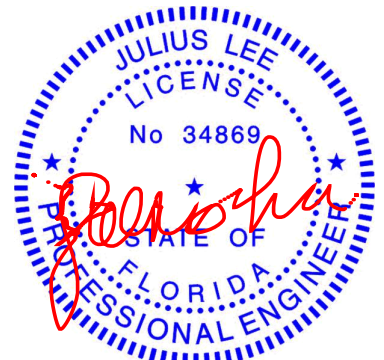

Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20, 2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser
SCOTT_KREMSER	J03	Jack-Open	16	1	T28825382

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:35 2022 Page 1

ID:ntfuDs1oaMOdQOhYkWF01Oyc2L8-t0TwVe4Lz0XvuCQAc?DomQ0ErWcGP_CEWYPyJpybp3o

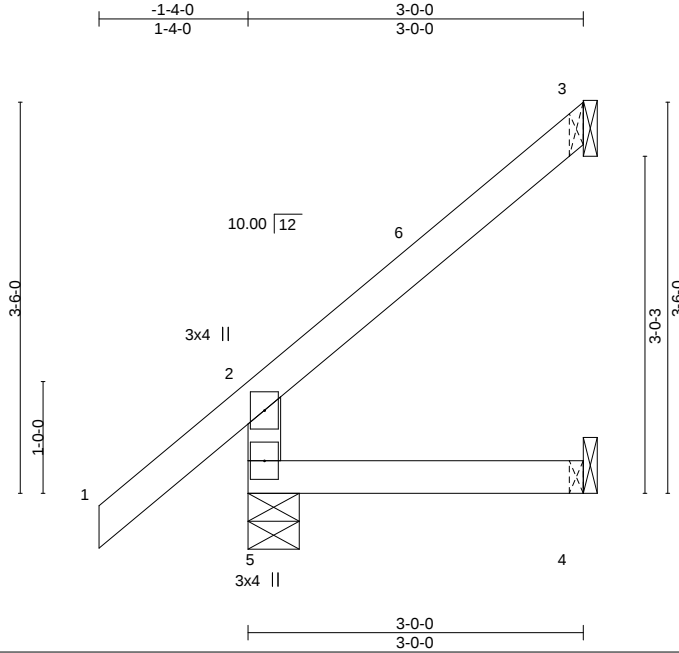

Scale = 1:20.6

LOADING (psf)	SPACING-	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 2-0-0	TC 0.19	Vert(LL) 0.01	4-5	>999	240		MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.17	Vert(CT) -0.01	4-5	>999	180			
BCLL 0.0 *	Rep Stress Incr YES	WB 0.00	Horz(CT) -0.01	3	n/a	n/a			
BCDL 10.0	Code FBC2020/TPI2014	Matrix-MR						Weight: 14 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 5=0-5-8, 3=Mechanical, 4=Mechanical
Max Horz 5=116(LC 12)
Max Uplift 5=-2(LC 12), 3=-37(LC 12)
Max Grav 5=224(LC 1), 3=74(LC 17), 4=51(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) -1-4-0 to 1-8-0, Interior(1) 1-8-0 to 2-11-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5, 3.

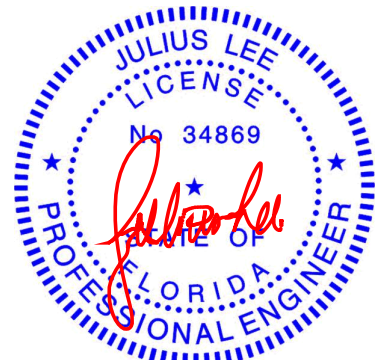

Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20, 2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser
SCOTT_KREMSER	J04	Jack-Open	16	1	T28825383


Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:36 2022 Page 1

ID:ntfuDs1oaModQOhYkWF01Oyc2L8-LD1lj_5_kKfmWM?MAj1JeZLTwwO8RSNIC8WrGybp3n



Scale = 1:30.2

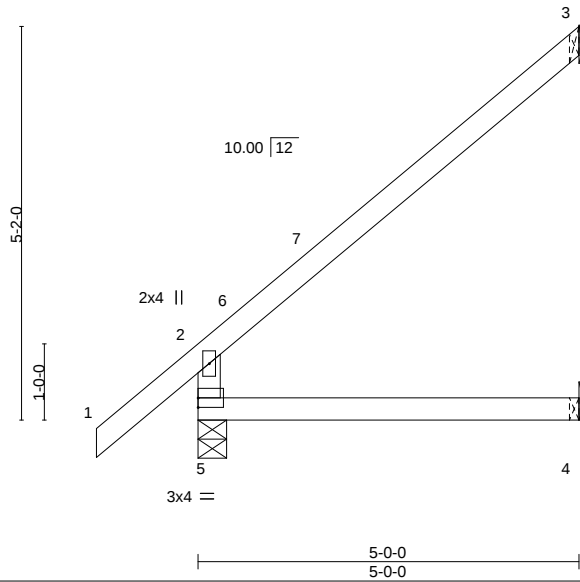

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 2-0-0	TC 0.39	Vert(LL) 0.04	4-5	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.37	Vert(CT) -0.05	4-5	>999	180		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.00	Horz(CT) -0.04	3	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-AS					Weight: 21 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.


(size) 5=0-4-8, 3=Mechanical, 4=Mechanical
Max Horz 5=156(LC 12)
Max Uplift 3=64(LC 12)
Max Grav 5=294(LC 1), 3=140(LC 17), 4=89(LC 3)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-5=-251/99

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) -1-4-0 to 1-8-0, Interior(1) 1-8-0 to 4-11-4 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 3.
- 7) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser
SCOTT_KREMSER	J05	Jack-Partial	2	1	T28825384
Job Reference (optional)					


Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:37 2022 Page 1

ID:ntfuDs1oaM0dQ0hYkWF01Oyc2L8-pPahwK5cVenc8WaYkQG6sr6R9KA0tqFX_su3Niybp3m



Scale = 1:44.7

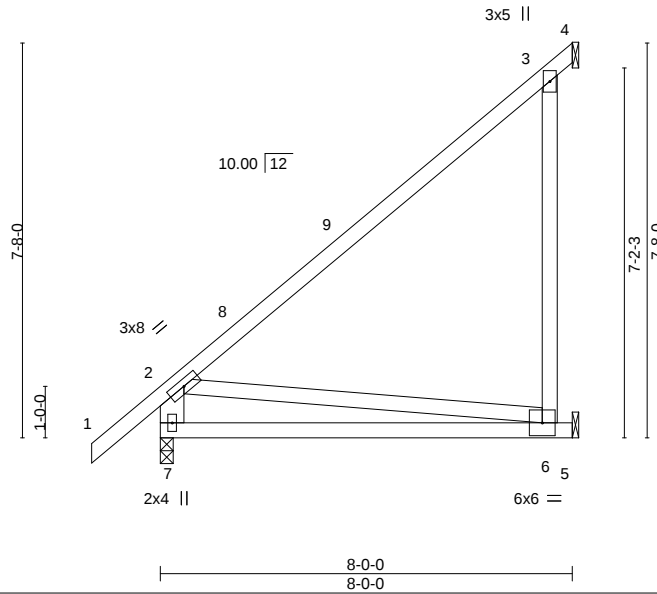

LOADING (psf)	SPACING-	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 2-0-0	TC 0.71	Vert(LL) 0.15	6-7	>620	240		MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.67	Vert(CT) -0.34	6-7	>270	180			
BCLL 0.0 *	Rep Stress Incr YES	WB 0.29	Horz(CT) -0.01	4	n/a	n/a			
BCDL 10.0	Code FBC2020/TPI2014	Matrix-AS						Weight: 52 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2 *Except*
2-7: 2x6 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.


(size) 7=0-3-0, 4=Mechanical, 5=Mechanical
Max Horz 7=218(LC 12)
Max Uplift 4=-85(LC 17), 5=-304(LC 12)
Max Grav 7=412(LC 1), 4=316(LC 3), 5=409(LC 17)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-7=-320/24
BOT CHORD 6-7=-320/147
WEBS 2-6=-148/322, 3-6=-341/638

NOTES-

- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) -1-4-0 to 1-8-0, Interior(1) 1-8-0 to 7-11-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 4 except (jt=lb) 5=304.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20, 2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825385
SCOTT_KREMSE	M01	Monopitch	9	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:39 2022 Page 1
ID:ntfuDs1oaM0dQOhYkWF01Oyc2L8-loiRL07s1F2KNqkxrrlKxGBqO8z7LmLpRANASbybp3k

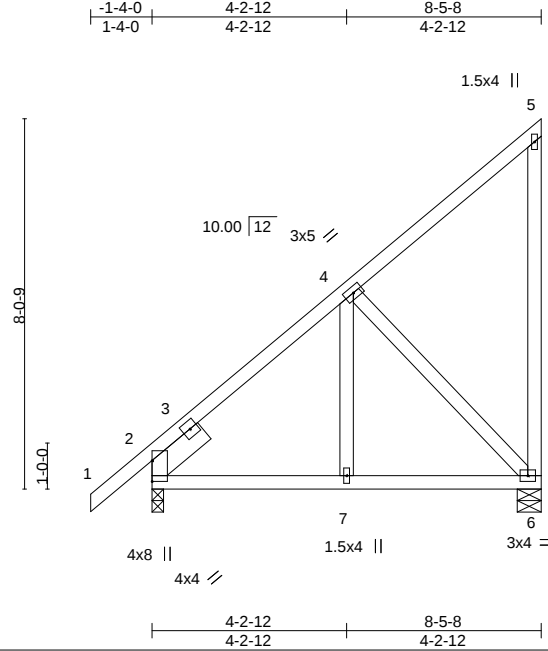

Scale = 1:50.1

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	L/defl	L/d	PLATES	GRIP
TCLL 20.0	2-0-0	TC 0.54	Vert(LL)	-0.01	6-7	>999	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.25	BC 0.18	Vert(CT)	-0.02	6-7	>999		
BCLL 0.0 *	Lumber DOL 1.25	WB 0.18	Horz(CT)	-0.01	2	n/a		
BCDL 10.0	Rep Stress Incr YES	Matrix-AS					Weight: 60 lb	FT = 20%
	Code FBC2020/TPI2014							

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2
SLIDER Left 2x6 SP No.2 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 2=0-3-0, 6=0-6-4
Max Horz 2=238(LC 11)
Max Uplift 2=-21(LC 12), 6=-77(LC 9)
Max Grav 2=419(LC 1), 6=367(LC 17)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-341/50
BOT CHORD 2-7=-223/303, 6-7=-223/303
WEBS 4-6=-316/215

NOTES-

- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) -1-4-0 to 1-8-0, Interior(1) 1-8-0 to 8-3-12 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 6.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20, 2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825386
SCOTT_KREMSER	M02	Monopitch	1	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:40 2022 Page 1
ID:ntfuDs1oaModQOhYkWF01Oyc2L8-D_GpZM8UnZAB?_J7PZpzTuk0IXDx4FRzgq6j_1ybp3j

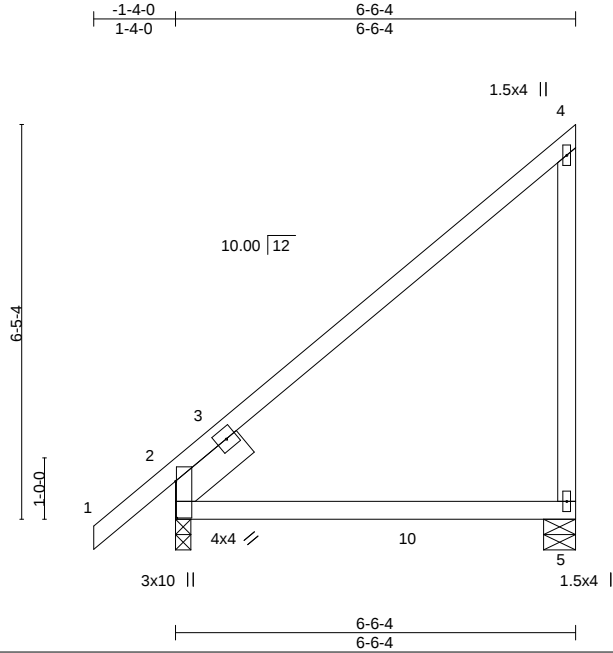

Scale = 1:37.6

Plate Offsets (X,Y)--		[2:0-7-3,0-0-3]			
LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.50	Vert(LL) 0.13 5-8 >612 240	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.53	Vert(CT) -0.20 5-8 >382 180		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.00	Horz(CT) 0.07 2 n/a n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-AS		Weight: 37 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2
SLIDER Left 2x6 SP No.2 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.


(size) 5=0-6-4, 2=0-3-0
Max Horz 2=189(LC 11)
Max Uplift 5=63(LC 9), 2=24(LC 12)
Max Grav 5=359(LC 17), 2=382(LC 18)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=353/204

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) -1-4-0 to 1-8-0, Interior(1) 1-8-0 to 6-4-8 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5, 2.
- 6) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Mayo Truss Company, Inc., Mayo, FL - 32066, 8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:41 2022 Page 1
ID:ntfuDs1oaM0dQOHYKWF01Oyc2L8-hAqBmh96Ysl2d7uJzGKD0hGBdxZNpih6uUsHWtybpb3i



NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) -1-4-0 to 1-8-0, Interior(1) 1-8-0 to 6-3-12 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5, 2.
- 6) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



September 20, 2022

 WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

WARNING - verify design parameters and READ NOTES ON THIS AND INCLUDED MITER REFERENCE PAGE MH/473 (rev. 5/19/2020) BEFORE USE. Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825388
SCOTT_KREMSER	M04	Monopitch	1	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:42 2022 Page 1

ID:ntfuDs1oaMOdQOhYkWF01Oyc2L8-ANOaz19kJAQvEHTWW_sSYvpJBLrQY9xG78bq3vybp3h

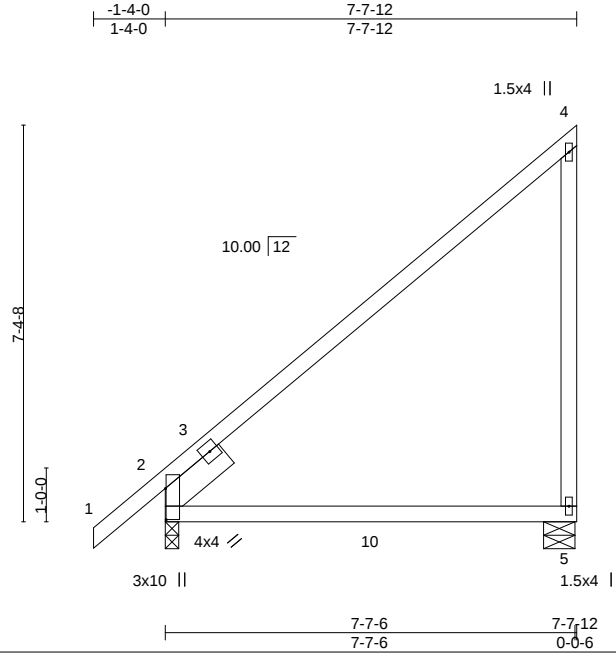

Scale = 1:42.8

Plate Offsets (X,Y)-- [2:0-6-15,0-0-3]

LOADING (psf)	SPACING-		CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	2-0-0	TC 0.69	Vert(LL)	-0.22	5-8	>411	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.78	Vert(CT)	-0.39	5-8	>229	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.11	2	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-AS						Weight: 43 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2
SLIDER Left 2x6 SP No.2 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.


(size) 5=0-7-0, 2=0-3-0
Max Horz 2=218(LC 11)
Max Uplift 5=-71(LC 9), 2=-22(LC 12)
Max Grav 5=429(LC 17), 2=440(LC 18)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-462/231, 4-5=-284/262

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) -1-4-0 to 1-8-0, Interior(1) 1-8-0 to 7-6-0 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5, 2.
- 6) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825389
SCOTT_KREMSE	PB01	Piggyback	1	1	Job Reference (optional)	


Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:43 2022 Page 1

ID:ntfuDs1oaMOdQOhYkWF01Oyc2L8-eZyyBNAN4UYmsR1i4hNh56MXyIJ3HcPPMoLobMybp3g

24-0-0
24-0-0

Scale = 1:41.4

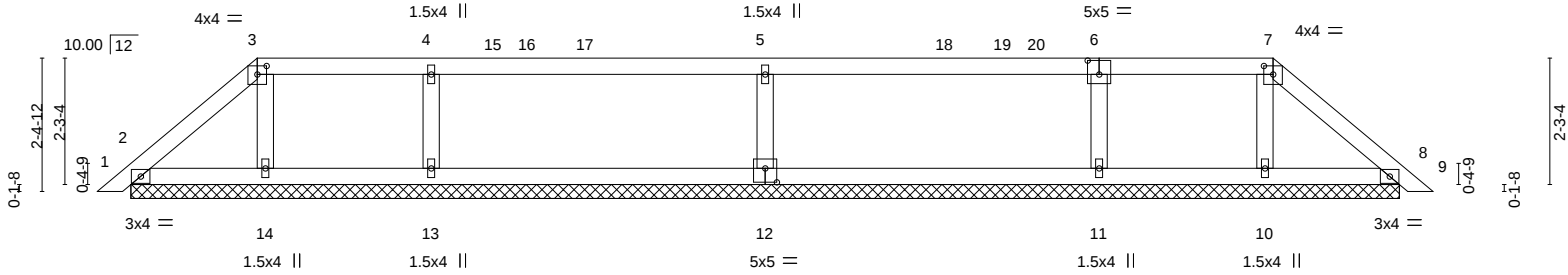

24-0-0
24-0-0

Plate Offsets (X,Y)-- [3:0-2-0,0-1-13], [6:0-2-8,0-3-0], [7:0-2-0,0-1-13], [12:0-2-8,0-3-0]

LOADING (psf)	SPACING-	CSL	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.46	Vert(LL)	0.00	8	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.31	Vert(CT)	0.00	9	n/r	120		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.05	Horz(CT)	0.00	8	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-S						Weight: 85 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2
OTHERS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 22-9-7.

(lb) - Max Horz 2=-44(LC 10)

Max Uplift All uplift 100 lb or less at joint(s) 2, 12, 14, 10, 8

Max Grav All reactions 250 lb or less at joint(s) 2, 14, 10, 8 except 12=517(LC 1), 13=415(LC 22), 11=350(LC 21)


FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

WEBS 5-12=-420/84, 4-13=-291/69

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) 0-2-12 to 2-10-8, Exterior(2R) 2-10-8 to 7-1-7, Interior(1) 7-1-7 to 21-1-8, Exterior(2E) 21-1-8 to 23-9-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 12, 14, 10, 8.
- See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.

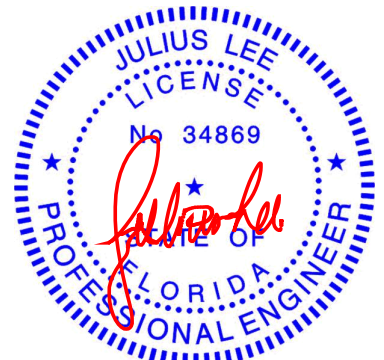

Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20, 2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825390
SCOTT_KREMSER	PB02	Piggyback	1	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:44 2022 Page 1

ID:ntfuDs1oaModQOhYkWF01Oyc2L8-6iWKOjB?mgdUbcueOuwKukW9fB010YbS4x7oybp3f

24-0-0
24-0-0

Scale = 1:41.4

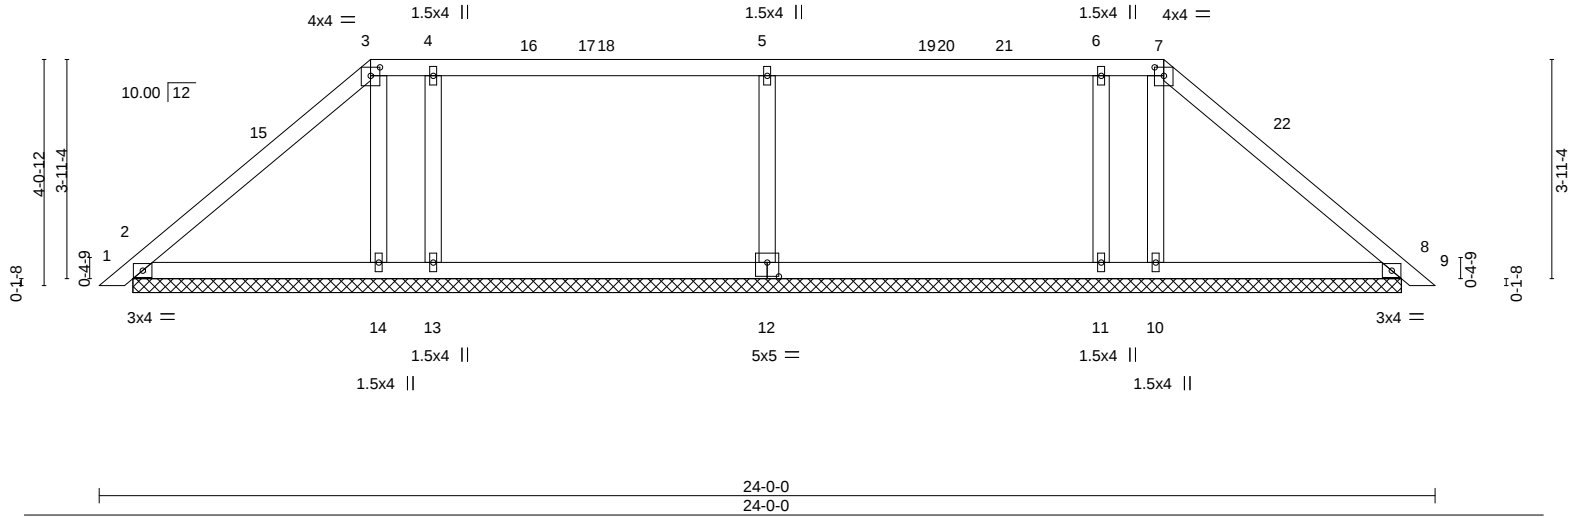


Plate Offsets (X,Y)-- [3:0-2-0,0-1-13], [7:0-2-0,0-1-13], [12:0-2-8,0-3-0]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.38	Vert(LL)	0.00	9	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.31	Vert(CT)	0.01	9	n/r	120		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.09	Horz(CT)	0.00	8	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-S						Weight: 99 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2
OTHERS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 22-9-7.
(lb) - Max Horz 2=-77(LC 10)
Max Uplift All uplift 100 lb or less at joint(s) 2, 12, 14, 10, 8
Max Grav All reactions 250 lb or less at joint(s) 2, 14, 10, 8 except 12=476(LC 1), 13=437(LC 22), 11=437(LC 21)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
WEBS 5-12=-381/76, 4-13=-314/72, 6-11=-314/73

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) 0-2-12 to 3-2-12, Interior(1) 3-2-12 to 4-10-8, Exterior(2R) 4-10-8 to 9-1-7, Interior(1) 9-1-7 to 19-1-8, Exterior(2R) 19-1-8 to 23-4-12, Interior(1) 23-4-12 to 23-9-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 12, 14, 10, 8.
- See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825391
SCOTT_KREMSER	PB03	Piggyback	1	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:46 2022 Page 1

ID:ntfuDs1oaModQOhYkWF01Oyc2L8-28d4pPCFNPwLjvmHlpwOjIz3eyKHUwir2mZ2Chybp3d

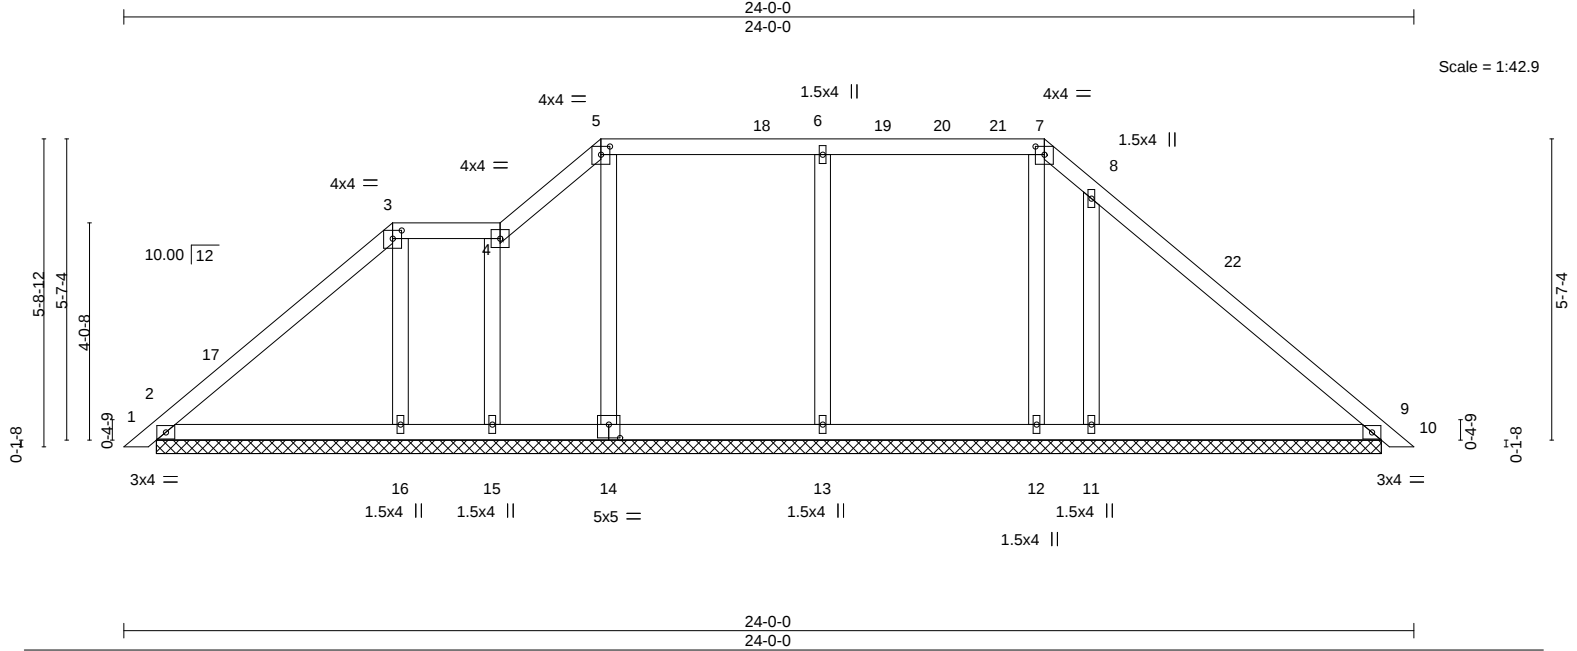


Plate Offsets (X,Y)-- [3:0-2-0,0-1-13], [5:0-2-0,0-1-13], [7:0-2-0,0-1-13], [14:0-2-8,0-3-0]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.34	Vert(LL)	0.01	10	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.27	Vert(CT)	0.02	10	n/r	120		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.14	Horz(CT)	0.00	9	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-S						Weight: 115 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2
OTHERS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6'-0" oc purlins.
BOT CHORD Rigid ceiling directly applied or 10'-0" oc bracing.

REACTIONS.

All bearings 22-9-7.
(lb) - Max Horz 2=-111(LC 10)
Max Uplift All uplift 100 lb or less at joint(s) 16, 15, 12 except 11=-120(LC 12)
Max Grav All reactions 250 lb or less at joint(s) 2, 15, 12, 9 except 11=632(LC 18), 16=408(LC 17), 14=268(LC 17), 13=479(LC 18)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
WEBS 8-11=-400/207, 6-13=-288/66

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) 0-2-12 to 3-2-12, Interior(1) 3-2-12 to 5-0-0, Exterior(2E) 5-0-0 to 7-0-0, Interior(1) 7-0-0 to 8-10-8, Exterior(2R) 8-10-8 to 11-10-8, Interior(1) 11-10-8 to 17-1-8, Exterior(2R) 17-1-8 to 20-1-8, Interior(1) 20-1-8 to 23-9-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-6" tall by 2'-0" wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 16, 15, 12 except (jt=lb) 11=120.
- See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20, 2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825392
SCOTT_KREMSER	PB04	Piggyback	1	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:47 2022 Page 1
ID:ntfuDs1oaModQOhYkWF01Oyc2L8-WKBT1Dt8i2CL2LTJXRdFyWCJMDkDL9?HQJbk7ybp3c

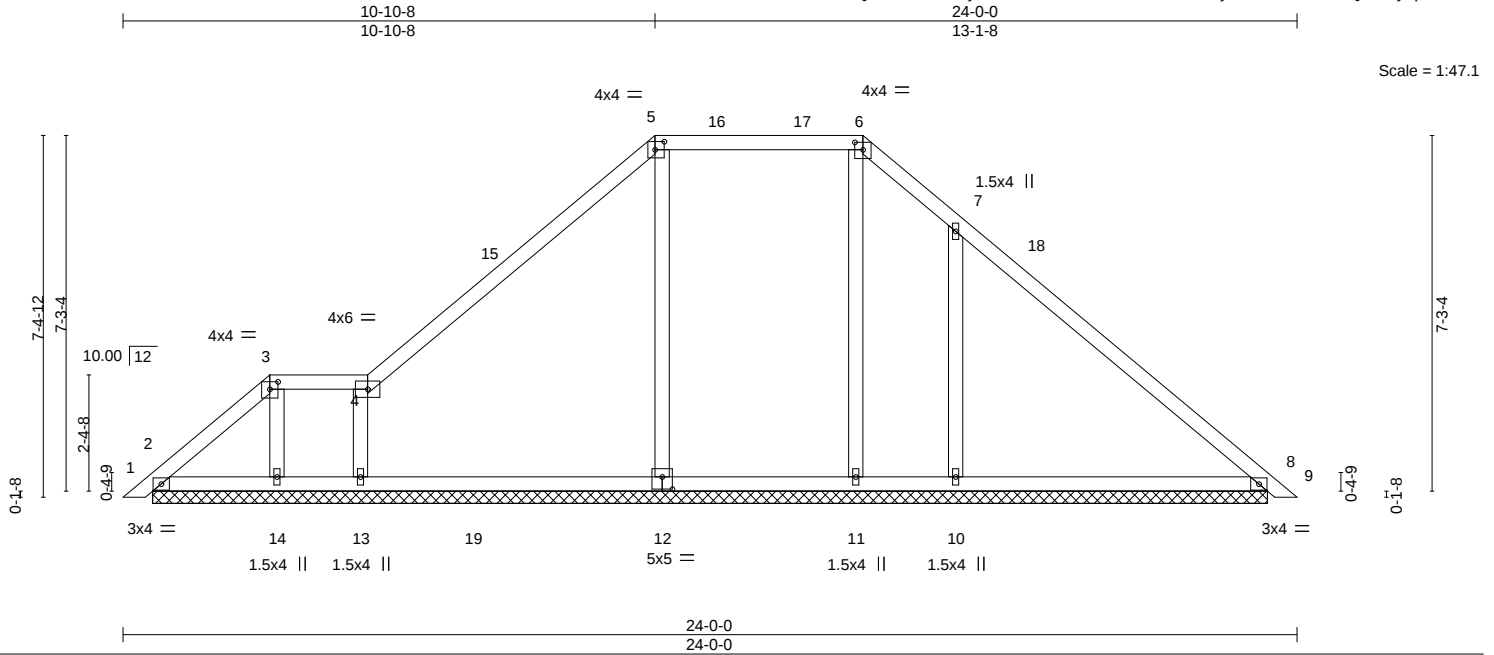


Plate Offsets (X,Y)-- [3:0-2-0,0-1-13], [5:0-2-4,0-2-0], [6:0-2-0,0-1-13], [12:0-2-8,0-3-0]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.48	Vert(LL)	0.02	9	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.45	Vert(CT)	0.03	9	n/r	120		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.26	Horz(CT)	0.00	8	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-S						Weight: 111 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2
OTHERS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6'-0" oc purlins.
BOT CHORD Rigid ceiling directly applied or 10'-0" oc bracing.

REACTIONS.


All bearings 22-9-7.
(lb) - Max Horz 2=-144(LC 10)
Max Uplift All uplift 100 lb or less at joint(s) 14, 13 except 10=-123(LC 12)
Max Grav All reactions 250 lb or less at joint(s) 2, 11, 14 except 12=511(LC 17), 10=645(LC 18), 13=558(LC 17), 8=259(LC 18)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
WEBS 5-12=-303/57, 7-10=-410/201, 4-13=-308/120

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCCL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) 0-2-12 to 5-0-0, Interior(1) 5-0-0 to 10-10-8, Exterior(2R) 10-10-8 to 13-10-8, Interior(1) 13-10-8 to 15-1-8, Exterior(2R) 15-1-8 to 18-1-8, Interior(1) 18-1-8 to 23-9-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-6" tall by 2'-0" wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 14, 13 except (jt=lb) 10=123.
- See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingle Ridge Rd. Chesterfield, MO 63017
Date:

September 20, 2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingle Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825393
SCOTT_KREMSER	PB05	Piggyback	1	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:49 2022 Page 1
ID:ntfuDs1oaModQOhYkWF01Oyc2L8-SjJDRRF7gKIwaMVSRyU5LNbU6AGKhFbIkjoio?ybp3a

1-0-0	3-0-0	10-0-0	24-0-0
1-0-0	2-0-0	7-0-0	14-0-0

Scale = 1:43.8

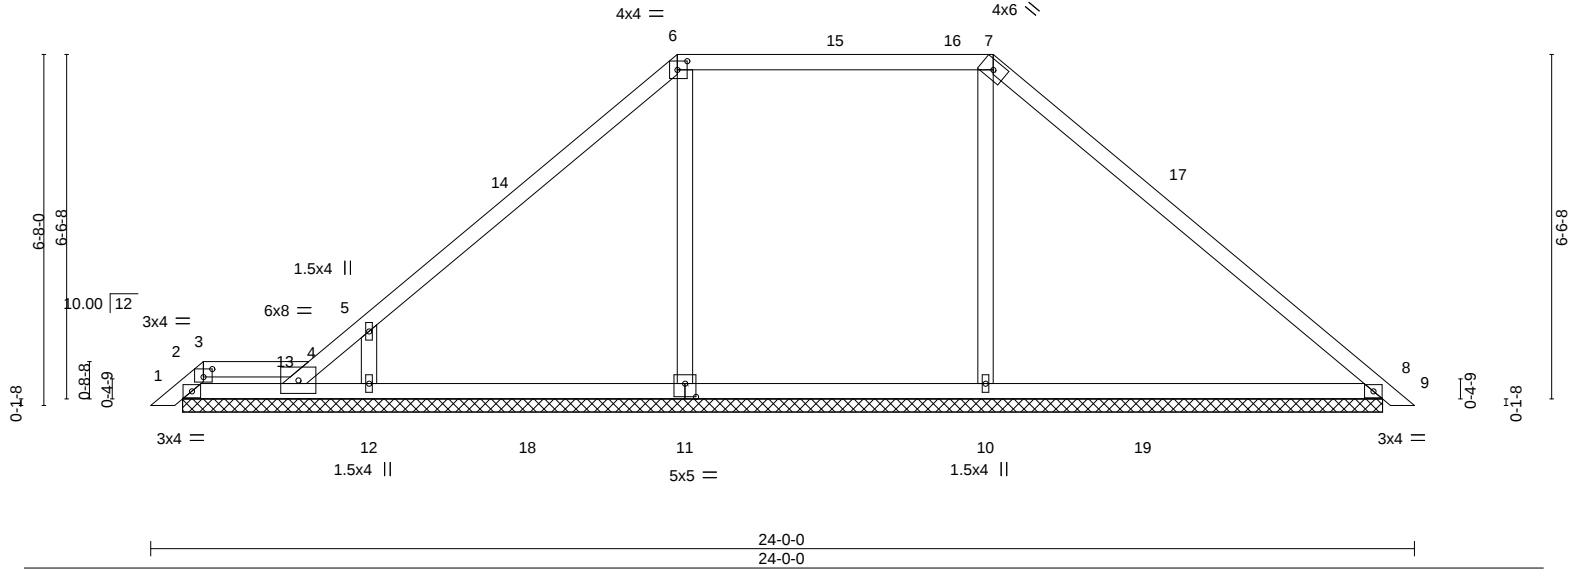


Plate Offsets (X,Y)-- [3:0-2-0,0-1-13], [6:0-2-4,0-2-0], [11:0-2-8,0-3-0]

LOADING (psf)	SPACING-		CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25		TC 0.71	Vert(LL)	0.03	9	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL 1.25		BC 0.70	Vert(CT)	0.06	9	n/r	120		
BCLL 0.0 *	Rep Stress Incr YES		WB 0.26	Horz(CT)	0.00	8	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-S						Weight: 97 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2
OTHERS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


All bearings 22-9-7.
(lb) - Max Horz 2=129(LC 11)
Max Uplift All uplift 100 lb or less at joint(s) 2, 8 except 13=182(LC 17), 12=108(LC 12)
Max Grav All reactions 250 lb or less at joint(s) 13, 2 except 11=494(LC 17), 12=704(LC 17), 10=766(LC 18), 8=359(LC 18)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
WEBS 6-11=-304/49, 5-12=-422/227, 7-10=-381/80

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCCL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) 0-2-12 to 3-0-10, Interior(1) 3-0-10 to 10-0-0, Exterior(2R) 10-0-0 to 13-0-0, Interior(1) 13-0-0 to 16-0-0, Exterior(2R) 16-0-0 to 19-0-0, Interior(1) 19-0-0 to 23-9-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 8 except (jt=lb) 13=182, 12=108.
- See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

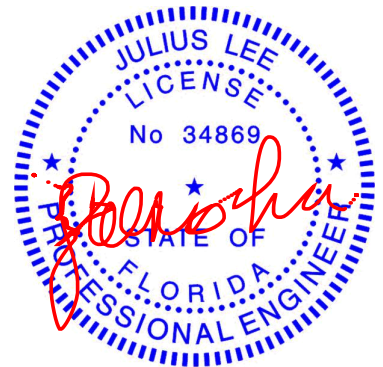

Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingle Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




16023 Swingle Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825394
SCOTT_KREMSER	PB06	Piggyback	1	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:50 2022 Page 1

ID:ntfuDs1oaMOdQOhYkWF01Oyc2L8-xvtbfmGmRdQmCW42_f?Ktb8l_ZgAQI?RzNXFLSybp3Z



Scale = 1:38.5

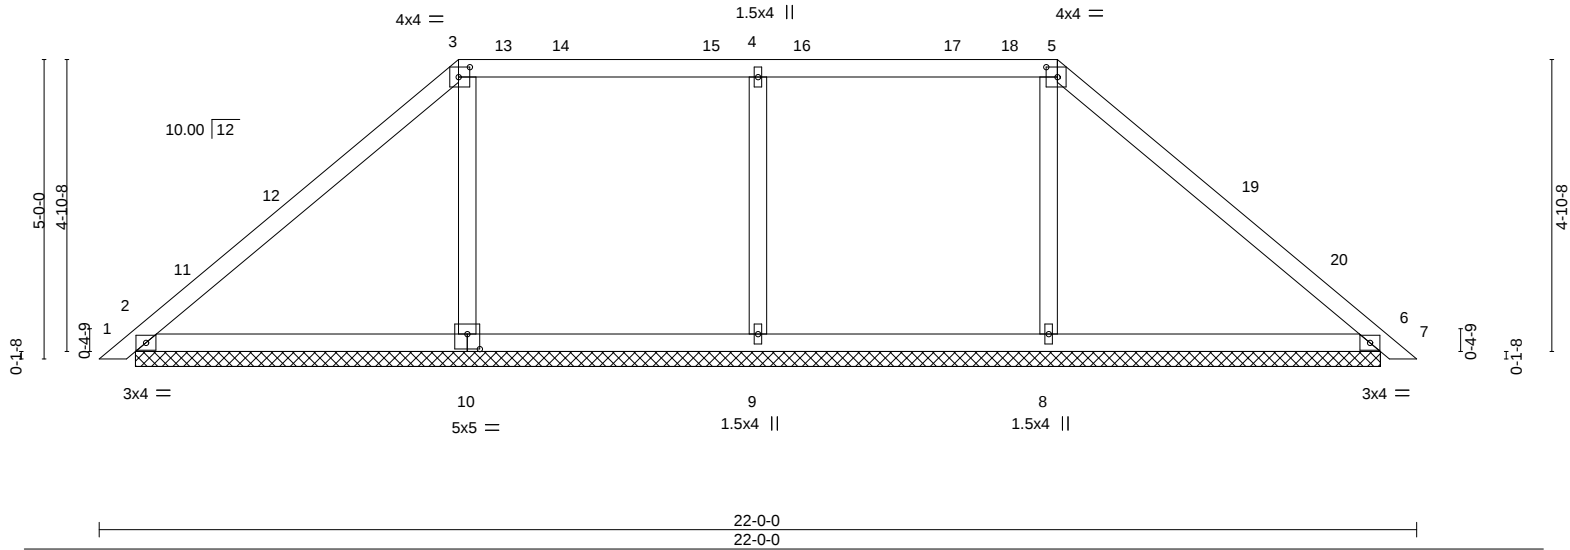


Plate Offsets (X,Y)-- [3:0-2-4,0-2-0], [5:0-2-4,0-2-0], [10:0-2-8,0-3-0]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.38	Vert(LL)	0.01	7	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.40	Vert(CT)	0.02	7	n/r	120		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.12	Horz(CT)	0.00	6	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-S						Weight: 88 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
OTHERS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


- All bearings 20-9-7.
(lb) - Max Horz 2=-96(LC 10)
Max Uplift All uplift 100 lb or less at joint(s) 2, 6
Max Grav All reactions 250 lb or less at joint(s) except 2=273(LC 18), 9=543(LC 23), 10=483(LC 17), 8=511(LC 18), 6=265(LC 18)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
WEBS 4-9=-332/62, 3-10=-283/63, 5-8=-273/60

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) 0-2-12 to 3-2-12, Interior(1) 3-2-12 to 6-0-0, Exterior(2R) 6-0-0 to 10-2-15, Interior(1) 10-2-15 to 16-0-0, Exterior(2R) 16-0-0 to 20-2-15, Interior(1) 20-2-15 to 21-9-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 6.
- See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20, 2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825395
SCOTT_KREMSER	PB07	Piggyback	1	1	Job Reference (optional)	

Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:52 2022 Page 1

ID:ntfuDs1oaMOdQOhYkWF01Oyc2L8-tl?M4SH0zFgURqDR641oy0D1mNLyuf7kQhOMPkybp3X

22-0-0
22-0-0

Scale = 1:37.8

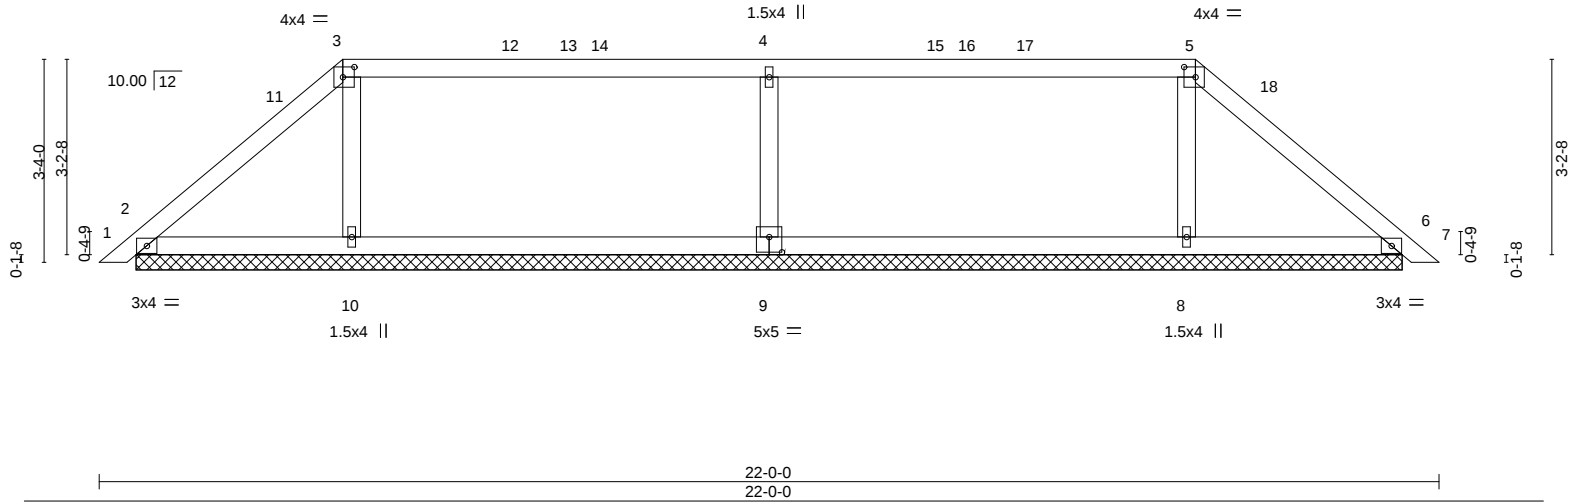


Plate Offsets (X,Y)-- [3:0-2-4,0-2-0], [5:0-2-4,0-2-0], [9:0-2-8,0-3-0]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.62	Vert(LL)	0.00	7	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.41	Vert(CT)	0.00	7	n/r	120		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.08	Horz(CT)	0.00	6	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-S						Weight: 79 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2
OTHERS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6'-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10'-0-0 oc bracing.

REACTIONS.

All bearings 20-9-7.
(lb) - Max Horz 2=-63(LC 10)
Max Uplift All uplift 100 lb or less at joint(s) 2, 9, 6
Max Grav All reactions 250 lb or less at joint(s) 2, 6 except 9=600(LC 21), 10=416(LC 21), 8=416(LC 22)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
WEBS 4-9=-489/96, 3-10=-267/66, 5-8=-267/64

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) 0-2-12 to 3-2-12, Interior(1) 3-2-12 to 4-0-0, Exterior(2R) 4-0-0 to 8-2-15, Interior(1) 8-2-15 to 18-0-0, Exterior(2E) 18-0-0 to 21-9-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-6-0 tall by 2'-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 9, 6.
- See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Scott Kremser	T28825396
SCOTT_KREMSER	PB08	Piggyback	1	1	Job Reference (optional)	


Mayo Truss Company, Inc., Mayo, FL - 32066,

8.530 s Aug 11 2022 MiTek Industries, Inc. Tue Sep 20 07:22:53 2022 Page 1

ID:ntfuDs1oaModQOHYkWF01Oyc2L8-LUYkHolekYoL3zodgnY1VDmE1njOd7ytlLmvxnybp3W

22-0-0
22-0-0

Scale = 1:37.8

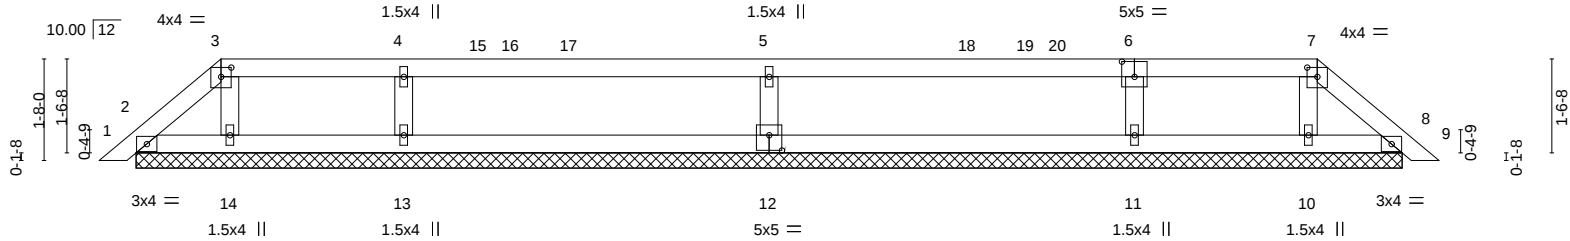

22-0-0
22-0-0

Plate Offsets (X,Y)-- [3:0-2-0,0-1-13], [6:0-2-8,0-3-0], [7:0-2-0,0-1-13], [12:0-2-8,0-3-0]

LOADING (psf)	SPACING-	CSL.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.46	Vert(LL)	0.00	8	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.31	Vert(CT)	0.00	8	n/r	120		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.05	Horz(CT)	0.00	8	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-S						Weight: 73 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.2
OTHERS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 20-9-7.
(lb) - Max Horz 2=-30(LC 10)
Max Uplift All uplift 100 lb or less at joint(s) 2, 12, 14, 10, 8
Max Grav All reactions 250 lb or less at joint(s) 2, 14, 10, 8 except 12=517(LC 1), 13=417(LC 22), 11=349(LC 21)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
WEBS 5-12=-419/84, 4-13=-290/72

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; B=45ft; L=24ft; eave=4ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (directional) and C-C Exterior(2E) 0-2-12 to 2-0-0, Exterior(2R) 2-0-0 to 6-2-15, Interior(1) 6-2-15 to 20-0-0, Exterior(2E) 20-0-0 to 21-9-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 12, 14, 10, 8.
- See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.



Julius Lee PE No. 34869
MiTek Inc. DBA MiTek USA FL Cert 6634
16023 Swingley Ridge Rd. Chesterfield, MO 63017
Date:

September 20,2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component


Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Symbols

PLATE LOCATION AND ORIENTATION



Center plate on joint unless X, Y offsets are indicated. Dimensions are in ft-in-sixteenths. Apply plates to both sides of truss and fully embed teeth.



For 4 x 2 orientation, locate plates 0- $\frac{3}{16}$ " from outside edge of truss.

— This symbol indicates the required direction of slots in connector plates.

*** Plate location details available in MiTek 2012 software or upon request.**

PLATE SIZE

4 X 4


The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T or I bracing if indicated.

BEARING




Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number where bearings occur. Min size shown is for crushing only.

Industry Standards:

ANSI/TP1.1: National Design Specification for Metal Plate Connected Wood Truss Construction.
DSB-89: Building Component Safety Information, Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses.

Numbering System

6-4-8 dimensions shown in ft-in-sixteenths (Drawings not to scale)

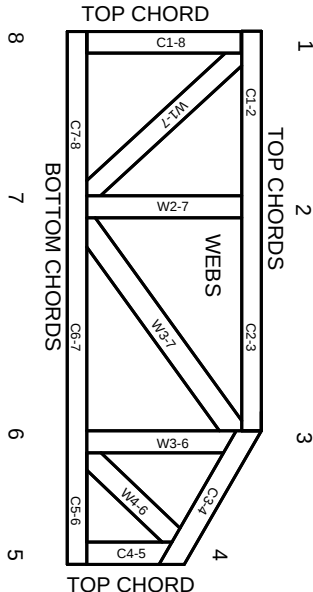

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

PRODUCT CODE APPROVALS

ICC-ES Reports:

ESR-1311, ESR-1352, ESR1988
ER-3907, ESR-2362, ESR-1397, ESR-3282

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.

Lumber design values are in accordance with ANSI/TP1 1 section 6.3 These truss designs rely on lumber values established by others.

© 2012 MiTek® All Rights Reserved



MiTek Engineering Reference Sheet: MII-7473 rev. 5/19/2020



General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative Tor I bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TP1 1.
7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TP1 1.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with ANSI/TP1 1 Quality Criteria.
21. The design does not take into account any dynamic or other loads other than those expressly stated.