

BUILDING CRITERIA

Width (ft)	= 100.0
Length (ft)	= 105.0
Eave Height (ft)	= 14.0/14.0
Roof Slope (Rise/12)	= 2.0/2.0
Dead Load (psf)	= 2.0
Collateral Load (psf)	= 0.0
Roof Live Load (psf)	= 20.0
Frame Live Load (psf)	= 12.0
Wind Speed (mph)	= 110.0
Wind Code	= FBC 04
Exposure	= B
Closed/Open/Partial	= C
Importance - Wind	= 1.00
Importance - Seismic	= 1.00
Seismic Coeff (Fd*Sa)	= 0.22

NOTES TO ERECTOR/OWNER:

- [1] "SBS" IS NOT RESPONSIBLE FOR THE ERECTION OF THE BUILDING, THE SUPPLY OF ANY TOOLS OR EQUIPMENT, OR ANY OTHER FIELD WORK UNLESS "SBS" HAS BEEN

BUILDING "A"
[100'-0" X 105'-0" X 14'-0"]

BUILDING "B"
[50'-0" X 20'-0"
X 14'-0"/22'-4"]

105'-0"

20'-0"

50'-0"

50'-0"

100'-0"

PROJECT LAYOUT PLAN

SBS STEEL BUILDING SYSTEMS, INC.

CUSTOMER:
NORTON HOME IMPROVEMENT


JOB NO: 05-08-222A DATE: 9/ 7/05


LOCATION: LAKE CITY, FLORIDA

DRAWING NAME: PROJECT LAYOUT PLAN

DRAWING NO: PAGE 1



105'-0" OUT-TO-OUT OF CONCRETE

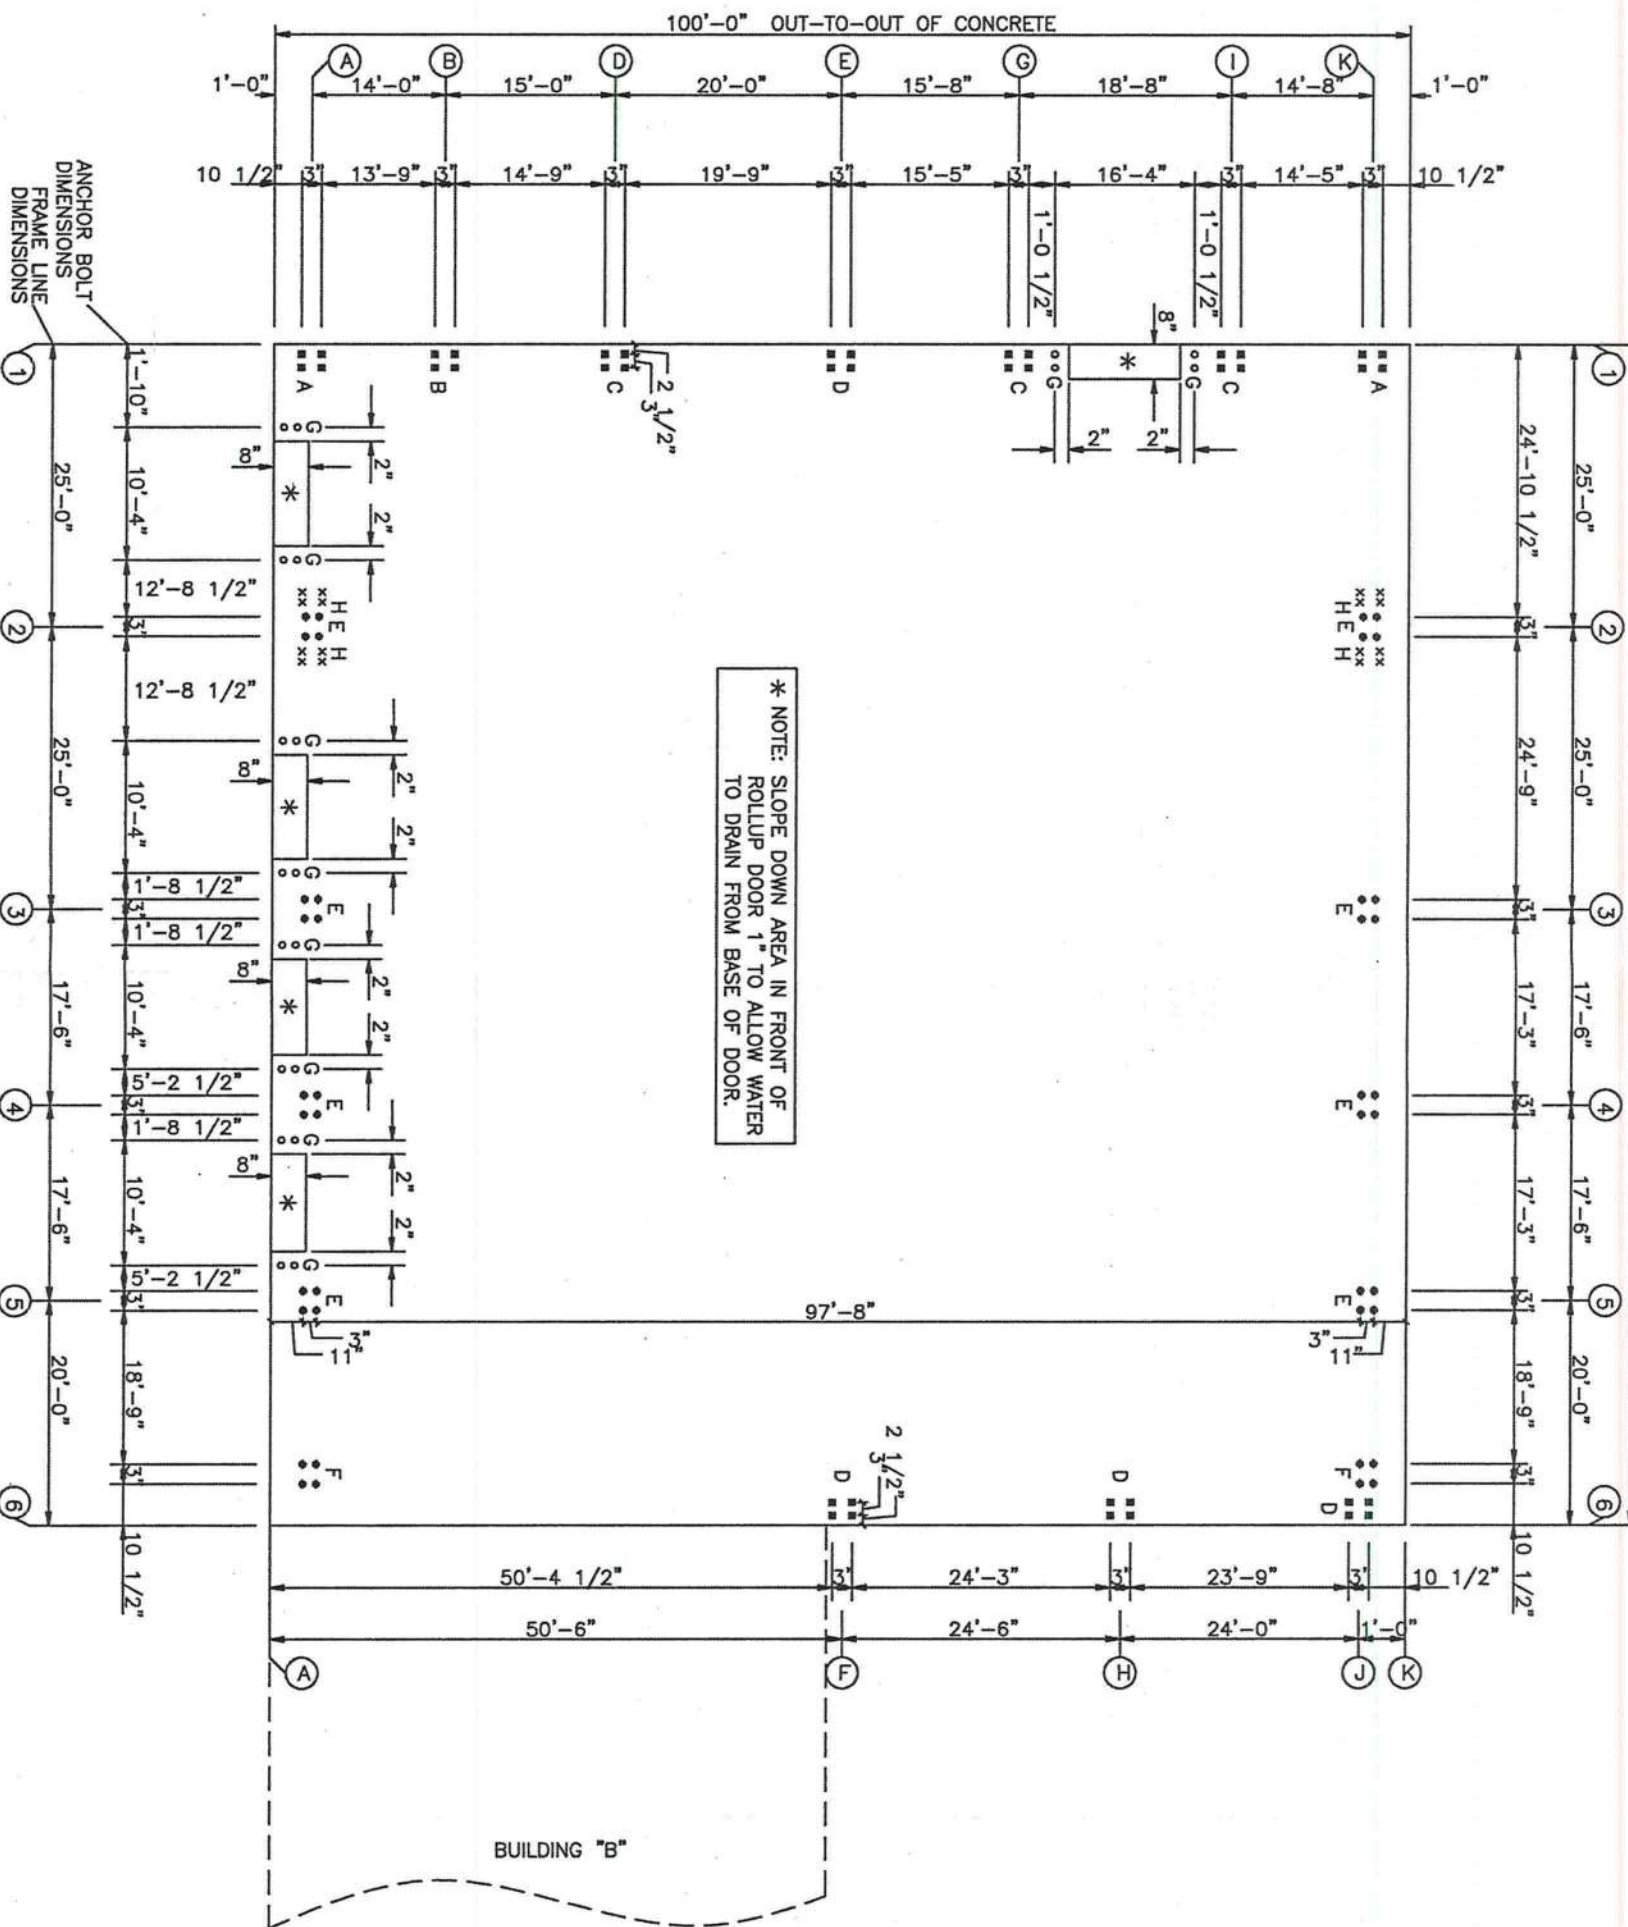


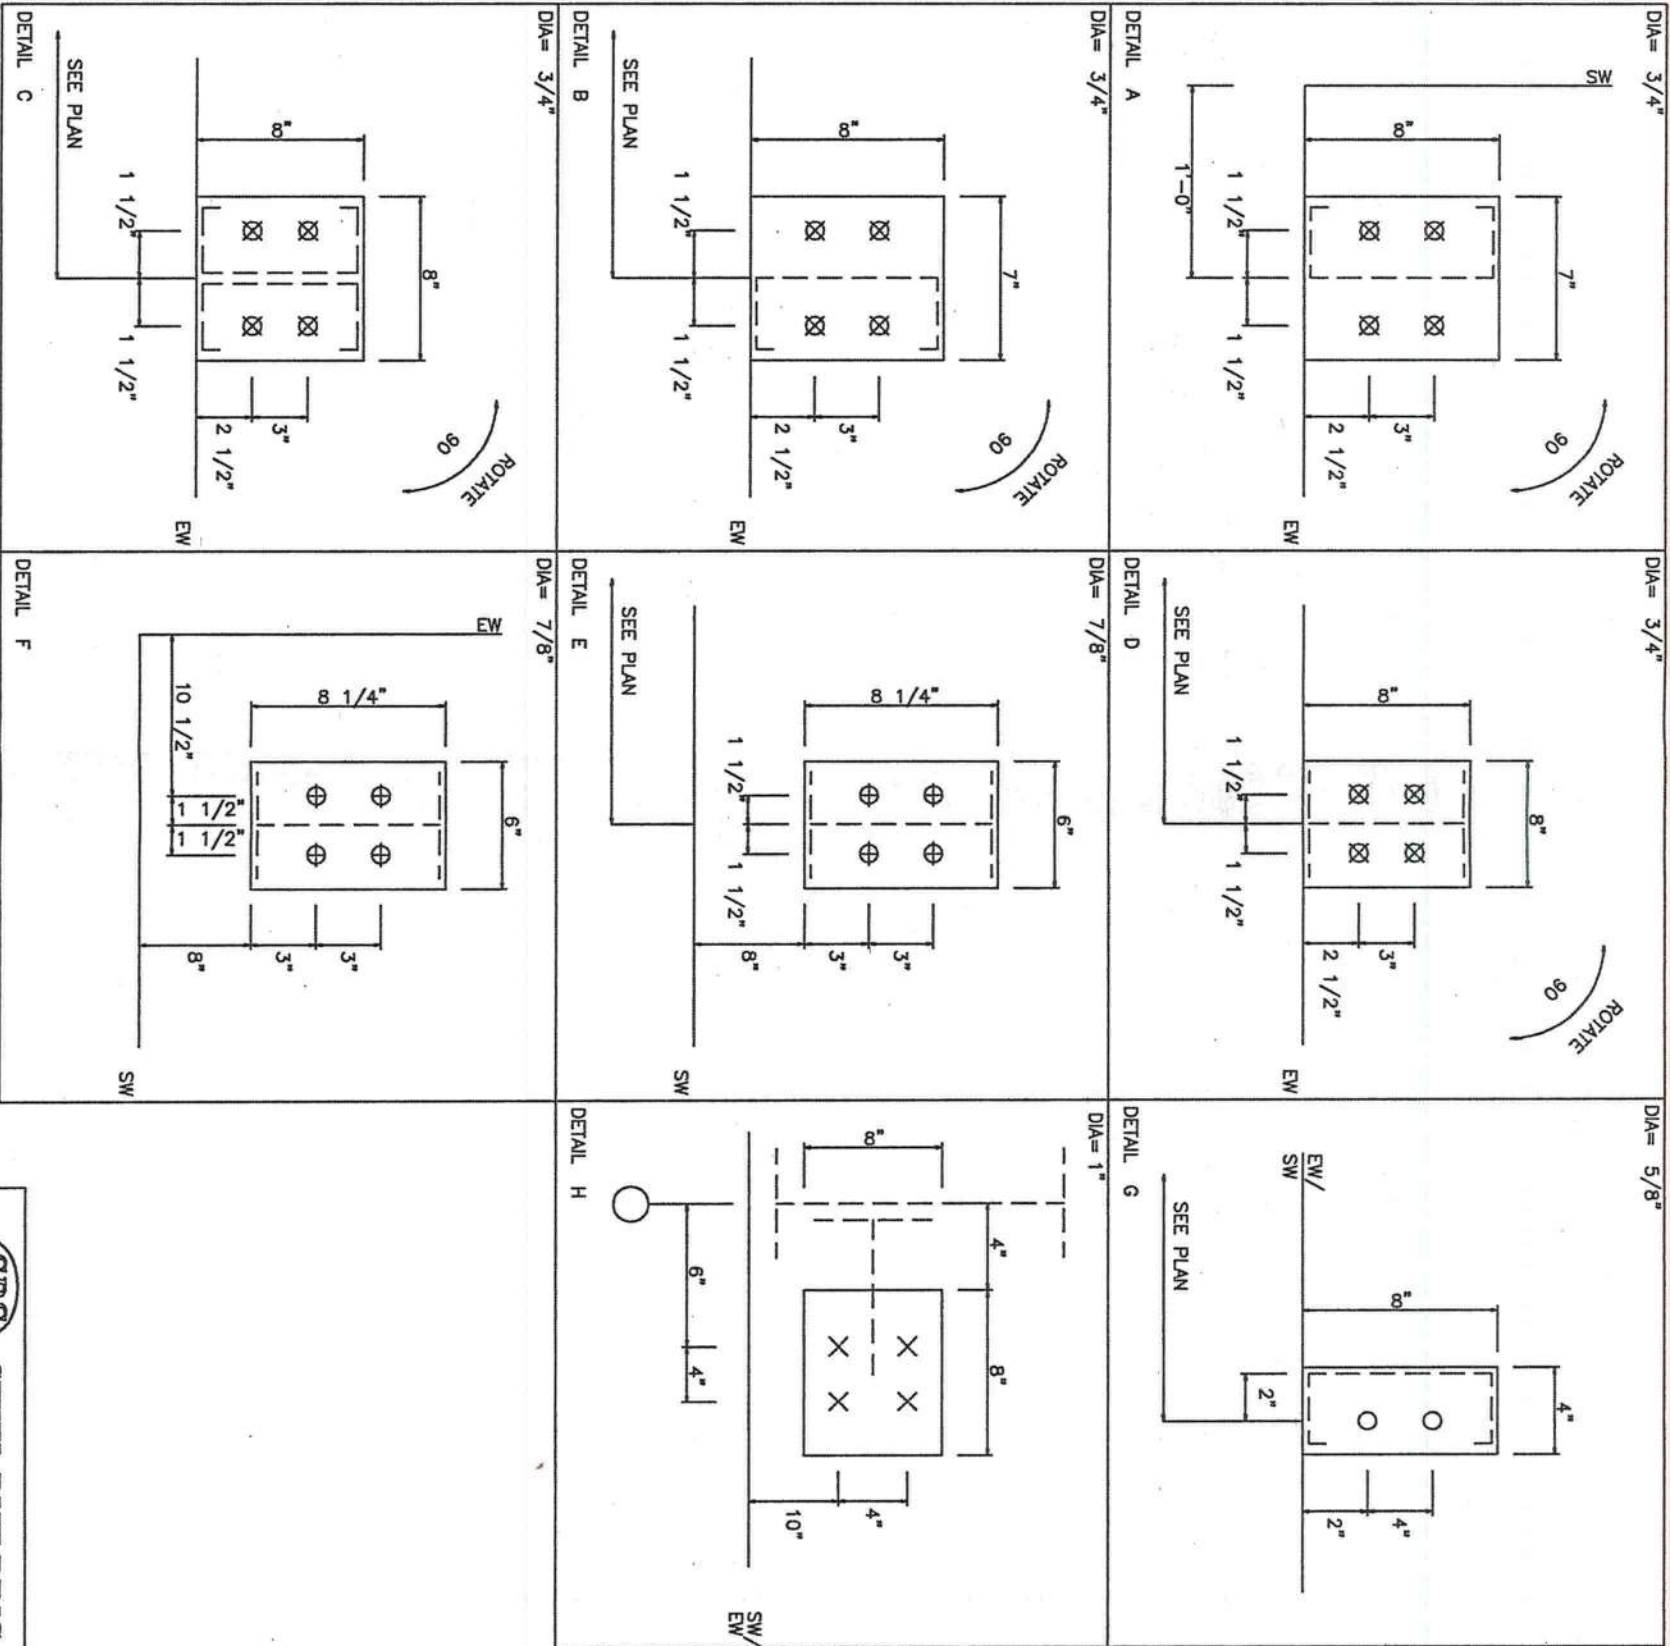


FLANGE BRACE TABLE		
FRAME LINE 2		
VID	SIDES	MARK
1	2	FR10
2	2	FR10
3	2	FR10
4	2	FR10
5	2	FR10
6	2	FR10
7	2	FR10
8	2	FR10

SPLICE BOLTS		
SPLICE	QUAN	-----BOLT-----
MARK	TOP/BOT/INT	TYPE DIA LEN
SP-1		

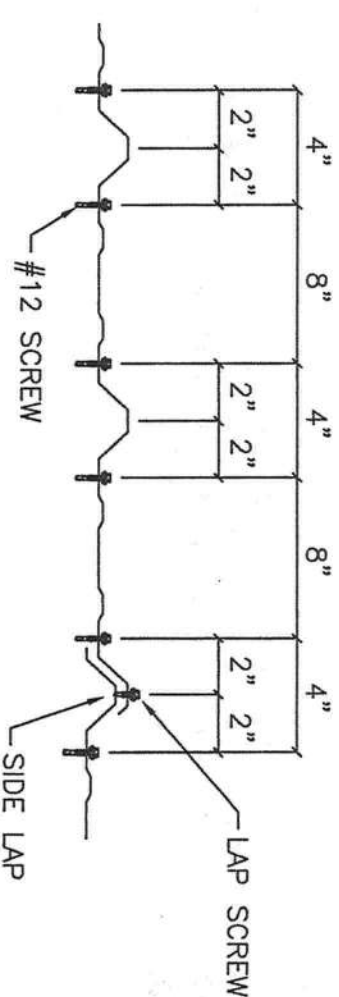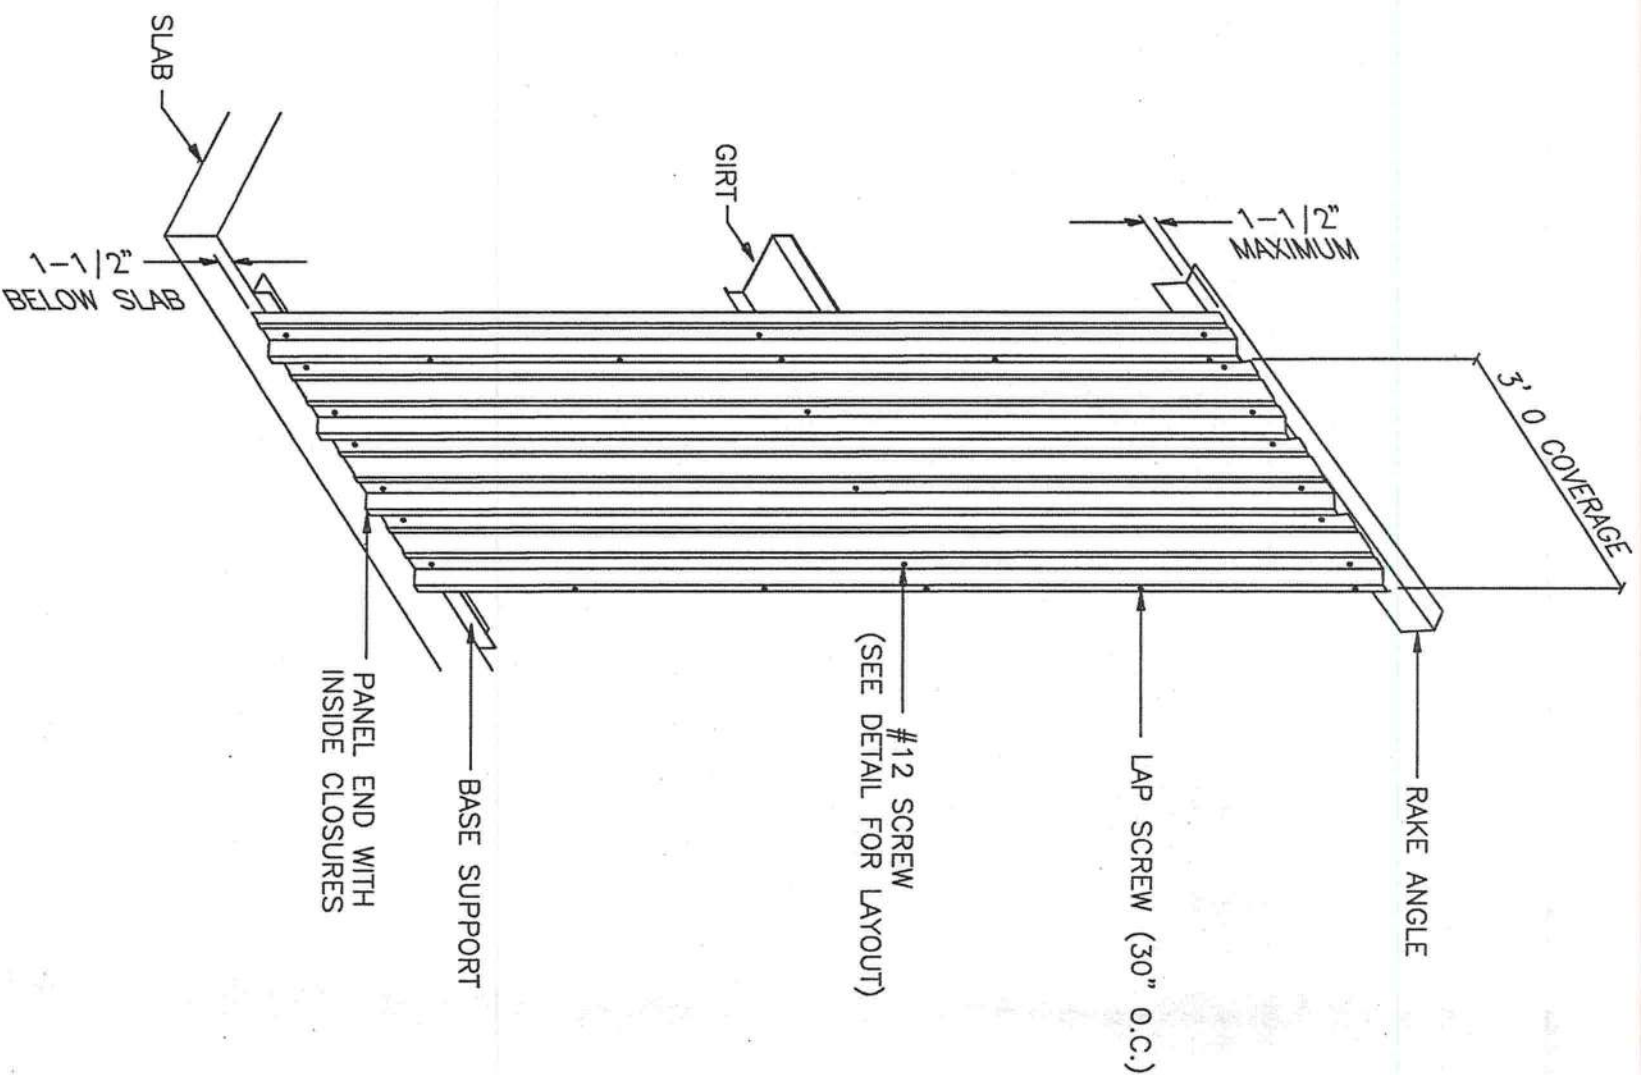

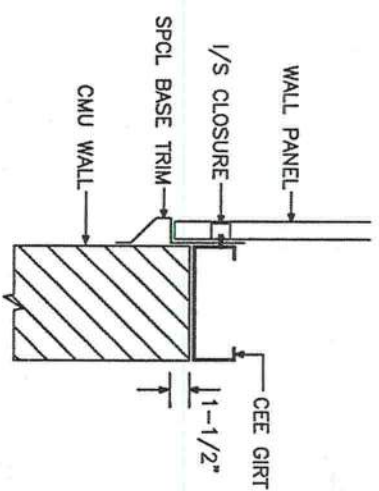



BASE TRIM DETAIL

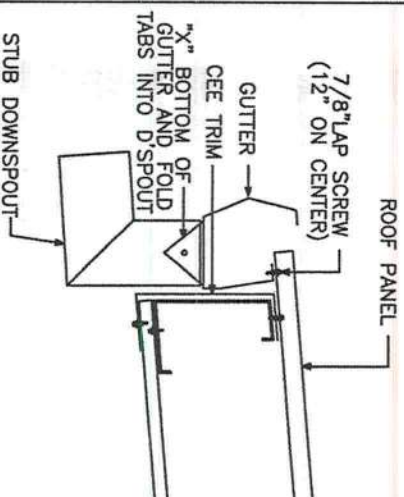


NOTE: INSTALL GUTTER STRAPS 3'0" ON CENTER.
NOTE: INSTALL D SPOUT STRAPS 5'0" ON CENTER.

GUTTER DETAIL

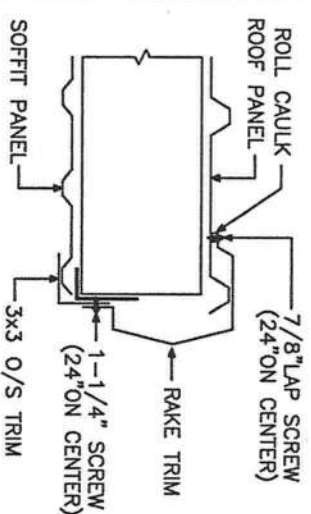

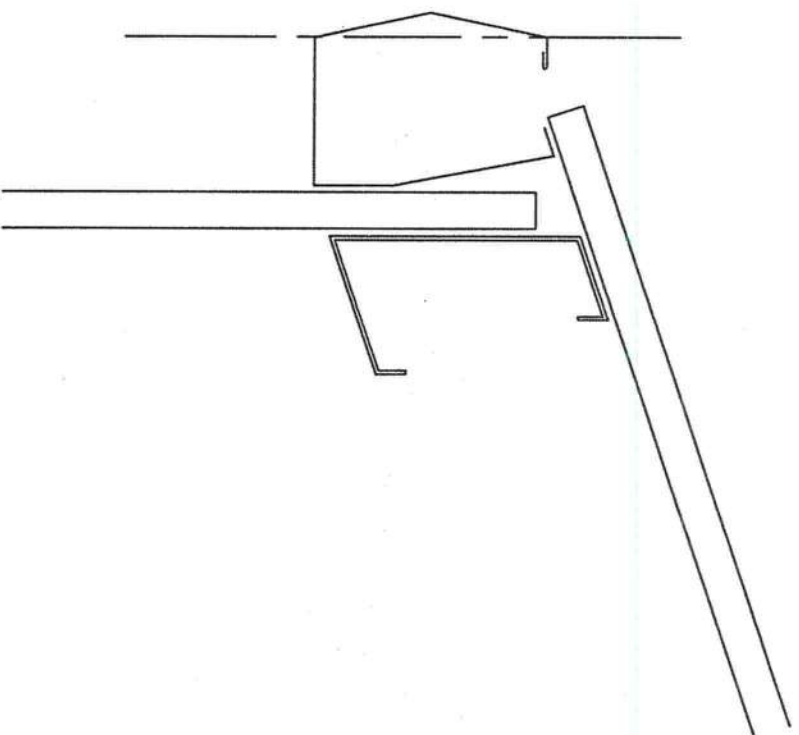

DO NOT INSTALL GUTTER WITH
OUTSIDE FACE PERPENDICULAR
TO THE GROUND.

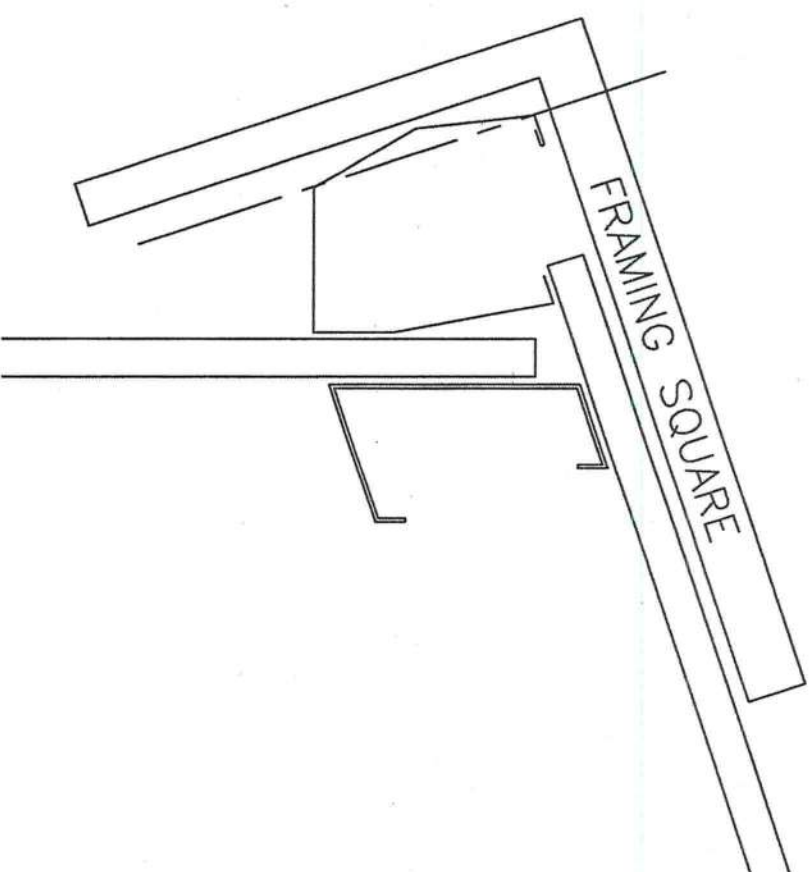

INSTALL GUTTER WITH
OUTSIDE FACE PERPENDICULAR
TO THE ROOF.

GUTTER INSTALLATION DETAIL

SBS STEEL BUILDING SYSTEMS
