

Gregory S. Wayland, PE 8200 SW 16th Place Florida PE #54396 COA #8236



-ARCHITECT -**WARREN E. BARRY**

FLORIDA ARCHITECT, LICENSE #AR93495 D.B.A.: W.E.B. DESIGNS

www.WEBarryDesigns.com

4409 NW 186TH STREET NEWBERRY, FLORIDA 32669

PHONE: FAX:

(352) 472-2600 (352) 472-2611

RESIDENCE



LAKE CITY, **FLORIDA**

THE DRAWINGS CONTAINED WITHIN THIS SET OF DOCUMENTS ARE INTENDED FOR THE ONE TIME USE IN REFERENCE TO THE PROJECT LISTED ABOVE ONLY. ANY UNAUTHORIZED COPYING OF OR UTILIZATION OF THE DOCUMENTS OR ANY PART WITHIN IS COPYRIGHT INFRINGEMENT OF INTELLECTUAL PROPERTY.

LIABILITY DISCLAIMER:

THE DRAWINGS CONTAINED WITHIN THIS SET OF DOCUMENTS ARE INTENDED FOR CONTRACTOR'S STANDARD CONSTRUCTION. W.E.B. DESIGNS IS RESPONSIBLE ONLY FOR THE ACCURATE REPRESENTATION, COORDINATION, AND DEPICTION OF THE GENERAL DESIGN. THE CONTRACTOR IS RESPONSIBLE AND LIABLE FOR THE SELECTION OF BOTH MATERIALS AND METHODS OF CONSTRUCTION IN REGARDS TO BUT NOT LIMITED TO THERMAL AND MOISTURE PROTECTION, PROPER APPLICATION AND INSTALLATION OF PRODUCTS ACCORDING TO MANUFACTURER'S RECOMMENDATIONS, AND THE UTILIZATION AND IMPLEMENTATION OF INDUSTRY STANDARDS. THE CONTRACTOR IS ALSO RESPONSIBLE FOR FIELD VERIFICATION OF ALL DIMENSIONS OF PREEXISTING CONSTRUCTION PRIOR TO THE FABRICATION OR COMMENCEMENT OF ANY NEW WORK. ACCEPTANCE BY CONTRACTOR OF THESE DRAWINGS FOR CONSTRUCTION IS ACKNOWLEDGMENT TO AND AGREEMENT WITH THESE TERMS AND CONDITIONS.

CONSTRUCTION DOCUMENTS FOR CONTRACTOR'S STANDARD CONSTRUCTION

PROJECT NO .:

DATE:

AUGUST 29, 2011 REVISION DATES:

11017

COPYRIGHT ©

FOUNDATION DETAILS


Gainesville, FL 32607/ Phone (352) 331-0727 Fax (352) 331-0727

- VERTICAL REINFORCEMENT PER STRUCTURAL ENGINEER

- 8" CMU BEARING WALL

. .

1'-4"

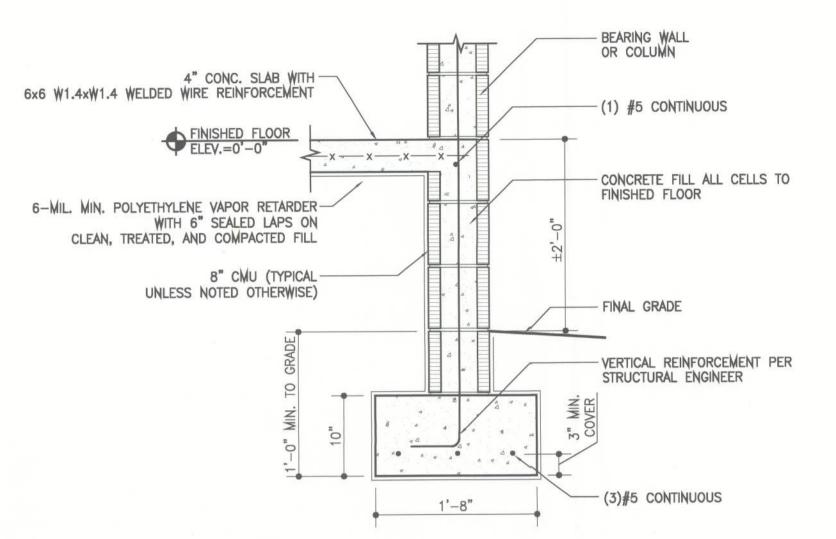

SCALE: 1"=1'-0" \ S1.11

(3)#5 CONTINUOUS

- COORDINATE FLOOR FINISH WITH OWNER

D-SLAB

BEARING WALL OR COLUMN - (1) #5 CONTINUOUS x - x - x - x - x 4" CONC. SLAB WITH -6x6 W1.4xW1.4 WELDED WIRE REINFORCEMENT CONCRETE FILL ALL CELLS TO FINISHED FLOOR 6-MIL. MIN. POLYETHYLENE VAPOR RETARDER WITH 6" SEALED LAPS ON CLEAN, TREATED, AND COMPACTED FILL 1/2" EXPANSION JOINT-- VERTICAL REINFORCEMENT PER STRUCTURAL ENGINEER

P.T. WOOD COLUMN 4" CONC. SLAB WITH -6x6 W1.4xW1.4 WELDED WIRE REINFORCEMENT (1) #5 CONTINUOUS CONCRETE FILL ALL CELLS TO FINISHED FLOOR 6-MIL. MIN. POLYETHYLENE VAPOR RETARDER-WITH 6" SEALED LAPS ON CLEAN, TREATED, AND COMPACTED FILL VERTICAL REINFORCEMENT PER STRUCTURAL ENGINEER - (3)#5 CONTINUOUS

4" CONC. SLAB WITH -

WITH 6" SEALED LAPS ON

X - x - x - x - x - x - x - x


(3)#5 CONTINUOUS-

6x6 W1.4xW1.4 WELDED WIRE REINFORCEMENT

6-MIL. MIN. POLYETHYLENE VAPOR RETARDER-

CLEAN, TREATED, AND COMPACTED FILL

FOUNDATION DETAIL

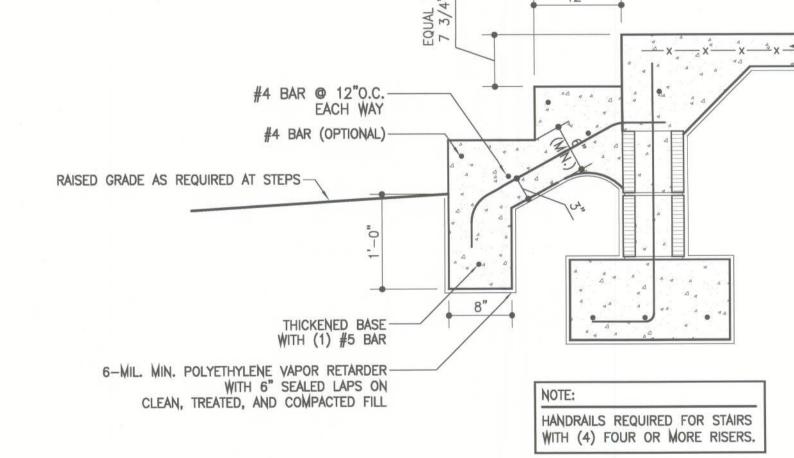

NON-EXPANDING GROUT SLOPE TO DRAIN, 1/4" PER FOOT MIN. - REMOVABLE FLOOR DRAIN CAP FLUSH WITH ADJACENT FLOORING FOAM PIPE INSULATION SLEEVE

W.S.E. WAYLAND STRUCTURAL ENGINEERING 2. SEE STRUCTURAL ENGINEERING PACKAGE BY WSE WAYLAND STRUCTURAL ENGINEERING FOR ADDITIONAL INFORMATION. 3. WIND LOAD ANALYSIS AND ENGINEER'S MARKUPS AND DRAWINGS SUPERSEDE. 4. SITE WORK SHALL COMPLY WITH SOIL REPORT PREPARED BY OTHERS.

1. STRUCTURAL REVIEWED AND CORRECTIONS BY: