



CEE-LOCK CLIP+ 36" O.C. MAX. OR CONT. CEE-RIB ZEE CLOSURE CUT TO BETWEEN SEAMS ---BERRIDGE CEE-LOCK PANEL ASTENERS: 2 PER ZEE, MIN. CONTINUOUS BEAD OF CAULK BETWEEN CEE-LOCK PANEL AND ZEE CLOSURE # 30 FE SOLID 1/2" PLYWOOD SHEATHING T UNDER

SCALE: NONE AIT/HDOIN DETAIL

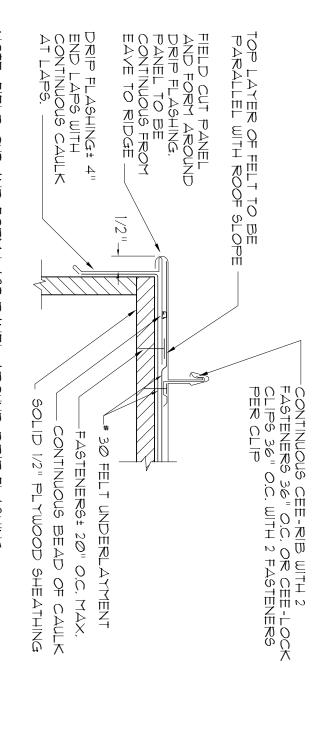

NOTE: FIELD OUT AND FORM LAST PANEL AROUND DRIP FLASHING PANEL MUST BE CONTINUOUS FROM RIDGE TO EAVE. GABLE DETAIL / TOANEL TURNDOWN

SCALE: NONE

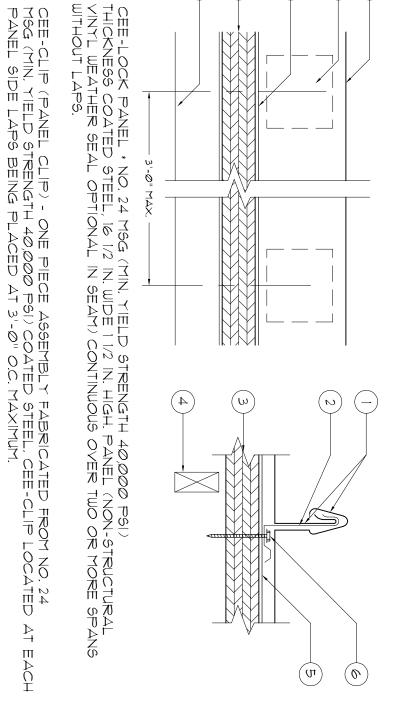

 \bigcirc

4

 \bigcirc

CLIP FASTENER DETAIL

RASTENERS (SCREWS) - FOR ATTACHING "CEE-CLIP" (ITEM TWO) TO DECK USE NO. 10 PANCAKE HEAD TEKS STEEL SCREWS, TWO FASTENER PER "CEE-CLIP".

JOIST - 2" \times 4" AT 2'-0" O.C. MAXIMUM WITH #12 \times 2" PAN HEAD WOOD SCREW AT 12" O.C. MAX. AT PLYWOOD TO JOIST CONNECTION AND AT PLYWOOD ENDS

30 FELT UNDERLAYMENT

DECK - 5/8" APA 40/20 PLYWOOD.

SCALE: NONE

(V)

 \mathcal{O}^{n}

7

<u>O</u>

5

 \mathcal{O}

 \mathcal{D}^{n}

 Ξ


70

 Ω


CONTINUOUS CLEAT: WITH FASTENERS 20" O.C. MAX. 무구 OUS BEAD OF CAULK N VALLEY FLASHING -T UNDERLAYMENT

VALLEY DETAIL

SCALE: NONE

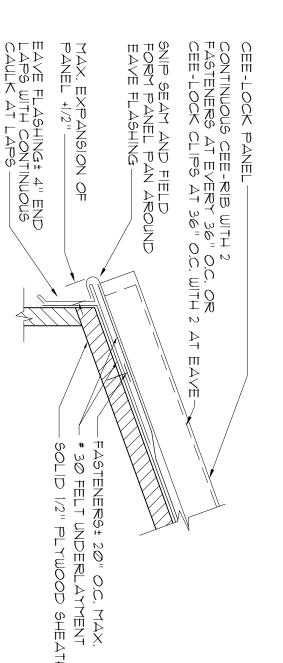

HAVE HAVE SCALE: NONE DETAIL

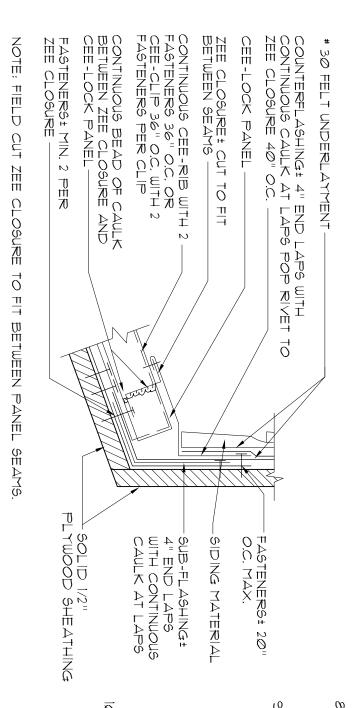

SCALE: NONE **ELASHING** DETAIL

NOTE: ALL ARCHITECTURAL PANELS ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, SHALL BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER. ARE 24 GAUGE METAL, TAKE CARE IN

NOTE:

ひせつきゃ クマーエご フネムきにむ, クネ ムマ ムアフネクショフ	COMBANY SPECIFICATIONS & DETAILS AS	SHALL COMPLY WITH BERRIDGE MANUFACTURING	THE STANDING SEAM METAL ROOF SYSTEM
------------------------------------	-------------------------------------	--	-------------------------------------

. TITINZ | TITI

http://www.enalerting.gom	1-800-610-1975	PERTH AMBOY, NJ 08862	1200 AMBOY AVENUE	ENGLERAT, INC.	

DNI DNA TO SHAM PANEL NSTALL

STRIPPABLE FILM: THE STRIPPABLE PLASTIC FILM WHICH IS APPLIED OVER MOST BERRIDGE PREFINISHED PRODUCTS, PANELS, FLASHINGS, COILS, AND FLAT SHEETS PROVIDES PROTECTION OF THE FINISH DURING FABRICATION AND TRANSIT. THIS FILM MUST BE REMOVED PRIOR TO INSTALLATION.

HASTENER RENETAT

EVELS EVELS

X ---2 =

 $\left| \begin{array}{c} \widetilde{\omega} \\ \overrightarrow{\neg} \end{array} \right|$

 $\begin{vmatrix} \nabla & \nabla \\ \mathcal{U} & \mathcal{U} \\ \overline{\omega} & \underline{\omega} \end{vmatrix}$

<u>φ</u>

 $\overline{\omega}$

2 4=

<u>~</u>

2 4 =

 $\stackrel{\sim}{\sim}$

 ω

 $\tilde{\varrho}$

 $\bar{\omega}$

2 = 4

 $\vec{\Sigma}$

2 4 =

<u>=</u>

0/0 140 10/0 10/0 10/0

70 7

D Z

 $\begin{vmatrix} \nabla & \nabla \\ \mathcal{U} & \mathcal{U} \\ \underline{\omega} & \underline{\omega} \end{vmatrix}$

70

TMOOD

SJENA

<u>=</u>

 $\bar{\omega}$

MANIEVOTIBEDIO METAL BOOFING DANELO
WANIEVOTIBEDIO METAL BOOFING DANELO

 $\stackrel{\textstyle <}{\coprod}$

OCITIE:

3. SOLID SHEATHING REQUIREMENTS: 5/8" PLYWOOD SHEATHING SHALL BE USED TO PROVIDE SUFFICIENT HOLDING POWER FOR FASTENERS.

A. SHEATHING END JOINTS SHOULD BE STAGGERED B. ALL END JOINTS SHOULD MEET AT EITHER A JOIS

BLOCKING OR "H" CLIPS SHOULD BE USED IF JOISTS DO NOTTHE WEIGHT OF WORKMEN. JOIST OR RAFTER

E. ALL CUTS AT PENETRATIONS SHOULD BE TIGHT, WITHOUT OF USE WOOD-FRAMED CRICKETS AT LARGE PENETRATIONS. HOUT GAPS

B. MAKE SURE FASCIA/RAKE IS FLUSH WITH SHEATHING.

FELT UNDERLAYMENT: A MINIMUM SINGLE LAYER OF #30 FELT UNDERLAYMENT (O EQUAL) MUST BE APPLIED OVER SOLID SHEATHING AS SHOWN IN THE BERRIDGE MANUFACTURING COMPANY TYPICAL FELTING DETAILS. THE USE OF ADDITIONAL LOF #30 FELT IS RECOMMENDED ON LOW-SLOPED ROOFS, AT ALL VALLEY CONDITIONS AT ROOF PENETRATIONS, AND CERTAIN OTHER FLASHING CONDITIONS AS DEPICTIONE CEE-LOCK PANEL TYPICAL DETAILS. (THE UNDERLAYMENT MUST COVER THE ENTIRE ROOF DECKED SURFACE).

FELTING INSTAL

Ĺ

DO NOT USE RED ROSIN PAPER UNDER METAL SWEEP ROOF AREA CLEAN. ROOFING

USE FLAT HEAD GALVANIZED ROOFING NAILS GALVANIZED FELT CAPS. NSTALL VAL LEY FELT FIRST. \times 1 1/4" LONG WITH BERRIDGE

NSTALL FELT PARALLEL TO EAVE (2 LAYERS REQUIRED AT EAVE), STARTING AT EAVE AND USING MINIMUM 6" LAPS, USE TWO LAYERS OF FELT ON ENTIRE ROOF DECK IF ROOF SLOPE IS 3 ON 12 OR LESS, 2 LAYERS OF FELT REQUIRED AT EAVE REGARDLESS OF SLOPE.

ASHING INSTALLATION: ASHING: IF BERRIDGE MANUFACTURING COMPANY IS TO SUPPLY FLASHINGS, ALL ASHINGS WILL BE FABRICATED IN 10'-0" LENGTHS WITH SQUARE END CUTS ONLY FE PURCHASER MUST PROVIDE ALL DIMENSIONS AND DEGREE OF ANGLES.

D. ALL FLASHINGS ARE TO BE DESIGNED AND INSTALLED TO NOT TRAP WATER. A. REMOVE STRIPPABLE PLASTIC FILM FROM AL INSTALL ALL FLASHINGS AS PER BERRIDGE TYPICAL DETAILS ALWAYS STAGGER JOINTS WHEN ONE FLASHING IS INSTALLED OVER OTHER FLASHING FLASHINGS PRIOR TO INSTAL

Ĺ

Ü

NOTALLATION:

Ĺ

REMOVE STRIPPABLE PLASTIC FILM FROM EACH PANEL PRIOR TO INSTALLATION.
START PANEL INSTALLATION AT ON GABLE END OF THE ROOF, WORKING TOWARD THE OTHER GABLE END. MAKE SURE PANELS ARE PERPENDICULAR TO THE EAVE. AT VALLEY AREAS, MAKE SURE PANELS ARE INSTALLED SO THAT DRAINAGE HAS FREEF FLOW AND IS NOT OBSTRUCTED BY PANEL SEAMS.

BEGIN BY INSTALLING J-CLIP AND/OR DRIP FL AT GABLE THEN PLACING

NSTALL CEE-LOCK CLIPS OR CONTINUOUS CEE-RIB AS PER BERRIDGE TYPICAL DETAILS AND CEE-LOCK CONTINUOUS RIB/CLIP INSTALLATION NOTES.

IF OPTIONAL VINYL WEATHERSEAL (US PATENT 4,641,475) IS TO BE USED, THIS WILL BE EITHER FACTORY INSTALLED OR INSTALLED IN THE FIELD AS THE CEE-LOCK PANEL EXITS FROM THE CL-21 PORTABLE ROLL FORMER.

NSTALL PANELS BY PLACING THE FEMALE LEG OVER THE MALE LEG AND CONTINUOUS CEE-RIB OR CLIP AND SNAPPING THE INTEGRAL SEAM INTO PLACE WITH HAND PRESSURE. DO NOT USE EXCESSIVE FORCE, FOOT PRESSURE OR OTHER TOOLS SUCH AS MALLETS AS THIS WILL SCRATCH OR DENT THE PANEL RIB AND CAUSE DEFORMATION TO THE VINYL WEATHERSEAL.

 \mathcal{C}

G. EACH PANEL IS TO BE KEPT TIGHT AGAINST THE LEG OF THE ADJOINING PANEL.

NEVER PERMIT A GAP BETWEEN VERTICAL LEGS.

H. KEEP PANELS ALIGNED SO THAT SEAMS MATCH AT HIPS, VALLEYS AND WHERE VERTICAL PANELS ADJOIN ROOF PANELS. DO NOT INSTALL LONG CONTINUOUS RUNS OF PANELS ALL AT ONE TIME WHERE SEAM LINES MUST MATCH, INSTALL TEN OR TWELVE PANELS IN ONE ELEVATION AND THEN FOLLOW WITH A LIKE NUMBER OF PANELS ON THE OTHER ELEVATION. WHEN YOU INSTALL PANELS IN THIS MATCHING.

J. COPPER-COTE, CHAMPAGNE, LEAD-COTE, AND PREWEATHER GALVALUME PANEL INSTALLATION: NOTE THE SERIES OF ARROWS PAINTED ON THE UNDERSIDE OF THE PANEL. ALL PANELS MUST BE INSTALLED IN CONSISTENT MANNER, MEANING THAT THE ARROWS ON EVERY PANEL ARE ALL POINTING IN THE SAME DIRECTION. IF A PANEL ARROWS POINTING OF THOSE ON OTHER PICANING THAT THE ARROWS POINTING OF THOSE ON OTHER PANEL IS A PANEL ARROWS POINTING OPPOSITE OF THOSE ON OTHER PANELS IT WILL APPEAR, FROM A DISTANCE, A DIFFERENT SHADE DUE TO THE GRANULAR OF THE PIGMENTS IN THE FINISH. METALLIC FINISHES ARE MATCH - LOT FINISHES. DO NOT MIX LOTS.

CEE-LOCK CLIP INSTA A. INSTALL CLIPS AT PER BERRIDGE TYPICAL CE B. CLIP SPACING ON SOLID SHEATHING TYPICALL CEE-LOCK PANEL DETAILS LLY 36" ON CENTER.

FASTENERS:
PLATED FASTENERS WHEN FASTENING TO WOOD, MAKE SURE ALL FASTENERS ARE DRIVEN STRAIGHT AND SET FLAT. DO NOT OVERDRIVE FASTENERS AS THIS WILL CAUSE THE CLIP AND/OR FLASHINGS TO BUCKLE OR BECOME RECESSED BELOW THE ELEVATION OF THE SUBSTRATE.

TREMCO, INC. SPECTREM I SILICONE SEALANT DO NOT USE CLEAR CAULK.

ATION NOTES

DOUBLE LAYER OF NUMBER THIRTY CEE-LOCK OPTIONAL VINYL WEATH Y FELT UNDERLAYMENT OR EQUAL AND THE HERSEAL (US PATENT NO. 4,641,475) ARE NTIONS WHERE THE ROOF SLOPE IS 3 ON 12 OR LESS

D. USE SHIMS TO KEEP ENTIRE SUBSTRATE EVEN. UNEVEN SUBSTRATE WILL RESULT IN "OIL-CANNING" IN PANELS, SUBSTRATE SHOULD BE LEVEL TO 1/4" IN 20'-0".

G. MAKE SURE SUBSTRATE JOINTS ARE TIGHT AT ALL HIPS, VALLEYS, AND RIDGES

FASCIA/RAKE INSPECTION: STRIKE A LINE THE FULL LENGTH OF THE FASCIA OR CORRECT WITH SHIMS. Ż Z STRAIGHT

-<

Щ

UNITO

 \overline{x}

 $\overset{\prec}{\omega}$

30# FELT

TANEL INSTALLATION NOTES

MALL

FLASHING

<u>___</u> 2 m m APPLIED

FAVE UNITED TO THE TO T HO NETAT THE EAVE

ACCORDANCE W/ MFGR'S INS STANT METAL OF MINIMUM NO INIMUM OF 11 LBS PER 100 S NOMINAL THICKNESS OF 0.8 0.019 0.019 ð BEFORE

T 36 INCHES WIDE AND COMPLYING WITH ASTM D 22. HES WIDE & COMPLYING WITH ASTM D 1970. SURFACE ROLL ROOF YER A MINIMUM OF 36 FOLLOWING:

PANELS


FASTENERS: FASTENERS FOR METAL PANE BASE AND CAP FLASHINGS: BASE AND CAP FLASHING SH M

 \mathbb{O} Q $\overline{\mathcal{O}}$ 70

Digitally signed by: N. P. GEISLER
DN: CN = N. P. GEISLER C = US
O = AR0007005 OU = ARCHITECT

Date: 2020.06.23 11:23:12 -05'00'

AR0007005



22J,

















CUSTOM DESIGNED HOME FOR: Mr. Randy cRae COLUMBIA COUNTY, FLORIDA Meta

Details Roof