

DATE 12/27/2006

Columbia County Building Permit

PERMIT

This Permit Expires One Year From the Date of Issue

000025342

APPLICANT BO ROYALS PHONE 754-4135
ADDRESS 4068 US HWY 90 WEST LAKE CITY FL 32055
OWNER HOPEFUL BAPTIST CHURCH TTES PHONE 752-4135
ADDRESS 2480 SW LITTLE ROAD LAKE CITY FL 32024
CONTRACTOR DALE HOUSTON PHONE 752-7814
LOCATION OF PROPERTY 47 S, L SW WALTER AVE, L ON SW LITTLE RD, 1ST ON RIGHT

TYPE DEVELOPMENT MH,UTILITY ESTIMATED COST OF CONSTRUCTION 0.00
HEATED FLOOR AREA TOTAL AREA HEIGHT STORIES
FOUNDATION WALLS ROOF PITCH FLOOR
LAND USE & ZONING A-3 MAX. HEIGHT 35
Minimum Set Back Requirments: STREET-FRONT 30.00 REAR 25.00 SIDE 25.00
NO. EX.D.U. 1 FLOOD ZONE X DEVELOPMENT PERMIT NO.

PARCEL ID 01-5S-16-03398-000 SUBDIVISION
LOT BLOCK PHASE UNIT TOTAL ACRES 1.00

IH0000040
Culvert Permit No. Culvert Waiver Contractor's License Number Applicant/Owner/Contractor
EXISTING 06-01113N CS JH Y
Driveway Connection Septic Tank Number LU & Zoning checked by Approved for Issuance New Resident

COMMENTS: FLOOR ONE FOOT ABOVE ROAD, 4.5.6 ACCESSORY USE IN A-3

Check # or Cash 25900

FOR BUILDING & ZONING DEPARTMENT ONLY

(footer/Slab)

Temporary Power Foundation Monolithic date/app. by date/app. by date/app. by
Under slab rough-in plumbing Slab Sheathing/Nailing date/app. by date/app. by date/app. by
Framing Rough-in plumbing above slab and below wood floor date/app. by date/app. by
Electrical rough-in Heat & Air Duct Peri. beam (Lintel) date/app. by date/app. by
Permanent power C.O. Final Culvert date/app. by date/app. by
M/H tie downs, blocking, electricity and plumbing Pool date/app. by date/app. by
Reconnection Pump pole Utility Pole date/app. by date/app. by
M/H Pole Travel Trailer Re-roof date/app. by date/app. by

BUILDING PERMIT FEE \$ 0.00 CERTIFICATION FEE \$ 0.00 SURCHARGE FEE \$ 0.00
MISC. FEES \$ 200.00 ZONING CERT. FEE \$ 50.00 FIRE FEE \$ 55.80 WASTE FEE \$ 167.50
FLOOD DEVELOPMENT FEE \$ FLOOD ZONE FEE \$ 25.00 CULVERT FEE \$ TOTAL FEE 498.30
INSPECTORS OFFICE CLERKS OFFICE

NOTICE: IN ADDITION TO THE REQUIREMENTS OF THIS PERMIT, THERE MAY BE ADDITIONAL RESTRICTIONS APPLICABLE TO THIS PROPERTY THAT MAY BE FOUND IN THE PUBLIC RECORDS OF THIS COUNTY. AND THERE MAY BE ADDITIONAL PERMITS REQUIRED FROM OTHER GOVERNMENTAL ENTITIES SUCH AS WATER MANAGEMENT DISTRICTS, STATE AGENCIES, OR FEDERAL AGENCIES.

"WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT."

This Permit Must Be Prominently Posted on Premises During Construction

PLEASE NOTIFY THE COLUMBIA COUNTY BUILDING DEPARTMENT AT LEAST 24 HOURS IN ADVANCE OF EACH INSPECTION, IN ORDER THAT IT MAY BE MADE WITHOUT DELAY OR INCONVIENCE, PHONE 758-1008. THIS PERMIT IS NOT VALID UNLESS THE WORK AUTHORIZED BY IT IS COMMENCED WITHIN 6 MONTHS AFTER ISSUANCE.

The Issuance of this Permit Does Not Waive Compliance by Permittee with Deed Restrictions.

Hopeful Baptist 498.30

PERMIT APPLICATION / MANUFACTURED HOME INSTALLATION APPLICATION

Office Use Only Zoning Official CFS 12/19/06 Building Official OK 5/11/12-18-06
AP# 0612-54 Date Received 12-18-06 By LA Permit # 25342
Flood Zone X Development Permit N/A Zoning A-3 Land Use Plan Map Category A-3
Comments 4.5.6 accessory use in A-3
FEMA Map # _____ Elevation _____ Finished Floor _____ River _____ In Floodway _____
☒ Site Plan with Setbacks shown ☒ Environmental Health Signed Site Plan ☐ Env. Health Release
☐ Well letter provided ☒ Existing Well Revised 9-23-04

- Property ID 01-55-16-03398-000 Must have a copy of the property deed
- New Mobile Home ☒ Used Mobile Home _____ Year 2006
- Subdivision Information _____

- Applicant Bo Royals Phone # 754-6737
- Address 4068 US HWY 90 West Lake City FL 32055

- Name of Property Owner Hopeful Baptist Church Phone # 752-4135
- 911 Address 2480 SW Little Road, Lake City FL 32024

- Circle the correct power company - FL Power & Light - Clay Electric
(Circle One) - Suwannee Valley Electric - Progressive Energy

- Name of Owner of Mobile Home Hopeful Baptist Church Phone # 752-4135
- Address 289 SE HOPEFUL DR Lake City FL 32024

- Relationship to Property Owner Youth Pastor for Hopeful Baptist Church
- Current Number of Dwellings on Property One Old Church - Youth House

- Lot Size 1 acre Total Acreage 1 acre

- Do you : Have an Existing Drive or need a Culvert Permit or a Culvert Waiver Permit

- Driving Directions 475, (C) SW Walter Ave, (B) on SW Little Rd, 1st place on (B)

- Is this Mobile Home Replacing an Existing Mobile Home NO

- Name of Licensed Dealer/Installer Dale Houston Phone # 386-752-7814
- Installers Address 136 S.W. Barrs Lake City FL 32024
- License Number TH0000040 Installation Decal # 244296

पत्रांक १८३

1000

New Home ☒ Used Home ☐


Home is installed in accordance with Rule 15-C

Do birds visit	<input type="checkbox"/>	Post all other Decid ?	<input checked="" type="checkbox"/>
Singles with	<input checked="" type="checkbox"/>	Wind Zone II	<input checked="" type="checkbox"/>
			2

Trailer Count	Serial #

PIER SPACING TABLE FOR USED HO

7

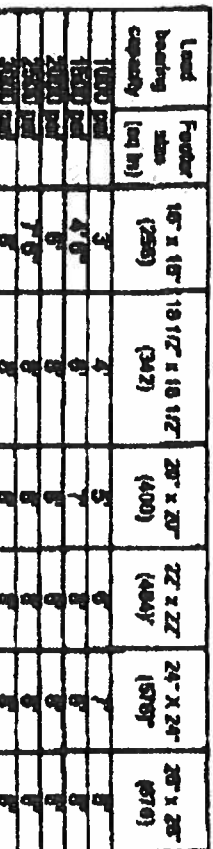

2000

Land bearing capacity	Further area (sq ft)	16' x 16' (256)	19 1/2' x 16 1/2' (312)	20' x 20' (400)	22 x 22 (484)	24 x 24 (576)	26' x 26' (676)
1000 sq ft	3	4	5	6	7	8	9
1500 sq ft	4 1/2	6	7	8	9	10	11
2000 sq ft	6	8	9	10	11	12	13
2500 sq ft	7 1/2	9	10	11	12	13	14
3000 sq ft	9	10	11	12	13	14	15
3500 sq ft	9	10	11	12	13	14	15

POULAR PAD 90

PAID	5/15
15 x 15	25
15 x 15	25
15 x 15	25

$$\begin{array}{r} 16.0 \times 16.0 \\ 16 \times 22.5 \\ 17 \times 22 \end{array}$$

20 x 20	400
17 3/8 x 25 3/8	441
17 1/2 x 25 1/2	446

70 x 28

1

FRAMES

speed 25.4 sec

OTHER TIES

Sidewall

Marriages with Children

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
84

1

PERMIT NUMBER

PERMIT WORKSHEET

POCKET PENETROMETER TEST

The pocket penetrometer tests are rounded down to _____ psi or check here to declare 1000 lb. soil _____ without testing

X _____ X _____

OK June 10

POCKET PENETROMETER TESTING METHOD

1. Test the perimeter of the home at 5 locations.
2. Take the reading at the depth of the footer.
3. Using 500 lb. increments, take the lowest reading and round down to half increment.

X _____ X _____ X _____

TORQUE PROBE TEST

The results of the torque probe test is _____ inch pounds or check here if you are declaring 5 anchors without testing _____ A test showing 275 inch pounds or less will require 4 foot anchors.

Note: A state approved lateral arm system is being used and 4 ft. anchors are allowed at the sidewall locations. 1 undersized 5 ft. anchors are required at all cantilever the points where the torque test reading is 275 or less and where the mobile home manufacturer may require anchors with 4000 lb. holding capacity.

Installer's Initials

ALL TESTS MUST BE PERFORMED BY A LICENSED INSTALLER

Installer Name

DATE Houston

Date Tested

12/12/05

Electrical

Connect electrical conductors between multi-wide units, but not to the main power source. This includes the bonding wire between multi-wide units. Pg. *NR*

Plumbing

Connect all sewer drains to an existing sewer line or septic tank. Pg. *NR*

Connect all potable water supply piping to an existing water meter, water tap, or other independent water supply system. Pg. *NR*

Site Preparation

Debris and organic material removed _____ Swept _____ Pad _____ Other _____

Fastening metal walls with

Floor: Type Fastener: _____ Length: _____ Spacing: _____
Walls: Type Fastener: _____ Length: _____ Spacing: _____
Roof: Type Fastener: _____ Length: _____ Spacing: _____

For used homes a min. 30 gauge, 6" wide, galvanized metal strip will be centered over the peak of the roof and fastened with galv. roofing nails at 2' on center on both sides of the cantilever.

General (including plumbing requirements)

I understand a properly installed gasnet is a requirement of all new and used homes and that condensation, mold, mildew and buckled marlango walls are a result of a poorly installed or no gasnet being installed. I understand a strip of tape will not serve as a gasnet.

Installer's Initials

Installed

Type gasnet: _____
Pg. _____
Between Floors Yes _____
Between Walls Yes _____
Bottom of ridgebeam Yes _____

Weatherproofing

The bottomboard will be repaired and/or lapped. Yes ☒ No _____ Pg. _____
Sealing on units is installed to manufacturer's specifications. Yes ☒ No _____
Flaplace chimney installed so as not to allow intrusion of rain water. Yes *NR*

Miscellaneous

Shifting to be installed. Yes ☒ No _____
Dryer vent installed outside of siding. Yes _____ No *NR*
Range downflow vent installed outside of siding. Yes _____ No *NR*
Drain lines supported at 4 foot intervals. Yes _____
Electrical crossovers protected. Yes _____
Other: _____

Installer verifies all information given with this permit worksheet is accurate and true based on the

manufacturer's installation instructions and/or Rule 15C-1 & 2

Installer Signature

Paul A. A.

Date *12/12/05*

SOIL BEARING TEST

To determine the safe bearing capacity of soil, it shall be tested at the site location by loading an area of less than four (4) square feet to not less than twice the maximum bearing capacity desired for use. Such double load shall be sustained by the soil for a period of not less than forty-eight (48) hours with no additional settlement taking place, in order that such desired bearing capacity may be used.

Foundations should be built upon natural solid ground. Where solid ground does not occur at the foundation depth, such foundation shall be extended down to natural solid ground or piles should be used. Foundations built upon mechanically compacted earth or fill material are subject to the approval of local building officials to show evidence that the proposed loads will be adequately supported.


PIER LOADS

There are several factors that control the numbers of piers required to support a home. The four most important factors are:

- (1) size of the home;
- (2) weight carrying capacity of the pier material;
- (3) soil bearing capacity; and
- (4) spacing between the individual piers.

Refer to tables 2 through 4 to determine the minimum size and location of individual footings and table 1 to determine the minimum strength requirements for individual piers.

**TABLE 1
MINIMUM PIER CAPACITY TABLE**

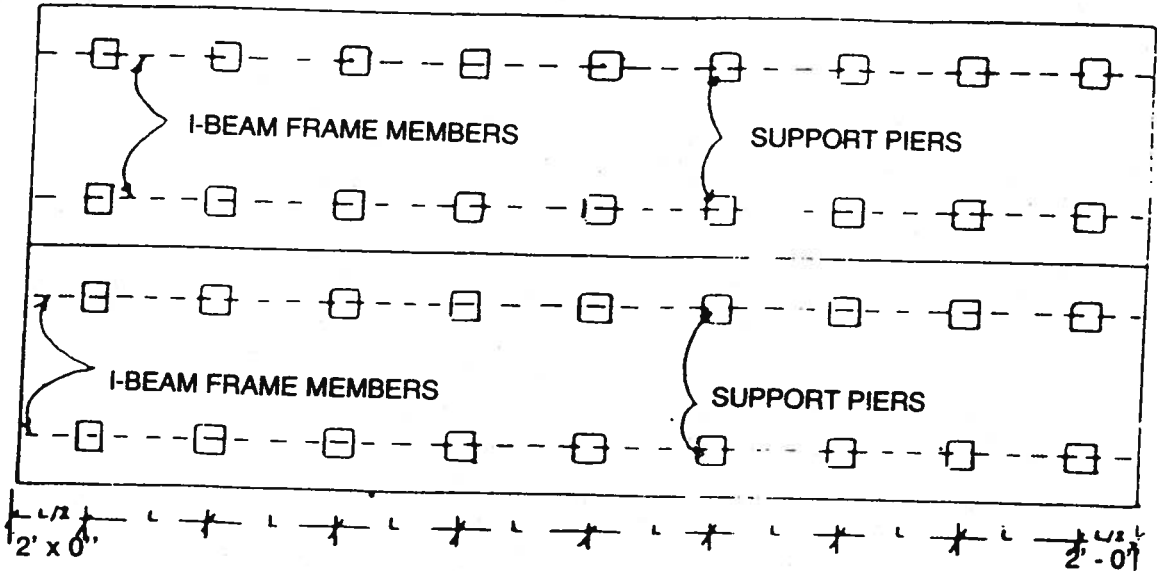

Roof Live Load 20 psf	PIER LOAD	Piers at 4' On Center		Piers at 6' On Center		Piers at 8' On Center	
		12-wide (lbs.)	14-wide (lbs.)	12-wide (lbs.)	14-wide (lbs.)	12-wide (lbs.)	14-wide (lbs.)
		2112	2464	3168	3696	4224	4928

TABLE 2
12 WIDE OR LESS FOOTING SCHEDULE

Pier Spacing (L)	Soil Bearing Capacity (PSF)	ROOF LIVE LOAD
		20 PSF REQUIRED FOOTING AREA IN SQ. IN.
Piers spaced no more than 4'-0" on center not more than 2'-0" from either end	1000	305
	1500	205
	2000	155
	2500	125
	3000	105
Piers spaced no more than 6'-0" on center not more than 2'-0" from either end	1000	460
	1500	305
	2000	230
	2500	185
	3000	155
Piers spaced no more than 8'-0" on center not more than 2'-0" from either end	1000	610
	1500	410
	2000	305
	2500	245
	3000	205

TABLE 3
14 WIDE OR LESS FOOTING SCHEDULE

Pier Spacing (L)	Soil Bearing Capacity (PSF)	ROOF LIVE LOAD
		20 PSF REQUIRED FOOTING AREA IN SQ. IN.
Piers spaced no more than 4'-0" on center not more than 2'-0" from either end	1000	355
	1500	240
	2000	180
	2500	145
	3000	120
Piers spaced no more than 6'-0" on center not more than 2'-0" from either end	1000	540
	1500	355
	2000	265
	2500	215
	3000	178
Piers spaced no more than 8'-0" on center not more than 2'-0" from either end	1000	710
	1500	475
	2000	355
	2500	285
	3000	240

NOTE:

1. Width refers to individual unit width and not total width of home.
2. If soil bearing capacity is not determined, use 1000 PSF as a minimum.
3. In the geographical areas subject to severe freezes, the bottom line of foundations must extend below the frost line established by local records.

TYPICAL FOOTER SIZES

* 16" X 16" - 256 Sq. Inches
16" X 24" - 384 Sq. Inches
24" X 24" - 576 Sq. Inches
24" X 30" - 720 Sq. Inches

* MINIMUM FOOTER
TO BE USED

FOOTER SIZE REQUIREMENTS

Footer Size Equals	Pier Load Soil Bearing Capacity
--------------------	---------------------------------------

Example: 14" Wide 8'-0" Center Piers
4928 (from table 1)
1000 (soil bearing capacity)

4928 Equals 4.9 Sq. Ft. Minimum Footer
1000

PIER LOAD CAPACITY FOR SIDE WALLS

100 X Span in Ft. divided by Soil Capacity

Example:

100 X 6'-0" equals 600 equals .6 sq. ft. min.
1000

Minimum Size Footer 8 X16
or 128 sq. inches for Sidewalls

MARRIAGE WALL PIER LOAD CAPACITY

100 X Span in Ft. X 2 equals Pier Load Divided by Soil Capacity

Example:


100 X 20'-0" X 2 Equals 4000 lbs. equals 4 sq. ft. Minimum Footer
1000 lbs.

NOTE:

1. Multi openings for sidewall or marriage wall, add openings together.
2. Treat each marriage wall in each half of double wide separately. Provide piers at all openings greater than 4'-0" wide.
3. Combine pier loads at locations where each half of the home has a ridge beam column support.

RTON HOMES

TABLE 4A

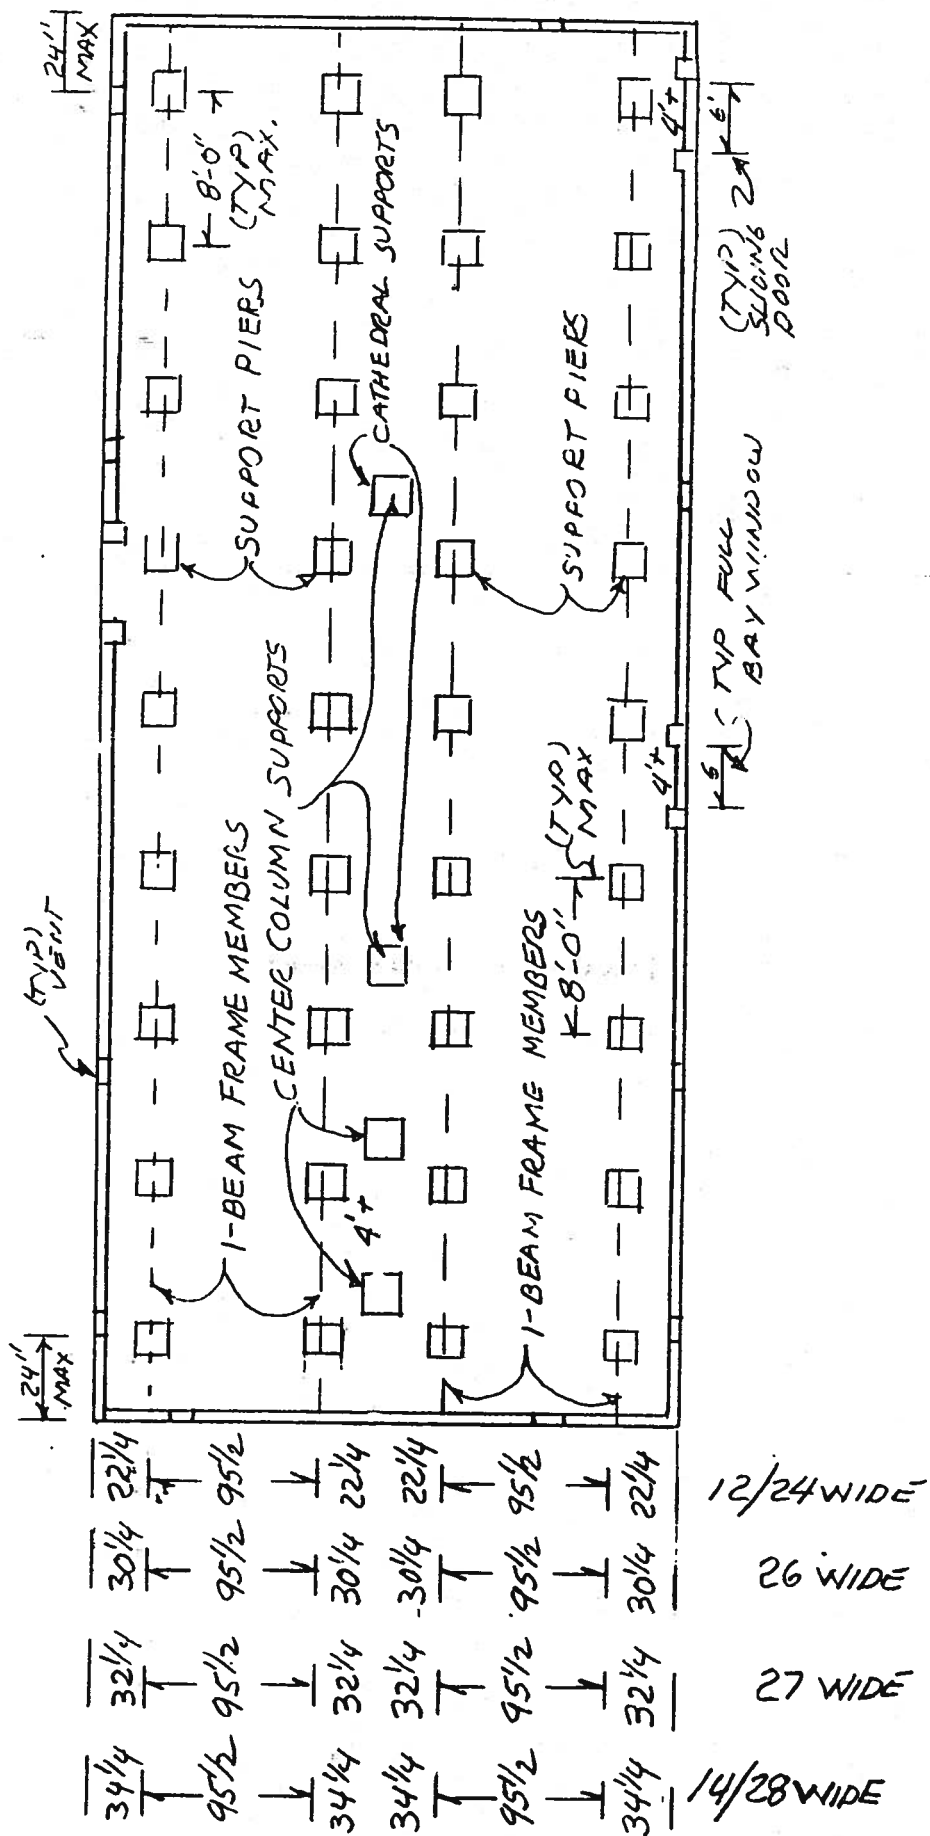

PIER LOADS

16' WIDE WITHOUT OVERHANG (188" FLOOR W/O OVERHANG)


MAX. PIER SPACING	PIER LOADS	Min. Footing Area (Sq. Inches) For Soil Pressure Specified				
4'-0"	2414	1000	1500	2000	2500	3000 PSF
6'-0"	3622	435	280	208	163	135
8'-0"	4829	628	403	297	238	195
		822	528	389	308	255

15' WIDE WITH OVERHANG SINGLE WIDE & D.W. (180" FLOOR W/ 12" OVERHANG)

MAX. PIER SPACING	PIER LOADS	Min. Footing Area (Sq. Inches) For Soil Pressure Specified				
4'-0"	2430	1000	1500	2000	2500	3000 PSF
6'-0"	3645	437	281	208	164	136
8'-0"	4860	632	407	299	237	196
		825	531	392	310	257

SIDEWALL OPENINGS FOOTING AREAS

MAX. OPENING	PIER LOADS	Min. Footing Area (Sq. Inches) For Soil Pressure Specified				
4'-0"	962	1000	1500	2000	2500	3000 PSF
6'-0"	1425	201	128	96	76	63
8'-0"	1904	277	178	131	105	86
10'-0"	2380	353	228	188	133	110
12'-0"	2835	429	276	204	161	134
14'-0"	3332	506	325	239	190	157
16'-0"	3808	582	374	276	218	181
18'-0"	4284	658	423	321	247	204
20'-0"	4760	734	472	348	276	228
		810	521	384	304	252

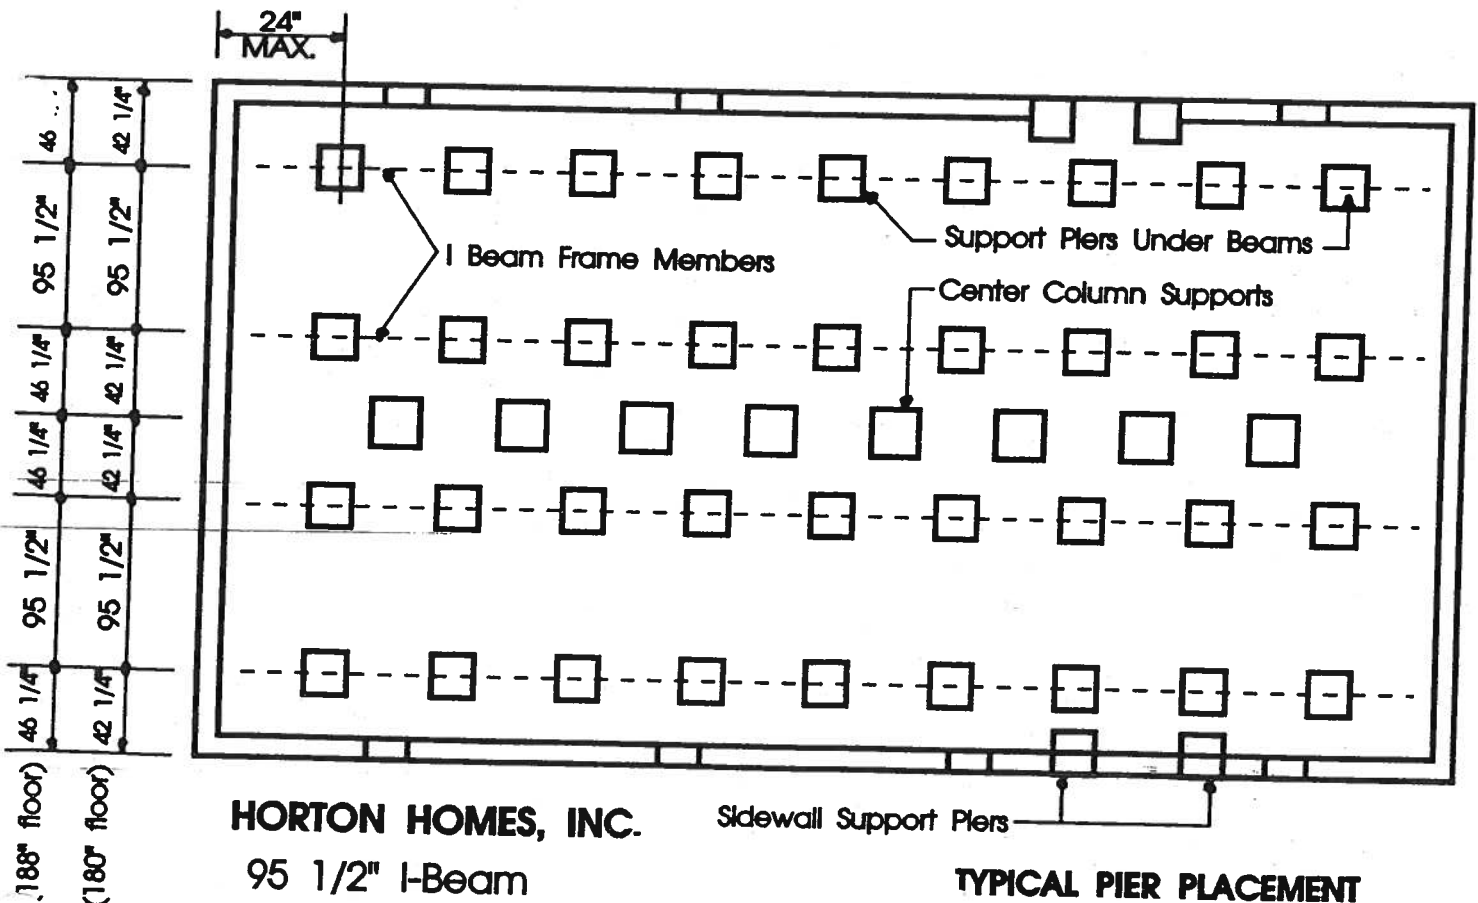

Spread for 16' Wide
and 15' Wide Floors

53 Sidewall & Center Column
Supports Installed Each
Side Of Openings 4' or Larger

MINIMUM BLOCKING STANDARDS

1. **Pier foundations shall be installed directly under the main frame (or chassis) of the manufactured home.** The piers shall not be further apart than eight (8) feet on centers and the maximum distance in from each end 2'-0".
2. **All grass and organic matter shall be removed and the pier foundation placed in stable soil.** The pier foundation shall be minimum of 24" x 30" x 4" (refer to soil bearing capacity for exact size), solid concrete pad, pre-cast or poured in place, or equivalent. (Min. based on 1000 psf - 8'-0" pier spacing).
3. Piers must be constructed of regular 8" x 8" x 16" concrete blocks, open cells, solid or equivalent (with open cells vertical) placed above the foundation. A 2" x 8" x 16" pressure treated wood plate, or equivalent, shall be placed on top of the pier with shims fitted and driven tight from both sides of the I-Beam. (See Figure 1.)
4. **All piers over forty (40) inches in height shall be double tiered with blocks interlocked and capped with a 4" x 16" x 16" solid concrete block or equivalent, and cushioned with wood shims or pressure treated plate.** (See Figures II and III.)
5. **All corner piers over three (3) blocks high shall be doubled tiered, with blocks interlocked and capped with a 4" x 16" x 16" solid concrete block or equivalent and cushioned with wood shims and pressure treated plate.**
6. **EXTERIOR SIDEWALL/MARRIAGE WALL BLOCKING - In addition to providing piers for supporting the frame, piers also are required to support the special roof loads.** These support piers are required at all marriage wall and sidewall openings greater than 4 ft. in width. These piers should be placed at each side of such openings. Typical sidewall openings - sliding glass door/full bay windows. Typical marriage wall openings - cathedral openings, passageway openings greater than 4'. In addition to these supports, it is optional that support piers may be installed around the perimeter of the house -8 ft. O.C. Max.

ADDENDUM TO MINIMUM BLOCKING STANDARDS

NOTE: In some situations forces and materials may interact in such a way as to result in some areas in a slight crowning of floor joists from the I-beam of the frame to the exterior wall. **When this situation does occur, it is required that the dealer exercise the option with respect to exterior sidewall blocking and install support piers around the perimeter of the house. 8 ft. O.C. Max.**

BLOCKING STANDARDS

FIGURE I



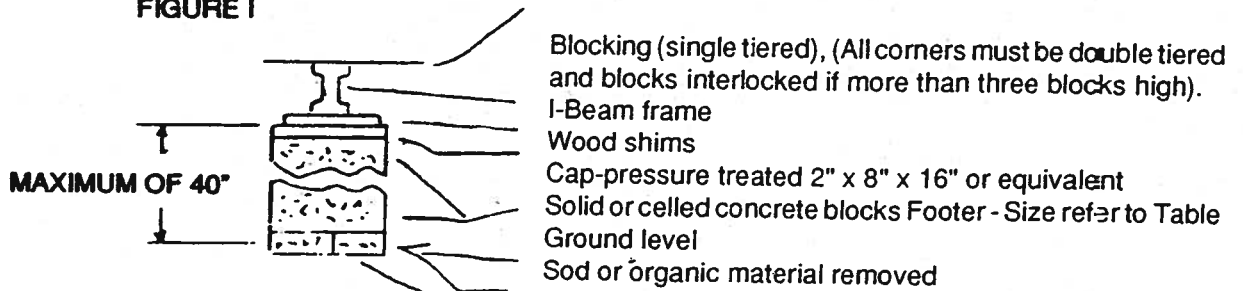



FIGURE II

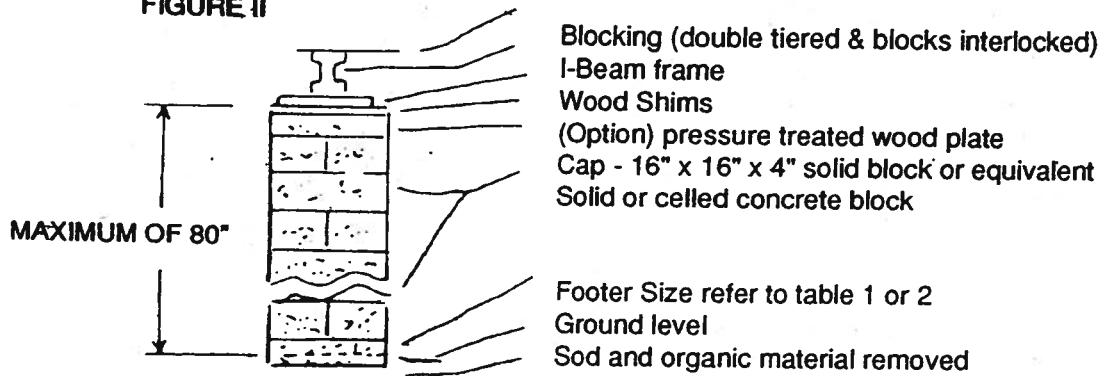

EXTERIOR SIDEWALL BLOCKING WITH NO UNDERPINNING

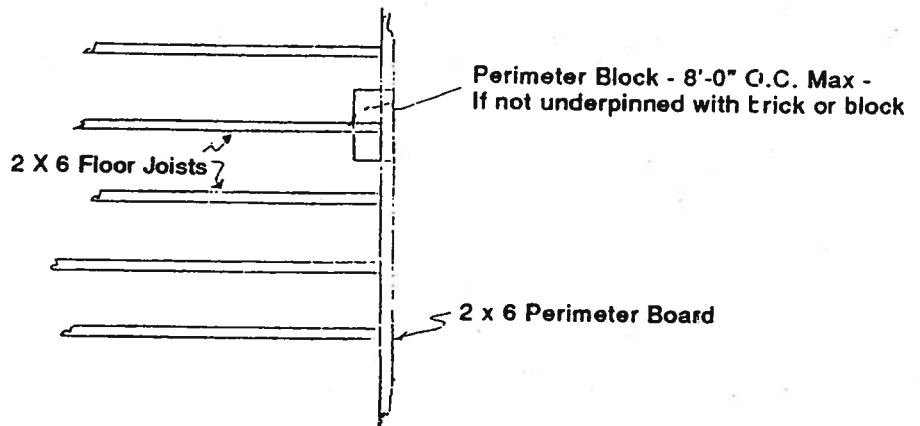

EXTERIOR SIDEWALL BLOCKING WITH BRICK/BLOCK UNDERPINNING

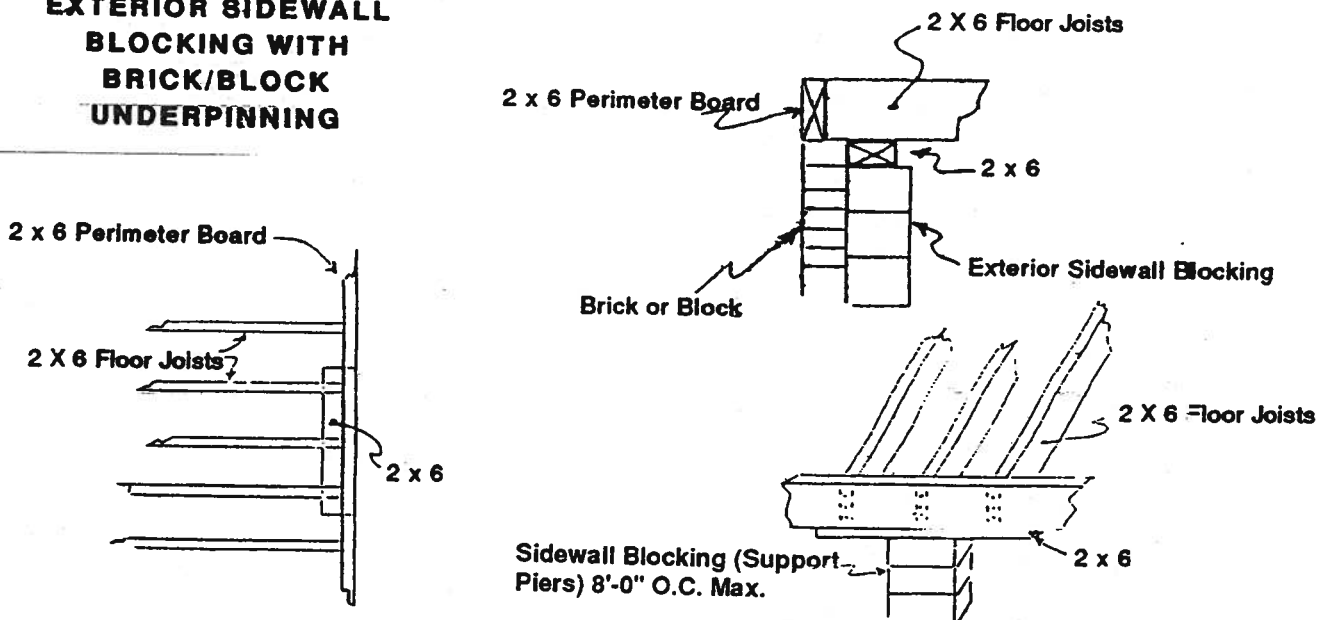

ANCHORING SYSTEM

All Horton Homes **must** be securely anchored according to wind zone location to resist the uplifting and sliding forces created by strong winds. Horton Homes are built to comply with HUD'S Manufactured Home Construction and Safety Standards which establish design requirements for each wind zone area. A wind zone map reflecting the three wind zone areas and the wind zone designation of your home can be found on a Certificate of Compliance sheet posted inside a kitchen cabinet, furnace compartment or some other convenient location. All Horton Homes must be anchored in accordance to the appropriate anchoring instruction found under the applicable wind zone section in this manual. Other methods of anchoring of your home maybe used if designed by a professional engineer for the applicable wind zones.

Note: Wind Zone 2 or 3 houses set up in wind zone 1 area need only comply with wind zone 1 anchoring requirements.


The tiedown straps and ground anchors are not provided by the manufacturer, as differing soil conditions require different anchoring system. Several good systems are available through your dealer or installation contractor.

STRAP TO FRAME ATTACHMENT

The strap to frame attachment details are shown in Illustration A or B. The required frame tiedown spacing is shown on charts and drawings. The strap to anchor connection and the anchor installation method must be in accordance with the anchor manufacturer's installation instructions.

It is essential that all components of the tiedown system meet the minimum strength requirements specified in this manual for the applicable wind zones.


**FIGURE III
OPTION**

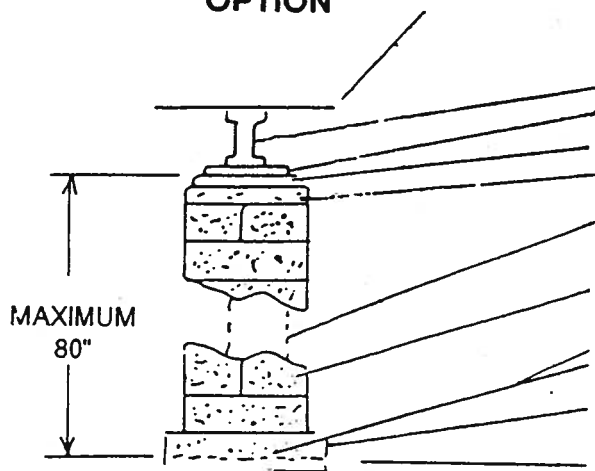

Blocking (double tiered - blocks interlocked concrete filled)
I-Beam frame
Wood shims
(Option) pressure treated wood plate
Cap - 16" x 16" x 4" solid block or equivalent
3/8" Steel reinforced rods
Celled concrete blocks
All cells filled with 2500 P.S.I. concrete

Footer Size refer to table 1 or 2
Ground level
Sod and organic material removed

**FIGURE IV
OPTION**

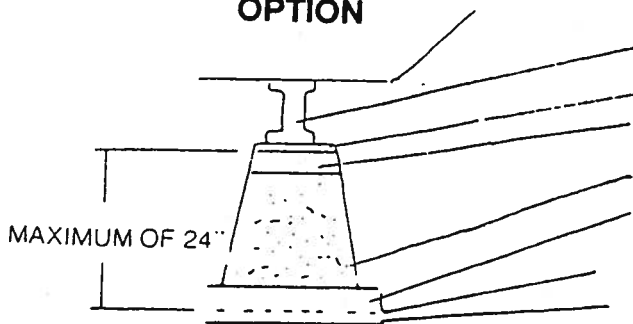

Blocking (solid pier)
I-Beam frame
Wood shims
(Option) Pressure treated wood plate
8" x 10" (minimum) pier top
Pier
Footer Size refer to table 1 or 2

Ground level
Sod and organic material removed

497-4866

Columbia County Property Appraiser

DB Last Updated: 11/20/2006

Parcel: 01-5S-16-03398-000 02

2007 Proposed Values

Tax Record

Property Card

Interactive GIS Map

Print

Owner & Property Info

Search Result: 1 of 14

Next >>

Owner's Name	HOPEFUL BAPTIST CHURCH TTES		
Site Address			
Mailing Address	289 SE HOPEFUL DR LAKE CITY, FL 32025		
Use Desc. (code)	CHURCHES (007100)		
Neighborhood	1516.00	Tax District	3
UD Codes	MKTA01	Market Area	01
Total Land Area	1.000 ACRES		
Description	BEG NW COR, RUN E 210 FT, S 243.21 FT, W 210 FT, N 243.13 FT TO POB. ORB 390-559, 818-957		

GIS Aerial



Property & Assessment Values

Mkt Land Value	cnt: (1)	\$16,250.00
Ag Land Value	cnt: (0)	\$0.00
Building Value	cnt: (1)	\$115,659.00
XFOB Value	cnt: (3)	\$2,576.00
Total Appraised Value		\$134,485.00

Just Value	\$134,485.00
Class Value	\$0.00
Assessed Value	\$134,485.00
Exempt Value	(code: 02) \$134,485.00
Total Taxable Value	\$0.00

Sales History

Sale Date	Book/Page	Inst. Type	Sale VImp	Sale Qual	Sale RCode	Sale Price
10/10/2000	917/403	WD	I	U	01	\$100.00
2/27/1996	818/957	WD	I	U	11	\$0.00

Building Characteristics

Bldg Item	Bldg Desc	Year Blt	Ext. Walls	Heated S.F.	Actual S.F.	Bldg Value
1	CHURCH (009100)	1978	Common BRK (19)	4637	4733	\$115,659.00
Note: All S.F. calculations are based on exterior building dimensions.						

Extra Features & Out Buildings


Code	Desc	Year Blt	Value	Units	Dims	Condition (% Good)
0166	CONC,PAVMT	0	\$200.00	1.000	0 x 0 x 0	(.00)
0260	PAVEMENT-A	0	\$1,976.00	1.000	61 x 154 x 0	(.00)
0294	SHED WOOD/	1993	\$400.00	80.000	8 x 10 x 0	(.00)

Land Breakdown

Lnd Code	Desc	Units	Adjustments	Eff Rate	Lnd Value
007100	CHURCH (MKT)	1.000 AC	1.00/1.00/1.00/1.00	\$16,250.00	\$16,250.00

Columbia County Property Appraiser

DB Last Updated: 11/20/2006

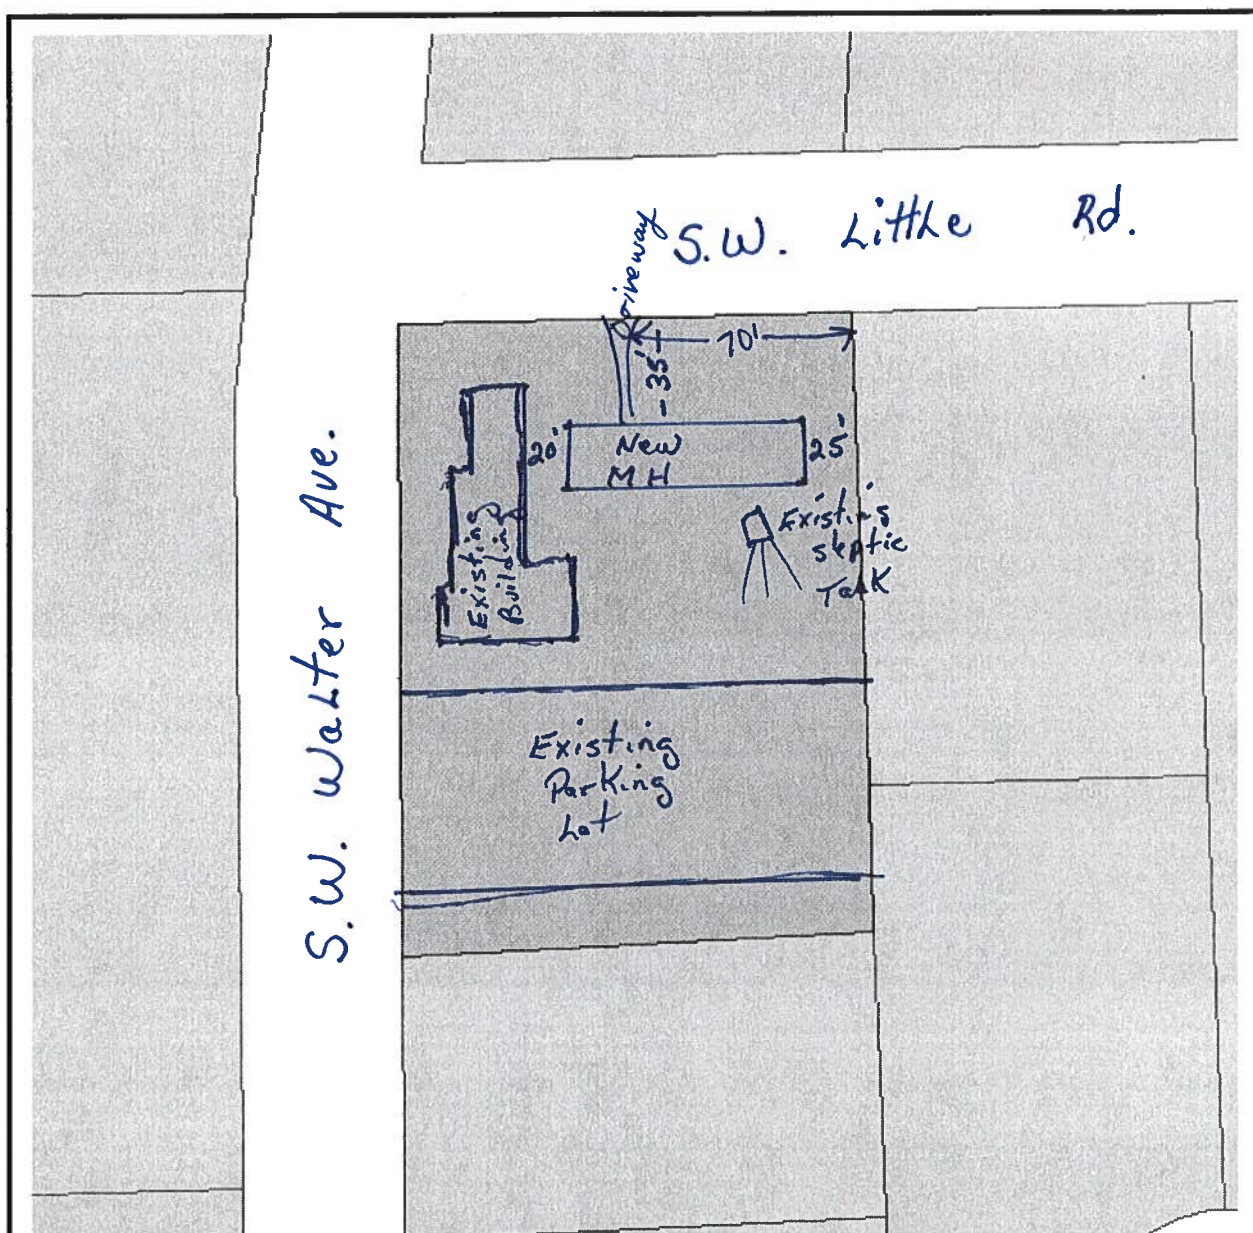

Columbia County Property Appraiser

J. Doyle Crews, CFA - Lake City, Florida - 386-758-1083

PARCEL: 01-5S-16-03398-000 02 - CHURCHES (007100)

Name: HOPEFUL BAPTIST CHURCH TTES	LandVal	\$16,250.00
Site:	BldgVal	\$115,659.00
Mail: 289 SE HOPEFUL DR	ApprVal	\$134,485.00
LAKE CITY, FL 32025	JustVal	\$134,485.00
Sales 10/10/2000 \$100.00 I / U	Assd	\$134,485.00
Info 2/27/1996 \$0.00 I / U	Exmpt	\$134,485.00
	Taxable	\$0.00

0 29 58 87 ft



This information, GIS Map Updated: 11/20/2006, was derived from data which was compiled by the Columbia County Property Appraiser Office solely for the governmental purpose of property assessment. This information should not be relied upon by anyone as a determination of the ownership of property or market value. No warranties, expressed or implied, are provided for the accuracy of the data herein, it's use, or it's interpretation. Although it is periodically updated, this information may not reflect the data currently on file in the Property Appraiser's office. The assessed values are NOT certified values and therefore are subject to change before being finalized for ad valorem assessment purposes.



Columbia County 9-1-1 Addressing / GIS Department

P.O. Box 1787, Lake City, FL 32056

Telephone: (386) 758-1125 * Fax: (386) 758-1365 * E-mail: ron_croft@columbiacountyfla.com



Lawrie Hodson

9-1-1 Address Request Form



NOTE: ADDRESS ASSIGNMENT MAY REQUIRE UP TO 10 WORKING DAYS. IF THE ADDRESSING DEPARTMENT NEEDS TO CONDUCT ON SITE GPS LOCATION IDENTIFICATION, ADDITIONAL TIME MAY BE REQUIRED.

Date of Request: 12-18-06

Requester Last Name: Hopeful Baptist Church TTES

First Name: _____

Contact Telephone Number: 758-1117

(Cell Phone Number if Provided): 623-0169 (Harry Dicks)

Requested for Self: _____ or Requested for Company: ☒ (check one)

If Address is Requested by a Company, Provide Name of Requesting Company:

Hopeful Baptist Church TTES

Parcel Identification Number: 01 - 55 - 16 - 03398-000 -

If in Subdivision, Provide Name Of Subdivision:

Phase or Unit Number (if any): _____ Block Number (if any): _____

Lot Number: _____

Attach Site Plan or you may use back of Request Form for Site Plan:

Requirements for Site Plan Are Listed on Back of Request From:

(NOTE: Site Plan Does NOT have to be a survey or to scale; FURTHER a Environmental Health Dept. Site Plan showing only a 210 by 210 cutout of a property will NOT suffice for Addressing Requirements.)

Addressing / GIS Department Use Only:

Date Received: _____

Date Assigned: _____

ID Number: _____

COLUMBIA COUNTY 9-1-1 ADDRESSING

P. O. Box 1787, Lake City, FL 32056-1787

PHONE: (386) 758-1125 * FAX: (386) 758-1365 * Email: ron_croft@columbiacountyfla.com

Addressing Maintenance

To maintain the Countywide Addressing Policy you must make application for a 9-1-1 Address at the time you apply for a building permit. The established standards for assigning and posting numbers to all principal buildings, dwellings, businesses and industries are contained in Columbia County Ordinance 2001-9. The addressing system is to enable Emergency Service Agencies to locate you in an emergency, and to assist the United States Postal Service and the public in the timely and efficient provision of services to residents and businesses of Columbia County.

DATE REQUESTED: 12/18/2006 DATE ISSUED: 12/18/2006

ENHANCED 9-1-1 ADDRESS:

2480 SW LITTLE RD

LAKE CITY FL 32024

PROPERTY APPRAISER PARCEL NUMBER:

01-5S-16-03398-000

Remarks:

2ND LOCATION ON PARCEL

Address Issued By:



Columbia County 9-1-1 Addressing / GIS Department

NOTICE: THIS ADDRESS WAS ISSUED BASED ON LOCATION INFORMATION RECEIVED FROM THE REQUESTER. SHOULD, AT A LATER DATE, THE LOCATION INFORMATION BE FOUND TO BE IN ERROR, THIS ADDRESS IS SUBJECT TO CHANGE.

**COLUMBIA COUNTY
9-1-1 ADDRESSING
APPROVED**

All Horton Homes designed for Wind Zone 1 are anchored to the ground to resist wind forces with frame ties only. Horton Homes designed for Wind Zones 2 and 3 use both vertical and diagonal frame ties. Over-the-roof down straps may be used in conjunction with the frame ties if preferred for Zone 1. All shearwall vertical tiedown locations along the sidewall and marriage wall are identified by the manufacturer at the factory.

Zone 2 Wind Zone houses set up in Zone 1 Wind Zone areas need only comply with Zone 1 anchoring requirements.

Park straps or vertical ties may have been installed on this house. If so, it should be noted that park straps are provided to supplement and not replace the engineered anchoring system. Under no circumstances should the diagonal anchoring straps be replaced by vertical park straps.

The following procedure may be used for installing the anchor system.

1. Thread straps through the buckle and around the I-beam at the proper locations (See Illustration A or use locking frame clip as shown in Illustration B). See page 66 for singlewide locations and page 69 for doublewide locations (Wind Zones 2 & 3, page 79 for singlewide and page 82 for doublewide).
2. Install ground anchors per the manufacturer's instructions. Each anchor must be positioned so the final strap angle will be within the limits.
3. Attach the straps to the ground anchor tensioning device as per the anchor manufacturer's instructions. It is recommended that all straps be tightened only enough to remove the slack. Then after all straps are installed in this manner, retighten each strap.
4. The strap tension should be re-checked periodically until pier settlement has stopped. The house must not be leveled without first loosening the tiedown strap. After re-leveling, all straps must be re-tightened.

Frame Tie With Buckle

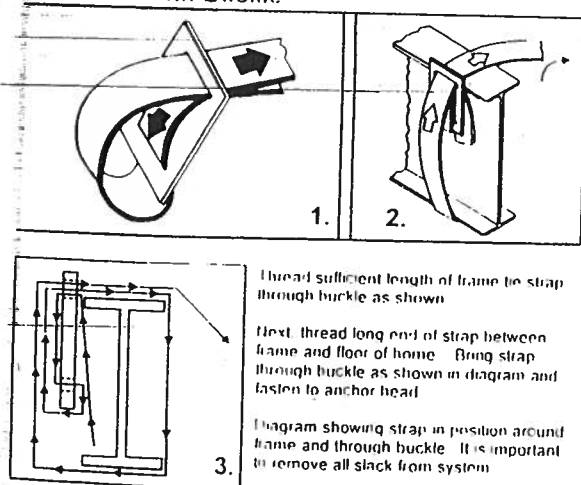


ILLUSTRATION A

NOTE: PROTECTION SHALL BE PROVIDED AT SHARP CORNERS OF I-BEAM AND BRACKETS WHERE STRAPS MAYBE DAMAGED.

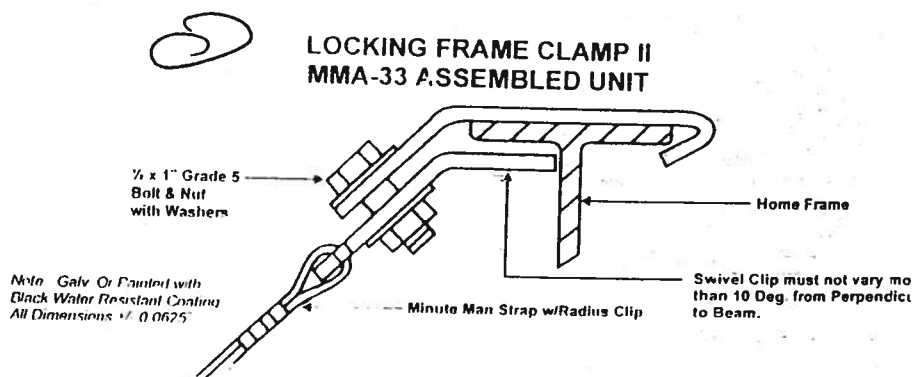



ILLUSTRATION B

STATE OF FLORIDA
DEPARTMENT OF HEALTH
APPLICATION FOR ONSITE SEWAGE DISPOSAL SYSTEM CONSTRUCTION PERMIT

Permit Application Number 06-0113W

PART II - SITEPLAN

Scale: 1 inch = 50 feet.

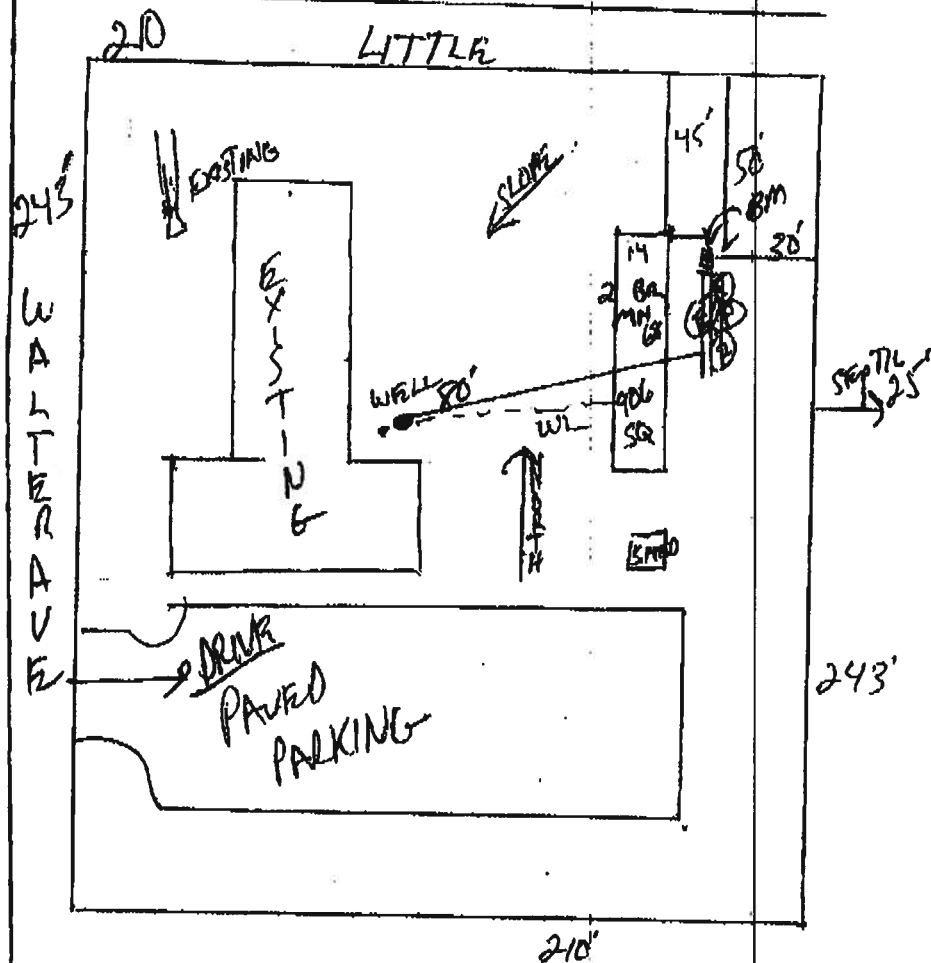

Notes:

Site Plan submitted by: Ralph D. Z...

Plan Approved APPROVED

By [Signature]

Not Approved

Columbia CHD

MASTER CONTRACTOR

County Health Department

ALL CHANGES MUST BE APPROVED BY THE COUNTY HEALTH DEPARTMENT

COLUMBIA COUNTY OFFICE OF M/H OCCUPANCY

COLUMBIA COUNTY, FLORIDA

Department of Building and Zoning Inspection

This Certificate of Occupancy is issued to the below named permit holder for the building and premises at the below named location, and certifies that the work has been completed in accordance with the Columbia County Building Code.

Parcel Number 01-5S-16-03398-000

Building permit No. 000025342

Permit Holder DALE HOUSTON

Owner of Building HOPEFUL BAPTIST CHURCH

Location: 2480 SW LITTLE RD, LAKE CITY, FL 32024

Date: 01/10/2007

Harry Sticker

Building Inspector



POST IN A CONSPICUOUS PLACE
(Business Places Only)