

This document has been electronically signed and sealed using a Digital Signature. Printed copies without an original signature must be verified using the original electronic version.



Alpine, an ITW Company 6750 Forum Drive, Suite 305 Orlando, FL 32821 Phone: (800)755-6001 www.alpineitw.com

COA #0 278 02/03/2022



Site Information:	Page 1:
Customer: W. B. Howland Company, Inc.	Job Number: 22-6882
Job Description: Reserve at Jewel Lake 31 - Carlisle A - GL	
Address: 452 SW Jewel Lake Dr, FL	

Job Engineering Criteria:				
Design Code: FBC 7th Ed. 2020 Res.	IntelliVIEW Version: 21.01.01A			
	JRef #: 1XcR2150012			
Wind Standard: ASCE 7-16 Wind Speed (mph): 130	Design Loading (psf): 40.00			
Building Type: Closed				

This package contains general notes pages, 27 truss drawing(s) and 3 detail(s).

Item	Drawing Number	Truss
1	034.22.1004.51504	A01
3	034.22.1004.51160	A03
5	034.22.1004.51223	A05
7	034.22.1004.51395	A07
9	034.22.1004.52380	A09
11	034.22.1004.52082	A11
13	034.22.1004.51974	A13
15	034.22.1004.52240	A15
17	034.22.1004.51849	A17
19	034.22.1004.52160	A19
21	034.22.1004.50927	B02
23	034.22.1004.51365	J02
25	034.22.1004.51082	J04
27	034.22.1004.51614	J06
29	BRCLBSUB0119	

Item	Drawing Number	Truss
2	034.22.1004.52176	A02
4	034.22.1004.51723	A04
6	034.22.1004.51785	A06
8	034.22.1004.51989	A08
10	034.22.1004.51567	A10
12	034.22.1004.51660	A12
14	034.22.1004.51457	A14
16	034.22.1004.50974	A16
18	034.22.1004.50723	A18
20	034.22.1004.51990	B01
22	034.22.1004.50863	J01
24	034.22.1004.51036	J03
26	034.22.1004.52332	J05
28	A14015ENC160118	
30	GBLLETIN0118	

General Notes

Truss Design Engineer Scope of Work, Design Assumptions and Design Responsibilities:

The design responsibilities assumed in the preparation of these design drawings are those specified in ANSI/TPI 1, Chapter 2; and the National Design Standard for Metal Plate Connected Wood Truss Construction, by the Truss Plate Institute. The truss component designs conform to the applicable provisions of ANSI/TPI 1 and NDS, the National Design Specification for Wood Construction by AWC. The truss component designs are based on the specified loading and dimension information furnished by others to the Truss Design Engineer. The Truss Design Engineer has no duty to independently verify the accuracy or completeness of the information provided by others and may rely on that information without liability. The responsibility for verification of that information remains with others neither employed nor controlled by the Truss Design Engineer. The Truss Design Engineer's seal and signature on the attached drawings, or cover page listing these drawings, indicates acceptance of professional engineering responsibility solely for the truss component designs and not for the technical information furnished by others which technical information and consequences thereof remain their sole responsibility.

The suitability and use of these drawings for any particular structure is the responsibility of the Building Designer in accordance with ANSI/TPI 1 Chapter 2. The Building Designer is responsible for determining that the dimensions and loads for each truss component match those required by the plans and by the actual use of the individual component, and for ascertaining that the loads shown on the drawings meet or exceed applicable building code requirements and any additional factors required in the particular application. Truss components using metal connector plates with integral teeth shall not be placed in environments that will cause the moisture content of the wood in which plates are embedded to exceed 19% and/or cause corrosion of connector plates and other metal fasteners.

The Truss Design Engineer shall not be responsible for items beyond the specific scope of the agreed contracted work set forth herein, including but not limited to: verifying the dimensions of the truss component, calculation of any of the truss component design loads, inspection of the truss components before or after installation, the design of temporary or permanent bracing and their attachment required in the roof and/or floor systems, the design of diaphragms or shear walls, the design of load transfer connections to and from diaphragms and shear walls, the design of load transfer to the foundation, the design of connections for truss components to their bearing supports, the design of the bearing supports, installation of the truss components, observation of the truss component installation process, review of truss assembly procedures, sequencing of the truss component installation, construction means and methods, site and/or worker safety in the installation of the truss components and/or its connections.

This document may be a high quality facsimile of the original engineering document which is a digitally signed electronic file with third party authentication. A wet or embossed seal copy of this engineering document is available upon request.

Temporary Lateral Restraint and Bracing:

Temporary lateral restraint and diagonal bracing shall be installed according to the provisions of BCSI chapters B1, B2, B7 and/or B10 (Building Component Safety Information, by TPI and SBCA), or as specified by the Building Designer or other Registered Design Professional. The required locations for lateral restraint and/or bracing depicted on these drawings are only for the permanent lateral support of the truss members to reduce buckling lengths, and do not apply to and may not be relied upon for the temporary stability of the truss components during their installation.

Permanent Lateral Restraint and Bracing:

The required locations for lateral restraint or bracing depicted on these drawings are for the permanent lateral support of the truss members to reduce buckling lengths. Permanent lateral support shall be installed according to the provisions of BCSI chapters B3, B7 and/or B10, or as specified by the Building Designer or other Registered Design Professional. These drawings do not depict or specify installation/erection bracing, wind bracing, portal bracing or similar building stability bracing which are parts of the overall building design to be specified, designed and detailed by the Building Designer.

Connector Plate Information:

Alpine connector plates are made of ASTM A653 or ASTM A1063 galvanized steel with the following designations, gauges and grades: W=Wave, 20ga, grade 40; H=High Strength, 20ga, grade 60; S=Super Strength, 18ga, grade 60. Information on model code compliance is contained in the ICC Evaluation Service report ESR-1118, available on-line at www.icc-es.org.

Fire Retardant Treated Lumber:

Fire retardant treated lumber must be properly re-dried and maintained below 19% or less moisture level through all stages of construction and usage. Fire retardant treated lumber may be more brittle than untreated lumber. Special handling care must be taken to prevent breakage during all handling activities.

General Notes (continued)

Key to Terms:

Information provided on drawings reflects a summary of the pertinent information required for the truss design. Detailed information on load cases, reactions, member lengths, forces and members requiring permanent lateral support may be found in calculation sheets available upon written request.

BCDL = Bottom Chord standard design Dead Load in pounds per square foot.

BCLL = Bottom Chord standard design Live Load in pounds per square foot.

CL = Certified lumber.

Des Ld = total of TCLL, TCDL, BCLL and BCDL Design Load in pounds per square foot.

FRT = Fire Retardant Treated lumber.

FRT-DB = D-Blaze Fire Retardant Treated lumber.

FRT-DC = Dricon Fire Retardant Treated lumber.

FRT-FP = FirePRO Fire Retardant Treated lumber.

FRT-FL = FlamePRO Fire Retardant Treated lumber.

FRT-FT = FlameTech Fire Retardant Treated lumber.

FRT-PG = PYRO-GUARD Fire Retardant Treated lumber.

g = green lumber.

HORZ(LL) = maximum Horizontal panel point deflection due to Live Load, in inches.

HORZ(TL) = maximum Horizontal panel point long term deflection in inches, due to Total Load, including creep adjustment.

HPL = additional Horizontal Load added to a truss Piece in pounds per linear foot or pounds.

Ic = Incised lumber.

FJ = Finger Jointed lumber.

L/# = user specified divisor for limiting span/deflection ratio for evaluation of actual L/defl value.

L/defl = ratio of Length between bearings, in inches, divided by the vertical Deflection due to creep, in inches, at the referenced panel point. Reported as 999 if greater than or equal to 999.

Loc = Location, starting location of left end of bearing or panel point (joint) location of deflection.

Max BC CSI = Maximum bending and axial Combined Stress Index for Bottom Chords for of all load cases.

Max TC CSI = Maximum bending and axial Combined Stress Index for Top Chords for of all load cases.

Max Web CSI= Maximum bending and axial Combined Stress Index for Webs for of all load cases.

NCBCLL = Non-Concurrent Bottom Chord design Live Load in pounds per square foot.

PL = additional Load applied at a user specified angle on a truss Piece in pounds per linear foot or pounds.

PLB = additional vertical load added to a Bottom chord Piece of a truss in pounds per linear foot or pounds

PLT = additional vertical load added to a Top chord Piece of a truss in pounds per linear foot or pounds.

PP = Panel Point.

R = maximum downward design Reaction, in pounds, from all specified gravity load cases, at the indicated location (Loc).

-R = maximum upward design Reaction, in pounds, from all specified gravity load cases, at the identified location (Loc).

Rh = maximum horizontal design Reaction in either direction, in pounds, from all specified gravity load cases, at the indicated location (Loc).

RL = maximum horizontal design Reaction in either direction, in pounds, from all specified non-gravity (wind or seismic) load cases, at the indicated location (Loc).

Rw = maximum downward design Reaction, in pounds, from all specified non-gravity (wind or seismic) load cases, at the identified location (Loc).

TCDL = Top Chord standard design Dead Load in pounds per square foot.

TCLL = Top Chord standard design Live Load in pounds per square foot.

U = maximum Upward design reaction, in pounds, from all specified non-gravity (wind or seismic) load cases, at the indicated location (Loc).

VERT(CL) = maximum Vertical panel point deflection in inches due to Live Load and Creep Component of Dead Load in inches.

VERT(CTL) = maximum Vertical panel point deflection ratios due to Live Load and Creep Component of Dead Load, and maximum long term Vertical panel point deflection in inches due to Total load, including creep adjustment.

VERT(LL) = maximum Vertical panel point deflection in inches due to Live Load.

VERT(TL) = maximum Vertical panel point long term deflection in inches due to Total load, including creep adjustment. W = Width of non-hanger bearing, in inches.

Refer to ASCE-7 for Wind and Seismic abbreviations.


Uppercase Acronyms not explained above are as defined in TPI 1.

References:

- 1. AWC: American Wood Council; 222 Catoctin Circle SE, Suite 201; Leesburg, VA 20175; www.awc.org.
- 2. ICC: International Code Council; www.iccsafe.org.
- 3. Alpine, a division of ITW Building Components Group Inc.: 514 Earth City Expressway, Suite 242, Earth City, MO 63045; www.alpineitw.com.
- 4. TPI: Truss Plate Institute, 2670 Crain Highway, Suite 203, Waldorf, MD 20601; www.tpinst.org.
- 5. SBCA: Wood Truss Council of America, 6300 Enterprise Lane, Madison, WI 53719; www. sbcacomponents.com.

SEQN: 389614 / HIPS Ply: 2 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T26 FROM: CDM DrwNo: 034.22.1004.51504 Qty: 1 Reserve at Jewel Lake 31 - Carlisle A - GL Truss Label: A01 / YK 02/03/2022

2 Complete Trusses Required

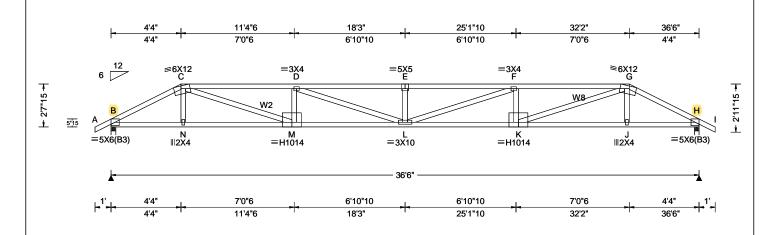

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria
TCLL: 20.00	Wind Std: ASCE 7-16	Pg: NA Ct: NA CAT: NA	PP Deflection in loc L/defl L/#
TCDL: 10.00	Speed: 130 mph	Pf: NA Ce: NA	VERT(LL): 0.636 E 684 360
BCLL: 0.00	Enclosure: Closed	Lu: NA Cs: NA	VERT(CL): 1.277 E 340 240
BCDL: 10.00	Risk Category: II	Snow Duration: NA	HORZ(LL): 0.102 C
Des Ld: 40.00	EXP: C Kzt: NA		HORZ(TL): 0.204 C
NCBCLL: 0.00	Mean Height: 15.00 ft TCDL: 5.0 psf	Building Code:	Creep Factor: 2.0
Soffit: 2.00	BCDL: 5.0 psf	FBC 7th Ed. 2020 Res.	Max TC CSI: 0.847
Load Duration: 1.25	MWFRS Parallel Dist: 0 to h/2	TPI Std: 2014	Max BC CSI: 0.736
Spacing: 24.0 "	C&C Dist a: 3.65 ft	Rep Fac: No	Max Web CSI: 0.743
	Loc. from endwall: not in 4.50 ft	FT/RT:20(0)/10(0)	
	GCpi: 0.18	Plate Type(s):	
	Wind Duration: 1.60	WAVE, HS	VIEW Ver: 21.01.01A.0521.20
Lumber		Wind	

Lumber

Top chord: 2x4 SP M-31;

Bot chord: 2x4 SP M-31; Webs: 2x4 SP #3; W2,W8 2x4 SP #2;

Nailnote

Nail Schedule:0.131"x3", min. nails Top Chord: 1 Row @12.00" o.c. Bot Chord: 1 Row @12.00" o.c. :1 Row @ 4" o.c.

Use equal spacing between rows and stagger nails

in each row to avoid splitting.

Special Loads

(Lumber Dur.Fac.=1.25 / Plate Dur.Fac.=1.25)					
TC: From	62 plf at	-1.00 to	62 plf at	4.33	
TC: From	31 plf at	4.33 to	31 plf at	32.17	
TC: From	62 plf at	32.17 to	62 plf at	37.50	
BC: From	4 plf at	-1.00 to	4 plf at	0.00	
BC: From	20 plf at	0.00 to	20 plf at	4.36	
BC: From	10 plf at	4.36 to	10 plf at	32.14	
BC: From	20 plf at	32.14 to	20 plf at	36.50	
BC: From	4 plf at	36.50 to	4 plf at	37.50	
TC: 223 lb Conc. Load at 4.36,32.14					
TC: 186 lb Conc. Load at 6.40, 8.40,10.40,12.40					
14.40,16.40,18.25,20.10,22.10,24.10,26.10,28.10					

BC: 334 lb Conc. Load at 4.36,32.14

BC: 128 lb Conc. Load at 6.40, 8.40,10.40,12.40 14.40,16.40,18.25,20.10,22.10,24.10,26.10,28.10 30.10

In lieu of structural panels use purlins to brace all flat TC @ 24" oc.

Wind loads and reactions based on MWFRS. Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is



▲ Maximum Reactions (lbs) Gravity Non-Gravity Loc R+ /Rh /Rw /U В 3590 /-/704 3590 /-/-/704

/RL

/-

/-

Wind reactions based on MWFRS Brg Width = 3.5Min Reg = 1.5В Brg Width = 3.5 Min Req = 1.5

Bearings B & H are a rigid surface. Members not listed have forces less than 375# Maximum Top Chord Forces Per Ply (lbs) Chords Tens.Comp. Chords Tens. Comp.

B-C C-D	664 - 3410	E-F	1392	- 7154
C-D	1190 - 6118	F-G	1190	- 6118
D-E	1392 - 7154	G-H	664	- 3410

Maximum Bot Chord Forces Per Ply (lbs) Chords Tens.Comp. Chords Tens. Comp. B - N 2991 - 580 6215 - 1221 N - M 3002 - 577 3002 - 577 K - J J - H M - L 6215 - 1221 2991 - 580

Maximum Web Forces Per Ply (lbs)

Webs	Tens.C	comp.	Webs	Tens. (Tens. Comp.	
С - М	3293	- 648	L-F	995	- 181	
M - D	255	- 799	F-K	255	- 799	
D-L	995	- 181	K-G	3293	- 648	
F-I	169	- 400				


WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.



SEQN: 389577 / HIPS Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T2 / FROM: CDM DrwNo: 034.22.1004.52176 Qty: 1 Reserve at Jewel Lake 31 - Carlisle A - GL Truss Label: A02 / DF 02/03/2022

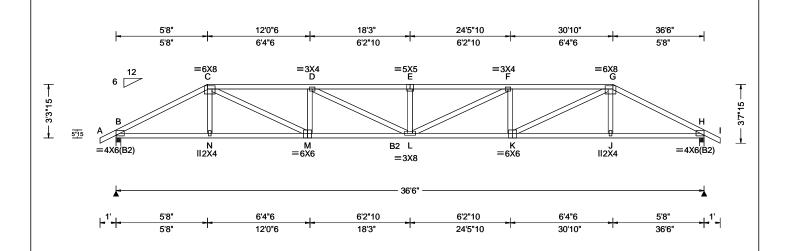

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	DefI/CSI Criteria
TCLL: 20.00	Wind Std: ASCE 7-16	Pg: NA Ct: NA CAT: NA	PP Deflection in loc L/defl L/#
TCDL: 10.00	Speed: 130 mph	Pf: NA Ce: NA	VERT(LL): 0.407 E 999 360
BCLL: 0.00	Enclosure: Closed	Lu: NA Cs: NA	VERT(CL): 0.830 E 524 240
BCDL: 10.00	Risk Category: II	Snow Duration: NA	HORZ(LL): 0.080 C
Des Ld: 40.00	EXP: C Kzt: NA		HORZ(TL): 0.164 C
NCBCLL: 10.00	Mean Height: 15.00 ft TCDL: 5.0 psf	Building Code:	Creep Factor: 2.0
Soffit: 2.00	BCDL: 5.0 psf	FBC 7th Ed. 2020 Res.	Max TC CSI: 0.959
Load Duration: 1.25	MWFRS Parallel Dist: h/2 to h	TPI Std: 2014	Max BC CSI: 0.972
Spacing: 24.0 "	C&C Dist a: 3.65 ft	Rep Fac: Yes	Max Web CSI: 0.821
-	Loc. from endwall: not in 9.00 ft	FT/RT:20(0)/10(0)	
	GCpi: 0.18	Plate Type(s):	
	Wind Duration: 1.60	WAVE	VIEW Ver: 21.01.01A.0521.20

Lumber

Top chord: 2x4 SP #2;

Bot chord: 2x4 SP #2; Webs: 2x4 SP #3;

Purlins

In lieu of structural panels use purlins to brace all flat


TC @ 24" oc.

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is 3-3-15.



Maximu	m Bot Chord I	Forces Per	Ply (lbs)
Chords	Tens.Comp.	Chords	Tens. Comp.

B - N	2331 - 1013	L-K	4022	- 1822
N - M	2333 - 1009	K-J	2333	- 998
M - L	4022 - 1833	J - H	2331	- 1002

Maximum Web Forces Per Ply (lbs)

Webs	Tens.Comp.		Webs	Tens. (Comp.
C - M	1809	- 919	L-F	535	- 255
M - D	458	- 656	F-K	458	- 656
D - L	535	- 255	K-G	1809	- 919



WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.



SEQN: 389578 / FROM: CDM


HIPS

Ply: 1 Qty: 1 Job Number: 22-6882

Reserve at Jewel Lake 31 - Carlisle A - GL

Truss Label: A03

Cust: R 215 JRef: 1XcR2150012 T3 / DrwNo: 034.22.1004.51160 / DF 02/03/2022

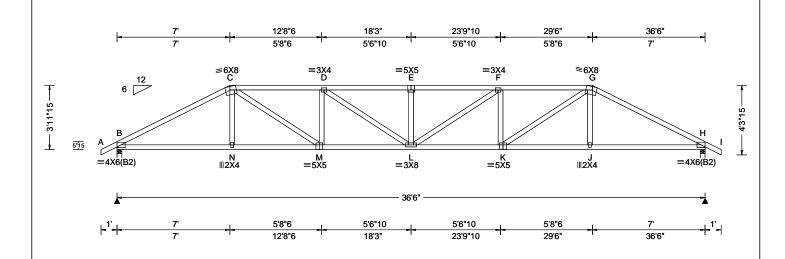

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria
TCLL: 20.00	Wind Std: ASCE 7-16	Pg: NA Ct: NA CAT: NA	PP Deflection in loc L/defl L/#
TCDL: 10.00	Speed: 130 mph	Pf: NA Ce: NA	VERT(LL): 0.300 E 999 360
BCLL: 0.00	Enclosure: Closed	Lu: NA Cs: NA	VERT(CL): 0.611 E 712 240
	Risk Category: II	Snow Duration: NA	HORZ(LL): 0.083 J
Des Ld: 40.00	EXP: C Kzt: NA		HORZ(TL): 0.170 J
NCBCLL: 10.00	Mean Height: 15.00 ft TCDL: 5.0 psf	Building Code:	Creep Factor: 2.0
Soffit: 2.00	BCDL: 5.0 psf	FBC 7th Ed. 2020 Res.	Max TC CSI: 0.747
Load Duration: 1.25	MWFRS Parallel Dist: h/2 to h	TPI Std: 2014	Max BC CSI: 0.908
Spacing: 24.0 "	C&C Dist a: 3.65 ft	Rep Fac: Yes	Max Web CSI: 0.540
'	Loc. from endwall: not in 9.00 ft	FT/RT:20(0)/10(0)	
	GCpi: 0.18	Plate Type(s):	
	Wind Duration: 1.60	WAVE	VIEW Ver: 21.01.01A.0521.20
Lumber			

Gravity Non-Gravity Loc R+ /Rh /Rw /U /RL В 1570 /-/891 /288 /118 1570 /-/-/891 /288 /-Wind reactions based on MWFRS Brg Width = 3.5Min Req = 1.9 В Brg Width = 3.5 Min Req = 1.9 Bearings B & H are a rigid surface. Members not listed have forces less than 375# Maximum Top Chord Forces Per Ply (lbs) Chords Tens.Comp. Chords Tens. Comp. B - C 1165 - 2658 1765 - 3684 C-D 1602 - 3323 F-G 1602 - 3323 D-E 1765 - 3684 G-H 1166 - 2658

Maximum Bot Chord Forces Per Ply (lbs)

- 941

Maximum Web Forces Per Ply (lbs)

Chords

K-J

J-H

Webs

L-F

F-K

K - G

Tens. Comp.

Tens. Comp.

- 1459

- 929

- 933

- 184

- 574

-653

3368

2281

2278

383

405

1251

Chords Tens.Comp.

2278 - 944

2281

3368 - 1471

Tens.Comp.

405 - 574

1251 - 653

383 - 184

B - N

N - M

M - L

Webs

▲ Maximum Reactions (lbs)

Top chord: 2x4 SP #2; Bot chord: 2x4 SP #2; Webs: 2x4 SP #3;

Purlins

In lieu of structural panels use purlins to brace all flat TC @ 24" oc.

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is



02/03/2022

WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!


IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.

Alpine, a division of ITW Building Components Group Inc. shall not be responsible for any deviation from this drawing, any failure to build the truss in conformance with ANSI/TPI 1, or for handling, shipping, installation and bracing of trusses. A seal on this drawing or cover page listing this drawing, indicates acceptance of professional engineering responsibility solely for the design shown. The suitability and use of this drawing for any structure is the responsibility of the Building Designer per ANSI/TPI 1 Sec.2.

For more information see these web sites: Alpine: alpineitw.com; TPI: tpinst.org; SBCA: sbcindustry.com; ICC: iccsafe.org; AWC: awc.org

SEQN: 389579 / HIPS Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T4 / FROM: CDM DrwNo: 034.22.1004.51723 Qty: 1 Reserve at Jewel Lake 31 - Carlisle A - GL Truss Label: A04 / DF 02/03/2022

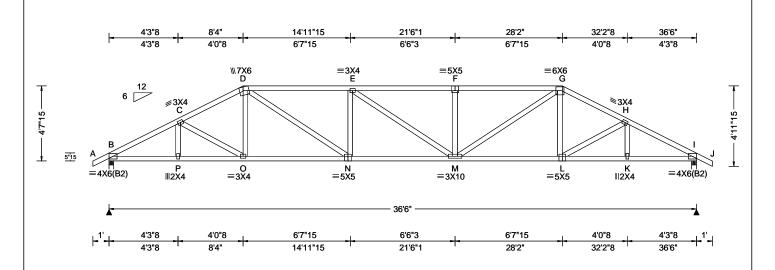

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria
TCLL: 20.00	Wind Std: ASCE 7-16	Pg: NA Ct: NA CAT: NA	PP Deflection in loc L/defl L/#
TCDL: 10.00	Speed: 130 mph	Pf: NA Ce: NA	VERT(LL): 0.234 F 999 360
BCLL: 0.00	Enclosure: Closed	Lu: NA Cs: NA	VERT(CL): 0.477 F 911 240
BCDL: 10.00	Risk Category: II	Snow Duration: NA	HORZ(LL): 0.078 K
Des Ld: 40.00	EXP: C Kzt: NA Mean Height: 15.00 ft		HORZ(TL): 0.158 K
NCBCLL: 10.00	TCDL: 5.0 psf	Building Code:	Creep Factor: 2.0
Soffit: 2.00	BCDL: 5.0 psf	FBC 7th Ed. 2020 Res.	Max TC CSI: 0.899
Load Duration: 1.25	MWFRS Parallel Dist: h/2 to h	TPI Std: 2014	Max BC CSI: 0.996
Spacing: 24.0 "	C&C Dist a: 3.65 ft	Rep Fac: Yes	Max Web CSI: 0.591
	Loc. from endwall: not in 9.00 ft	FT/RT:20(0)/10(0)	
	GCpi: 0.18	Plate Type(s):	
	Wind Duration: 1.60	WAVE	VIEW Ver: 21.01.01A.0521.20

Lumber

Top chord: 2x4 SP #2; Bot chord: 2x4 SP #2; Webs: 2x4 SP #3;


In lieu of structural panels use purlins to brace all flat TC @ 24" oc.

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is

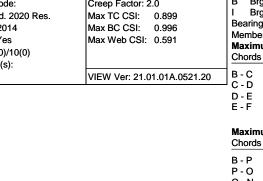

▲ Maxin	num Rea	ctions	(lbs)			
	Gravity		N	on-Grav	/ity	
Loc R+	/ R-	/ Rh	/ Rw	/ U	/ RL	
B 157	0 /-	/-	/902	/287	/136	
I 157	0 /-	/-	/902	/287	/-	
Wind re	actions b	ased on	MWFRS			
B Brg	Width =	3.5	Min Re	q = 1.9)	
I Brg	Width =	3.5	Min Re	q = 1.9)	
Bearing	sB&lar	e a rigio	l surface.	-		
Member	s not liste	ed have	forces les	s than 3	375#	
Maximu	ım Top C	hord F	orces Per	Ply (lb:	s)	
Chords	Tens.Co	mp.	Chords	Tens.	Comp.	
B-C	1071 -	2652	F-G	1446	- 3048	
C-D			G-H	1120		
D-E	1435 -		H-I	1072		
E-F	1446 -	3048				

Chords	Tens.Co	mp.	Chords	Tens. (Comp.
B - P	2286	- 889	M - L	2219	- 859
P - O	2287	- 892	L-K	2288	- 882
O - N	2220	- 870	K-I	2286	- 879
N - M	3056 -	1271			

Maximum Web Forces Per Ply (lbs)

Webs	Tens.Comp.	Webs	Tens. Comp.
D-N	974 - 504	F-M	337 - 406
N - E	350 - 414	M - G	992 - 515




WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.



SEQN: 389617 / HIPS Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T5 / FROM: CDM DrwNo: 034.22.1004.51223 Qty: 1 Reserve at Jewel Lake 31 - Carlisle A - GL Truss Label: A05 / DF 02/03/2022

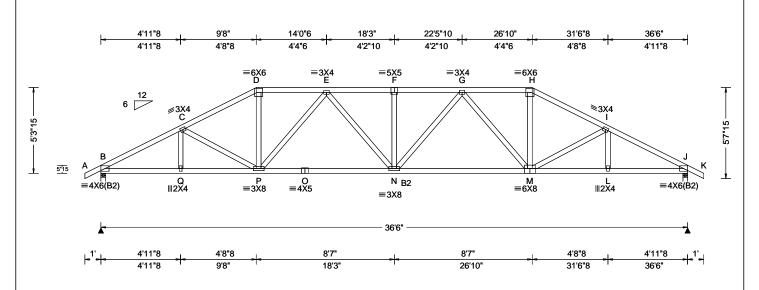

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria
TCLL: 20.00	Wind Std: ASCE 7-16	Pg: NA Ct: NA CAT: NA	PP Deflection in loc L/defl L/#
TCDL: 10.00	Speed: 130 mph	Pf: NA Ce: NA	VERT(LL): 0.193 F 999 360
BCLL: 0.00	Enclosure: Closed	Lu: NA Cs: NA	VERT(CL): 0.393 F 999 240
BCDL: 10.00	Risk Category: II	Snow Duration: NA	HORZ(LL): 0.067 L
Des Ld: 40.00	EXP: C Kzt: NA Mean Height: 15.00 ft		HORZ(TL): 0.137 L
NCBCLL: 10.00	TCDL: 5.0 psf	Building Code:	Creep Factor: 2.0
Soffit: 2.00	BCDL: 5.0 psf	FBC 7th Ed. 2020 Res.	Max TC CSI: 0.636
Load Duration: 1.25	MWFRS Parallel Dist: h to 2h	TPI Std: 2014	Max BC CSI: 0.895
Spacing: 24.0 "	C&C Dist a: 3.65 ft	Rep Fac: Yes	Max Web CSI: 0.517
	Loc. from endwall: not in 9.00 ft	FT/RT:20(0)/10(0)	
	GCpi: 0.18	Plate Type(s):	
	Wind Duration: 1.60	WAVE	VIEW Ver: 21.01.01A.0521.20

Lumber

Top chord: 2x4 SP #2;

Bot chord: 2x4 SP M-31; B2 2x4 SP #2; Webs: 2x4 SP #3;

In lieu of structural panels use purlins to brace all flat TC @ 24" oc.

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is 5-3-15.

)	Loc	R+	/ R-	/Rh	/ Rw	/ U	/ RL
)	В	1570	/-	/-	/912	/98	/154
	J	1570	/-	/-	/912	/98	/-
	Win	d reac	tions bas	sed on	MWFRS		
	В	Brg V	Vidth = 3	.5	Min Re	q = 1.5	
	J		Vidth = 3			q = 1.5	
	Bea	rings l	B & J are	a rigid	l surface.		
	Men	nbers	not listed	have	forces less	s than 3	375#
	Max	imum	Top Ch	ord Fo	orces Per	Ply (lb:	s)
	Cho	rds T	ens.Con	np.	Chords	Tens.	Comp.
=	В-0	?	1023 - 20	672	F-G	1239	- 2715
	l c - i	-	1034 - 24		G-H	983	- 2137
	D - I	Ē	982 - 2	139	H-I	1034	- 2425
	E - I	=	1239 - 27	715	i-J	1023	- 2672

Non-Gravity

▲ Maximum Reactions (lbs) Gravity

Maximu	m Bot Chord	Forces Per	Ply (lbs	s)
Chords	Tens.Comp.	Chords	Tens.	Ċc

Chords	Tens.C	omp.	Chords	Tens. (Comp.	
B - Q	2307	- 845	N - M	2535	- 979	
Q-P	2308	- 847	M - L	2309	- 836	
P - O	2536	- 990	L-J	2308	- 834	
O - N	2536	- 990				

Maximum Web Forces Per Ply (lbs)

Webs	Tens.Comp.	Webs	Tens. Comp.
D-P	759 - 268	G - M	385 - 621
P - E	386 - 620	M - H	758 - 268




WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.



SEQN: 389581 / HIPS Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T6 / FROM: CDM Qty: 1 Reserve at Jewel Lake 31 - Carlisle A - GL DrwNo: 034.22.1004.51785 Truss Label: A06 / DF 02/03/2022

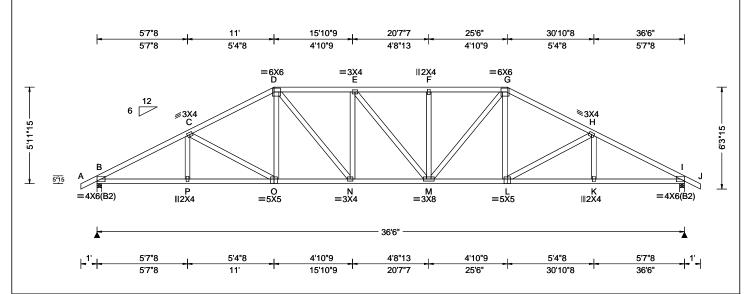

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria
TCLL: 20.00	Wind Std: ASCE 7-16	Pg: NA Ct: NA CAT: NA	PP Deflection in loc L/defl L/#
TCDL: 10.00	Speed: 130 mph	Pf: NA Ce: NA	VERT(LL): 0.183 F 999 360
BCLL: 0.00	Enclosure: Closed	Lu: NA Cs: NA	VERT(CL): 0.373 F 999 240
BCDL: 10.00	Risk Category: II	Snow Duration: NA	HORZ(LL): 0.077 K
Des Ld: 40.00	EXP: C Kzt: NA Mean Height: 15.00 ft		HORZ(TL): 0.156 K
NCBCLL: 10.00	TCDL: 5.0 psf	Building Code:	Creep Factor: 2.0
Soffit: 2.00	BCDL: 5.0 psf	FBC 7th Ed. 2020 Res.	Max TC CSI: 0.701
Load Duration: 1.25	MWFRS Parallel Dist: h to 2h	TPI Std: 2014	Max BC CSI: 0.985
Spacing: 24.0 "	C&C Dist a: 3.65 ft	Rep Fac: Yes	Max Web CSI: 0.284
	Loc. from endwall: not in 9.00 ft	FT/RT:20(0)/10(0)	
	GCpi: 0.18	Plate Type(s):	
	Wind Duration: 1.60	WAVE	VIEW Ver: 21.01.01A.0521.20

Lumber

Top chord: 2x4 SP #2; Bot chord: 2x4 SP #2; Webs: 2x4 SP #3;

In lieu of structural panels use purlins to brace all flat TC @ 24" oc.

Wind

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is 5-11-15.

		G	ravity		N	lon-Grav	vity
)	Loc	R+	/ R-	/ Rh	/ Rw	/ U	/ RL
)	В	1570	/-	/-	/920	/90	/172
	1	1570	/-	/-	/920	/90	/-
	Win	d reac	tions I	based o	n MWFRS		
	В	Brg V	Vidth =	3.5	Min Re	eq = 1.9)
	1	Brg V	Vidth =	3.5	Min Re	eq = 1.9)
	Bearings B & I are a rigid surface.						
	Members not listed have forces less than 375#						375#
	Maximum Top Chord Forces Per Ply (lbs)						s)
	Cho	rds T	ens.C	omp.	Chords	Tens.	Comp.
_	В-0		961	- 2687	F-G	1066	- 2348
	ī - ɔ l			- 2332	G-H	964	- 2332
	D - E	=	1059 -	- 2337	H-I	962	- 2687
	E - F	=	1065 -	- 2347			


▲ Maximum Reactions (lbs)

Maximum Bot Chord Forces Per Ply (lbs)

Chords	Tens.C	Comp.	Chords	Tens. Comp.	
B - P	2315	- 783	M - L	2023	- 672
P - O	2314	- 786	L-K	2315	- 775
O - N	2023	- 684	K-I	2315	- 772
N M	2251	636			

Maximum Web Forces Per Ply (lbs)

vvebs	rens.comp.	vvebs	rens. Comp.	
D - N	491 - 271	M - G	499	- 278



WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.



FROM: CDM Qty: 1 DrwNo: 034.22.1004.51395 Reserve at Jewel Lake 31 - Carlisle A - GL Truss Label: A07 / DF 02/03/2022 6'3"8 12'4" 18'3" 24'2" 30'2"8 36'6" 6'3"8 6'0"8 5'11' 5'11' 6'0"8 6'3"8 =6X6 ∥2<u>X</u>4 =6X6 [≷]3X4 ✓ G //3X4 C 6'11"15 67 B2 L N ∥2X4 M ≡5X5 =5X5 =4X6(B2) =4X6(B2) ∥2X4 =3X8 36'6' 6'3"8 6'0"8 5'11" 5'11' 6'0"8 6'3"8 6'3"8 12'4" 18'3" 24'2' 30'2"8 36'6"

Loading Criteria (psf) Wind Criteria		Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria
TCLL: 20.00	Wind Std: ASCE 7-16	Pg: NA Ct: NA CAT: NA	PP Deflection in loc L/defl L/#
TCDL: 10.00	Speed: 130 mph	Pf: NA Ce: NA	VERT(LL): 0.159 E 999 360
BCLL: 0.00	Enclosure: Closed	Lu: NA Cs: NA	VERT(CL): 0.323 E 999 240
BCDL: 10.00	Risk Category: II	Snow Duration: NA	HORZ(LL): 0.061 J
Des Ld: 40.00	EXP: C Kzt: NA Mean Height: 15.00 ft		HORZ(TL): 0.125 J
NCBCLL: 10.00	TCDL: 5.0 psf	Building Code:	Creep Factor: 2.0
Soffit: 2.00	BCDL: 5.0 psf	FBC 7th Ed. 2020 Res.	Max TC CSI: 0.681
Load Duration: 1.25	MWFRS Parallel Dist: h to 2h	TPI Std: 2014	Max BC CSI: 0.548
Spacing: 24.0 "	C&C Dist a: 3.65 ft	Rep Fac: Yes	Max Web CSI: 0.404
-	Loc. from endwall: not in 9.00 ft	FT/RT:20(0)/10(0)	
	GCpi: 0.18	Plate Type(s):	
	Wind Duration: 1.60	WAVE	VIEW Ver: 21.01.01A.0521.20
Lumber			

Job Number: 22-6882

▲ Maximum Reactions (lbs) Gravity Non-Gravity Loc R+ /R /Rh /Rw /U /RL В 1570 /-/927 /189 1570 /-/927 /-/82 Wind reactions based on MWFRS Brg Width = 3.5В Min Rea = 1.5Brg Width = 3.5 Min Req = 1.5 Bearings B & H are a rigid surface. Members not listed have forces less than 375# Maximum Top Chord Forces Per Ply (lbs) Chords Tens.Comp. Chords Tens. Comp. 894 - 2680 947 - 2153 C - D 883 - 2242 F-G 883 - 2242 D-E 947 - 2153 G-H 895 - 2680

Cust: R 215 JRef: 1XcR2150012 T7 /

Lumber

Top chord: 2x4 SP #2;

Bot chord: 2x4 SP M-31; B2 2x4 SP #2; Webs: 2x4 SP #3;

SEQN: 389582 /

HIPS

Ply: 1

Purlins

In lieu of structural panels use purlins to brace all flat


TC @ 24" oc.

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is



Maximum Web Forces Per Ply (lbs)

Webs	Tens.C	omp.	Webs	Tens. (Comp.	
C - M	149	- 431	F-K	413	- 24	
D - M	413	- 24	K - G	149	- 431	



WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.



SEQN: 389619 / HIPS Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T12 / FROM: CDM Qty: 1 Reserve at Jewel Lake 31 - Carlisle A - GL DrwNo: 034.22.1004.51989 Truss Label: A08 / DF 02/03/2022 6'11"8 13'8" 18'3" 22'10" 29'6"8 36'6" 6'11"8 6'8"8 4'7' 4'7' 6'8"8 6'11"8 =6X6 **≡3X4** =6X6 [≥]5X5 G **∮**5X5 73, 77 5"15 B2 M ∥2X4 =4X6(B2) K ≡5X10 =4X6(B2) ≡5X10 J ∥2X4 36'6" 6'11"8 6'8"8 9'2" 6'8"8 6'11"8 6'11"8 13'8' 22'10' 29'6"8 36'6' ▲ Maximum Reactions (lbs)

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	DefI/CSI Criteria
TCLL: 20.00	Wind Std: ASCE 7-16	Pg: NA Ct: NA CAT: NA	PP Deflection in loc L/defl L/#
	Speed: 130 mph	Pf: NA Ce: NA	VERT(LL): 0.148 E 999 360
BCLL: 0.00	Enclosure: Closed	Lu: NA Cs: NA	VERT(CL): 0.302 E 999 240
	Risk Category: II	Snow Duration: NA	HORZ(LL): 0.059 J
Dec 1 d · 40 00	EXP: C Kzt: NA		HORZ(TL): 0.121 J
NCDCLL: 40.00	Mean Height: 15.00 ft	Building Code:	Creep Factor: 2.0
0.00	TCDL: 5.0 psf BCDL: 5.0 psf	FBC 7th Ed. 2020 Res.	Max TC CSI: 0.702
l	MWFRS Parallel Dist: h to 2h	TPI Std: 2014	Max BC CSI: 0.796
	C&C Dist a: 3.65 ft	Rep Fac: Yes	Max Web CSI: 0.600
- - - - - - - - - -	Loc. from endwall: not in 9.00 ft	FT/RT:20(0)/10(0)	
	GCpi: 0.18	Plate Type(s):	
	Wind Duration: 1.60	WAVE	VIEW Ver: 21.01.01A.0521.20
Lumber			

Gravity Non-Gravity Loc R+ /Rh /Rw /U /RL В 1566 /-/932 /207 1566 /932 /-Wind reactions based on MWFRS Brg Width = 3.5В Min Rea = 1.5Brg Width = 3.5 Min Req = 1.5 Bearings B & H are a rigid surface. Members not listed have forces less than 375# Maximum Top Chord Forces Per Ply (lbs) Chords Tens.Comp. Chords Tens. Comp. 828 - 2661 775 - 1838 C - D 792 - 2138 F-G 792 - 2138 D-E 775 - 1838 G-H 828 - 2661

Top chord: 2x4 SP #2;

Bot chord: 2x4 SP #2; Webs: 2x4 SP #3;

Bracing

(a) Continuous lateral restraint equally spaced on

In lieu of structural panels use purlins to brace all flat TC @ 24" oc.


Wind

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is 7-3-15.



Webs	Tens.Comp.	Webs	Tens. (Comp.
C-L	190 - 522	K-F		- 135
D-L	557 - 135	K-G		- 522




WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.



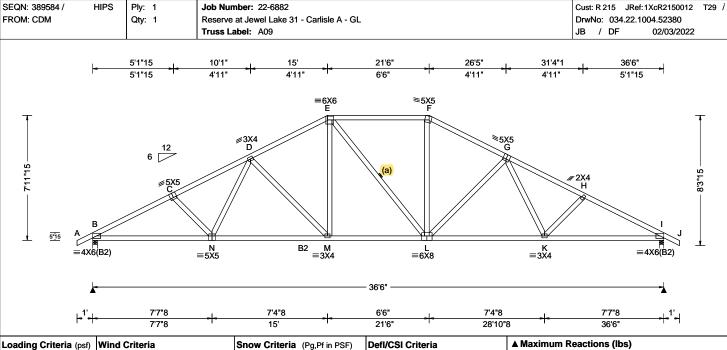

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	DefI/CSI Criteria	A
TCLL: 20.00 TCDL: 10.00 BCLL: 0.00 BCDL: 10.00 Des Ld: 40.00 NCBCLL: 10.00 Soffit: 2.00 Load Duration: 1.25 Spacing: 24.0 "	Wind Stid: ASCE 7-16 Speed: 130 mph Enclosure: Closed Risk Category: II EXP: C Kzt: NA Mean Height: 15.00 ft TCDL: 5.0 psf BCDL: 5.0 psf MWFRS Parallel Dist: h to 2h C&C Dist a: 3.65 ft Loc. from endwall: not in 9.00 ft GCpi: 0.18 Wind Duration: 1.60	Pg: NA Ct: NA CAT: NA Pf: NA Ce: NA Lu: NA Cs: NA Snow Duration: NA Building Code: FBC 7th Ed. 2020 Res. TPI Std: 2014 Rep Fac: Yes FT/RT:20(0)/10(0) Plate Type(s):	PP Deflection in loc L/defl L/# VERT(LL): 0.166 M 999 360 VERT(CL): 0.326 M 999 240 HORZ(LL): 0.068 K HORZ(TL): 0.134 K Creep Factor: 2.0 Max TC CSI: 0.718 Max BC CSI: 0.719 Max Web CSI: 0.494 VIEW Ver: 21.01.01A.0521.20	
	Wind Duration: 1.60	WAVE	VIEW Ver: 21.01.	01A.0521.20

Lumber

Top chord: 2x4 SP #2;

Bot chord: 2x4 SP #2; Webs: 2x4 SP #3;

Bracing

(a) Continuous lateral restraint equally spaced on

Loading

Truss passed check for 20 psf additional bottom chord live load in areas with 42"-high x 24"-wide clearance.

Purlins

In lieu of structural panels use purlins to brace all flat TC @ 24" oc.


Wind

Wind loads based on MWFRS with additional C&C member design.

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is 7-11-15.

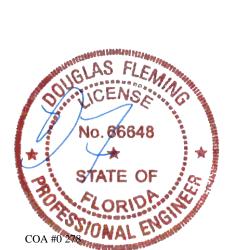

Gravity Non-Gravity Loc R+ /Rh /Rw /U /RL 1633 /-/935 /225 1624 /935 /41 /-Wind reactions based on MWFRS Brg Width = 3.5Min Req = 1.5 Brg Width = 3.5 Min Req = 1.5 Bearings B & I are a rigid surface.

Members not listed have forces less than 375# Maximum Top Chord Forces Per Ply (lbs) Chords Tens.Comp. Chords

B - C	770 - 2832	F-G	720	-2113
C - D	757 - 2637	G-H	755	- 2616
D - E	722 - 2145	H - I	769	- 2812
F-F	702 - 1840			

Maximum Bot Chord Forces Per Ply (lbs)

B - N 2447 -617 L - K 2170 -510 N - M 2192 -522 K - I 2430 -605	Cnoras	rens.c	omp. Cnoras		rens. Comp.	
M - L 1858 - 395		2192	- 522			

Maximum Web Forces Per Ply (lbs)

vvebs	Tens.C	omp.	webs	Tens. C	Jonip.
D - M	184	- 482	L-F	551	-77
E - M	590	- 69	L-G	182	- 484

WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.


Alpine, a division of ITW Building Components Group Inc. shall not be responsible for any deviation from this drawing, any failure to build the truss in conformance with ANSI/TPI 1, or for handling, shipping, installation and bracing of trusses. A seal on this drawing or cover page listing this drawing, indicates acceptance of professional engineering responsibility solely for the design shown. The suitability and use of this drawing for any structure is the responsibility of the Building Designer per ANSI/TPI 1 Sec.2.

For more information see these web sites: Alpine: alpineitw.com; TPI: tpinst.org; SBCA: sbcindustry.com; ICC: iccsafe.org; AWC: awc.org



02/03/2022

SEQN: 389589 / HIPS Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T17 / FROM: CDM Qty: 1 Reserve at Jewel Lake 31 - Carlisle A - GL DrwNo: 034.22.1004.51567 Truss Label: A10 / DF 02/03/2022

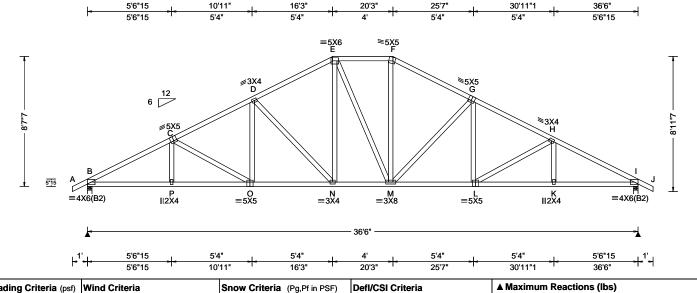

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria	▲ Maximum Reactions (It	os)
TCLL: 20.00	Wind Std: ASCE 7-16	Pg: NA Ct: NA CAT: NA	PP Deflection in loc L/defl L/#	Gravity	No
TCDL: 10.00	Speed: 130 mph	Pf: NA Ce: NA	VERT(LL): 0.162 N 999 360	Loc R+ /R- /Rh	/Rw
BCLL: 0.00	Enclosure: Closed	Lu: NA Cs: NA	VERT(CL): 0.329 N 999 240	B 1570 /- /-	/937
BCDL: 10.00	Risk Category: II	Snow Duration: NA	HORZ(LL): 0.074 K	I 1570 /- /-	/937
Des Ld: 40.00	EXP: C Kzt: NA		HORZ(TL): 0.151 K	Wind reactions based on M	/WFRS
NCBCLL: 10.00	Mean Height: 15.00 ft	Building Code:	Creep Factor: 2.0	B Brg Width = 3.5	Min Re
Soffit: 2.00	TCDL: 5.0 psf	FBC 7th Ed. 2020 Res.	Max TC CSI: 0.701	I Brg Width = 3.5	Min Re
Load Duration: 1.25	BCDL: 5.0 psf	TPI Std: 2014	Max BC CSI: 0.985	Bearings B & I are a rigid s	
	MWFRS Parallel Dist: h to 2h	Rep Fac: Yes	Max Web CSI: 0.717	Members not listed have for	orces less
Spacing: 24.0 "	C&C Dist a: 3.65 ft	·	Wax VVCD CCI. C.717	Maximum Top Chord For	ces Per
		FT/RT:20(0)/10(0)		Chords Tens.Comp. C	Chords
	GCpi: 0.18	Plate Type(s):			
	Wind Duration: 1.60	WAVE	VIEW Ver: 21.01.01A.0521.20		F - G
				¹C-D 675-2348 0	G - H

Lumber

Top chord: 2x4 SP #2; Bot chord: 2x4 SP #2; Webs: 2x4 SP #3;

Purlins


In lieu of structural panels use purlins to brace all flat TC @ 24" oc.

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is

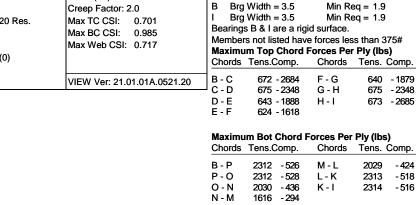

Non-Gravity

/36


/RL

/241

/-

/Rw /U

Maximum Web Forces Per Ply (lbs) Tens.Comp. Webs Tens. Comp. D - N 210 -611 M - F 529 - 121 M - G 208 533 -609



02/03/2022

WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.

SEQN: 389584 / HIPS Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T9 / FROM: CDM Reserve at Jewel Lake 31 - Carlisle A - GL DrwNo: 034.22.1004.52082 Qty: 1 Truss Label: A11 / DF 02/03/2022 5'1"15 10'1" 21'6" 26'5' 31'4"1 36'6' 5'1"15 6'6" 5'1"15 ≡6X6 F ≅5X5 F //3X4 D 8'3"15 N ≡5X5 В2 M ≡3X4 K ≡3X4 =6X8 =4X6(B2) \equiv 4X6(B2) 36'6" 7'7"8 7'4"8 6'6" 7'4"8 7'7"8 7'7"8 15' 21'6' 28'10"8 36'6

Loading Criteria (psf) Wind Criteria	Snow Criteria (Pg,Pf in PSF)	DefI/CSI Criteria	▲ Max
TCLL: 20.00 TCDL: 10.00 BCLL: 0.00 BCDL: 10.00 Des Ld: 40.00 NCBCLL: 10.00 Soffit: 2.00 Load Duration: 1.25 Spacing: 24.0 " Wind Std: ASCE 7-16 Speed: 130 mph Enclosure: Closed Risk Category: II EXP: C Kzt: NA Mean Height: 15.00 ft TCDL: 5.0 psf BCDL: 5.0 psf BCDL: 5.0 psf MWFRS Parallel Dist: h to 2h C&C Dist a: 3.65 ft Loc. from endwall: not in 9.00 ft GCpi: 0.18 Wind Duration: 1.60	Pg: NA Ct: NA CAT: NA Pf: NA Ce: NA Lu: NA Cs: NA Snow Duration: NA Building Code: FBC 7th Ed. 2020 Res. TPI Std: 2014 Rep Fac: Yes FT/RT:20(0)/10(0) Plate Type(s): WAVE	PP Deflection in loc L/defl L/# VERT(LL): 0.166 M 999 360 VERT(CL): 0.326 M 999 240 HORZ(LL): 0.068 K HORZ(TL): 0.134 K Creep Factor: 2.0 Max TC CSI: 0.718 Max BC CSI: 0.719 Max Web CSI: 0.494 VIEW Ver: 21.01.01A.0521.20	Loc F B 16 I 16 Wind r B Bi I Bi Bearin Memb Maxim Chords B - C C - D

Lumbei

Top chord: 2x4 SP #2;

Bot chord: 2x4 SP M-31; B2 2x4 SP #2; Webs: 2x4 SP #3;

(a) Continuous lateral restraint equally spaced on

Loading

Truss passed check for 20 psf additional bottom chord live load in areas with 42"-high x 24"-wide clearance.

Purlins

In lieu of structural panels use purlins to brace all flat TC @ 24" oc.

Wind

Wind loads based on MWFRS with additional C&C member design.

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is 7-11-15.



▲ Maximum Reactions (lbs) Gravity Non-Gravity R+ /Rh /Rw /U /RL 1633 /-/935 /225 1624 /935 /41 /-Wind reactions based on MWFRS Brg Width = 3.5Min Req = 1.5 Brg Width = 3.5 Min Reg = 1.5Bearings B & I are a rigid surface. Members not listed have forces less than 375# Maximum Top Chord Forces Per Ply (lbs) Chords Tens.Comp. Chords Tens. Comp. 770 - 2832 720 - 2113

Maximu	ım Bot Chord F	Forces Per	Ply (lbs)
Chords	Tens.Comp.	Chords	Tens. Comp.

0110140	. 0.10.00	,,,,p.	0110140	. 0.10.	JUI.IP.
B - N	2447	- 617	L-K	2170	- 510
N - M	2192	- 522	K - I	2430	- 605
M - I	1858	- 395			

G-H

H - I

755 - 2616

769 - 2812

Maximum Web Forces Per Ply (lbs)

757 - 2637

722 - 2145

702 - 1840

D-E

E-F

webs rens.comp. wer	, , , , , , , , , , , , , , , , , , ,
D - M 184 - 482 L - F E - M 590 - 69 L - C	

WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.



SEQN: 389621 / HIPS Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T8 / FROM: CDM DrwNo: 034.22.1004.51660 Qty: 1 Reserve at Jewel Lake 31 - Carlisle A - GL Truss Label: A12 / DF 02/03/2022 6'11"8 13'8" 18'3" 22'10" 29'6"8 36'6" 6'11"8 6'8"8 4'7' 4'7' 6'8"8 6'11"8 =6X6 =3X4 =6X6 [≷]5X5 G **∮**5X5 7'3"1 77 5"15 B2 M ∥2X4 =4X6(B2) K ≡5X10 =4X6(B2) J ∥2X4 =5X10 36'6" 6'11"8 6'8"8 9'2" 6'8"8 6'11"8 6'11"8 13'8' 22'10' 29'6"8 36'6"

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria	T
TCLL: 20.00 TCDL: 10.00 BCLL: 0.00 BCDL: 10.00 Des Ld: 40.00 NCBCLL: 10.00 Soffit: 2.00	Wind Stid: ASCE 7-16 Speed: 130 mph Enclosure: Closed Risk Category: II EXP: C Kzt: NA Mean Height: 15.00 ft TCDL: 5.0 psf BCDL: 5.0 psf MWFRS Parallel Dist: h to 2h C&C Dist a: 3.65 ft Loc. from endwall: not in 9.00 ft GCpi: 0.18 Wind Duration: 1.60	Pg: NA Ct: NA CAT: NA Pf: NA Ce: NA Lu: NA Cs: NA Snow Duration: NA Building Code: FBC 7th Ed. 2020 Res. TPI Std: 2014 Rep Fac: Yes FT/RT:20(0)/10(0) Plate Type(s): WAVE	PP Deflection in loc L/defl L/# VERT(LL): 0.148 E 999 360 VERT(CL): 0.302 E 999 240 HORZ(LL): 0.059 J HORZ(TL): 0.121 J Creep Factor: 2.0 Max TC CSI: 0.702 Max BC CSI: 0.796 Max Web CSI: 0.600 VIEW Ver: 21.01.01A.0521.20	
Lumban				-

▲ Maxir	▲ Maximum Reactions (lbs)							
	Gravity		Non-Gravity					
Loc R	- /R-	/ Rh	/ Rw	/ U	/ RL			
B 156	6 /-	/-	/932	/71	/207			
H 156	6 /-	/-	/932	/71	/-			
Wind re	actions b	ased on	MWFRS					
B Brg	Width =	3.5	Min Re	q = 1.5	5			
H Brg	Width =	3.5	Min Req = 1.5					
Bearing	sB&Ha	are a rigio	d surface.					
Member	rs not list	ed have	forces les	s than :	375#			
Maximu	ım Top (hord Fo	orces Per	Ply (lb	s)			
Chords	Tens.Co	mp.	Chords	Tens.	Comp.			
в-с	828 -	2661	E-F	775	- 1838			
C-D		2138		792				
D-E	775 -	1838	G-H	828	- 2661			

Lumber

Top chord: 2x4 SP #2;

Bot chord: 2x4 SP #2; Webs: 2x4 SP #3;

Bracing

(a) Continuous lateral restraint equally spaced on

In lieu of structural panels use purlins to brace all flat TC @ 24" oc.


Wind

Wind loads based on MWFRS with additional C&C


Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is 7-3-15.



Webs Tens.Comp. Webs Tens. Comp. C - L 557 190 - 522 K - F - 135 D-L 557 - 135 K - G 190 - 522



02/03/2022


WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.



SEQN: 389623 / HIPS Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T16 / FROM: CDM Qty: 1 Reserve at Jewel Lake 31 - Carlisle A - GL DrwNo: 034.22.1004.51974 Truss Label: A13 / DF 02/03/2022

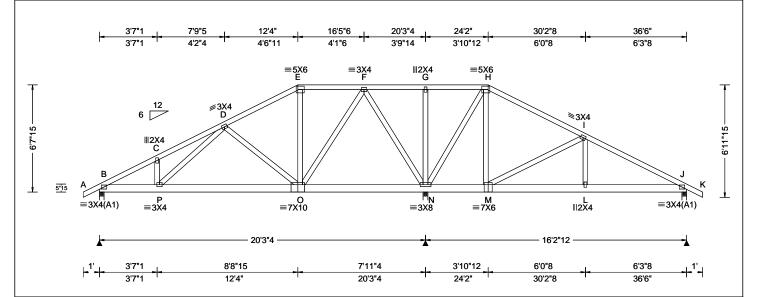

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria	
TCLL: 20.00	Wind Std: ASCE 7-16	Pg: NA Ct: NA CAT: NA	PP Deflection in loc L/defl L/#	
TCDL: 10.00	Speed: 130 mph	Pf: NA Ce: NA	VERT(LL): 0.021 P 999 360	١.
BCLL: 0.00	Enclosure: Closed	Lu: NA Cs: NA	VERT(CL): 0.046 P 999 240	П
BCDL: 10.00	Risk Category: II	Snow Duration: NA	HORZ(LL): 0.007 C	
Des Ld: 40.00	EXP: C Kzt: NA		HORZ(TL): 0.015 C	١.
NCBCLL: 10.00	Mean Height: 15.00 ft	Building Code:	Creep Factor: 2.0	ľ
Soffit: 2.00	TCDL: 5.0 psf BCDL: 5.0 psf	FBC 7th Ed. 2020 Res.	Max TC CSI: 0.486	
Load Duration: 1.25	MWFRS Parallel Dist: h to 2h	TPI Std: 2014	Max BC CSI: 0.115	
Spacing: 24.0 "	C&C Dist a: 3.65 ft	Rep Fac: Yes	Max Web CSI: 0.965	ľ
-	Loc. from endwall: not in 9.00 ft	FT/RT:20(0)/10(0)		
	GCpi: 0.18	Plate Type(s):		
	Wind Duration: 1.60	WAVE	VIEW Ver: 21.01.01A.0521.20	
Lumber				

▲ M	▲ Maximum Reactions (lbs)					
	Gravity			Non-Gravity		
Loc	R+	/ R-	/ Rh	/Rw	/ U	/ RL
В	760	/-	/-	/486	/38	/189
N	1904	/-	/-	/995	/98	/-
J	577	/-	/-	/390	/61	/-
Win	d reac	tions bas	sed on M	WFRS		
В	Brg V	Vidth = 3.	.5	Min Re	q = 1.5	
N	Brg V	Vidth = 3.	.5	Min Re	q = 1.5	
J	Brg V	Vidth = 3.	.5	Min Re	q = 1.5	
Bea	rings l	B, N, & J	are a rig	id surfac	e.	
Mer	Members not listed have forces less than 375#					
Max	Maximum Top Chord Forces Per Ply (lbs)					
		ens.Com				

B - C 259 - 1143 F-G 558 - 47 C-D 318 - 1124 G-H 558 - 48 D-E 224 - 477 124 -672

Chords

M - I

Tens. Comp.

- 40

- 39

534

537

Maximum Bot Chord Forces Per Ply (lbs)

Chords Tens.Comp.

982 - 184

693 - 151

Top chord: 2x4 SP #2; Bot chord: 2x6 SP 2400f-2.0E; Webs: 2x4 SP #3;


In lieu of structural panels use purlins to brace all flat TC @ 24" oc.

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is

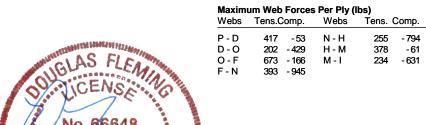

R-P

P - 0

WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!


IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.

COA #0 278 02/03/2022



SEQN: 389625 / HIPS Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T15 / Qty: 1 FROM: CDM Reserve at Jewel Lake 31 - Carlisle A - GL DrwNo: 034.22.1004.51457 Truss Label: A14 / DF 02/03/2022

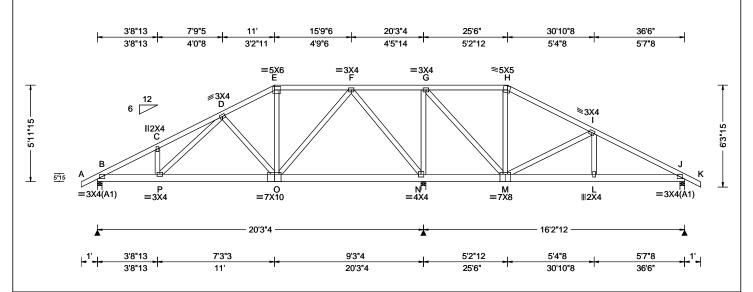

Loading Criteria (psf) Wi	ind Criteria	Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria
TCLL: 20.00 Wi	ind Std: ASCE 7-16	Pg: NA Ct: NA CAT: NA	PP Deflection in loc L/defl L/#
1.0220.00	peed: 130 mph	Pf: NA Ce: NA	VERT(LL): 0.021 P 999 360
DCLL. 0.00	nclosure: Closed	Lu: NA Cs: NA	VERT(CL): 0.045 P 999 240
1BCDL. 10.00 1	sk Category: II	Snow Duration: NA	HORZ(LL): 0.007 C
Dec d 10 00	XP: C Kzt: NA		HORZ(TL): 0.015 C
INCECT 1 40 00	ean Height: 15.00 ft CDL: 5.0 psf	Building Code:	Creep Factor: 2.0
0-40	CDL: 5.0 psf	FBC 7th Ed. 2020 Res.	Max TC CSI: 0.377
1	WFRS Parallel Dist: h to 2h	TPI Std: 2014	Max BC CSI: 0.109
l	&C Dist a: 3.65 ft	Rep Fac: Yes	Max Web CSI: 0.944
Loc	oc. from endwall: not in 9.00 ft	FT/RT:20(0)/10(0)	
	GCpi: 0.18	Plate Type(s):	
Wi	ind Duration: 1.60	WAVE	VIEW Ver: 21.01.01A.0521.20

▲ M	▲ Maximum Reactions (lbs)						
Gravity Non-Gravity						/ity	
Loc	R+	/ R-	/Rh	/ Rw	/ U	/ RL	
В	767	/-	/-	/487	/41	/172	
N	1854	/-	/-	/968	/110	/-	
J	606	/-	/-	/403	/57	/-	
Win	d read	tions ba	sed on I	MWFRS			
В	Brg V	/idth = 3	.5	Min Re	q = 1.5	;	
N	Brg V	/idth = 3	.5	Min Re	q = 1.5	;	
J	Brg V	/idth = 3	.5	Min Re	q = 1.5	;	
Bea	Bearings B, N, & J are a rigid surface.						
Men	Members not listed have forces less than 375#						
Max	Maximum Top Chord Forces Per Ply (lbs)						
Cho	rds T	ens.Cor	np.	Chords	Tens.	Ćomp.	

Lumber

Top chord: 2x4 SP #2; Bot chord: 2x6 SP 2400f-2.0E; Webs: 2x4 SP #3;

In lieu of structural panels use purlins to brace all flat TC @ 24" oc.

Wind

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is 5-11-15.



Maximum Bot Chord Forces Per Ply (lbs)

Chords	Tens.Comp.	Chords	Tens. C	Comp.	
B - P	971 - 231	M - L	608	- 78	
P - O	707 - 172	L-J	611	-77	
N - M	274 - 495				

F-G

- 483

-60

- 751

290

543

177

Maximum Web Forces Per Ply (lbs)

314 - 1132

376 - 1114

286 - 589

B - C

C-D

D-E

Webs	Tens.Comp.		Webs	Tens. Comp.		
0-F	597	- 132	G - M	809	- 283	
F-N	436	- 964	M - I	183	- 517	
N - G	460	- 918				


WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.



SEQN: 389627 / HIPS Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T14 / FROM: CDM Qty: 1 Reserve at Jewel Lake 31 - Carlisle A - GL DrwNo: 034.22.1004.52240 Truss Label: A15 / DF

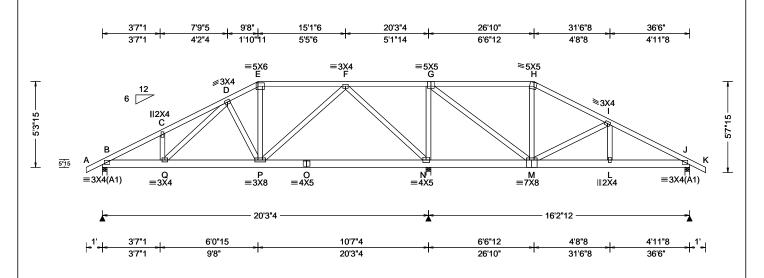

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria
Loading Criteria (psf) TCLL: 20.00 TCDL: 10.00 BCLL: 0.00 BCDL: 10.00 Des Ld: 40.00 NCBCLL: 10.00 Soffit: 2.00	Wind Std: ASCE 7-16 Speed: 130 mph Enclosure: Closed Risk Category: II EXP: C Kzt: NA Mean Height: 15.00 ft TCDL: 5.0 psf	Snow Criteria (Pg,Pf in PSF) Pg: NA Ct: NA CAT: NA Pf: NA Ce: NA Lu: NA Cs: NA Snow Duration: NA Building Code: FBC 7th Ed. 2020 Res.	Defl/CSI Criteria
Load Duration: 1.25 Spacing: 24.0 "	BCDL: 5.0 psf MWFRS Parallel Dist: h to 2h C&C Dist a: 3.65 ft Loc. from endwall: not in 9.00 ft GCpi: 0.18 Wind Duration: 1.60	TPI Std: 2014 Rep Fac: Yes FT/RT:20(0)/10(0) Plate Type(s): WAVE	Max BC CSI: 0.148 Max Web CSI: 0.977 VIEW Ver: 21.01.01A.0521.20

▲ Ma	▲ Maximum Reactions (lbs)							
	Gı	avity		No	n-Grav	rity		
Loc	R+	/ R-	/Rh	/Rw	/ U	/ RL		
В	779	/-	/-	/490	/40	/154		
N	1822	/-	/-	/943	/129	/-		
J	619	/-	/-	/406	/49	/-		
Win	d react	tions bas	ed on M\	WFRS				
В	Brg W	'idth = 3.	5	Min Red	q = 1.5			
N	Brg W	'idth = 3.	5	Min Red	q = 1.5			
J	Brg W	'idth = 3.	5	Min Red	q = 1.5			
Bearings B, N, & J are a rigid surface.								
Members not listed have forces less than 375#								
Max	imum	Top Ch	ord Forc	es Per	Ply (lbs	s)		
Cho	rds T	ens.Com	ip. Ch	nords	Tens.	Comp.		

02/03/2022

Top chord: 2x4 SP #2; Bot chord: 2x6 SP 2400f-2.0E; Webs: 2x4 SP #3;

In lieu of structural panels use purlins to brace all flat TC @ 24" oc.

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is 5-3-15.



E-F 332 - 622

H - I

- 92

- 397

- 794

537

171

211

Maximum Bot Chord Forces Per Ply (lbs) Chords Tens.Comp. Chords Tens. Comp. B - Q 975 - 274 M - L 652 - 114 - 113 Q - P 743 - 193 I - J655 N - M 276 - 483

Maximum Web Forces Per Ply (lbs)

362 - 1135

427 - 1120

342 - 717

B - C

C-D

D-E

Webs	Tens.Comp.	Webs	Tens. Comp	٥.
P - F F - N	539 - 104 489 - 1005	G - M M - I	855 - 32 148 - 41	-
N - G	508 - 914			


WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.



SEQN: 389629 / SPEC Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T11 / Qty: 1 FROM: CDM Reserve at Jewel Lake 31 - Carlisle A - GL DrwNo: 034.22.1004.50974 Truss Label: A16 / DF 02/03/2022

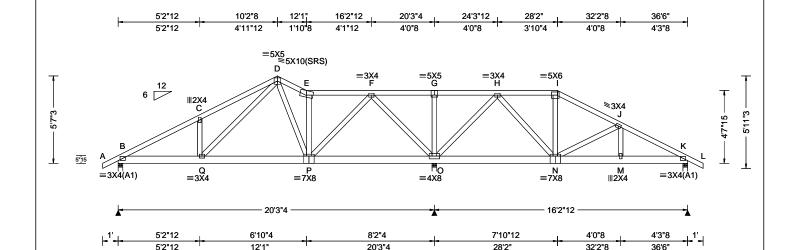

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria
Coading Criteria (psf) TCLL:	Wind Criteria Wind Std: ASCE 7-16 Speed: 130 mph Enclosure: Closed Risk Category: II EXP: C Kzt: NA Mean Height: 15.00 ft TCDL: 5.0 psf	Pg: NA Ct: NA CAT: NA Pf: NA Cs: NA Lu: NA Cs: NA Snow Duration: NA Building Code:	PP Deflection in loc L/defl L/# VERT(LL): 0.026 C 999 360 VERT(CL): 0.055 C 999 240 HORZ(LL): 0.008 C - HORZ(TL): 0.018 C - Creep Factor: 2.0
Soffit: 2.00 Load Duration: 1.25 Spacing: 24.0 "	MWFRS Parallel Dist: h/2 to h C&C Dist a: 3.65 ft Loc. from endwall: not in 9.00 ft GCpi: 0.18 Wind Duration: 1.60	FBC 7th Ed. 2020 Res. TPI Std: 2014 Rep Fac: Yes FT/RT:20(0)/10(0) Plate Type(s): WAVE	Max TC CSI: 0.346 Max BC CSI: 0.093 Max Web CSI: 0.707 VIEW Ver: 21.01.01A.0521.20

▲ M	▲ Maximum Reactions (Ibs)							
	G	ravity		No	n-Grav	rity		
Loc	R+	/ R-	/Rh	/Rw	/ U	/ RL		
В	770	/-	/-	/481	/128	/161		
0	1859	/-	/-	/959	/345	/-		
K	603	/-	/-	/381	/93	/-		
Win	d reac	tions bas	sed on M	WFRS				
В	Brg V	Vidth = 3.	.5	Min Red	q = 1.5			
0	Brg V	Vidth = 3.	.5	Min Red	q = 1.5			
K	Brg V	Vidth = 3.	.5	Min Re	q = 1.5			
Bea	rings l	B, O, & K	are a rig	id surfa	ce.			
Mer	Members not listed have forces less than 375#							
Max	imum	Top Ch	ord Ford	es Per	Ply (lbs	s)		
Cho	rds T	ens.Con	np. Cl	hords	Tens.	Comp.		

B - C 315 - 1100 F-G 719 - 205 C-D 415 - 1085 G-H 719 - 205 D-E 317 - 649 177 - 468 E - F 258 - 557 .I - K 222 - 779

Maximum Bot Chord Forces Per Ply (lbs) Chords Tens.Comp. Chords Tens. Comp. B - Q 929 - 206 N - M 649 - 133 - 132 Q - P 534 - 67 M - K 651

Maximum Web Forces Per Ply (lbs)								
Webs	Tens.Comp.		Webs	Tens. Comp.				
Q - D	549	- 180	F-O	490	- 1069			
E - P	246	- 420	O - H	420	- 889			
P - F	690	- 185	H - N	525	- 138			

Top chord: 2x4 SP #2; Bot chord: 2x6 SP 2400f-2.0E; Webs: 2x4 SP #3;


In lieu of structural panels use purlins to brace all flat TC @ 24" oc.

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is



02/03/2022


WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.

Alpine, a division of ITW Building Components Group Inc. shall not be responsible for any deviation from this drawing, any failure to build the truss in conformance with ANSI/TPI 1, or for handling, shipping, installation and bracing of trusses. A seal on this drawing or cover page listing this drawing, indicates acceptance of professional engineering responsibility solely for the design shown. The suitability and use of this drawing for any structure is the responsibility of the Building Designer per ANSI/TPI 1 Sec.2.

SEQN: 389631 / SPEC Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T1 / FROM: CDM Qty: 1 Reserve at Jewel Lake 31 - Carlisle A - GL DrwNo: 034.22.1004.51849 Truss Label: A17 / DF 02/03/2022

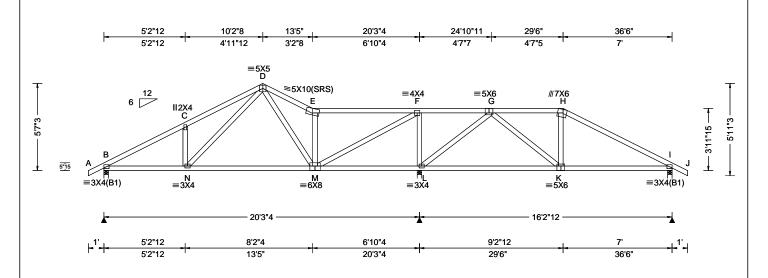

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	DefI/CSI Criteria	T
TCLL: 20.00	Wind Std: ASCE 7-16	Pg: NA Ct: NA CAT: NA	PP Deflection in loc L/defl L/#	
TCDL: 10.00	Speed: 130 mph	Pf: NA Ce: NA	VERT(LL): 0.040 C 999 360	
BCLL: 0.00	Enclosure: Closed	Lu: NA Cs: NA	VERT(CL): 0.084 C 999 240	
BCDL: 10.00	Risk Category: II	Snow Duration: NA	HORZ(LL): 0.013 C	
Des Ld: 40.00	EXP: C Kzt: NA		HORZ(TL): 0.028 C	
NCBCLL: 10.00	Mean Height: 15.00 ft TCDL: 5.0 psf	Building Code:	Creep Factor: 2.0	
Soffit: 2.00	BCDL: 5.0 psf	FBC 7th Ed. 2020 Res.	Max TC CSI: 0.638	
Load Duration: 1.25	MWFRS Parallel Dist: h/2 to h	TPI Std: 2014	Max BC CSI: 0.541	
Spacing: 24.0 "	C&C Dist a: 3.65 ft	Rep Fac: Yes	Max Web CSI: 0.624	
	Loc. from endwall: not in 9.00 ft	FT/RT:20(0)/10(0)		
	GCpi: 0.18	Plate Type(s):		1
	Wind Duration: 1.60	WAVE	VIEW Ver: 21.01.01A.0521.20	ı
Lumber		•	•	

▲ Maximum Reactions (lbs)							
	G	ravity		No	n-Grav	rity	
Loc	R+	/ R-	/Rh	/ Rw	/U	/ RL	
В	789	/-	/-	/483	/146	/161	
L	1811	/-	/-	/949	/307	/-	
1	621	/-	/-	/392	/113	/-	
Win	d reac	tions bas	sed on N	/WFRS			
В	Brg W	/idth = 3	.5	Min Re	q = 1.5		
L	Brg W	/idth = 3	.5	Min Re	q = 1.8		
1	Brg W	/idth = 3	.5	Min Re	q = 1.5		
Bea	rings E	3, L, & I a	are a rig	id surface	Э.		
Mer	nbers	not listed	l have fo	orces less	than 3	75#	
Max	Maximum Top Chord Forces Per Ply (lbs)						
				Chords			
В-(С	333 - 11	153 F	- G	696	- 177	

Top chord: 2x4 SP #2; Bot chord: 2x4 SP #2; Webs: 2x4 SP #3;

In lieu of structural panels use purlins to brace all flat TC @ 24" oc.

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is



Maximum Bot Chord Forces Per Ply (lbs)

Chords	Tens.Comp.		Chords	Tens. Comp.		
B - N	964	- 212	M - L	294	-612	
N - M	558	- 85	K-I	551	- 134	

G-H

H - I

295

265

- 543

-710

Maximum Web Forces Per Ply (lbs)

435 - 1126

288 - 619

398 - 771

C-D

D-E

F-F

Webs	Tens.Comp.		Webs	Tens.	Comp.
N - D	572	- 166	F-L	566	- 1074
E - M	404	- 637	L-G	415	- 912
M - F	1342	- 484	G-K	546	- 120

WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!


IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS


Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.

Alpine, a division of ITW Building Components Group Inc. shall not be responsible for any deviation from this drawing, any failure to build the truss in conformance with ANSI/TPI 1, or for handling, shipping, installation and bracing of trusses. A seal on this drawing or cover page listing this drawing, indicates acceptance of professional engineering responsibility solely for the design shown. The suitability and use of this drawing for any structure is the responsibility of the Building Designer per ANSI/TPI 1 Sec.2.

For more information see these web sites: Alpine: alpineitw.com; TPI: tpinst.org; SBCA: sbcindustry.com; ICC: iccsafe.org; AWC: awc.org

SEQN: 389633 / SPEC Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T28 / FROM: CDM Qty: 1 Reserve at Jewel Lake 31 - Carlisle A - GL DrwNo: 034.22.1004.50723 Truss Label: A18 / DF 02/03/2022



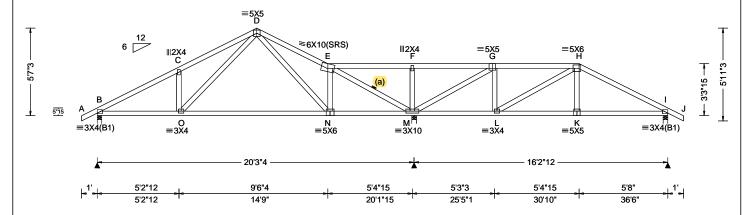

TCLL: 20.00 Wind Std: ASCE 7-16 Speed: 130 mph ScLL: 0.00 BCLL: 0.00 Enclosure: Closed BCDL: 10.00 BCD	Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	DefI/CSI Criteria	Τ
IVAVE VIEW TO THE TOTAL OF THE	TCLL: 20.00 TCDL: 10.00 BCLL: 0.00 BCDL: 10.00 Des Ld: 40.00 NCBCLL: 10.00 Soffit: 2.00 Load Duration: 1.25 Spacing: 24.0 "	Wind Std: ASCE 7-16 Speed: 130 mph Enclosure: Closed Risk Category: II EXP: C Kzt: NA Mean Height: 15.00 ft TCDL: 5.0 psf BCDL: 5.0 psf MWFRS Parallel Dist: h/2 to h C&C Dist a: 3.65 ft Loc. from endwall: not in 9.00 ft	Pg: NA Ct: NA CAT: NA Pf: NA Ce: NA Lu: NA Cs: NA Snow Duration: NA Building Code: FBC 7th Ed. 2020 Res. TPI Std: 2014 Rep Fac: Yes FT/RT:20(0)/10(0)	PP Deflection in loc L/defl L/# VERT(LL): 0.038 C 999 360 VERT(CL): 0.082 C 999 240 HORZ(LL): 0.016 K HORZ(TL): 0.033 K Creep Factor: 2.0 Max TC CSI: 0.527 Max BC CSI: 0.633	

ritv					
Gravity Non-Gravity Loc R+ / R- / Rh / Rw / U / RL					
/ RL					
/161					
/-					
/-					
75#					
Maximum Top Chord Forces Per Ply (lbs)					
Ćomp.					

Lumber

Top chord: 2x4 SP #2; Bot chord: 2x4 SP #2; Webs: 2x4 SP #3;

(a) Continuous lateral restraint equally spaced on

In lieu of structural panels use purlins to brace all flat TC @ 24" oc.

Wind

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is 5-7-3.



D-E - 787 285 - 708 H - I 326 F-F 845 - 264

F-G

G-H

- 263

- 416

845

246

289 - 1159

389 - 1128

B - C

C-D

Maximum Bot Chord Forces Per Ply (lbs)

Chords	Tens.C	comp.	Chords	Tens. (Comp.
B - O	968	- 169	M - L	394	- 115
O - N	553	- 53	L-K	640	- 199
N - M	578	- 52	K-I	635	- 202

Maximum Web Forces Per Ply (lbs)

Webs	Tens.Comp.	Webs	
0 - D	586 - 150	M - G	520 - 1201
F - M	518 - 1503	1 - H	117 - 377


WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.



SEQN: 389635 / SPEC Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T13 / FROM: CDM Qty: 1 Reserve at Jewel Lake 31 - Carlisle A - GL DrwNo: 034.22.1004.52160 Truss Label: A19 / DF 02/03/2022

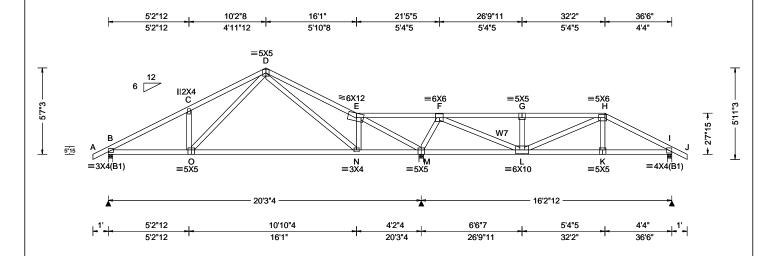

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria	Ī
TCLL: 20.00	Wind Std: ASCE 7-16	Pg: NA Ct: NA CAT: NA	PP Deflection in loc L/defl L/#	ı
TCDL: 10.00	Speed: 130 mph	Pf: NA Ce: NA	VERT(LL): 0.068 G 999 360	ı
BCLL: 0.00	Enclosure: Closed	Lu: NA Cs: NA	VERT(CL): 0.146 G 999 240	ı
BCDL: 10.00	Risk Category: II	Snow Duration: NA	HORZ(LL): 0.026 K	ı
Des Ld: 40.00	EXP: C Kzt: NA		HORZ(TL): 0.053 K	
NCBCLL: 10.00	Mean Height: 15.00 ft TCDL: 5.0 psf	Building Code:	Creep Factor: 2.0	
Soffit: 2.00	BCDL: 5.0 psf	FBC 7th Ed. 2020 Res.	Max TC CSI: 0.980	ı
Load Duration: 1.25	MWFRS Parallel Dist: 0 to h/2	TPI Std: 2014	Max BC CSI: 0.906	ı
Spacing: 24.0 "	C&C Dist a: 3.65 ft	Rep Fac: Varies by Ld Case	Max Web CSI: 0.810	
-	Loc. from endwall: not in 4.50 ft	FT/RT:20(0)/10(0)		ı
	GCpi: 0.18	Plate Type(s):		4
	Wind Duration: 1.60	WAVE	VIEW Ver: 21.01.01A.0521.20	
Lumber				_

В	732	/-	/-	/-	/138	/-
М	2452	/-	/-	/-	/454	/-
1	1281	/-	/-	/-	/249	/-
Wi	nd reac	tions	based or	MWFRS		
В	Brg V	Vidth:	= 3.5	Min Re	q = 1.5	
М	Brg V	Vidth:	= 3.5	Min Re	q = 2.9	
1	Brg V	Vidth:	= 3.5	Min Re	q = 1.5	
Bea	arings l	В, М,	& I are a	rigid surfac	ce.	
Ме	mbers	not lis	sted have	forces les	s than 3	375#
Ma	ximum	Тор	Chord F	orces Per	Ply (lb:	s)
Ch	ords T	ens.0	Comp.	Chords	Tens.	Ćomp.
				_		

/Rh

Non-Gravity

/ RL

/Rw /U

▲ Maximum Reactions (lbs) Gravity

Loc R+ /R-

B - C 166 - 1059 - 1825 329 C-D 157 - 1024 G-H 330 - 1826 D-E 413 - 2154 395 - 391 H - I F-F 1569 - 275

Special Loads

Top chord: 2x4 SP #2;

Bot chord: 2x4 SP #2; Webs: 2x4 SP #3; W7 2x4 SP #2;

Dur.Fac.=1.	.25 / Plate D	Dur.Fac.=1.2	25)
62 plf at	-1.00 to	62 plf at	22.10
31 plf at	22.10 to	31 plf at	32.17
62 plf at	32.17 to	62 plf at	37.50
4 plf at	-1.00 to	4 plf at	0.00
			20.27
			32.02
			36.50
			37.50
		3.10,30.10	
		3.10,30.10	
Conc. Load	at 32.14		
	62 plf at 31 plf at 62 plf at 4 plf at 20 plf at 10 plf at 20 plf at 4 plf at 0 Conc. Load 0 Conc. Load 0 Conc. Load 0 Conc. Load 0 Conc. Load	62 plf at -1.00 to 31 plf at 22.10 to 62 plf at 32.17 to 4 plf at -1.00 to 20 plf at 0.00 to 10 plf at 32.02 to 4 plf at 36.50 to 0 Conc. Load at 22.10,24 to Conc. Load at 32.14 to Conc. Load at 32.14 to Conc. Load at 22.10,24 to Conc. Load at 32.14 to Conc. Load at 22.10,24 to Conc. Load at 32.14	31 plf at 22.10 to 31 plf at 62 plf at 32.17 to 62 plf at 4 plf at -1.00 to 4 plf at 20 plf at 0.00 to 20 plf at 10 plf at 20.27 to 10 plf at 20 plf at 32.02 to 20 plf at 4 plf at 36.50 to 4 plf at 20 plf at 32.10,24.10 conc. Load at 22.10,24.10 conc. Load at 32.14 pl conc. Load at 22.10,24.10 conc. Load at 22.10,24.10 conc. Load at 22.10,24.10 conc. Load at 26.10,28.10,30.10 conc. Load at 26.10,28.10,30.10 conc. Load at 26.10,28.10,30.10

Purlins

In lieu of structural panels use purlins to brace all flat TC @ 24" oc.

Wind loads and reactions based on MWFRS. Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is



Maximum Bot Chord Forces Per Ply (lbs)

Chords	Tens.C	Comp.	Chords	Tens. (Comp.
B - O	878	- 125	L-K	1885	- 345
O - N	452	- 96	K-I	1858	- 348
M - L	108	- 847			

Maximum Web Forces Per Ply (lbs)

webs	rens.comp.	vvebs	rens. Comp.
O - D	604 - 30	M - F	377 - 1640
D - N	164 - 580	F-L	2694 - 478
E-N	560 - 18	G-L	262 - 637
E - M	285 - 1814	K - H	443 0


WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.



SEQN: 389597 / GABL Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T27 / FROM: CDM Qty: 1 Reserve at Jewel Lake 31 - Carlisle A - GL DrwNo: 034.22.1004.51990 Truss Label: B01 / DF 02/03/2022

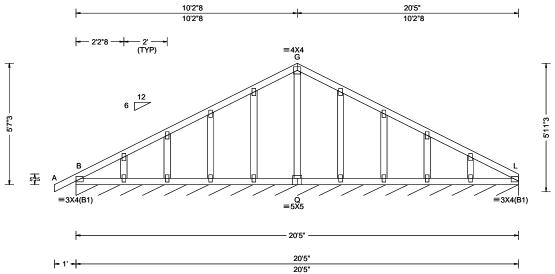

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	DefI/CSI Criteria
TCLL: 20.00	Wind Std: ASCE 7-16	Pg: NA Ct: NA CAT: NA	PP Deflection in loc L/defl L/#
	Speed: 130 mph	Pf: NA Ce: NA	VERT(LL): 0.001 F 999 360
DCLL. 0.00	Enclosure: Closed	Lu: NA Cs: NA	VERT(CL): 0.001 F 999 240
DCDL. 10.00	Risk Category: II	Snow Duration: NA	HORZ(LL): -0.001 F
Dec 1 4: 40 00	EXP: C Kzt: NA		HORZ(TL): 0.002 F
NCBCLL: 10.00	Mean Height: 15.00 ft TCDL: 5.0 psf	Building Code:	Creep Factor: 2.0
Soffit: 2.00	BCDL: 5.0 psf	FBC 7th Ed. 2020 Res.	Max TC CSI: 0.071
l	MWFRS Parallel Dist: 0 to h/2	TPI Std: 2014	Max BC CSI: 0.036
l	C&C Dist a: 3.00 ft	Rep Fac: Yes	Max Web CSI: 0.055
	Loc. from endwall: Any	FT/RT:20(0)/10(0)	
	GCpi: 0.18	Plate Type(s):	
	Wind Duration: 1.60	WAVE	VIEW Ver: 21.01.01A.0521.20
Lumber			

▲ Maximum Reactions (lbs), or *=PLF Gravity Non-Gravity Loc R+ /R /Rw /U /RL L* 86 /-/-/45 Wind reactions based on MWFRS Brg Width = 245 Min Req = -Bearing B is a rigid surface. Members not listed have forces less than 375#

Top chord: 2x4 SP #2; Bot chord: 2x4 SP #2; Webs: 2x4 SP #3;

Plating Notes

All plates are 2X4 except as noted.

Wind

Wind loads based on MWFRS with additional C&C member design.

Wind loading based on both gable and hip roof types.

Additional Notes

See DWGS A14015ENC160118 & GBLLETIN0118 for gable wind bracing and other requirements.

The overall height of this truss excluding overhang is

Truss designed to support 8" maximum gable end overhang.



WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.




SEQN: 389596 / COMN Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T25 / FROM: CDM Qty: 3 Reserve at Jewel Lake 31 - Carlisle A - GL DrwNo: 034.22.1004.50927 Truss Label: B02 / DF 02/03/2022

15'2"4

20'5"

10'2"8

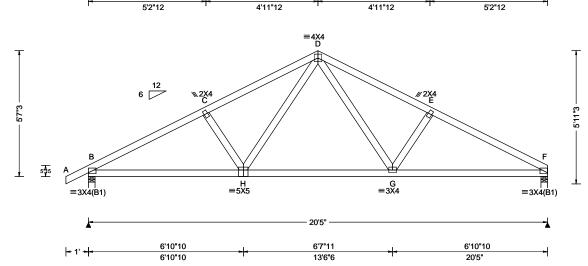

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	DefI/CSI Criteria	A
TCLL: 20.00 TCDL: 10.00 BCLL: 0.00 BCDL: 10.00 Des Ld: 40.00 NCBCLL: 10.00 Soffit: 2.00 Load Duration: 1.25 Spacing: 24.0 "	Wind Std: ASCE 7-16 Speed: 130 mph Enclosure: Closed Risk Category: II EXP: C Kzt: NA Mean Height: 15.00 ft TCDL: 5.0 psf BCDL: 5.0 psf MWFRS Parallel Dist: 0 to h/2 C&C Dist a: 3.00 ft Loc. from endwall: Any GCpi: 0.18 Wind Duration: 1.60	Pg: NA Ct: NA CAT: NA Pf: NA Ce: NA Lu: NA Cs: NA Snow Duration: NA Building Code: FBC 7th Ed. 2020 Res. TPI Std: 2014 Rep Fac: Yes FT/RT:20(0)/10(0) Plate Type(s): WAVE	PP Deflection in loc L/defl L/# VERT(LL): 0.048 H 999 360 VERT(CL): 0.098 H 999 240 HORZ(LL): 0.020 G HORZ(TL): 0.041 G Creep Factor: 2.0 Max TC CSI: 0.374 Max BC CSI: 0.477 Max Web CSI: 0.159 VIEW Ver: 21.01.01A.0521.20	B F V B F B M
Lumber				⊐ C

5'2"12

▲ N	laxim	um Rea	ctions	(lbs)		
	(Gravity		N	on-Grav	vity
Loc	: R+	/ R-	/ Rh	/ Rw	/ U	/ RL
В	910	/-	/-	/540	/161	/147
F	839	/-	/-	/484	/142	/-
Wir	nd rea	ctions b	ased or	MWFRS		
В	Brg '	Width =	3.5	Min Re	q = 1.5	5
F	Brg '	Width =	3.5	Min Re	q = 1.5	5
Bea	arings	B&Fa	re a rig	id surface.	-	
Me	mbers	not liste	ed have	forces les	s than 3	375#
Ma	ximu	m Top C	hord F	orces Per	Ply (lb	s)
Cho	ords	Tens.Co	mp.	Chords	Tens.	Ćomp.
В-	С	617 -	1366	D-E	625	- 1211
С	-	620 -		F-F	622	- 1375

Top chord: 2x4 SP #2; Bot chord: 2x4 SP #2; Webs: 2x4 SP #3;

Wind

Wind loads based on MWFRS with additional C&C member design.

Wind loading based on both gable and hip roof types.

Additional Notes


The overall height of this truss excluding overhang is

Maximum Bot Chord Forces Per Ply (lbs)

Chords	Tens.Com	p. Chords	Tens. (Comp.
B - H	1153 - 5	00 G-F	1163	- 476
H - G	800 -2	63		

Maximum Web Forces Per Ply (lbs)

Webs	Tens.Comp.	Webs	Tens. C	comp.
H - D	404 - 178	D-G	417	- 186



02/03/2022


WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.



SEQN: 389595 / **EJAC** Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T24 / FROM: CDM DrwNo: 034.22.1004.50863 Qty: 19 Reserve at Jewel Lake 31 - Carlisle A - GL Truss Label: J01 / DF 02/03/2022

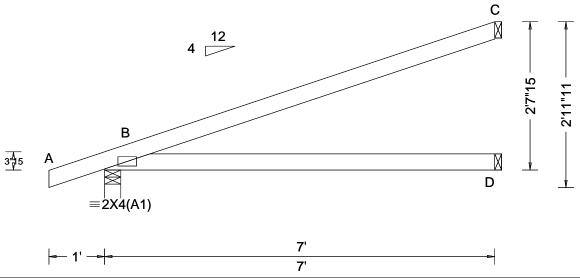

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria
TCLL: 20.00 TCDL: 10.00 BCLL: 0.00 BCDL: 10.00 Des Ld: 40.00 NCBCLL: 10.00 Soffit: 2.00 Load Duration: 1.25 Spacing: 24.0 "	Wind Stid: ASCE 7-16 Speed: 130 mph Enclosure: Closed Risk Category: II EXP: C Kzt: NA Mean Height: 15.00 ft TCDL: 5.0 psf BCDL: 5.0 psf BCDL: 5.0 psf MWFRS Parallel Dist: 0 to h/2 C&C Dist a: 3.00 ft Loc. from endwall: not in 4.50 ft GCpi: 0.18 Wind Duration: 1.60	Pg: NA Ct: NA CAT: NA Pf: NA Ce: NA Lu: NA Cs: NA Snow Duration: NA Building Code: FBC 7th Ed. 2020 Res. TPI Std: 2014 Rep Fac: Yes FT/RT:20(0)/10(0) Plate Type(s): WAVE	PP Deflection in loc L/defl L/# VERT(LL): NA VERT(CL): NA HORZ(LL): 0.016 D HORZ(TL): 0.032 D Creep Factor: 2.0 Max TC CSI: 0.703 Max BC CSI: 0.503 Max Web CSI: 0.000 VIEW Ver: 21.01.01A.0521.20
Lumbor			

A N	/laxim	um Rea	actions (II	bs)		
	G	ravity		No	on-Gra	vity
Loc	: R+	/ R-	/ Rh	/ Rw	/ U	/ RL
В	361	/-	/-	/235	/57	/92
D	128	/-	/-	/73	/-	/-
С	186	/-	/-	/104	/79	/-
Wi	nd read	ctions b	ased on N	IWFRS		
В	Brg V	Vidth =	3.5	Min Re	q = 1.5	5
D	Brg V	Vidth =	1.5	Min Re	q = -	
С	Brg V	Vidth =	1.5	Min Re	q = -	
Bea	aring B	is a rig	gid surface	€.	-	
Ме	mbers	not list	ed have fo	orces less	s than	375#
l						


Top chord: 2x4 SP #2; Bot chord: 2x4 SP #2;

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is



02/03/2022

WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS


Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.


Alpine, a division of ITW Building Components Group Inc. shall not be responsible for any deviation from this drawing, any failure to build the truss in conformance with ANSI/TPI 1, or for handling, shipping, installation and bracing of trusses. A seal on this drawing or cover page listing this drawing, indicates acceptance of professional engineering responsibility solely for the design shown. The suitability and use of this drawing for any structure is the responsibility of the Building Designer per ANSI/TPI 1 Sec.2.

For more information see these web sites: Alpine: alpineitw.com; TPI: tpinst.org; SBCA: sbcindustry.com; ICC: iccsafe.org; AWC: awc.org

SEQN: 389594 / **EJAC** Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T23 / FROM: CDM DrwNo: 034.22.1004.51365 Qty: 2 Reserve at Jewel Lake 31 - Carlisle A - GL Truss Label: J02 / DF 02/03/2022



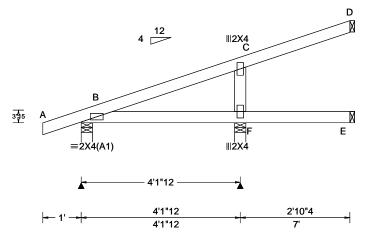



Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria
TCLL: 20.00	Wind Std: ASCE 7-16	Pg: NA Ct: NA CAT: NA	PP Deflection in loc L/defl L/#
TCDL: 10.00	Speed: 130 mph	Pf: NA Ce: NA	VERT(LL): 0.005 F 999 360
BCLL: 0.00	Enclosure: Closed	Lu: NA Cs: NA	VERT(CL): 0.010 F 999 240
BCDL: 10.00	Risk Category: II	Snow Duration: NA	HORZ(LL): 0.002 F
Des Ld: 40.00	EXP: C Kzt: NA		HORZ(TL): 0.004 F
NCBCLL: 10.00	Mean Height: 15.00 ft TCDL: 5.0 psf	Building Code:	Creep Factor: 2.0
Soffit: 2.00	BCDL: 5.0 psf	FBC 7th Ed. 2020 Res.	Max TC CSI: 0.167
Load Duration: 1.25	MWFRS Parallel Dist: h/2 to h	TPI Std: 2014	Max BC CSI: 0.132
Spacing: 24.0 "	C&C Dist a: 3.00 ft	Rep Fac: Yes	Max Web CSI: 0.101
-	Loc. from endwall: not in 9.00 ft	FT/RT:20(0)/10(0)	
	GCpi: 0.18	Plate Type(s):	
	Wind Duration: 1.60	WAVE	VIEW Ver: 21.01.01A.0521.20
Lauraban			

	▲ M	laxim	um Rea	actions (I	lbs)		
		G	ravity		No	on-Gra	vity
0	Loc	R+	/ R-	/ Rh	/ Rw	/ U	/ RL
0	В	232	/-	/-	/149	/26	/92
	F	337	/-	/-	/219	/79	/-
	Е	34	/-	/-	/16	/-	/-
	D	66	/-	/-	/29	/27	/-
	Wir	nd read	ctions b	ased on I	MWFRS		
	В		Vidth =	3.5	Min Re	q = 1.5	5
	F	Brg V	Vidth =	3.5	Min Re	q = 1.5	5
		Brg V	Vidth =	1.5	Min Re	q = -	
	D	Brg V	Vidth =	1.5	Min Re	q = -	
	Bea	arings	B&Fa	re a rigid	surface.		
	Mei	mbers	not list	ed have f	orces less	s than	375#

Lumber

Top chord: 2x4 SP #2; Bot chord: 2x4 SP #2; Webs: 2x4 SP #3;


Wind

Wind loads based on MWFRS with additional C&C member design.

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is



02/03/2022


WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.

6750 Forum Drive Suite 305 Orlando FL, 32821

SEQN: 389610 / JACK Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T21 / FROM: CDM DrwNo: 034.22.1004.51036 Qty: 3 Reserve at Jewel Lake 31 - Carlisle A - GL Truss Label: J03 / DF 02/03/2022

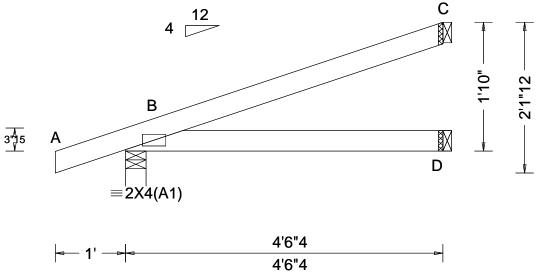

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria	▲ Maxir
TCLL: 20.00 TCDL: 10.00 BCLL: 0.00 BCDL: 10.00 Des Ld: 40.00 NCBCLL: 10.00 Soffit: 2.00 Load Duration: 1.25 Spacing: 24.0 "	Wind Std: ASCE 7-16 Speed: 130 mph Enclosure: Closed Risk Category: II EXP: C Kzt: NA Mean Height: 15.00 ft TCDL: 5.0 psf BCDL: 5.0 psf MWFRS Parallel Dist: 0 to h/2 C&C Dist a: 3.00 ft Loc. from endwall: Any GCpi: 0.18	Pg: NA Ct: NA CAT: NA Pf: NA Ce: NA Lu: NA Cs: NA Snow Duration: NA Building Code: FBC 7th Ed. 2020 Res. TPI Std: 2014 Rep Fac: Yes FT/RT:20(0)/10(0) Plate Type(s):	PP Deflection in loc L/defl L/# VERT(LL): NA VERT(CL): NA HORZ(LL): 0.004 D HORZ(TL): 0.007 D Creep Factor: 2.0 Max TC CSI: 0.339 Max BC CSI: 0.189 Max Web CSI: 0.000	Loc R ₁ B 264 D 80 C 114 Wind re B Brg D Brg C Brg Bearing Membel
	Wind Duration: 1.60	WAVE	VIEW Ver: 21.01.01A.0521.20	
Lumber	•	<u> </u>		_

rimum Reactions (lbs) Gravity Non-Gravity /Rh /Rw /U /RL /-/176 /62 /-/45 /64 /49 reactions based on MWFRS rg Width = 3.5 Min Req = 1.5 rg Width = 1.5 Min Req = rg Width = 1.5 Min Req = g B is a rigid surface. ers not listed have forces less than 375#

Top chord: 2x4 SP #2; Bot chord: 2x4 SP #2;

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is 1-10-0.



WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!


IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.

Alpine, a division of ITW Building Components Group Inc. shall not be responsible for any deviation from this drawing, any failure to build the truss in conformance with ANSI/TPI 1, or for handling, shipping, installation and bracing of trusses. A seal on this drawing or cover page listing this drawing, indicates acceptance of professional engineering responsibility solely for the design shown. The suitability and use of this drawing for any structure is the responsibility of the Building Designer per ANSI/TPI 1 Sec.2.

For more information see these web sites: Alpine: alpineitw.com; TPI: tpinst.org; SBCA: sbcindustry.com; ICC: iccsafe.org; AWC: awc.org

SEQN: 389612 / JACK Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T19 / FROM: CDM DrwNo: 034.22.1004.51082 Qty: 3 Reserve at Jewel Lake 31 - Carlisle A - GL Truss Label: J04 / DF 02/03/2022

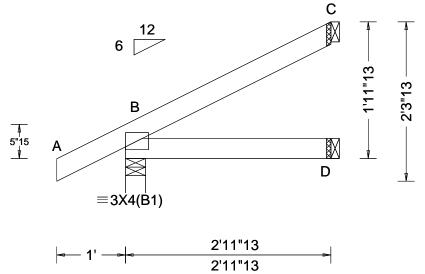

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria
TCLL: 20.00	Wind Std: ASCE 7-16	Pg: NA Ct: NA CAT: NA	PP Deflection in loc L/defl L/#
TCDL: 10.00	Speed: 130 mph	Pf: NA Ce: NA	VERT(LL): NA
BCLL: 0.00	Enclosure: Closed	Lu: NA Cs: NA	VERT(CL): NA
BCDL: 10.00	Risk Category: II	Snow Duration: NA	HORZ(LL): -0.001 C
Des Ld: 40.00	EXP: C Kzt: NA		HORZ(TL): 0.001 D
NCBCLL: 10.00	Mean Height: 15.00 ft TCDL: 5.0 psf	Building Code:	Creep Factor: 2.0
Soffit: 2.00	BCDL: 5.0 psf	FBC 7th Ed. 2020 Res.	Max TC CSI: 0.163
Load Duration: 1.25	MWFRS Parallel Dist: 0 to h/2	TPI Std: 2014	Max BC CSI: 0.078
Spacing: 24.0 "	C&C Dist a: 3.00 ft	Rep Fac: Yes	Max Web CSI: 0.000
'	Loc. from endwall: not in 4.50 ft	FT/RT:20(0)/10(0)	
	GCpi: 0.18	Plate Type(s):	
	Wind Duration: 1.60	WAVE	VIEW Ver: 21.01.01A.0521.20
Lumber			

Rh /R	Non-	-Gravi	h,		
Rh /R		O.u.	ιy		
1311 / 13	w /	U	/RL		
- /14	6 /	26	/66		
- /28	} /-	-	/-		
/45	<i>/</i> 4	42	/-		
d on MWFF	s				
Min	Req =	= 1.5			
Min	Req =	= -			
Min	Req =				
Bearing B is a rigid surface.					
ave forces	ess ti	han 37	75#		
	/28 /45 d on MWFR Min Min Min urface.	/ /28 /- /45 /- d on MWFRS Min Req - Min Req - urface.	/28 /- /45 /42 d on MWFRS Min Req = 1.5 Min Req = - Min Req = -		


Top chord: 2x4 SP #2; Bot chord: 2x4 SP #2;

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is



02/03/2022

WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!


IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.

Alpine, a division of ITW Building Components Group Inc. shall not be responsible for any deviation from this drawing, any failure to build the truss in conformance with ANSI/TPI 1, or for handling, shipping, installation and bracing of trusses. A seal on this drawing or cover page listing this drawing, indicates acceptance of professional engineering responsibility solely for the design shown. The suitability and use of this drawing for any structure is the responsibility of the Building Designer per ANSI/TPI 1 Sec.2.

For more information see these web sites: Alpine: alpineitw.com; TPI: tpinst.org; SBCA: sbcindustry.com; ICC: iccsafe.org; AWC: awc.org

SEQN: 389608 / JACK Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T20 / FROM: CDM DrwNo: 034.22.1004.52332 Qty: 3 Reserve at Jewel Lake 31 - Carlisle A - GL Truss Label: J05 / DF 02/03/2022

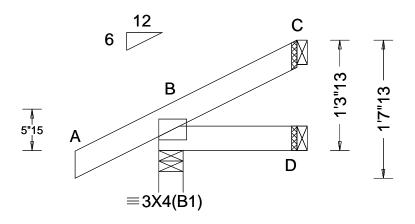

L 1'L	1'7"13	
	1'7"13	

Loading Criteria (psf)	Wind Criteria	Snow Criteria (Pg,Pf in PSF)	Defl/CSI Criteria
TCLL: 20.00	Wind Std: ASCE 7-16	Pg: NA Ct: NA CAT: NA	PP Deflection in loc L/defl L/#
TCDL: 10.00	Speed: 130 mph	Pf: NA Ce: NA	VERT(LL): NA
BCLL: 0.00	Enclosure: Closed	Lu: NA Cs: NA	VERT(CL): NA
BCDL: 10.00	Risk Category: II	Snow Duration: NA	HORZ(LL): -0.000 C
Des Ld: 40.00	EXP: C Kzt: NA Mean Height: 15.00 ft		HORZ(TL): 0.000 C
NCBCLL: 10.00	TCDL: 5.0 psf	Building Code:	Creep Factor: 2.0
Soffit: 2.00	BCDL: 5.0 psf	FBC 7th Ed. 2020 Res.	Max TC CSI: 0.102
Load Duration: 1.25	MWFRS Parallel Dist: 0 to h/2	TPI Std: 2014	Max BC CSI: 0.018
Spacing: 24.0 "	C&C Dist a: 3.00 ft	Rep Fac: Yes	Max Web CSI: 0.000
	Loc. from endwall: Any	FT/RT:20(0)/10(0)	
	GCpi: 0.18	Plate Type(s):	
	Wind Duration: 1.60	WAVE	VIEW Ver: 21.01.01A.0521.20
Lumbor	·	·	

▲ Maximum Reactions (lbs)						
	G	Gravity		No	on-Gra	vity
Loc	R+	/ R-	/ Rh	/ Rw	/ U	/ RL
В	168	/-	/-	/121	/25	/42
D	27	/-	/-	/14	/-	/-
С	24	/-	/-	/14	/20	/-
Win	nd read	ctions b	ased on I	MWFRS		
В	Brg V	Vidth =	3.5	Min Req = 1.5		
D	Brg V	Vidth =	1.5	Min Re	q = -	
С	Brg V	Vidth =	1.5	Min Re	q = -	
Bearing B is a rigid surface.						
Mer	mbers	not list	ed have f	orces les	s than	375#
1						

Lumber


Top chord: 2x4 SP #2; Bot chord: 2x4 SP #2;

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is 1-3-13.



02/03/2022

WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!


IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.

Alpine, a division of ITW Building Components Group Inc. shall not be responsible for any deviation from this drawing, any failure to build the truss in conformance with ANSI/TPI 1, or for handling, shipping, installation and bracing of trusses. A seal on this drawing or cover page listing this drawing, indicates acceptance of professional engineering responsibility solely for the design shown. The suitability and use of this drawing for any structure is the responsibility of the Building Designer per ANSI/TPI 1 Sec.2.

For more information see these web sites: Alpine: alpineitw.com; TPI: tpinst.org; SBCA: sbcindustry.com; ICC: iccsafe.org; AWC: awc.org

SEQN: 389606 / JACK Ply: 1 Job Number: 22-6882 Cust: R 215 JRef: 1XcR2150012 T22 / Reserve at Jewel Lake 31 - Carlisle A - GL FROM: CDM DrwNo: 034.22.1004.51614 Qty: 3 Truss Label: J06 KD / YK 02/03/2022

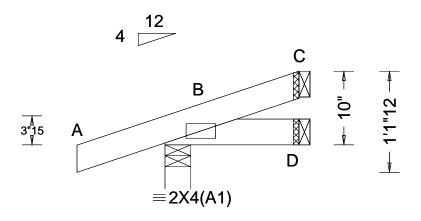



Des Ld: 40.00 NCBCLL: 10.00 Soffit: 2.00 Soffit: 2.00 BCDL: 5.0 psf BCDL: 5.0 psf	TCLL: 20.00 TCDL: 10.00 BCLL: 0.00 BCDL: 10.00	Wind Criteria Wind Std: ASCE 7-16 Speed: 130 mph Enclosure: Closed Risk Category: II EXP: C Kzt: NA	Pg: NA Ct: NA CAT: NA Pf: NA Cs: NA Lu: NA Cs: NA Snow Duration: NA	PP Deflection in loc L/defl L/# VERT(LL): NA VERT(CL): NA HORZ(LL): 0.000 D	
Wind Duration: 1.60 WAVE VIEW Ver: 21.01.01A.0521.20	BCLL: 0.00 BCDL: 10.00 Des Ld: 40.00 NCBCLL: 10.00 Soffit: 2.00 Load Duration: 1.25	Enclosure: Closed Risk Category: II EXP: C Kzt: NA Mean Height: 15.00 ft TCDL: 5.0 psf BCDL: 5.0 psf MWFRS Parallel Dist: 0 to h/2 C&C Dist a: 3.00 ft Loc. from endwall: Any GCpi: 0.18	Lu: NA Cs: NA Snow Duration: NA Building Code: FBC 7th Ed. 2020 Res. TPI Std: 2014 Rep Fac: Yes FT/RT:20(0)/10(0) Plate Type(s):	VERT(CL): NA HORZ(LL): 0.000 D HORZ(TL): 0.000 D Creep Factor: 2.0 Max TC CSI: 0.122 Max BC CSI: 0.014 Max Web CSI: 0.000	

	G	ravity	Non-Gravity				
Loc	R+	/ R-	/ Rh	/ Rw	/ U	/ RL	
В	164	/-	/-	/116	/43	/27	
D	20	/-	/-	/11	/1	/-	
С	16	/-	/-	/10	/9	/-	
Win	d read	ctions b	ased on I	MWFRS			
В	Brg V	Vidth =	3.5	Min Re	q = 1.5	5	
D	Brg V	Vidth =	1.5	Min Re	q = -		
С	Brg V	Vidth =	1.5	Min Re	q = -		
Bearing B is a rigid surface.							
Mer	nbers	not liste	orces les	s than	375#		

Top chord: 2x4 SP #2; Bot chord: 2x4 SP #2;

Wind loads based on MWFRS with additional C&C

Wind loading based on both gable and hip roof types.

Additional Notes

The overall height of this truss excluding overhang is 0-10-0.



WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!

IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7, or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions. Refer to job's General Notes page for additional information.



Gable Stud Reinforcement Detail


ASCE 7-16: 140 mph Wind Speed, 15' Mean Height, Enclosed, Exposure C, Kzt = 1.00

Dr: 120 mph Wind Speed, 15' Mean Height, Partially Enclosed, Exposure C, Kzt = 1.00

Dr: 120 mph Wind Speed, 15' Mean Height, Enclosed, Exposure D, Kzt = 1.00

Dr: 100 mph Wind Speed, 15' Mean Height, Partially Enclosed, Exposure D, Kzt = 1.00

		2×4 Vertica	Brace	No	(1) 1×4 *L	Brace *	(1) 2×4 "L	" Brace *	(2) 2×4 L	" Brace **	(1) 2×6 'L	* Brace *	(2) 2×6 *L	Brace **
اعاا	Spacing	Species	Grade		Group A	Group B	Group A	Group B	Group A	Group B	Group A	Group B	Group A	Group B
		CDE	#1 / #2	4′ 3″	7′ 3″	7′ 7″	8′ 7 ″	8′ 11 ″	10′ 3″	10′ 8 ″	13′ 6″	14' 0"	14' 0"	14′ 0″
	1.1	SPF	#3	4′ 1 ″	6′ 7 ″	7′ 1″	8` 6 "	8′ 10 ″	10′ 1″	10′ 6 ″	13′ 4″	13′ 10″	14′ 0″	14′ 0″
21	Ų	HF	Stud	4′ 1 ″	6′ 7 ″	7′ 0 ″	8′ 6 ″	8′ 10 ″	10′ 1″	10′ 6″	13′ 4″	13′ 10 ″	14′ 0″	14′ 0″
>	Ō	1 11	Standard	4′ 1″	5′ 8 ″	6′ 0 ″	7′ 7 ″	8′ 1 ″	10′ 1″	10′ 6″	11′ 10″	12′ 8 ″	14′ 0″	14′ 0″
0.			#1	4′ 6″	7′ 4″	7′ 8 ″	8′ 8 ″	9′ 0″	10′ 4″	10′ 9 ″	13′ 8″	14′ 0″	14′ 0″	14′ 0″
-	*	SP	#2	4′ 3″	7′ 3″	7′ 7″	8′ 7 ″	8′ 11 ″	10′ 3″	10′ 8″	13′ 6″	14′ 0″	14′ 0″	14′ 0″
	4	l	#3	4′ 2″	6′ 0 ″	6′ 4 ″	7′ 11″	8′ 6″	10′ 2″	10′ 7″	12′ 5″	13′ 4″	14′ 0″	14′ 0″
g	Ω	DFL	Stud	4′ 2″	6′ 0″	6′ 4″	7′ 11″	8′ 6 ″	10′ 2″	10′ 7″	12′ 5 ″	13′ 4″	14′ 0″	14′ 0″
II			Standard	4′ 0 ″	5′ 3″	5′ 7 ″	7′ 0″	7′ 6 ′	9′ 6″	10′ 2 ″	11′ 0″	11′ 10″	14' 0"	14′ 0″
II <u>-</u>		SPF	#1 / #2	4′ 11″	8′ 4″	8′ 8 ″	9′ 10″	10′ 3″	11′ 8″	12′ 2″	14′ 0″	14′ 0″	14′ 0″	14′ 0″
=	₽ -		#3	4′ 8″	8′ 1″	8′ 8 ″	9′ 8 ″	10′ 1″	11′ 7″	12′ 1″	14′ 0″	14′ 0″	14′ 0″	14′ 0″
`_	\cup	HF	Stud	4′ 8″	8′ 1″	8′ 6 ″	9′ 8″	10′ 1″	11′ 7″	12′ 1″	14′ 0″	14′ 0″	14′ 0″	14′ 0″
ΠāΙ	Ō	1 11	Standard	4′ 8 ″	6′ 11 ″	7′ 5 ′	9′ 3″	9′ 11″	11′ 7″	12′ 1″	14′ 0″	14′ 0″	14′ 0″	14′ 0″
\parallel $\stackrel{\sim}{\smile}$ \parallel	_		#1	5′ 1 ″	8′ 5 ″	8′ 9 ″	9′ 11″	10′ 4″	11′ 10″	12′ 4″	14′ 0″	14′ 0″	14′ 0″	14′ 0″
/		SP	#2	4′ 11″	8′ 4″	8′ 8 ″	9′ 10″	10′ 3″	11′ 8″	12′ 2″	14′ 0″	14′ 0″	14' 0"	14′ 0″
	Ò	l	#3	4′ 9″	7′ 4″	7′ 9 ′	9′ 9″	10′ 2″	11′ 8″	12′ 1″	14′ 0″	14' 0"	14' 0"	14′ 0″
0	/	DFL	Stud	4′ 9 ″	7′ 4″	7′ 9 ″	9′ 9″	10′ 2″	11′ 8″	12′ 1″	14′ 0″	14′ 0″	14′ 0″	14′ 0″
ロスト			Standard	4′ 8″	6′ 5 ″	6′ 10 ″	8′ 7 ″	9′ 2″	11′ 7″	12′ 1″	13′ 6″	14′ 0″	14′ 0″	14′ 0″
abl		SPF	#1 / #2	5′ 5″	9′ 2″	9′ 6″	10′ 10″	11′ 3″	11′ 8″	13′ 5″	14′ 0″	14′ 0″	14′ 0″	14′ 0″
<u> 0</u>		76	#3	5′ 1″	9′ 0″	9′ 4″	10′ 8″	11′ 1″	12′ 9″	13′ 3″	14′ 0″	14′ 0″	14′ 0″	14′ 0″
0		HF	Stud	5′ 1 ″	9′ 0″	9′ 4″	10′ 8 ″	11′ 1″	12′ 9″	13′ 3″	14′ 0″	14′ 0″	14′ 0″	14′ 0″
		1 11	Standard	5′ 1″	8′ 0″	8′ 6 ″	10′ 8″	11′ 1″	12′ 9″	13′ 3″	14′ 0″	14′ 0″	14′ 0″	14′ 0″
×	•		#1	5′ 8 ″	9′ 3″	9′ 8″	10′ 11″	11′ 4″	13′ 0″	13′ 6″	14′ 0″	14′ 0″	14′ 0″	14′ 0″
	*	SP	#2	5′ 5″	9′ 2″	9′ 6″	10′ 10′	11′ 3″	12′ 11″	13′ 5″	14′ 0″	14′ 0″	14′ 0″	14′ 0″
Ma	ù		#3	5′ 3″	8′ 5 ″	9′ 0″	10′ 9″	11′ 2″	12′ 10″	13′ 4″	14′ 0″	14′ 0″	14′ 0″	14′ 0″
	Ţ	DFL	Stud	5′ 3 ″	8′ 5 ″	9′ 0″	10′ 9″	11′ 2″	12′ 10 ″	13′ 4″	14′ 0″	14′ 0″	14′ 0″	14′ 0″
			Standard	5′ 1 ″	7′ 5 ″	7′ 11″	9′ 11″	10′ 7″	12′ 9″	13′ 3″	14′ 0″	14′ 0″	14′ 0″	14′ 0″



1x4 Braces shall be SRB (Stress-Rated Board) ***For 1x4 So. Pine use only Industrial 55 or Industrial 45 Stress-Rated Boards, Group B values may be used with these grades.


Gable Truss Detail Notes: Wind Load deflection criterion is L/240.

Provide uplift connections for 55 plf over continuous bearing (5 psf TC Dead Load).

Gable end supports load from 4' 0' outlookers with 2'0" overhang, or 12" plywood overhang.

Attach "L" braces with 10d (0.128"x3.0" min) nails. ¥ For (1) "L" brace: space nails at 2" o.c. in 18" end zones and 4" o.c. between zones. ₩₩For (2) "L" braces: space nails at 3" o.c. in 18" end zones and 6" o.c. between zones.

"L" bracing must be a minimum of 80% of web member length.



Refer to the Building Designer for conditions not addressed by this detail.

Gable Truss Diagonal brace option: vertical length may be doubled when diagonal brace is used. Connect diagonal brace for 450# at each end. Max web "L" Brace End total length is 14'. Zones, typ. 2x4 DF-L #2 or better diagonal brace; single Vertical length shown or double cut in table above. (as shown) at upper end. Connect diagonal at Refer to chart bo√€ for lena midpoint of vertical web.

VARNINGI READ AND FOLLOW ALL NOTES ON THIS DRAWINGI
****IMPORTANT*** FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLER

Trusses require extreme care in fabricating, handling, shipping, installing interministrations are installed and bracing. Refer to follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for spractices prior to performing these functions. Installers shall provide temporary bracing performed to thermise, top chord shall have properly attached structural sheathing and boos shall have a properly attached rigid celling. Locations shown for permanent lateral restraint shall have bracing installed per BCSI sections B3, B7 or B10, as applicable. Apply plates to eat of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions.

Alpine, a division of ITV Building Components Group Inc. shall not be responsible for any deviation in this drawing, any fallure to build the truss in conformance with ANSI/TPI 1, or for handling, shipping; installation & bracing of trusses.

A seal on this drawing or cover page listing this drawing, indicates acceptance of professional engineering responsibility solely for the design shown. The suitability and use of this drawing for any structure is the responsibility of the Building Besigner per ANSI/TPI 1 Sec.2.

For more information see this Job's general notes page and these web sites: ALPINE: www.alpineitw.com; TPI: www.tpinst.org; SBCA: www.sbcacomponents.com; ICC: www.iccsafe.org

MAX, TOT, LD, 60 PSF MAX. SPACING 24.0"

514 Earth City Expressway Suite 242 Earth City, MO 63045

ASCE7-16-GAB14015 DATE 01/26/2018 DRWG A14015ENC160118

CLR Reinforcing Member Substitution

This detail is to be used when a Continuous Lateral Restraint (CLR) is specified on a truss design but an alternative web reinforcement method is desired.

Notes:

This detail is only applicable for changing the specified CLR shown on single ply sealed designs to T-reinforcement or L-reinforcement or scab reinforcement.


Alternative reinforcement specified in chart below may be conservative. For minimum alternative reinforcement, re-run design with appropriate reinforcement type.

Use scabs instead of L- or T- reinforcement on webs with intersecting truss joints, such as K-web joints, that may interfere with proper application along the narrow face of the web.

Web Member Specified CLR Size Restraint		Alternative Reir T- or L- Reinf.	
2x3 or 2x4	1 row	2×4	1-2×4
2x3 or 2x4	2 rows	2×6	2-2×4
2×6	1 row	2×4	1-2×6
2×6	2 rows	2×6	2-2×4(米)
5×8	1 row	2×6	1-2×8
5×8	2 rows		2-2×6(*/)


T-reinforcement, L-reinforcement, or scab reinforcement to be same species and grade or better than web member unless specified otherwise on Engineer's sealed design.

(**) Center scab on wide face of web. Apply (1) scab to each face of web.

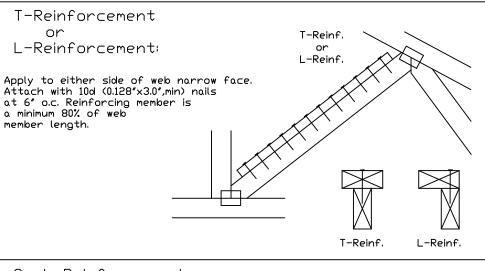

Scab Reinforcement:

Apply scab(s) to wide face of web. No more than (1) scab per face. Attach with 10d (0.128"x3.0",min) nalls at 6" o.c. Reinforcing member is a minimum 80% of web member length.

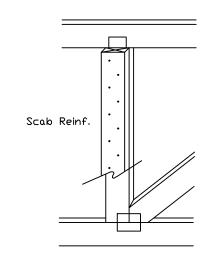

OVICENS:

VARNING| READ AND FOLLOW ALL NOTES ON THIS DRAVING ***IMPORTANT*** FURNISH THIS DRAVING TO ALL CONTRACTORS INCLUDING THE INSTALLER!

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Reference are in fabricating, handling, shipping, installing and bracing. Reference are represented by the state of the second shipping and bracing and bracing and bracing are represented by the second shipping and bracing installed per BCSI sections B3, B7 or B10, as applicable. Apply plates to each for a few and and the Joint Details, unless noted otherwise.

Refer to drawings 1504–Z for standard plate positions.

Alpine, a division of ITV Building Components Group Inc. shall not be responsible for any deviation of this drawing, any failure to build the truss in conformance with ANSI/TPI 1, or for handling, shipping; installation & bracing of trusses.

A seal on this drawing or cover page listing this drawing, indicates acceptance of professional engineering responsibility solely for the design shown. The suitability and use of this drawing for any structure is the responsibility of the Building Designer per ANSI/TPI 1 Sec.2.

For more information see this job's general notes page and these web sites:
ALPINE: www.alpineitw.com; TPI: www.tpinstorg; SBCA: www.sbcacomponents.com; ICC: www.iccsafe.org

STATE OF
CORIDA STATE
OZOGO ST

TC LL	PSF
TC DL	PSF
BC DL	PSF
BC LL	PSF
тот. LD.	PSF
DUR. FAC.	

SPACING

REF CLR Subst.

DATE 01/02/19

DRWG BRCLBSUB0119

ALPINE AN ITW COMPANY

514 Earth City Expressway Suite 242 Earth City, MO 63045

Gable Detail For Let-in Verticals Gable Truss Plate Sizes Refer to appropriate Alpine gable detail for minimum plate sizes for vertical studs. +) Refer to Engineered truss design for peak, splice, web, and heel plates. *If gable vertical plates overlap, use a single plate that covers the total area of the overlapped plates to span the web. Gable Example: Length typ.

Provide connections for uplift specified on the engineered truss design.

Attach each "T" reinforcing member with

End Driven Nails:

10d Common (0.148"x 3.", min) Nails at 4" o.c. plus

(4) nails in the top and bottom chords.

10d Common (0.148"x3".min) Toenails at 4" o.c. plus

(4) toenails in the top and bottom chords.

This detail to be used with the appropriate Alpine gable detail for ASCE wind load.

ASCE 7-05 Gable Detail Drawings

A13015051014, A12015051014, A11015051014, A10015051014, A14015051014, A13030051014, A12030051014, A11030051014, A10030051014, A14030051014


ASCE 7-10 & ASCE 7-16 Gable Detail Drawings

A11515ENC100118, A12015ENC100118, A14015ENC100118, A16015ENC100118, A18015ENC100118, A20015ENC100118, A20015END100118, A20015PED100118, A11530ENC100118, A12030ENC100118, A14030ENC100118, A16030ENC100118, A18030ENC100118, A20030ENC100118, A20030END100118, A20030PED100118, S11515ENC100118, S12015ENC100118, S14015ENC100118

\$18015ENC100118, \$20015ENC100118, \$20015END100118, \$20015PE 100118, \$11530ENC100118, \$12030ENC100118, \$14030ENC.00118, \$14030ENC.0018, \$14030E S18030ENC100118, S20030ENC100118, S20030 NITCOLES, S20030PED100118

See appropriate Alpine gable detail for maxium preinforced gable vertical length.

"T" Reinforcement Attachment Detail



To convert from "L" to "T" reinforcing members, multiply "T" increase by length (based on appropriate Alpine gable detail).

Maximum allowable "T" reinforced gable vertical length is 14' from top to bottom chord.

"T" reinforcing member material must match size, specie, and grade of the "L" reinforcing member.

Web Length Increase w/ "T" Brace

"T" Reinf.	"T"		
Mbr. Size	Increase		
2×4	30 %		
2x6	20 %		

Example:

ASCE 7-10 Wind Speed = 120 mph Mean Roof Height = 30 ft, Kzt = 1.00 Gable Vertical = 24°o.c. SP #3 "T" Reinforcing Member Size = 2x4

"T" Brace Increase (From Above) = 30% = 1.30 (1) 2x4 "L" Brace Length = 8' 7"

Maximum "T" Reinforced Gable Vertical Length $1.30 \times 8' \ 7'' = 11' \ 2''$

VARNING|** READ AND FOLLOW ALL NOTES ON THIS DRAVING *IMPORTANT*** FURNISH THIS DRAVING TO ALL CONTRACTORS INCLUDING THE INSTALLER:

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Ref. of follow the latest edition of BCSI (Building Component Safety Information, is TPI and SBCA) fc spractices prior to performing these functions. Installers shall provide temporary bracing pe Unless noted otherwise, top chord shall have properly attached structural sheathing and bo shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint shall have bracing installed per BCSI sections B3, B7 or BIO, as applicable. Apply plates to ear of truss and position as shown above and on the Joint Details, unless noted otherwise.

Refer to drawings 160A-Z for standard plate positions.

Alpine, a division of ITV Building Components Group Inc. shall not be responsible for any deviation of this drawing, any failure to build the truss in conformance with ANSI/TPI 1, or for handling, shipping:
A seal on this drawing or cover page listing this drawing, indicates acceptance of professional engineering responsibility solely for the design shown. The sultability and use of this for any structure is the responsibility of the Building Designer per ANSI/TPI 1 Sec.2.

For more information see this job's general notes page and these web sites: ALPINE: www.alpineitw.com; TPI: www.tpinst.org; SBCA: www.sbcacomponents.com; ICC: www.iccsafe.org

IREF LET-IN VERT 01/02/2018 DATE DRWG GBLLETIN0118

MAX, TOT, LD, 60 PSF DUR. FAC. ANY MAX. SPACING 24.0"



Rigid Sheathing

Ceiling

4 Nails

Nails

Spaced At


4 Nails

Reinforcing Member

Gable

Truss

514 Earth City Expressway Suite 242 Earth City, MO 63045

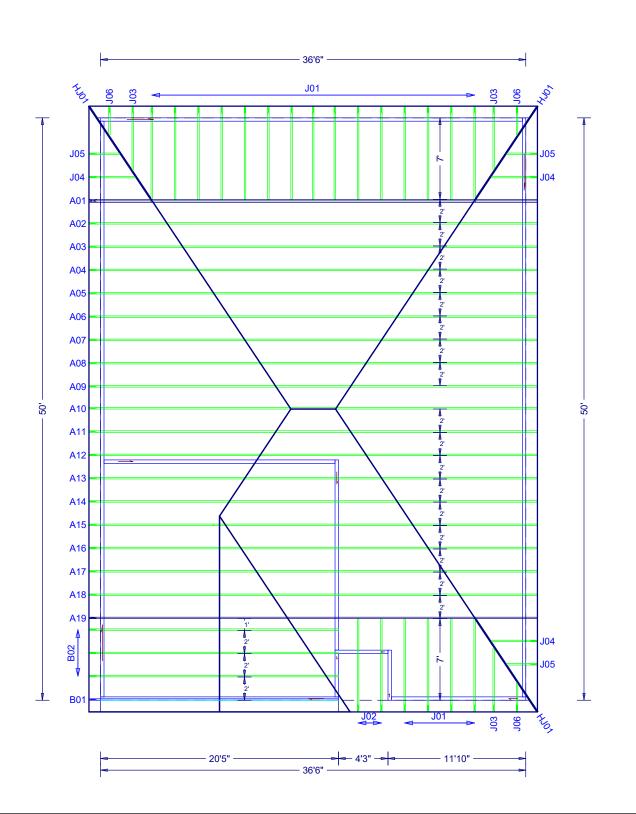

W.B. Howland Truss Co. 610 11th St. SW Live Oak, FL 32064 (386) 362-1235 (386) 362-7124 (Fax) howlandtruss@gmail.com

ROOF PITCH: 4/12, 6/12 -- FASCIA ALIGNED

OVERHANG: 12" PLUMB CUT

CEILING: FLAT

EXT. WALLS: FRAME

LOADING: 40 PSF TL WIND LOAD: 130 CATEGORY: II EXPOSURE: C DEFLECTION: 360/240

DATE: 8/13/21

Job Name: Reserve at Jewel Lake 31 Customer: Century Complete Designer: Chris McCall ADDRESS: 452 SW Jewel Lake Dr SALESMAN: Fill in later : <Not Found>

JOB #: 22-6882

JOB NO: 22-6882

1 OF 1

PAGE NO: