

CAUTION!!!

DO NOT ATTEMPT TO ERECT TRUSSES WITHOUT REFERRING TO THE ENGINEERING DRAWINGS AND BSCI-B1 SUMMARY SHEETS. ALL PERMANENT BRACING MUST BE IN PLACE PRIOR TO LOADING TRUSSES, (ie. SHEATHING, SHINGLES, ETC.) ALL INTERIOR BEARING WALLS MUST BE IN PLACE PRIOR TO INSTALLING TRUSSES. REFER TO FINAL ENGINEERING SHEETS FOR THE FOLLOWING.

- 1) NUMBER OF GIRDER PILES AND NAILING SCHEDULE.
- 2) BEARING BLOCK REQUIREMENTS.
- 3) SCAB DETAILS (IF REQUIRED).
- 4) UPLIFT AND GRAVITY REACTIONS.

WARNING
Backcharges Will Not Be Accepted
Regardless of Fault Without Prior
Notification By Customer Within 48
Hours And Investigation By
Builders FirstSource.

NO EXCEPTIONS.
The General Contractor Is Responsible
For All Connections Other Than Truss
To Truss, Gable Shear Wall, And
Connections, Temporary And
Permanent Bracing, And Ceiling And
Roof Diaphragm Connections.

ROOF PITCH: 6/12
CEILING PITCH: 0
TOP CHORD SIZE: 2 X 4
BOTTOM CHORD SIZE: 2 X 6 / 2 X 4
OVERHANG LENGTH: 16"
END CUT: PLUMB
CANTILEVER: 0
TRUSS SPACING: 24"
BUILDING CODE: FBC2020

BEARING HEIGHT SCHEDULE

Hatch Legend
10'-0" BRG. HGT.
16'-4" KNEEWALL
11'-4" STEP CLG.

BUILDER: JIM WILLIAMS

PROJECT: WILLIAMS RESIDENCE

MODEL: CUSTOM 1-STY

ADDRESS: 500 S. HIGHWAY 247

LOT / BLOCK:

SUBDIVISION:

CITY: LAKE CITY

DRAWN BY: RYAN CONARD

JOB #: 2904837

DATE: 12/27/2021 SCALE: N/A

PLAN DATE: 6/14/2021

REVISIONS:

1.


2.

3.


4.

SHEET SIZE: ARCH D (24" X 36")

FirstSource Builders
4408 Airport Road
Plant City, FL 33667
Phone (813) 305-1300
Fax (813) 305-1301

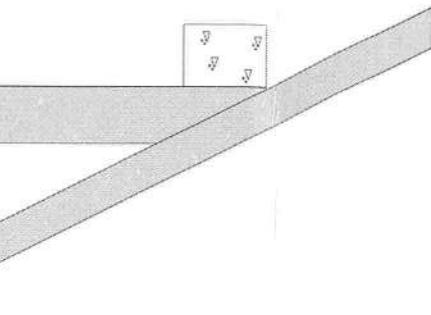

OVERHANG DETAIL: TOP CHORD OVERHANG

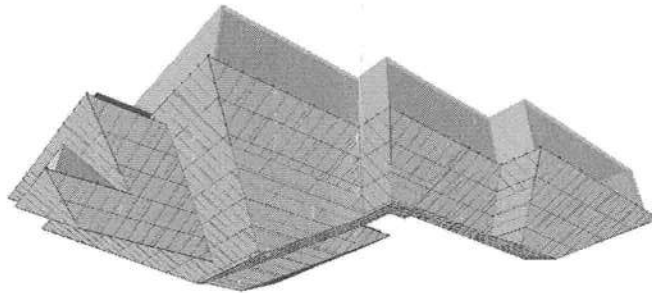


PROJECTION VIEW

SIMPSON CONNECTOR SCHEDULE		
QTY	ID	MODEL
DOWN	UPLIFT	DETAIL
UNLESS OTHERWISE SPECIFIED BY BOB. TRUSS HANGERS LISTED HERE ARE REQUIRED.		
0	A	LUS24
27	B	HTU26
0	C	HTU26
0	D	HTU26-2
2	E	HTU26-2
0	F	HGUS26-2
0	G	HGUS26-2
0	H	HGUS26-3
0	J	HGUS26-3
0	K	HGUS26
0	L	HGUS26
0	M	THU26
0	N	THU26
1915		1310
2940		915

HANGER SCHEDULE

IMPORTANT
This Drawing Must Be Approved And Returned Before Fabrication Will Begin. For Your Protection Check All Dimensions And Conditions Prior To Approval Of Plan.
SIGNATURE BELOW INDICATES ALL NOTES AND DIMENSIONS HAVE BEEN ACCEPTED.
Date _____ By _____

MAIN WIND FORCE RESISTING SYSTEM: HYBRID WIND ASCE-15
EXPOSURE CATEGORY: C
WIND LOAD: 140 MPH
WIND IMPORTANCE FACTOR: 1.0
TRUSSES HAVE BEEN DESIGNED FOR A 100 PSF BOTTOM CHORD LIVE LOAD
NONCONFORMANT WITH ANY OTHER LIVE LOADS
FLOOR LOADING
TCLL: 20 PSF
BCDL: 10 PSF
TOTAL: 40 PSF
DURATION: 1.25
TCLL: 20 PSF
BCDL: 10 PSF
TOTAL: 40 PSF
DURATION: 1.25



TYP. HTU26 NAILING INSTALLATION

