40053

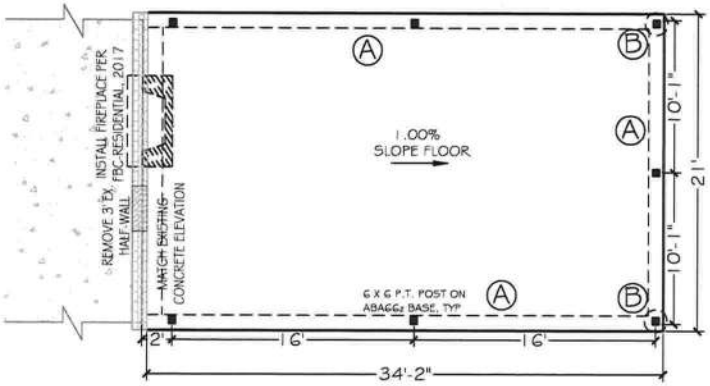



LVL detail connection



LVL detail connection

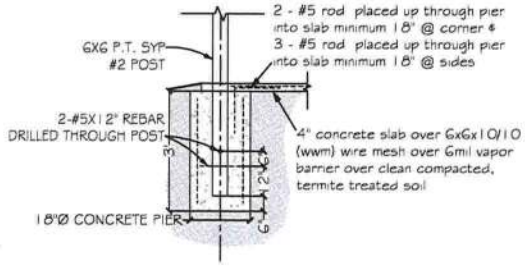



B Embedded post detail

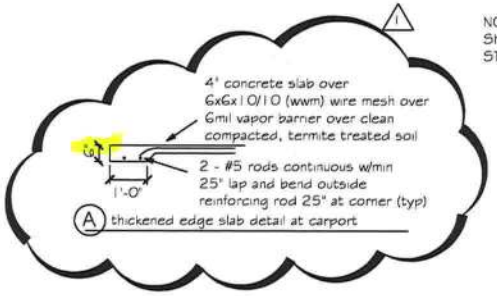

A thickened edge slab detail at carport

NOTE: MONOLITHIC SLAB SHOWN; ALTERNATIVELY, STEM WALL MAY BE USED

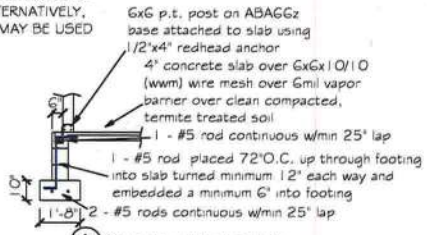

A Stem wall detail at carport

NOTE:
IF ALL POSTS ARE EMBEDDED, NEITHER STEMWALL NOR MONOSLAB IS REQUIRED FOR THE SLAB EXCEPT UNDER FIRE PLACE - INSTALL THICKENED EDGE DETAIL C

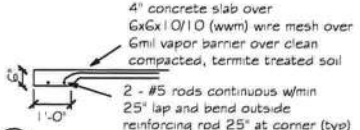

C thickened edge slab detail at carport

FOUNDATION NOTES

1. THE SLAB SHALL BE 4" CONCRETE SLAB REINFORCED w/ 6X6-1.4/1.4 WELDED WIRE MESH PLACED ON CHAIRS 1 1/2" DEPTH OR FIBER MESH CONCRETE, 6-MIL POLY VAPOR BARRIER w/ 6" LAPS SEALED w/ POLY TAPE OVER TERMITE-TREATED & COMPACTED FILL
2. BOTTOM OF EXTERIOR FOOTINGS SHALL BE A MINIMUM OF 12" BELOW UNDISTURBED SOIL OR ENGINEERED FILL PER FBC-RES. SECTION R403.1.4

NOTE:
SOIL UNDER FOOTING SHALL BE COMPRESSED TO 2000 PSF AT 95% DENSITY. CONCRETE STRENGTH SHALL BE 2500 PSI

COLUMBIA COUNTY BUILDING DEPARTMENT
Received for FILE COPY
Code Compliance
PLANS EXAMINER
9.23.20

Carol Chadwick, PE
cn=Carol Chadwick, PE, o=This item has been electronically signed and sealed by Carol Chadwick, PE using a digital signature., ou=, email=ccpewyo@gmail.com, c=US
2020.08.26 13:36:29 -04'00'

CAROL CHADWICK P.E.

REV NO	DATE	REVISION DESCRIPTION
1		REVISED MONOLAB FOOTING DETAIL

PREPARED FOR
WALLACE CABLE
423.306.1441

CABLE RESIDENCE
FOUNDATION PLAN
299 SW Old Bellamy Road
Fort White, FL

PROJECT NO.	F120069
DATE	MAY 6, 2020
REVISION DATE	AUG. 26, 2020
SHEET	S-1