DARE 10/12/2004 C	olumbia County	<b>Building Per</b>	·mit P	PERMIT
	This Permit Expires One Yo			00022380
-	C 815	_		32056
-	and a second	PHONE		
ADDRESS 949 NW HC	PRIZON ST	LAKE CITY	FL	32055
CONTRACTOR BRYAN ZEC	HER	PHONE	752-8653	
LOCATION OF PROPERTY	90W, TR O BROWN ROAD, TR	ON HORIZON DR., 1/2 M	LE ON	
	RIGHT			
TYPE DEVELOPMENT SFD,	UTILITY ES	TIMATED COST OF CON	STRUCTION 88	300.00
APPLICANT BRYANZECHER PHONE 752-8653  APPLICANT BRYANZECHER PHONE 752-8653  OWNER EUGENE & MARJORIE BRADDY PHONE 752-8653  OWNER EUGENE & MARJORIE BRADDY PHONE 752-8653  ADDRESS 949 NW HORIZON ST LAKE CITY 752-8653  FLOOT STANLED TO NOTE OF THE CONTROL OF THE		STORIES 1		
FOUNDATION CONC	WALLS FRAMED I	ROOF PITCH 6/12	FLOOR	SLAB
LAND USE & ZONING A-3		MAX. I	IEIGHT _20	
Minimum Set Back Requirments:	STREET-FRONT 30.00	REAR 2	5.00 SIDE	25.00
The state of the s	OD ZONE X	DEVELOPMENT PERMI	T NO	
100 mm 1			n actives.	
3 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -		Service of the servic		
LOT 26 BLOCK	PHASEUNIT _	TOTAL	ACRES 2.50	
000000417 N	CBC054575	/	41	14, 15, 27, 47,
· · · · · · · · · · · · · · · · · · ·		nber Ap	olicant/Owner/Contrac	tor
PERMIT 04-0958-	NBK			Y
Driveway Connection Septic Ta	nk Number LU & Zonir	ng checked by Approv	red for Issuance	New Resident
COMMENTS: ONE FOOT ABOVE	THE ROAD, NOC ON FILE			
		C	neck # or Cash 2	383
	FOR BUILDING & ZONIN	G DEPARTMENT O	NLY	(footer/Slab)
				,
	. by	date/app. by	da	ate/app. by
Under slab rough-in plumbing			Sheathing/Nailing	
Framing	C 5.4 05:		oor	date/app. by
	Nough in planning ab	ove stab and below wood no		ate/app. by
		Per	i. beam (Lintel)	
E10	25 <b>.</b>	date/app. by		date/app. by
			A	/app. by
M/H tie downs, blocking, electricity ar	d plumbing			
Reconnection			date/a	app. by
## From the Date of Issue ### RPHICATE ### SPHONE SPLAY SECHER  ### SP				
OWNER   EUGENE & MARIORIE BRADDY			p. by	
This Permit Expires One Year From the Date of Issue		m - 0.00.20		
			URCHARGE FEE \$	13.14
MISC. FEES \$ .00	ZONING CERT. FEE \$ 50.00	FIRE FEE \$	WASTE FEE \$	
FLOOD ZONE DEVELOPMENT FEE	\$ CULVERT FE	E \$ TO	TAL FEE 546	.28
INSPECTORS OFFICE	le 18dole	CLERKS OFFICE	CN	
NOTICE: IN ADDITION TO THE REQU PROPERTY THAT MAY BE FOUND IN FROM OTHER GOVERNMENTAL PAT	IREMENTS OF THIS PERMIT, THERE IT THE PUBLIC RECORDS OF THIS COLUMN SUCH AS WATER MANAGEMENT.	MAY BE ADDITIONAL RESTRINTY. AND THERE MAY BE A	ICTIONS APPLICABLE T	O THIS EQUIRED

"WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT."

This Permit Must Be Prominently Posted on Premises During Construction

PLEASE NOTIFY THE COLUMBIA COUNTY BUILDING DEPARTMENT AT LEAST 24 HOURS IN ADVANCE OF EACH INSPECTION, IN ORDER THAT IT MAY BE MADE WITHOUT DELAY OR INCONVIENCE, PHONE 758-1008. THIS PERMIT IS NOT VALID UNLESS THE WORK AUTHORIZED BY IT IS COMMENCED WITHIN 6 MONTHS AFTER ISSUANCE.


#### Columbia County Building Permit Application


For Office Use Only Application # 0409.24 Date Received 9/15/04 By Permit # 417 22380
Application Approved by - Zoning Official BLK Date 08:10:04 Plans Examiner Date
Flood Zone Development Permit Zoning Land Use Plan Map Category
Comments
EH Thuss 911
Applicants Name Bryan Zecher Phone 752-8653
Address PO Box BIS Lake City, FC 32056
Owners Name Eugene + Marjorie Braddy Phone 752-8653
911 Address 949 NW Was Harizon \$5+, Lake Ch, Fr 32055
Contractors Name Bryan Zuher Construction, Inc. Phone 752-8653
Address Po Box B15 Lake City, FC 32056
Fee Simple Owner Name & Address Eugre + Narjonie Briddy
Bonding Co. Name & Address
Architect/Engineer Name & Address Teena Putto/ Make Disoway
Mortgage Lenders Name & Address 1st Sederal / US 90 W Lake City
Property ID Number 29-35-16-02390-026 Estimated Cost of Construction 128,000-
Subdivision Name Fair field Hills Lot 2/2 Block Unit Phase
Driving Directions US 90 West to Brown Rd, T/R to Horizon Drive,
- 1/2 mile on right
Type of Construction Number of Existing Dwellings on Property
Total Acreage 2/2 Lot Size 2/2 Acre Do you need a - Quivert Permit or Culvert Waiver or Have an Existing Driv
Actual Distance of Structure from Property Lines - Front 75 Side 80' Side 119' Rear 312
Total Building Height 20' Number of Stories 1 Heated Floor Area 1766 Roof Pitch 6/12
Number of Stories Heated Floor Area/ /66 Roof Pitch _6/12
Application is hereby made to obtain a permit to do work and installations as indicated. I certify that no work or
installation has commenced prior to the issuance of a permit and that all work be performed to meet the standards of all laws regulating construction in this jurisdiction.
an laws regulating construction in this jurisdiction.
OWNERS AFFIDAVIT: I hereby certify that all the foregoing information is accurate and all work will be done in compliance with all applicable laws and regulating construction and zoning.
WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCMENT MAY RESULT IN YOU PAYING
TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT.
TENDER OR ATTORNET BETORE RECORDING TOOK NOTICE OF COMMENCEMENT.
eregichet
Owner Builder or Agent (Including Contractor) Contractor Signature
STATE OF FLORIDA Contractors License Number CBC 054 5 75 Competency Card Number
COUNTY OF COLUMBIA . Competency Card Number
Sworn to (or affirmed) and subscribed before me NOTARY STAMP/SEAL
this day of 20
Personally known or Produced Identification
Notary Signature

LOT 26 FAIRFIE ORB 811-1953-19	LD HILLS S/1 955.		LITTLE B MARGARIT RT 17 BO	A F		29-3s-16-02390-026 PRINTED							y 200 CARD 0	01 of	001
			LAKE CIT			FL 32055		API			002 HC				
USE		AE?		HTD AREA	.000	INDEX	29316.01					00000			
MOD	BATH			EFF AREA		E-RATE	.000	INDX	STR	29-	3s- 16				
EXW	FIXT			RCN				AYB	MKT	AREA	03			0	BLDG
8	BDRM			%GOOD		BLDG VAL		EYB	(PUI						XFOB
RSTR	RMS										2.470		18	,525	LAND
RCVR	UNTS		3FIELD					3	NTCL						AG
8	C-W%			FAIRFIELD HI	LLS			3	APPR					0	MKAG
INT	HGHT		3					3	CNDC	)			18	,525	JUST
8	PMTR		3					3	SUBI	)				0	CLAS
FLR	STYS		3					3	BLK						
8	ECON		3					3	LOT					0	SOHD
HTTP	FUNC		3					3	MAP#					0	ASSD
A/C	SPCD		3					3						0	EXPT
QUAL	DEPR		3					3	TXDI	0	03			0	COTX
PNDN	UD-1		3					3							
SIZE	UD-2		3					3			BLD	G TRAVE	RSE		
CEIL	UD-3		3					3							
ARCH	UD-4		3					3							
FRME	UD-5		3					3							
KTCH	UD-6		3					3							
VNDO	UD-7		3					3							
CLAS	UD-8		3					3							
occ	UD-9		3					3							
COND	8		3					3 _			P	ERMITS			
SUB A-AREA	E-AREA	SUB VALU	UE 3					3	NUMBER	. 1	DESC		AMT	ISS	UED
	*		3					3							
			3					3				SALE -			
			3						воок						RICE
			3					3				4/1995	OV		1700
			3					3	GRANTOR						-, -,
			3						GRANTEE					יייד. פ	
			3					3							
			3						GRANTOR				~ "		1500
TOTAL									GRANTER	STEP	HEN A	ROBERTS			
EXTRA FI	EATURES			F	IELD CK:			-							
AE BN CODE	DESC	LEN	WID HGHT	QTY QL YR .	ADJ	UNITS U	T PR	ICE	ADJ UT	PR	SPCD	% %G	OOD X	FOB V	ALUE
LAND DESC AE CODE Y 000000 VAC RI SALE - LOT 26 2004	ZONE TOPO ES 00	ROAD (UTIL (U	UD1 {UD3	FRONT DEPTH F BACK DT 1.	IELD CK:	NTS .00 1.00	UN:	ITS U	 T	PRICE	ADJ	UT PR	LAN	D VAI	UE

http://www.appraiser.columbiacountyfla.com/GIS/Show\_FieldCard.asp?PIN=29-3S-16-02390-026

9/11/2004

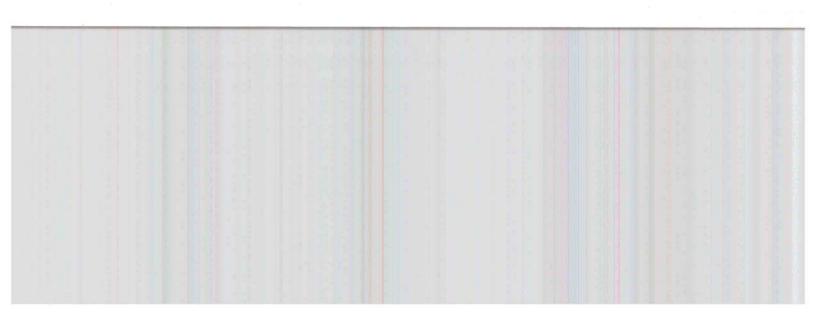

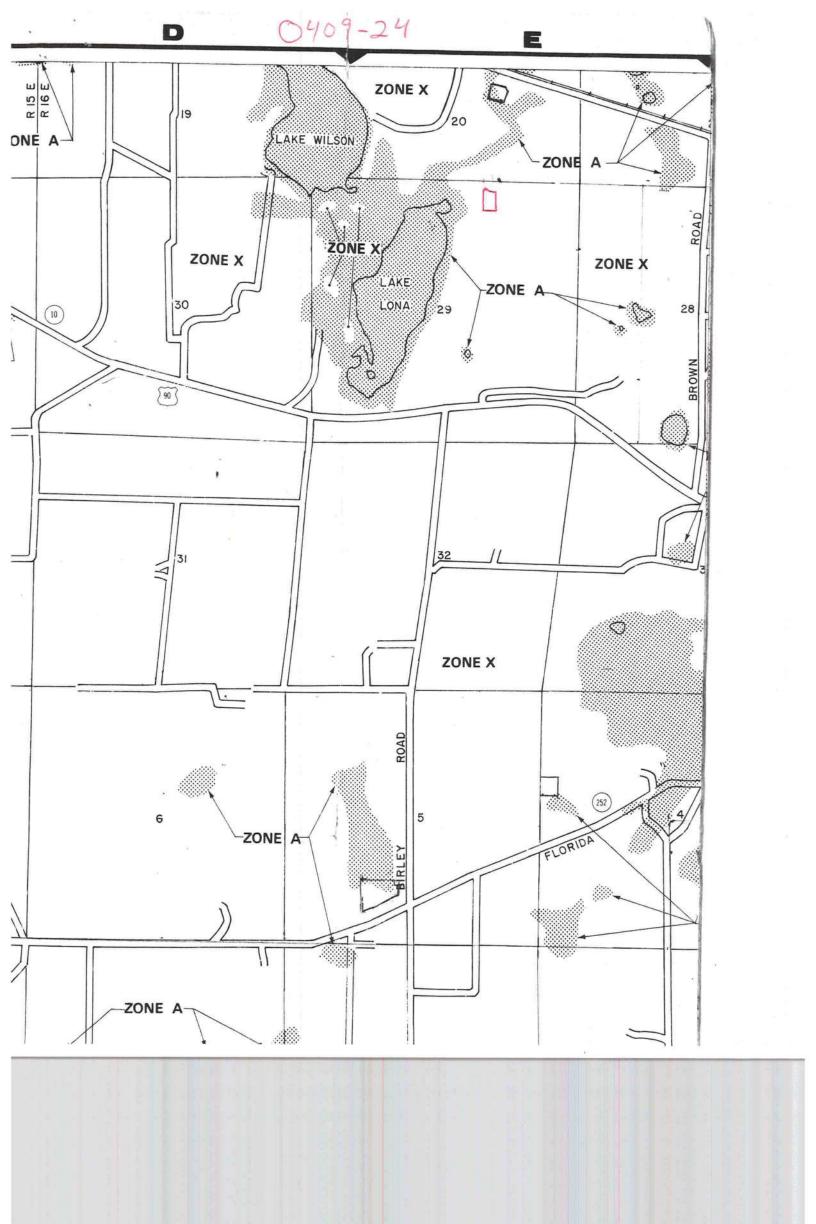

	JEPARTMENT OF HEALTH	}
	APPLICATION FOR ONSITE SEWAGE DISPOSAL SYSTEM CONSTRUCTION  Permit Application Nu	
GOD WE THE	Permit Application No.	
	lock represents 5 feet and 1 inch = 50 feet.	
Notes:		
Site Plan su	ubmitted by: Rock 77	Mastre Centerator
Plan Approv	Signature	Date 9.20 04
3v	Gradds · ESI. COLUMBIA	County Health Departmen
-,———	ALL CHANGES MUST BE APPROVED BY THE COUNTY HEALTH D	DEPARTMENT

THIS INSTRUMENT WAS PREPARED BY: FIRST FEDERAL SAVINGS BANK OF FLORIDA 4705 WEST U.S. HIGHWAY 90 P.O. BOX 2029 LAKE CITY, FLORIDA 32056 Inst:2004020689 Date:09/10/2004 Time:09:23

\_\_\_\_\_DC,P. DeWitt Cason,Columbia County B:1025 P:1661

and ice
_
BIA
ERA
₩ A
<u>S</u> 6 to s.
_
who

Notary Public

My Commission Expires:

Project Name:

Address:

City, State:

408121BraddyRes.

Bryan Zecher

# FLORIDA ENERGY EFFICIENCY CODE FOR BUILDING CONSTRUCTION

Florida Department of Community Affairs
Residential Whole Building Performance Method A

Builder:

Permitting Office:

Permit Number: 22380

Owner: Eugene & North	Marjorie Braddy	Jurisdiction Number: 2	21000
<ol> <li>New construction or existing</li> <li>Single family or multi-family</li> <li>Number of units, if multi-family</li> <li>Number of Bedrooms</li> <li>Is this a worst case?</li> <li>Conditioned floor area (ft²)</li> <li>Glass area &amp; type         <ol> <li>Clear glass, default U-factor</li> <li>Default tint, default U-factor</li> <li>Labeled U-factor or SHGC</li> </ol> </li> <li>Floor types         <ol> <li>Slab-On-Grade Edge Insulation</li> <li>N/A</li> <li>N/A</li> <li>N/A</li> </ol> </li> <li>Frame, Wood, Exterior</li> <li>Frame, Wood, Adjacent</li> <li>N/A</li> </ol> <li>Sup: Unc. Ret: Unc. AH: Garage</li> <li>N/A</li>	New Single family	12. Cooling systems a. Central Unit b. N/A c. N/A  13. Heating systems a. Electric Heat Pump b. N/A c. N/A  14. Hot water systems a. Electric Resistance b. N/A  c. Conservation credits (HR-Heat recovery, Solar DHP-Dedicated heat pump)  15. HVAC credits (CF-Ceiling fan, CV-Cross ventilation, HF-Whole house fan, PT-Programmable Thermostat, MZ-C-Multizone cooling, MZ-H-Multizone heating)	Cap: 39.0 kBtu/hr SEER: 12.20

by this calculation are in compliance with the Florida Energy Code.

PREPARED BY: Evan Beamsley

DATE: 9/3/64

I hereby certify that this building, as designed, is in compliance with the Florida Energy Code.

OWNER/AGENT:

DATE:

I hereby certify that the plans and specifications covered

Glass/Floor Area: 0.18

Review of the plans and specifications covered by this calculation indicates compliance with the Florida Energy Code. Before construction is completed this building will be inspected for compliance with Section 553.908 Florida Statutes.



BUILDING OFFICIAL:	
DATE:	

**PASS** 

EnergyGauge® (Version: FLR2PB v3.4)

Total as-built points: 26127

Total base points: 26193

# **SUMMER CALCULATIONS**

# Residential Whole Building Performance Method A - Details

ADDRESS: , , , PERMIT #:

	BAS	E				AS-	-BUI	LT				
GLASS TYPE				Overhoos								
.18 X Condi Floor	tioned X Area	BSPM =	Points	Type/SC	Ove Ornt	erhang Len		Area X	SPN	ИΧ	SOF	= Points
.18 17	766.0	20.04	6370.3	Double, Clear	N	1.5	9.0	10.0	19.2	0	0.98	187.3
				Double, Clear	N	10.0	9.0	67.0	19.2	0	0.69	892.0
				Double, Clear	N	10.0	2.0	10.0	19.2		0.59	113.9
				Double, Clear	NW	12.0	7.5	10.0	25.9		0.57	147.4
				Double, Clear Double, Clear	NW	12.0 4.0	2.5	2.3	25.9		0.52	30.8
				Double, Clear	NW	4.0	7.5 2.5	30.0	25.9 25.9		0.77 0.57	599.2 44.2
				Double, Clear	N	1.5	7.5	40.0	19.2		0.96	738.5
				Double, Clear	N	1.5	2.5	4.0	19.2		0.80	61.2
				Double, Clear	NE	4.0	7.5	30.0	29.5		0.74	657.3
				Double, Clear	NW	4.0	2.5	3.0	25.9		0.57	44.2
				Double, Clear	N	1.5	2.0	4.0	19.2		0.76	58.1
				Double, Clear	S	9.5	7.5	36.0	35.8	7	0.49	630.6
				Double, Clear	S	9.5	2.5	6.0	35.8	7	0.43	93.0
				Double, Clear	S	9.5	9.0	14.0	35.8	7	0.51	257.4
				Double, Clear	S	9.5	2.5	5.0	35.8		0.43	77.5
				Double, Clear	S	1.5	6.5	30.0	35.8		0.88	943.5
				Double, Clear	S	1.5	1.0	6.0	35.8		0.47	101.8
				Double, Clear	W	1.5	1.7	2.7	38.5	2	0.55	57.7
				As-Built Total:				313.0				5735.5
WALL TYPES	S Area	X BSPM	= Points	Туре		R-	-Value	Area	Х	SPN	1 =	Points
Adjacent	156.0	0.70	109.2	Frame, Wood, Exterior			13.0	1057.0		1.50		1585.5
Exterior	1057.0	1.70	1796.9	Frame, Wood, Adjacent			13.0	156.0		0.60		93.6
Base Total:	1213.0	1	1906.1	As-Built Total:				1213.0				1679.1
DOOR TYPE			= Points	Туре				Area	×	SPM	=	Points
	20.0	CANODE C COMPLETE DE PETROL	The second second							_		
Adjacent Exterior	30.0	2.40 6.10	48.0 183.0	Exterior Insulated Adjacent Insulated				10.0 20.0		4.10		41.0
Exterior	50.0	0.10	103.0	Exterior Insulated				20.0		1.60 4.10		32.0 82.0
				Exterior insulated				20.0		4.10		02.0
Base Total:	50.0		231.0	As-Built Total:				50.0				155.0
CEILING TYP	ES Area	X BSPM	= Points	Туре		R-Valu	ue A	Area X S	SPM	X SC	M =	Points
Under Attic	1766.0	1.73	3055.2	Under Attic		6	30.0	1922.0 1	.73 X	1.00		3325.1

EnergyGauge® DCA Form 600A-2001

EnergyGauge®/ResFREE'2001 FLR2PB v3.4

# **SUMMER CALCULATIONS**

# Residential Whole Building Performance Method A - Details

ADDRESS: , , , PERMIT #:

	BASE			AS-BUILT									
FLOOR TYPES	Area X	BSPM	= Points	Туре		R	-Value	Area	X SPM	=	Points		
Slab Raised	197.0(p) 0.0	-37.0 0.00	-7289.0 0.0	Slab-On-Grade Edç	ge Insulat	tion	0.0 19	97.0(p	-41.20		-8116.4		
Base Total:			-7289.0	As-Built Total:				197.0			-8116.4		
INFILTRATION	Area X	BSPM	= Points					Area	X SPM	=	Points		
	1766.0	10.21	18030.9					1766.0	) 10.21		18030.9		
Summer Ba	se Points:	: :	22304.5	Summer As	-Built	Points:				20	809.1		
Total Summer Points	X System Multiplie		Cooling Points	Total X Component	Cap Ratio	X Duct Multiplier (DM x DSM x A	Mult	tem X iplier	Credit Multiplier		Cooling Points		
22304.5	0.4266	,	9515.1	20809.1 <b>20809.1</b>	1.000 <b>1.00</b>	(1.090 x 1.147 <b>1.250</b>		0.280 <b>.280</b>	1.000 <b>1.000</b>		7278.1 <b>278.1</b>		

# **WINTER CALCULATIONS**

# Residential Whole Building Performance Method A - Details

ADDRESS: , , , PERMIT #:

	BASE	<b>=</b>				AS	-BUI	AS-BUILT										
GLASS TYP	ES																	
.18 X Cond	itioned X E	WPM =	Points		Overhang													
Floor	Area			Type/SC	Ornt	Len	Hgt	Area X	WPM	X	WOF	= Point						
.18 1	766.0	12.74	4049.8	Double, Clear	N	1.5	9.0	10.0	24.58		1.00	245.9						
				Double, Clear	N	10.0	9.0	67.0	24.58		1.02	1679.0						
				Double, Clear	N	10.0	2.0	10.0	24.58		1.03	252.5						
				Double, Clear	NW	12.0	7.5	10.0	24.30		1.03	250.5						
				Double, Clear	NW	12.0	2.5	2.3	24.30		1.04	57.9						
				Double, Clear	NW	4.0	7.5	30.0	24.30		1.01	739.3						
				Double, Clear	NW	4.0	2.5	3.0	24.30		1.03	75.2						
				Double, Clear	N	1.5	7.5	40.0	24.58		1.00	984.3						
				Double, Clear	N	1.5	2.5	4.0	24.58		1.01	99.5						
				Double, Clear Double, Clear	NE NW	4.0	7.5	30.0	23.57		1.03	725.7						
				Double, Clear	N	4.0 1.5	2.5 2.0	3.0 4.0	24.30 24.58		1.03	75.2 99.8						
				Double, Clear	S	9.5	7.5	36.0	13.30		3.10	1483.5						
				Double, Clear	S	9.5	2.5	6.0	13.30		3.66	292.0						
				Double, Clear	S	9.5	9.0	14.0	13.30		2.82	525.4						
				Double, Clear	S	9.5	2.5	5.0	13.30		3.66	243.3						
				Double, Clear	S	1.5	6.5	30.0	13.30		1.09	436.4						
				Double, Clear	S	1.5	1.0	6.0	13.30		3.28	261.3						
				Double, Clear	W	1.5	1.7	2.7	20.73		1.16	64.7						
				As-Built Total:				313.0				8591.3						
WALL TYPE	S Area X	BWPM	= Points	Туре		R	-Value	Area	x w	PM	=	Points						
Adjacent	156.0	3.60	561.6	Frame, Wood, Exterior			13.0	1057.0	3.	40		3593.8						
Exterior	1057.0	3.70	3910.9	Frame, Wood, Adjacent			13.0	156.0	3.	30		514.8						
Base Total:	1213.0		4472.5	As-Built Total:				1213.0				4108.6						
DOOR TYPE	S Area X	BWPM	= Points	Туре				Area	x w	PM	=	Points						
Adjacent	20.0	11.50	230.0	Exterior Insulated				10.0	8.	40		84.0						
Exterior	30.0	12.30	369.0	Adjacent Insulated				20.0		00		160.0						
				Exterior Insulated				20.0		40		168.0						
Base Total:	50.0		599.0	As-Built Total:				50.0				412.0						
CEILING TY	PES Area X	BWPM	= Points	Туре	R	-Value	e Ar	ea X W	PM X V	VCI	M =	Points						
Under Attic	1766.0	2.05	3620.3	Under Attic			30.0	1922.0 2	.05 X 1.0	00		3940.1						
Base Total:	1766.0		3620.3	As-Built Total:				1922.0				3940.1						

EnergyGauge® DCA Form 600A-2001

EnergyGauge®/ResFREE'2001 FLR2PB v3.4

# **WINTER CALCULATIONS**

# Residential Whole Building Performance Method A - Details

ADDRESS: , , , PERMIT #:

	BASE	Ü.		AS-BUILT									
FLOOR TYPES	Area X	BWPM	= Points	Туре			R-Valu	ie Area	X	WPM	=	Points	
Slab Raised	197.0(p) 0.0	8.9 0.00	1753.3 0.0	Slab-On-Grade Edg	ge Insula	tion	0.0	197.0(p		18.80		3703.6	
Base Total:			1753.3	As-Built Total:				197.0				3703.6	
INFILTRATION	Area X	BWPM	= Points					Area	X	WPM	=	Points	
	1766.0	-0.59	-1041.9					1766.	0	-0.59		-1041.9	
Winter Base	Points:		13453.0	Winter As-B	Built P	oints:					19	713.7	
Total Winter > Points	System Multipl		Heating Points	Total X Component	Cap Ratio	X Duct Multiplie (DM x DSM	er N	System X Multiplier		Credit ⁄lultiplier		Heating Points	
13453.0	0.627	4	8440.4	19713.7 <b>19713.7</b>	1.000 <b>1.00</b>	(1.069 x 1.16 <b>1.25</b>		0) 0.449 <b>0.449</b>		1.000 <b>1.000</b>		1053.5 1 <b>053.5</b>	

# **WATER HEATING & CODE COMPLIANCE STATUS**

Residential Whole Building Performance Method A - Details

ADDRESS: , , , PERMIT #:

	BASE	AS-BUILT												
WATER HEA Number of Bedrooms	X	Multiplier	=	Total	Tank Volume	EF	Number of Bedrooms	X	Tank X Ratio	Multiplier		Credit Multiplie		Total
3		2746.00		8238.0	40.0	0.93	3		1.00	2598.37		1.00		7795.1
					As-Built To	otal:								7795.1

CODE COMPLIANCE STATUS													
BASE					AS-BUILT								
Cooling Points	+	Heating Points	+	Hot Water Points	=	Total Points	Cooling Points	+	Heating Points	+	Hot Water Points	=	Total Points
9515		8440		8238		26193	7278		11054		7795		26127

PASS



EnergyGauge™ DCA Form 600A-2001

EnergyGauge®/ResFREE'2001 FLR2PB v3.4

# **Code Compliance Checklist**

# Residential Whole Building Performance Method A - Details

ADDDESS	personal control of the control of t
ADDRESS: , , ,	PERMIT #:

#### 6A-21 INFILTRATION REDUCTION COMPLIANCE CHECKLIST

COMPONENTS	SECTION	REQUIREMENTS FOR EACH PRACTICE	CHECK
Exterior Windows & Doors	606.1.ABC.1.1	Maximum:.3 cfm/sq.ft. window area; .5 cfm/sq.ft. door area.	
Exterior & Adjacent Walls	606.1.ABC.1.2.1	Caulk, gasket, weatherstrip or seal between: windows/doors & frames, surrounding wall; foundation & wall sole or sill plate; joints between exterior wall panels at corners; utility penetrations; between wall panels & top/bottom plates; between walls and floor. EXCEPTION: Frame walls where a continuous infiltration barrier is installed that extends from, and is sealed to, the foundation to the top plate.	
Floors	606.1.ABC.1.2.2	Penetrations/openings >1/8" sealed unless backed by truss or joint members.  EXCEPTION: Frame floors where a continuous infiltration barrier is installed that is sealed to the perimeter, penetrations and seams.	
Ceilings	606.1.ABC.1.2.3	Between walls & ceilings; penetrations of ceiling plane of top floor; around shafts, chases, soffits, chimneys, cabinets sealed to continuous air barrier; gaps in gyp board & top plate; attic access. EXCEPTION: Frame ceilings where a continuous infiltration barrier is installed that is sealed at the perimeter, at penetrations and seams.	
Recessed Lighting Fixtures	606.1.ABC.1.2.4	Type IC rated with no penetrations, sealed; or Type IC or non-IC rated, installed inside a sealed box with 1/2" clearance & 3" from insulation; or Type IC rated with < 2.0 cfm from conditioned space, tested.	
Multi-story Houses	606.1.ABC.1.2.5	Air barrier on perimeter of floor cavity between floors.	
Additional Infiltration reqts	606.1.ABC.1.3	Exhaust fans vented to outdoors, dampers; combustion space heaters comply with NFPA, have combustion air.	

6A-22 OTHER PRESCRIPTIVE MEASURES (must be met or exceeded by all residences.)

COMPONENTS	SECTION	REQUIREMENTS	CHECK
Water Heaters	612.1	Comply with efficiency requirements in Table 6-12. Switch or clearly marked circuit breaker (electric) or cutoff (gas) must be provided. External or built-in heat trap required.	
Swimming Pools & Spas	612.1	Spas & heated pools must have covers (except solar heated). Non-commercial pools must have a pump timer. Gas spa & pool heaters must have a minimum thermal efficiency of 78%.	
Shower heads	612.1	Water flow must be restricted to no more than 2.5 gallons per minute at 80 PSIG.	
Air Distribution Systems	610.1	All ducts, fittings, mechanical equipment and plenum chambers shall be mechanically attached, sealed, insulated, and installed in accordance with the criteria of Section 610. Ducts in unconditioned attics: R-6 min. insulation.	
HVAC Controls	607.1	Separate readily accessible manual or automatic thermostat for each system.	
Insulation	604.1, 602.1	Ceilings-Min. R-19. Common walls-Frame R-11 or CBS R-3 both sides.  Common ceiling & floors R-11.	

# **ENERGY PERFORMANCE LEVEL (EPL) DISPLAY CARD**

#### ESTIMATED ENERGY PERFORMANCE SCORE\* = 83.1

The higher the score, the more efficient the home.

#### Eugene & Marjorie Braddy, , , ,

1.	New construction or existing		New		12.	Cooling systems		
2.	Single family or multi-family		Single family			Central Unit	Cap: 39.0 kBtu/hr	
3.	Number of units, if multi-family		1				SEER: 12.20	_
4.	Number of Bedrooms		3		b.	N/A		_
5.	Is this a worst case?		No					_
6.	Conditioned floor area (ft2)		1766 ft²		c.	N/A		_
7.	Glass area & type	Single Pane	Double Pane					_
a.	Clear glass, default U-factor	0.0 ft <sup>2</sup>	313.0 ft <sup>2</sup>		13.	Heating systems		_
	Default tint, default U-factor	0.0 ft <sup>2</sup>	0.0 ft <sup>2</sup>	<del></del>		Electric Heat Pump	Cap: 39.0 kBtu/hr	
c.	Labeled U-factor or SHGC	0.0 ft <sup>2</sup>	0.0 ft <sup>2</sup>				HSPF: 7.60	_
8.	Floor types			_	b.	N/A		-
a.	Slab-On-Grade Edge Insulation	R=0	0.0, 197.0(p) ft					
	N/A			1 10	c.	N/A		_
c.	N/A							
9.	Wall types				14.	Hot water systems		_
a.	Frame, Wood, Exterior	R=1	3.0, 1057.0 ft <sup>2</sup>			Electric Resistance	Cap: 40.0 gallons	
b.	Frame, Wood, Adjacent	R=	13.0, 156.0 ft <sup>2</sup>	: <u> </u>			EF: 0.93	
	N/A		u tyroson <b>x</b> annote anno atomic	_	b.	N/A		
d.	N/A							_
e.	N/A			_	c.	Conservation credits		
10.	Ceiling types			50		(HR-Heat recovery, Solar		
	Under Attic	R=3	0.0, 1922.0 ft <sup>2</sup>			DHP-Dedicated heat pump)		
b.	N/A			_	15.	HVAC credits		
c.	N/A			_		(CF-Ceiling fan, CV-Cross ventilation,		
11.	Ducts					HF-Whole house fan,		
a.	Sup: Unc. Ret: Unc. AH: Garage	Sup. R	e=6.0, 210.0 ft			PT-Programmable Thermostat,		
	N/A			_		MZ-C-Multizone cooling,		
						MZ-H-Multizone heating)		
						The first manning)		
				_				
				_				
I cer	tify that this home has complie	d with the Fl	lorida Energ	y Efficie	ncy	Code For Building		
Con	struction through the above ene	rgy saving f	eatures which	h will be	ins	talled (or exceeded)	THE STAN	
in th	is home before final inspection	. Otherwise,	a new EPL l	Display	Caro	d will be completed		B
base	d on installed Code compliant	Catures.					18/100	113
						1 1.1	3	21
Buil	der Signature:			Date: _	- 4	1/10/69	15	DA
							-	
Add	ress of New Home:			City/FI	L Zi	p: Lake City Fr	COD WE TRUST	A

\*NOTE: The home's estimated energy performance score is only available through the FLA/RES computer program. This is <u>not</u> a Building Energy Rating. If your score is 80 or greater (or 86 for a US EPA/DOE EnergyStar  $^{TM}$  designation), your home may qualify for energy efficiency mortgage (EEM) incentives if you obtain a Florida Energy Gauge Rating. Contact the Energy Gauge Hotline at 321/638-1492 or see the Energy Gauge web site at www.fsec.ucf.edu for information and a list of certified Raters. For information about Florida's Energy Efficiency Code For Building Construction, contact the Department of Community Affairs at 850/487-1824.

EnergyGauge® (Version: FLR2PB v3.4)

GOD WE TR

# Columbia County Building Department Culvert Permit

135 NE Hernando Ave., Suite B-21

Phone: 386-758-1008 Fax: 386-758-2160


Lake City, FL 32055

# Culvert Permit No. 000000417

DATE 10/12/200	)4	PARCEL ID # 29-3S-	16-02390-02	26			
APPLICANT BRY	YAN ZECHER		PH	ONE	752-8653		
ADDRESS	P.O. BOX 815		LAKE CIT	Y		FĻ	32056
OWNER EUGEN	NE & MARJORIE BRAD	DY	_ PH	ONE	752-8653		
ADDRESS 949	NW HORIZON ST		LAKE CIT	Ϋ́		FL	32055
CONTRACTOR B	BRYAN ZECHER		PH	ONE	752-8653		
LOCATION OF PR	OPERTY 90W, TR	ON BROWN ROAD, TR	ON HORIZON	N RIVE	, 1/2 ON RIGH	Т	
			. = = :				
SUBDIVISION/LO	T/BLOCK/PHAŞE <b>/</b>	UNIT FAIRFIELD HILLS			26		
		ABASSI MISS NO. 1					
SIGNATURE	(A)					34	
IN	ISTALIATION RE	OUIREMENTS					
X Cu	ulvert size will be 18	inches in diameter wit ends will be mitered 4 f	th a total ler foot with a	nght o 4:1 s	f 32 feet, lea lope and pou	ving ired v	24 feet of with a 4 inch
2	a) a majority of the c b) the driveway to be Turnouts shall be c concrete or paved of	TE: Turnouts will be recurrent and existing drive served will be paved concrete or paved a mir driveway, whichever is g paved or concreted to	veway turno or formed v nimum of 12 greater. Th	outs and with condition 2 feet	re paved, or; oncrete. wide or the	width	
Cu	lvert installation sha	all conform to the appro	oved site pla	an star	ndards.		
De	partment of Transpo	ortation Permit installat	ion approve	ed star	ndards.		
Otl	her						
D	,						
	Y REQUIREMENTS S LATION OF THE CUL	HOULD BE FOLLOWED				É	E GOIN

Amount Paid 25.00

GOLD CONTROL OF THE PARTY OF TH

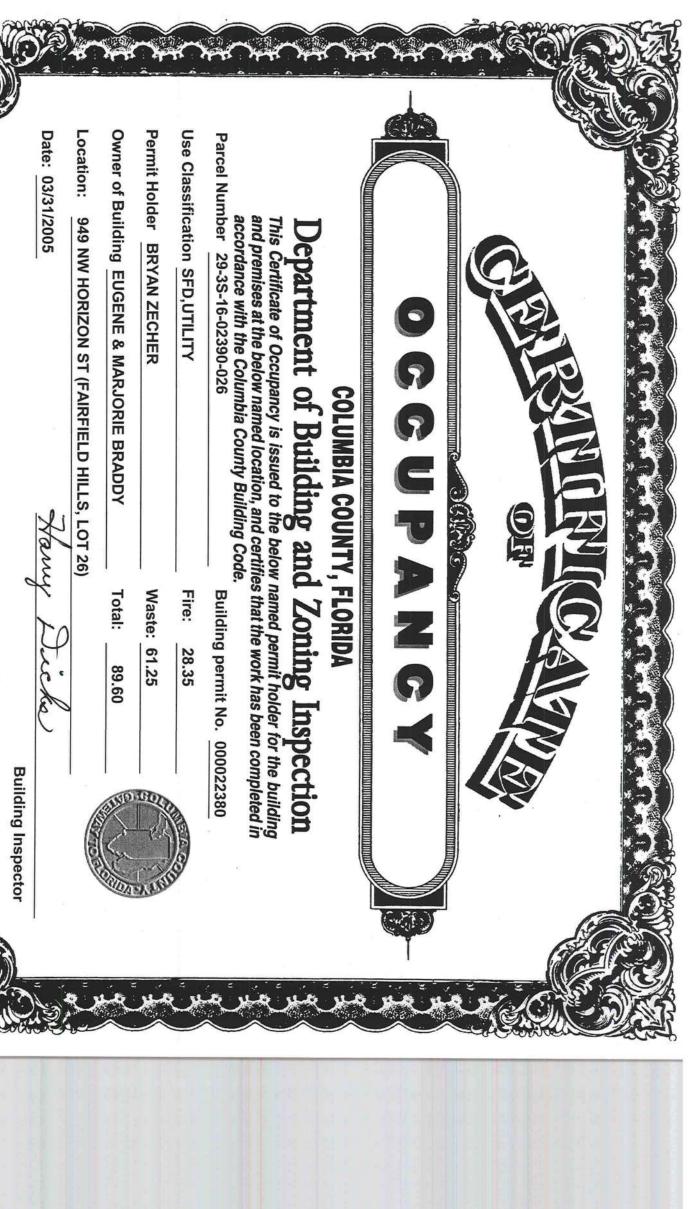

POST IN A CONSPICUOUS PLACE (Business Places Only)

	Notice of	f Treatment	- /				
Applicator Florida Pest Control & Chemical Co. //24/							
Address BAYA AUR							
City [AKe City Phone 752 1703							
Site Location	Subdivision_	FAIRFIEL	D HILLS				
Lot#_2® Bloc	k#Perr	nit# 22380	)				
Address 949	NW Hore	ZONST					
AREAS TREATE	D						
		W	Print Technician's				
Area Treated	Date	Time Gal.	Name				
Main Body	11/15/04	1230 482	1254				
Patio/s #							
Stoop/s #							
Porch/s #							
Brick Veneer							
Extension Walls							
A/C Pad							
Walk/s #							
Exterior of Foundation							
Driveway Apron							
Out Building							
Tub Trap/s							
			Carried Tollar				
(Other)							
Name of Product A Remarks			10S %				
	terror no	1 (2)(3)(2)					