



COLUMBIA COUNTY BUILDING DEPARTMENT
135 NE Hernando Ave., Suite B-21
Lake City, FL 32055
Office: 386-758-1008 Fax: 386-758-2160

16

Application Number _____

NOTICE TO SWIMMING POOL OWNERS

I Jack J. Nordon have been informed and I understand that prior to the final inspection and use of my pool, I will need all the inspections approved and the required fencing installed in accordance with applicable regulations. The Florida Building Code Chapter 4 Section 24 requires private residential swimming pools, hot tubs, or non-portable spas containing water over 24 inches deep to meet the following pool barrier safety feature requirements:

- The pool access must be isolated by a barrier at least 4 feet high and installed around the perimeter of the pool. Unless the pool is equipped with a safety cover complying with the specifications of American Society for Testing and Materials standard F-1346-91.
- The barrier shall not have any gaps or openings which would allow a child to crawl under, squeeze through, or climb over and must be placed no less than 20 inches from the water's edge.
- Gates located in the pool barrier must open outward away from the pool and be both self-closing and self-latching, with a release mechanism not less than 54" above the standing surface at the gate.
- The barrier must be separate from any other fence, wall, or other enclosure surrounding the yard unless the fence, wall or other enclosure or portion thereof is situated on the perimeter of the pool and meets the pool barrier requirements.
- Where a wall of a dwelling serves as part of the barrier **one** of the following shall apply:
 - 1) All doors and first floor windows with a sill height of less than 48 inches providing direct access to the home must be equipped with an alarm that has a minimum sound pressure rating of 85 decibels at 10 feet. The alarm shall sound immediately upon opening the window or door unless the tamper bypass mechanism is activated.
 - 2) **Or;** all doors providing direct access from the home to the pool must be equipped with a self-closing self-latching device with a release mechanism located at least 54 inches above the floor.

According to Florida statutes, failure to comply with these requirements is a misdemeanor of the second degree, punishable by imprisonment for up to 60 days or a fine of up to \$500, except that no penalty shall be imposed if within 30 days after arrest or issuance of a summons or notice to appear, the pool is equipped with the aforementioned safety features and the responsible person attends a drowning prevention education program developed by the Florida Department of Health. I also understand that there are several inspections required in addition to a final inspection for my swimming pool.

Jack J. Nordon 6-12-12
Owner Signature Date

Address: 2663 SW Tustenuggee AVE. Lake City FL 32025


Michael P. Smith 6-19-12
Contractor Signature Date

CPC-1457306
License Number



IntelliFlo[®] VS+ SVRS and IntelliPro[®] VS+ SVRS

Variable Speed Programmable Pump
with Safety Vacuum Release System (SVRS) Protection
(Compatible with IntelliComm[®] communication center,
EasyTouch[®], IntelliTouch[®] and SunTouch[®] control systems)

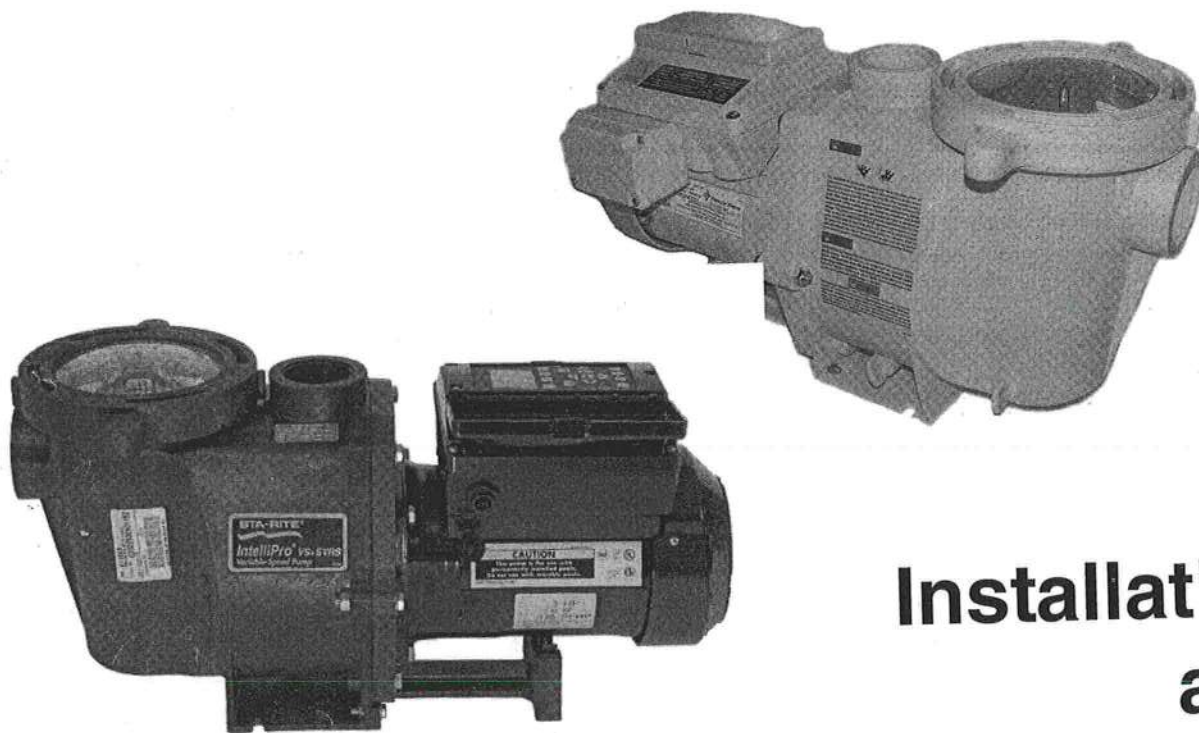


Installation and User's Guide




IMPORTANT SAFETY INSTRUCTIONS
READ AND FOLLOW ALL INSTRUCTIONS
SAVE THESE INSTRUCTIONS



Pump Dimensions

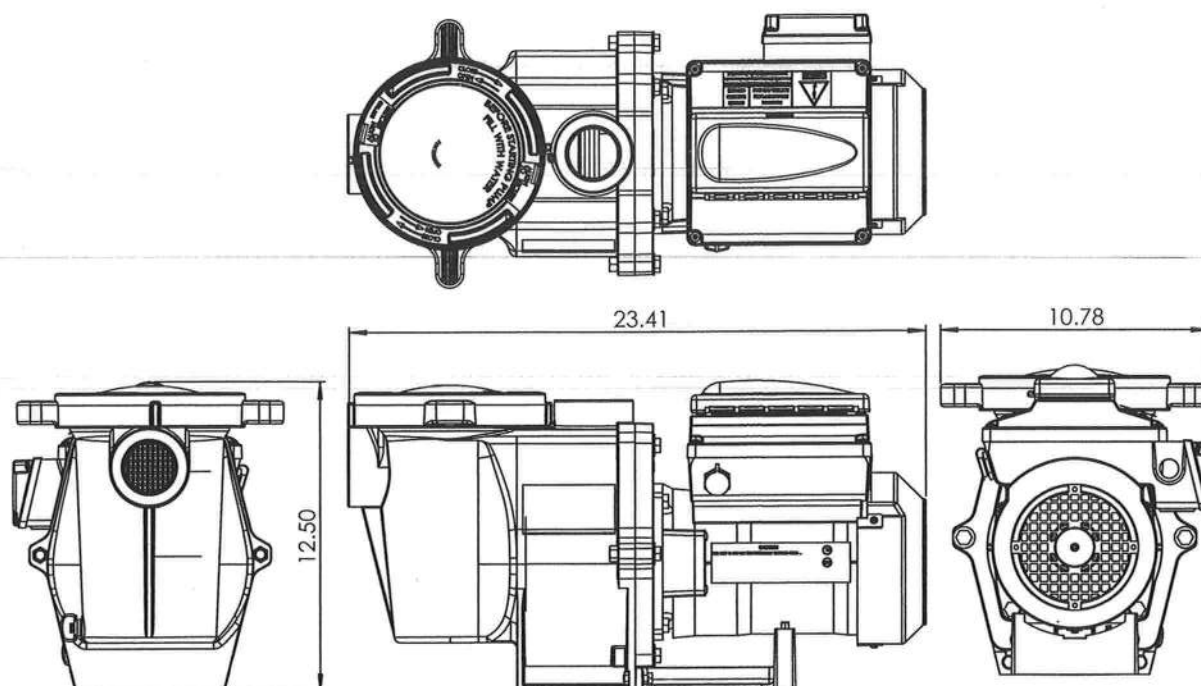

Flow and Power vs Flow Pump Curve

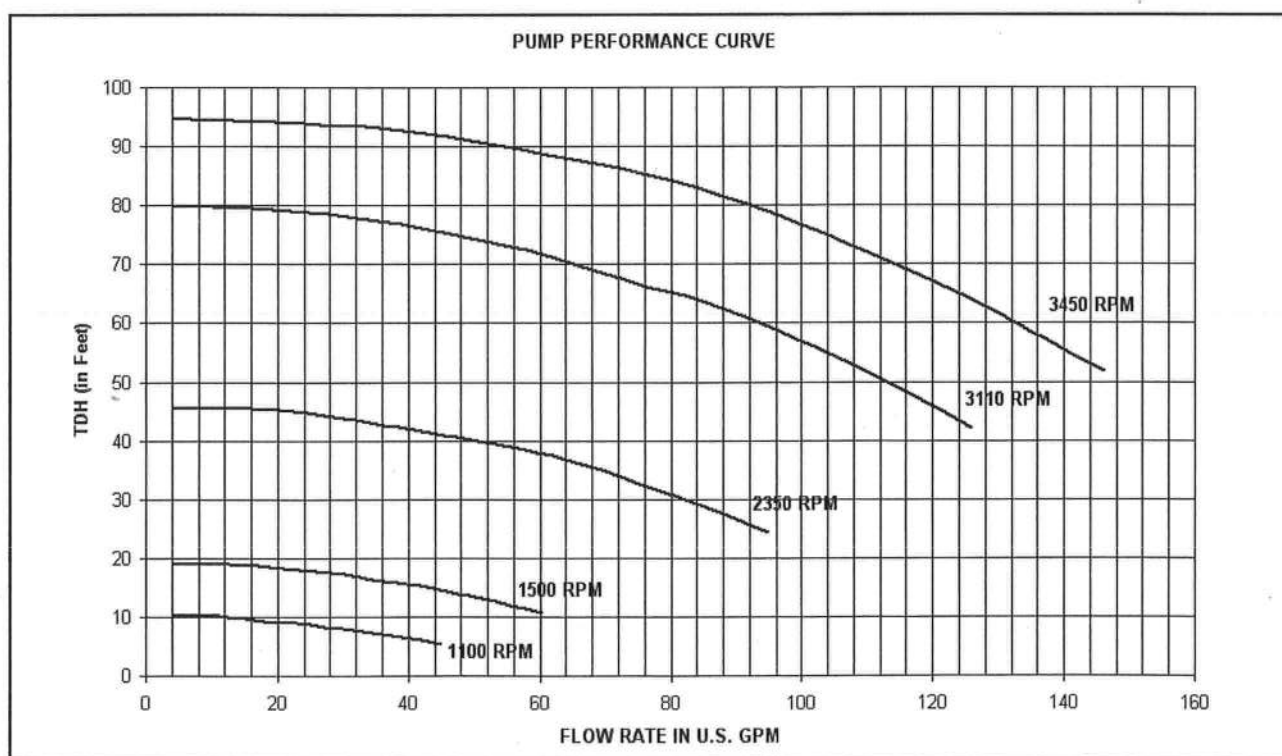

Electrical Specifications

Circuit Protection: Two-pole 20 AMP device at the Electrical Panel.

Input: 230 VAC, 50/60 Hz, 3200 Watts


CERTIFICATION OF COMPLIANCE

32" ULTRA STRIP DRAIN: P/N 640-132x V

Contents: 1

Part Number: 640-132x V

Description: Ultra Strip Drain
Size: 32"

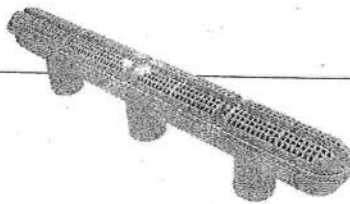

Open Area: 37.7 in²
GPM @ 1.5 fps: 175
Floor Flow Rate: 288 GPM @ 2.46 fps (one port center)
Floor Flow Rate: 352 GPM @ 3.01 fps (two ports)
Wall Flow Rate: 232 GPM @ 1.98 fps (one port center)
Wall Flow Rate: 296 GPM @ 2.53 fps (two ports)

NSF



VGB
2008

Date of Manufacture:

NOV 21 2011

This product has been tested to ANSI/ASME 112.19.8-2007 (addendum 8a-2008) per §1404 of the Virginia Graham Baker (VGB 2008) Pool and Spa Safety Act. Certified by: Underwriters Laboratories, Inc., 2929 E. Imperial Highway, Suite 100, Brea, CA 92821-6729

This product is certified to comply with §1404 of the Virginia Graham Baker (VGB 2008) Pool and Spa Safety Act. A copy of the test results for the above may be found at www.waterwayplastics.com or go to www.ul.com. This product is manufactured by Waterway Plastics, Oxnard, CA 93030



© 2010 Waterway Plastics

Waterway

2200 East Sturgis Road, Oxnard, CA 93030 • Ph. (805) 981-0262 • Fax (805) 981-9403
www.waterwayplastics.com • waterway@waterwayplastics.com

810-0320.0310