


END WALL BRACING FOR CEILING DIAPHRAGM

(ALTERNATIVE TO BALLOON FRAMING) NOTE: ALL WOOD TO BE NUMBER 2 GRADE SOUTHERN YELLOW PINE

ROOF SHEATHING FASTENINGS				
NAILING ZONE	SHEATHING TYPE	FASTENER	SPACING	
1			6 in. o.c. EDGE 12 in. o.c. FIELD	
2	7/16 " 0.5.B. OR 15/32 CDX	.113 RING SHANKED NAILS	6 in. o.c. EDGE 6 in. o.c. FIELD	
3			4 in. o.c. @ GABLE ENDWA OR GABLE TRUSS 6 in. o.c. EDGE 6 in. o.c. FIELD	

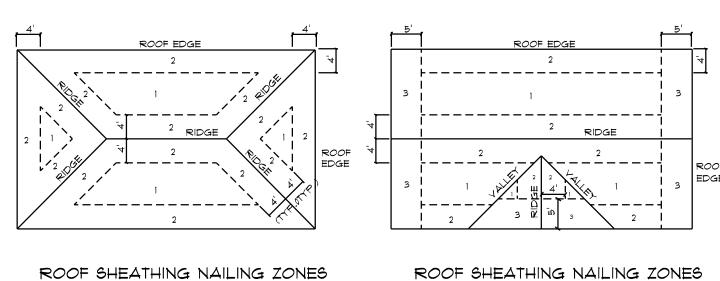


Roof Nail Pattern DET. SCALE: NONE

(HIP ROOF)





(GABLE ROOF)

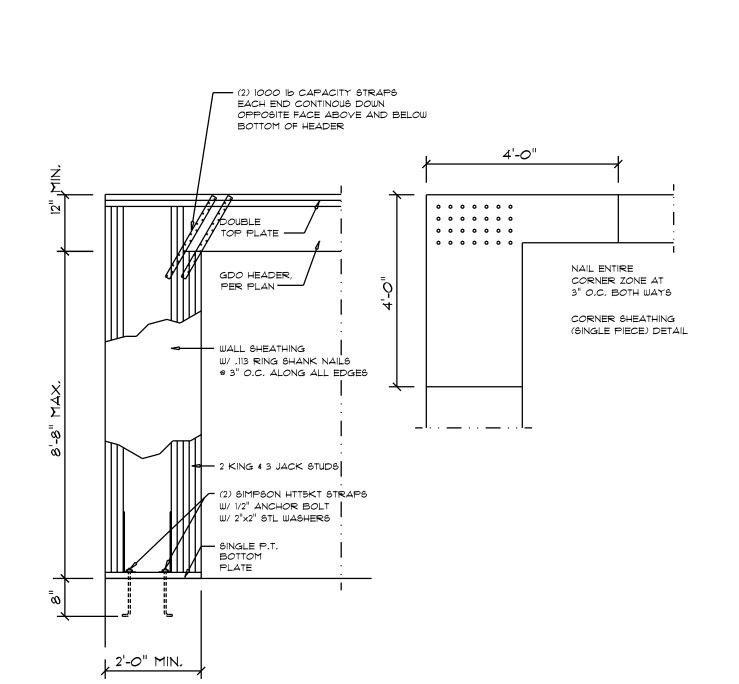


Garage End Wall DETAILS


SCALE: 1/2" = 1'-0"

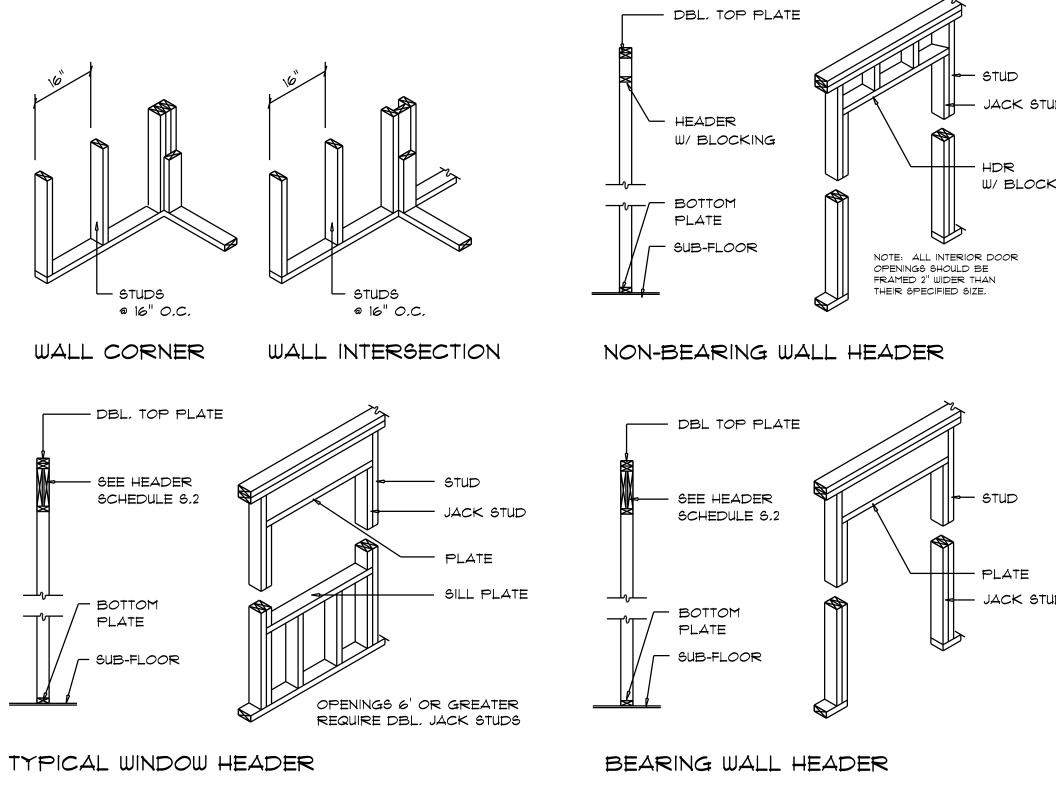

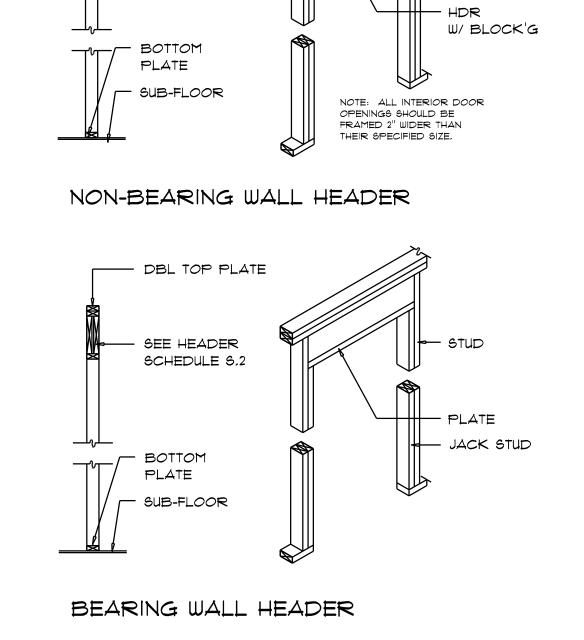


Wall Framing/Header DETAILS



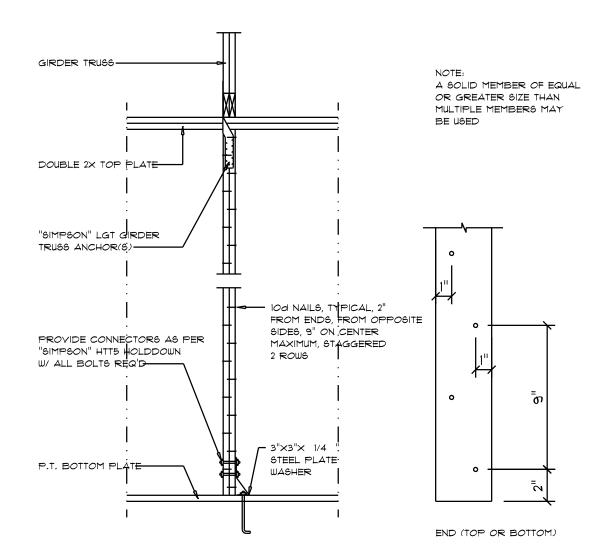

Girder Truss Column DET.

SCALE: 1/2" = 1'-0"

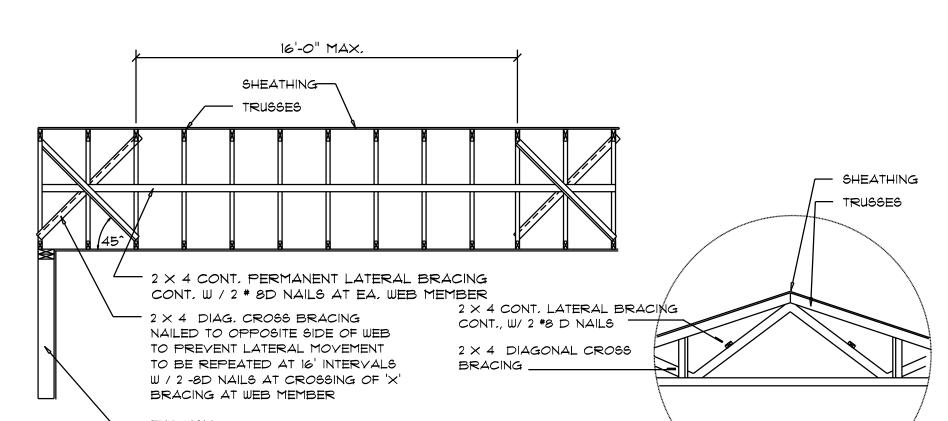


TYP, PERMANENT TRUSS BRACING DIA.

NOTE: ALL WOOD TO BE NUMBER 2 GRADE SOUTHERN YELLOW PINE

Truss Bracing DETAILS

SCALE: AS NOTED

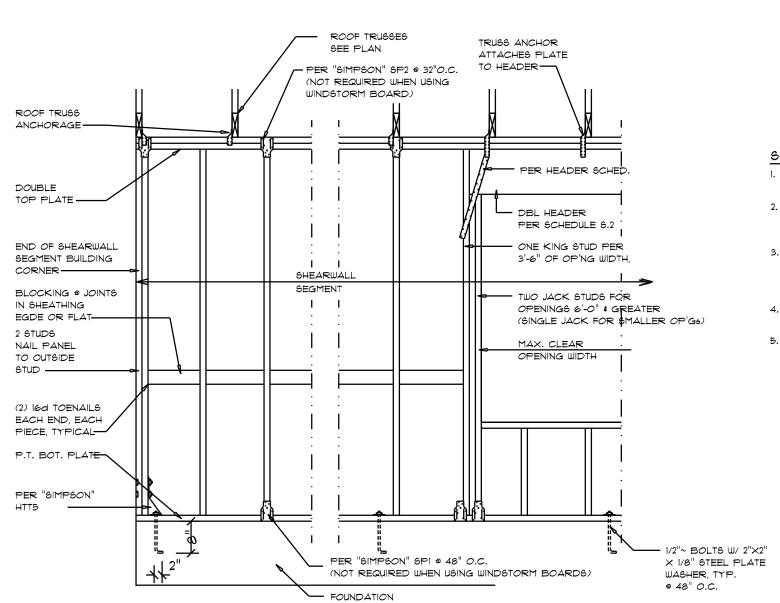

SHEARWALL NOTES: 1. ALL SHEARWALLS SHALL BE TYPE 2 SHEARWALLS

D

- 2. THE WALL SHALL BE ENTIRELY SHEATHED WITH 7/16" WINDSTORM BD INCLUDING AREAS ABOVE AND BELOW OPENINGS
- 3. ALL SHEATHING SHALL BE ATTACHED TO FRAMING ALONG ALL FOUR EDGES WITH JOINTS FOR ADJACENT PANELS OCCURING OVER COMMON FRAMING MEMBERS OR ALONG BLOCKING.
- 4. NAIL SPACING SHALL BE 4" O.C. EDGES AND 8" O.C. IN THE FIELD.
- 5. TYPE 2 SHEARWALLS ARE DESIGNED FOR THE OPENING IT CONTAINS, MAXIMUM HEIGHT OF OPENING SHALL BE 5/6 TIMES THE WALL HEIGHT. THE MINIMUM DISTANCE BETWEEN OPENINGS SHALL BE THE WALL HEIGHT/3.5 FOR 8'-0" WALLS (2'-3").

OPENING WIDTH	SILL PLATES	16d TOE NAIL EACH END
UP TO 6'-0" > 6' TO 9'-0" > 9' TO 12'-0"	(1) 2x4 OR (1) 2x6 (3) 2x4 OR (1) 2x6 (5) 2x4 OR (2) 2x6	

Digitally signed by: Nicholas P Geisler DN: CN = Nicholas P P Geisler C = US O = Unaffiliated Date: 2024.10.30 16: **4**5:43 -04'00'

Shear Wall DETAILS

SCALE: NONE

9 R

 \approx

JAME.

SHEET NUMBER OF 4 SHEETS