

DATE09/17/2007

Columbia County Building Permit

PERMIT000026243

This Permit Expires One Year From the Date of Issue

APPLICANTLOUIS T. SPELL

PHONE813-477-4747

ADDRESS1050NW MORELL DR

WHITE SPRINGS

FL32096

OWNERLOUIS T. SPELL

PHONE813-477-4747

ADDRESS1050NW MORELL DR

WHITE SPRINGS

FL32096

CONTRACTOROWNER

PHONE

LOCATION OF PROPERTY441 N, R LASSIE BLACK, L MORRELL DR, SEE BLACK IRON GATE

WITH RED BRICK PILLARS

TYPE DEVELOPMENTSHOP METAL BLDG

ESTIMATED COST OF CONSTRUCTION65000.00

HEATED FLOOR AREA

TOTAL AREA5000.00

HEIGHT16.00

STORIES1

FOUNDATIONCONCRETE

WALLSMETAL

ROOF PITCH

FLOOR

LAND USE & ZONINGAG-3

MAX. HEIGHT35

Minimum Set Back Requirments:

STREET-FRONT30.00

REAR25.00

SIDE25.00

NO. EX.D.U.0

FLOOD ZONEXSP

DEVELOPMENT PERMIT NO.

PARCEL ID10-2S-16-01581-002

SUBDIVISION

LOT

BLOCK

PHASE

UNIT

TOTAL ACRES40.00

Culvert Permit No.

Culvert Waiver

Contractor's License Number

Applicant/Owner/Contractor

EXISTING

X07-339

BK

JH

N

Driveway Connection

Septic Tank Number

LU & Zoning checked by

Approved for Issuance

New Resident

COMMENTS: FLOOR ONE FOOT ABOVE THE ROAD, ACCESSORY BLDG

Check # or Cash

FOR BUILDING & ZONING DEPARTMENT ONLY

(footer/Slab)

Temporary Power

Foundation

Monolithic

date/app. by

date/app. by

date/app. by

Under slab rough-in plumbing

Slab

Sheathing/Nailing

date/app. by

date/app. by

date/app. by

Framing

Rough-in plumbing above slab and below wood floor

date/app. by

date/app. by

Electrical rough-in

Heat & Air Duct

Peri. beam (Lintel)

date/app. by

date/app. by

date/app. by

Permanent power

C.O. Final

Culvert

date/app. by

date/app. by

date/app. by

M/H tie downs, blocking, electricity and plumbing

Pool

date/app. by

date/app. by

Reconnection

Pump pole

Utility Pole

date/app. by

date/app. by

date/app. by

M/H Pole

Travel Trailer

Re-roof

date/app. by

date/app. by

date/app. by

BUILDING PERMIT FEE \$325.00

CERTIFICATION FEE \$25.00

SURCHARGE FEE \$25.00

MISC. FEES \$0.00

ZONING CERT. FEE \$50.00

FIRE FEE \$0.00

WASTE FEE \$

FLOOD DEVELOPMENT FEE \$

FLOOD ZONE FEE \$

CULVERT FEE \$

TOTAL FEE425.00

INSPECTORS OFFICE

CLERKS OFFICE

NOTICE: IN ADDITION TO THE REQUIREMENTS OF THIS PERMIT, THERE MAY BE ADDITIONAL RESTRICTIONS APPLICABLE TO THIS PROPERTY THAT MAY BE FOUND IN THE PUBLIC RECORDS OF THIS COUNTY. AND THERE MAY BE ADDITIONAL PERMITS REQUIRED FROM OTHER GOVERNMENTAL ENTITIES SUCH AS WATER MANAGEMENT DISTRICTS, STATE AGENCIES, OR FEDERAL AGENCIES.

"WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT."

This Permit Must Be Prominently Posted on Premises During Construction

PLEASE NOTIFY THE COLUMBIA COUNTY BUILDING DEPARTMENT AT LEAST 24 HOURS IN ADVANCE OF EACH INSPECTION, IN ORDER THAT IT MAY BE MADE WITHOUT DELAY OR INCONVENIENCE, PHONE 758-1008. THIS PERMIT IS NOT VALID UNLESS THE WORK AUTHORIZED BY IT IS COMMENCED WITHIN 6 MONTHS AFTER ISSUANCE.

The Issuance of this Permit Does Not Waive Compliance by Permittee with Deed Restrictions.

Columbia County Building Permit Application

425.00

For Office Use Only Application # 0708-63 Date Received 8/27/07 By LH Permit # 26243
 Application Approved by - Zoning Official BLK Date 28.08.07 Plans Examiner DK JTH Date 9-17-07
 Flood Zone xpsiteplan Development Permit N/A Zoning A-3 Land Use Plan Map Category A-3
 Comments Accessory Bldg. 666 813-477-4747

☒ NOC ☒ EH ☒ Deed or PA ☒ Site Plan ☒ Disclosure ☐ State Road Info ☐ Parent Parcel # ☐ Development Per
 Fax 813-982-8283

Name Authorized Person Signing Permit LOUIS (Tom) SPELL Phone 813-477-4147

Address 10032 E. FAWLER AVE THONOTOSASSA, FL. 33592

Owners Name LOUIS T. and RHONDA S. SPELL Phone 813-477-4147

911 Address 1050 NW MORRELL DR. WHITE SPRINGS, FL. 32096 386-755-3869

Contractors Name NONE Phone _____

Address _____

Fee Simple Owner Name & Address _____

Bonding Co. Name & Address _____

Architect/Engineer Name & Address RICHARD T. SMITH 301 BROOME ST. SUITE 100 LAGRANGE, GA.

Mortgage Lenders Name & Address N/A

Circle the correct power company - FL Power & Light - Clay Elec. - Suwannee Valley Elec. - Progressive Ener

Property ID Number 10-25-16-01581-002 Estimated Cost of Construction \$65,000

Subdivision Name _____ Lot _____ Block _____ Unit _____ Phase _____

Driving Directions From I10 travel N on 441 MILES, turn RIGHT onto LASSIE BLACK RD travel
MILES, turn LEFT onto MORRELL DR. travel approx. MILES, 1050 NW MORRELL
is on LEFT (BLACK IRON Gate/Red Brick Pillars)

Type of Construction 50'x100' SHOP (METAL) BUILDING Number of Existing Dwellings on Property 1

Total Acreage 40 +/- Lot Size 1240 +/- Do you need a - Culvert Permit or Culvert Waiver or Have an Existing D

Actual Distance of Structure from Property Lines - Front 75 Side 468 Side 75 Rear 1000 +

Total Building Height 16' Number of Stories 1 Heated Floor Area N/A Roof Pitch 12/12

Application is hereby made to obtain a permit to do work and installations as indicated. I certify that no work or installation has commenced prior to the issuance of a permit and that all work be performed to meet the standards c all laws regulating construction in this jurisdiction.

OWNERS AFFIDAVIT: I hereby certify that all the foregoing information is accurate and all work will be done in compliance with all applicable laws and regulating construction and zoning.

WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOU PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT.

Owner Builder or Authorized Person by Notarized Letter _____

STATE OF FLORIDA
 COUNTY OF COLUMBIA
 Sworn to (or affirmed) and subscribed before me



Contractor Signature _____
 Contractors License Number _____
 Competency Card Number _____
 NOTARY STAMP/SEAL

this 27 day of 08 2007
 Personally known _____ or Produced Identification ☒
 Notary Signature Laurie Hodson

NOTICE OF COMMENCEMENT FORM
COLUMBIA COUNTY, FLORIDA

THIS DOCUMENT MUST BE RECORDED AT THE COUNTY
CLERKS OFFICE BEFORE YOUR FIRST INSPECTION

THE UNDERSIGNED hereby gives notice that improvement will be made to certain real property, and in accordance with Chapter 713, Florida Statutes, the following information is provided in this Notice of Commencement.

IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT.

Tax Parcel ID Number 10-25-16-01581-002

Permit Number _____

1. Description of property: (legal description of the property and street address or 911 address)

Comm SW COR of SEC 11, RUN E 1323.94 FT to W R/W Morrell Rd, RUN N 1126.61 FT along R/W for POB, RUN W Approx 1278 FT, N Approx 60 FT, E Approx 1278 FT, S 60.01 FT to POB (Part of parcel desc orb 720-643) (JOINS RE# 01581-002 in SEC 10-25-16)
1050 NW Morrell Rd. White Springs, FL 32096

2. General description of improvement: 50' X 100' STEEL SHOP BUILDING

3. Owner Name & Address LOUIS T. SPELL

10032 E. Fowler Ave. Thonotosassa, FL 33592

Interest in Property 100%

4. Name & Address of Fee Simple Owner (if other than owner): _____

5. Contractor Name NONE LOUIS T SPELL

Phone Number 813-4774747

Address 1050 10032 EAST FOWLER AVE THONOTOSASSA FL 33592

6. Surety Holders Name N/A

Phone Number _____

Address _____

Amount of Bond _____

Inst: 200712019386 Date: 8/27/2007 Time: 12:39 PM

7. Lender Name N/A

DC, P. DeWitt Cason, Columbia County Page 1 of 1

Address _____

8. Persons within the State of Florida designated by the Owner upon whom notices or other documents may be served as provided by section 718.13 (1)(a) 7; Florida Statutes:

Name TOM SPELL

Phone Number 813-477-4747

Address 10032 E. FOWLER AVE. THONOTOSASSA, FL 33592

9. In addition to himself/herself the owner designates N/A

of

to receive a copy of the Lien Notice as provided in Section 713.13 (1) -

(a) 7. Phone Number of the designee N/A

10. Expiration date of the Notice of Commencement (the expiration date is 1 (one) year from the date of recording, (Unless a different date is specified) _____

THE OWNER MUST SIGN THE NOTICE OF COMMENCEMENT AND NO ONE ELSE MAY BE PERMITTED TO SIGN IN HIS/HER STEAD.

Signature of Owner

Sworn to (or affirmed) and subscribed before day of 8-27, 20 07.

Signature of Notary

NOTARY STAMP/SEAL



NOTORIZED DISCLOSURE STATEMENT

FOR OWNER/BUILDER WHEN ACTING AS THEIR OWN CONTRACTOR AND CLAIMING EXEMPTION OF CONTRACTOR LICENSING REQUIREMENTS IN ACCORDANCE WITH FLORIDA STATUTES, ss. 489.103(7).

State law requires construction to be done by licensed contractors. You have applied for a permit under an exemption to that law. The exemption allows you, as the owner of your property, to act as your own contractor with certain restrictions even though you do not have a license. You must provide direct, onsite supervision of the construction yourself. You may build or improve a one-family or two-family residence or a farm outbuilding. You may also build or improve a commercial building, provided your costs do not exceed \$75,000. The building or residence must be for your own use or occupancy. It may not be built or substantially improved for sale or lease. If you sell or lease a building you have built or substantially improved yourself within 1 year after the construction is complete, the law will presume that you built or substantially improved it for sale or lease, which is a violation of this exemption. You may not hire an unlicensed person to act as your contractor or to supervise people working on your building. It is your responsibility to make sure that people employed by you have licenses required by state law and by county or municipal licensing ordinances. You may not delegate the responsibility for supervising work to a licensed contractor who is not licensed to perform the work being done. Any person working on your building who is not licensed must work under your direct supervision and must be employed by you, which means that you must deduct F.I.C.A. and withholding tax and provide workers' compensation for that employee, all as prescribed by law. Your construction must comply with all applicable laws, ordinances, building codes, and zoning regulations.

TYPE OF CONSTRUCTION

- ☐ Single Family Dwelling
☐ Farm Outbuilding

☐ Two-Family Residence
☒ Other Garage/Shop Building

NEW CONSTRUCTION OR IMPROVEMENT

☒ New Construction

☐ Addition, Alteration, Modification or other Improvement

I Louis T. Spell, have been advised of the above disclosure statement for exemption from contractor licensing as an owner/builder. I agree to comply with all requirements provided for in Florida Statutes ss.489.103(7) allowing this exception for the construction permitted by Columbia County Building Permit Number 26243

L
Owner Builder Signature

Date

The above signer is personally known to me or produced identification ✓

Notary Signature Laurie Hodson

Date 8-27-07



(Stamp / Seal)

FOR BUILDING USE ONLY

I hereby certify that the above listed owner/builder has been notified of the disclosure statement in Florida Statutes ss 489.103(7).

Date 8-27-07

Building Official/Representative L. Spell

This Warranty Deed made this 27th day of April, 2007 by

Frank Perrone, and his wife, Angela Perrone

hereinafter called the Grantor, to

Louis T. Spell, and his wife, Rhonda Spell

whose post office address is 10032 E. Fowler Avenue, Thonotosassa, FL 33592, hereinafter called the Grantee.

(Wherever used herein the terms "Grantor" and "Grantee" include all the parties to this instrument and the heirs, legal representatives and assigns of Individuals, and the successors and assigns of Corporation.)

The Grantor, for and in consideration of the sum of \$10.00 and other valuable considerations, receipt whereof is hereby acknowledged, hereby grants, bargains, sells, unto the Grantee all that certain land, situate in Columbia County, Florida, viz: TAX ID: R01581-002 & R01593-002 :

See Exhibit "A" attached hereto and by this reference made a part hereof.

Together with all the tenements, hereditaments, and appurtenances thereto belonging or in anyways appertaining.

To have and to hold, the same in fee simple forever.

And the Grantor hereby covenants with said Grantee that the Grantor is lawfully seized of said land in fee simple; that the Grantor has good right and lawful authority to sell and convey said land, and hereby warrants the title to said land and will defend the same against the lawful claims of all persons whomsoever; and that said land is free of all encumbrances except taxes accruing subsequent to December 31, 2006.

In witness whereof, the said Grantor has signed and sealed these presents the day and year first above written.


Cheryl Beatty
WITNESS
Printed Name: Cheryl Beatty
Debi Henderson
WITNESS
Printed Name: Debi Henderson

Frank Perrone
Frank Perrone
Angela Perrone
Angela Perrone

State of Florida
County of Columbia


I hereby certify that on this 27th day of April, 2007, before me, an officer duly authorized to administer oaths and take acknowledgements, personally appeared Frank Perrone, and his wife, Angela Perrone, who is personally known to me or produced a drivers license for identification, and known to me to be the person described in and who executed the foregoing instrument, who acknowledged before me that he/she/they executed the same, and an oath was not taken.

(SEAL)


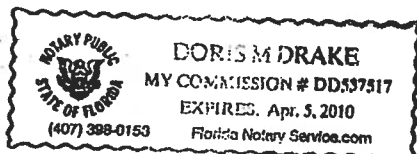


[Signature]
NOTARY PUBLIC


My Commission Expires:

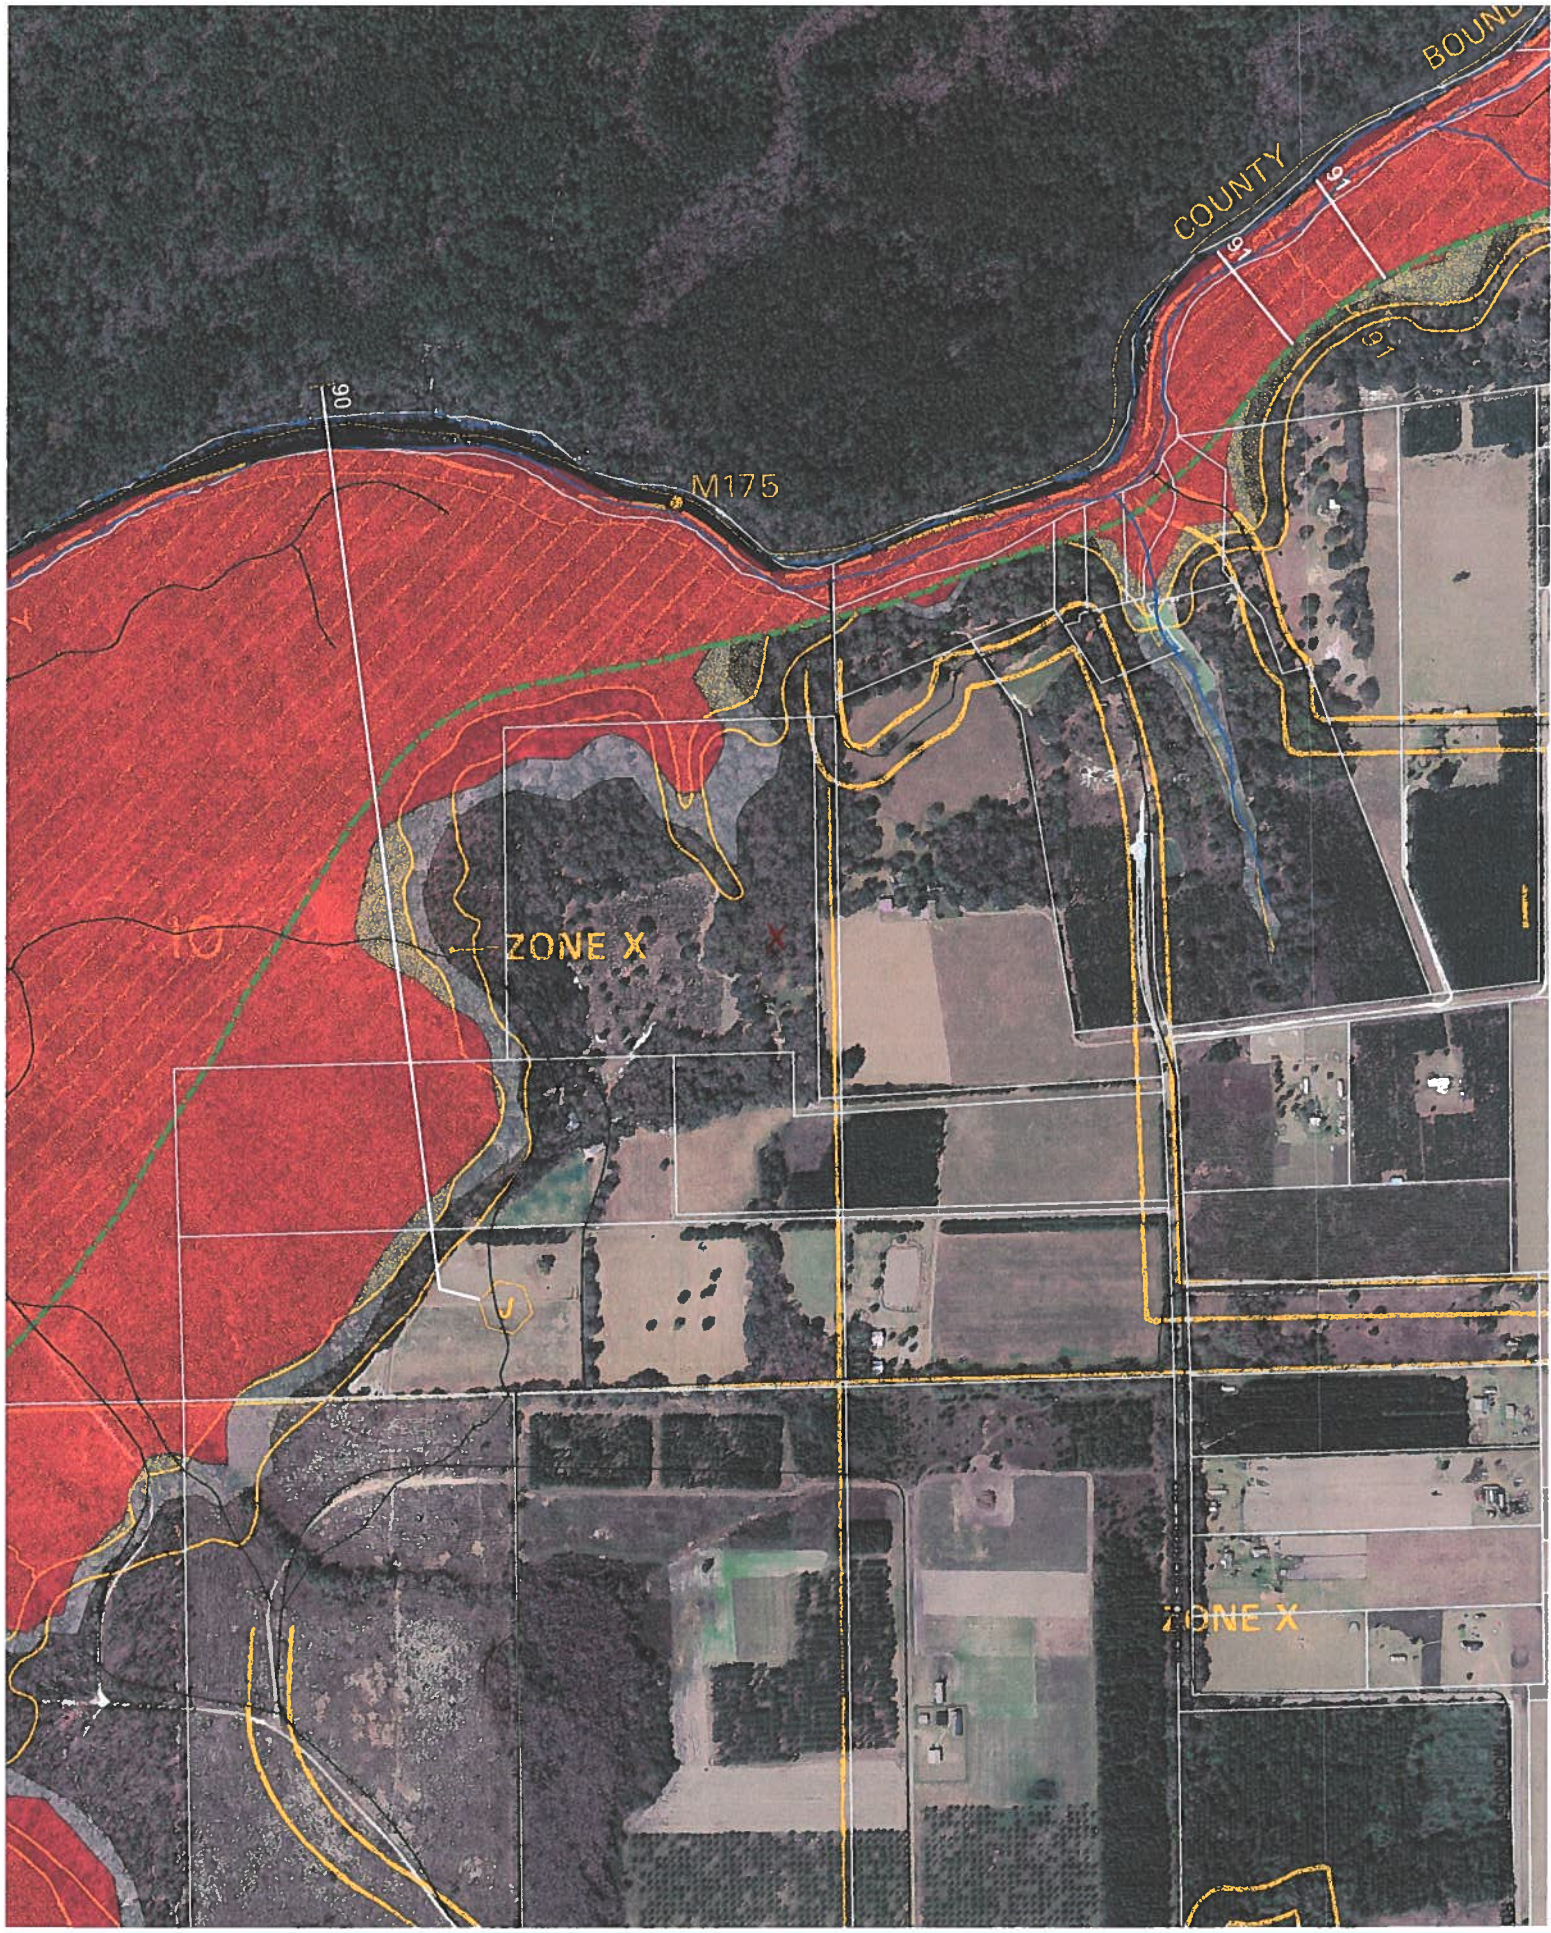

0708-63

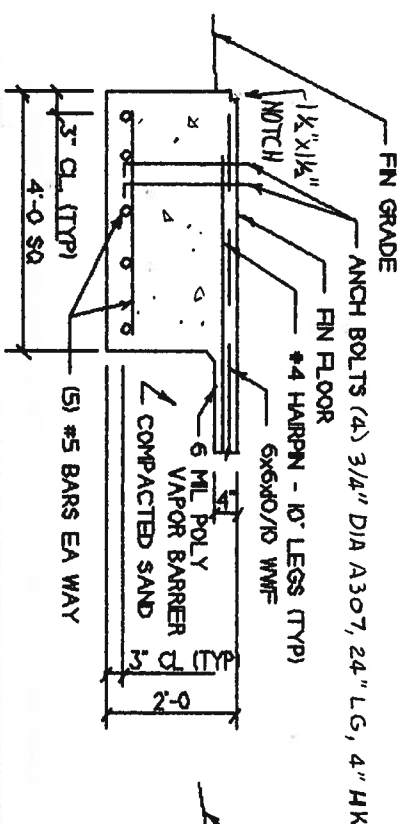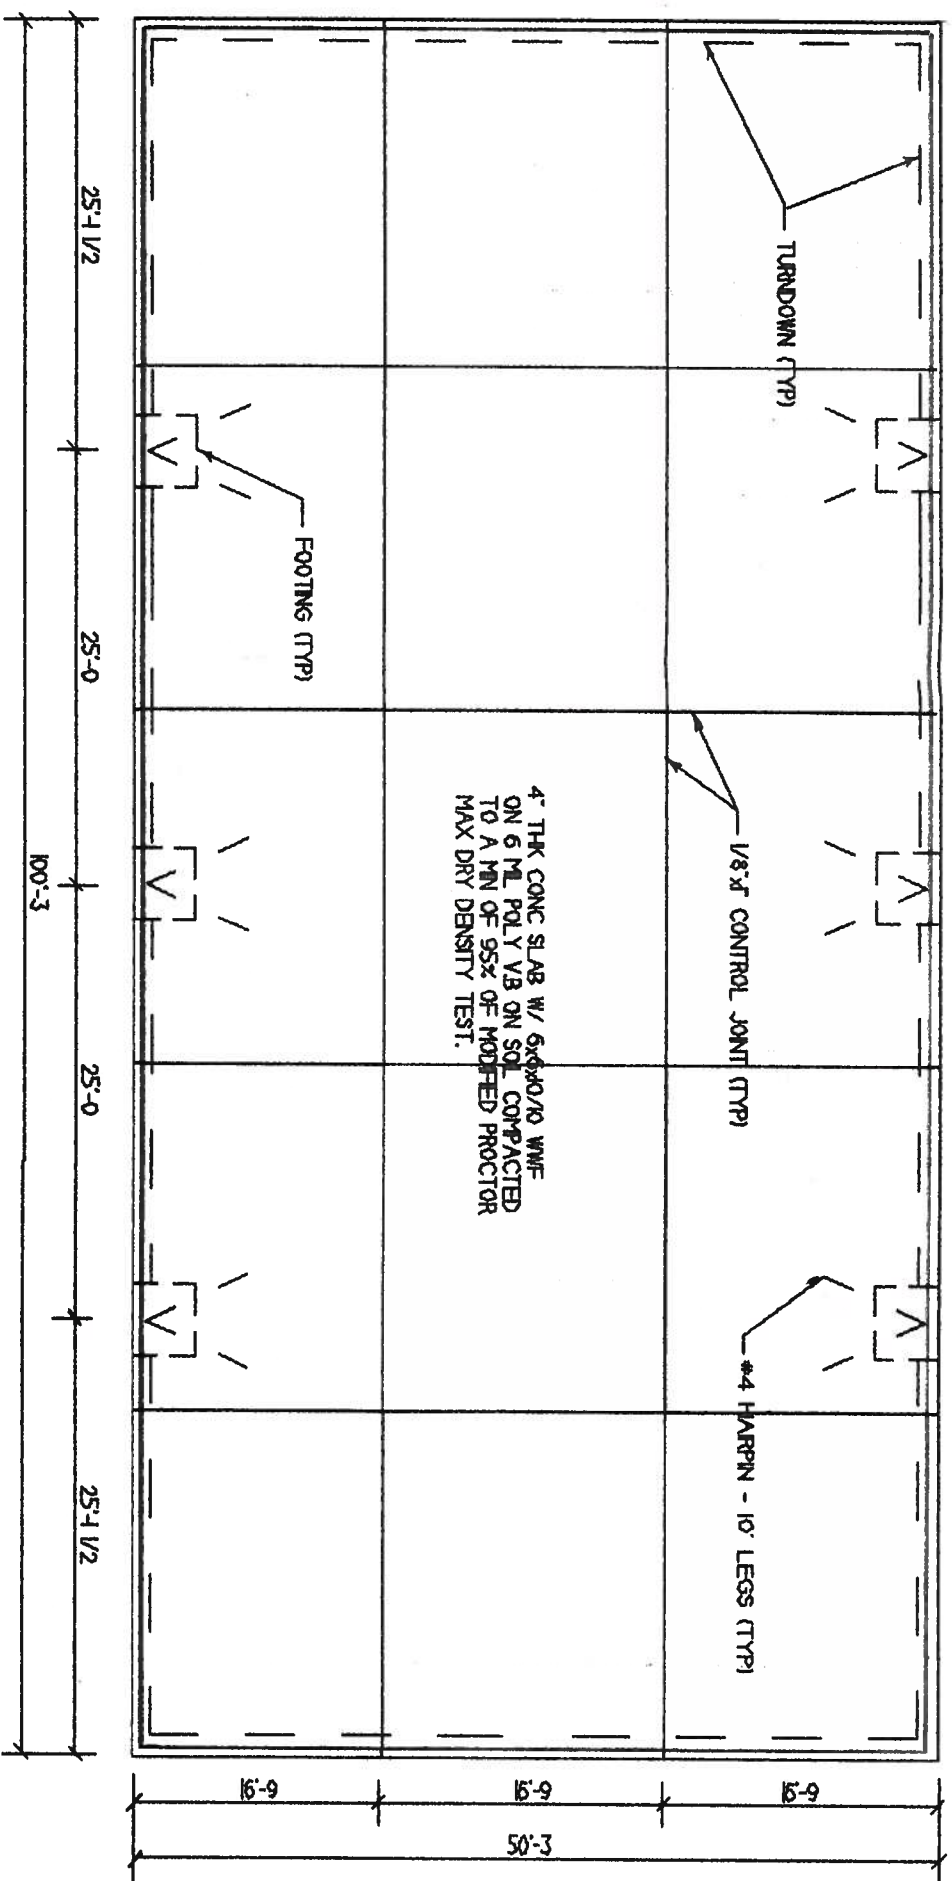

TYPICAL FOOTING SECTION
NOT TO SCALE

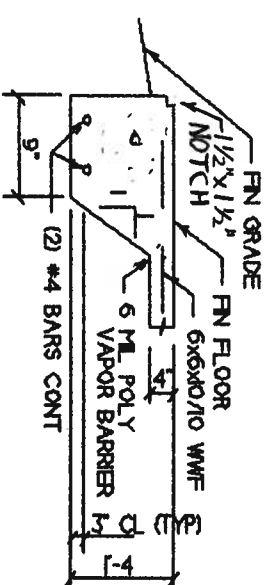

TYPICAL TURNDOWN
NOT TO SCALE

FOUNDATION PLAN
NOT TO SCALE

- NOTES:
1. FOUNDATION IS DESIGNED TO BEAR ON SOIL CAPABLE OF SUPPORTING 2000 PSF.
 2. CONCRETE WORK SHALL CONFORM TO ACI 318-83.
 3. CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI IN 28 DAYS.
 4. REINFORCING STEEL SHALL CONFORM TO ASTM A615-GRADE 60.
 5. WELDED WIRE FABRIC SHALL CONFORM TO ASTM A185 AND HAVE A MINIMUM SIDE LAP OF 8 INCHES.
 6. FIBER MESH MAY BE USED IN LEU OF WELDED WIRE FABRIC.

FOUNDATION PLAN
TOM SPELL
COLUMBIA CO. FL

HARRY V. WHIDDON, P.E.
2195 OLD QUITMAN RD ADEL, GA
(229) 896-6833 PE 38968

DATE	REV.	DRWN
9-1-07		V.W.
SCALE	REV.	SHEET
AS SHOWN		1 OF 1

Handwritten signature: H. V. Whiddon
9-11-07

ENGINEERING DESIGN CRITERIA

EXPERT BLDG. SYSTEMS
Job Number: 17527
End User: UTILITY TRUCK & EQUIP.
Job Location: LAKE CITY, FL

DATE: 6/14/07
DESIGNED BY: SPV
DETAILED BY: PK
CHECKED BY:

SPECIAL NOTE:

BUILDING IS NOT STRUCTURALLY SOUND UNTIL ALL WALL COVERING, ROOF SHEETS, AND PERMANENT BRACING IS INSTALLED. BUILDER / CONTRACTOR IS RESPONSIBLE FOR SUPPORTS OR TEMPORARY BRACING DURING ERECTION. HE SHALL FURNISH, AND INSTALL THESE TEMPORARY SUPPORTS WHERE NECESSARY. TEMPORARY SUPPORTS ARE NOT PROVIDED BY THE METAL BUILDING MANUFACTURER.

GENERAL NOTES

1. MATERIALS
- ASTM DESIGNATION
- STRUCTURAL STEEL PLATE
- A529 DR A572 DR A570 DR A607
- GRADE 50
- COLD FORMED LIGHT GAGE SHAPES
- A570 DR A607
- GRADE 55
- BRACE RODS
- A572
- GRADE 65, UNLESS NOTED
- HOT ROLLED MILL SHAPES
- A36 DR A572
- FY= 36 KSI DR GRADE 50
- ROOF AND WALL SHEETS
- A653 DR A792
- GRADE 50
- BOLTS
- A307, A325, AND A440
- A307 UNLESS NOTED
- BUILT-UP MEMBERS
- A570
- GRADE 50 DR 55
2. STRUCTURAL PRIMER
- SHIP PRIMER PAINT IS A RUST INHIBITIVE PRIMER AND ITS COLOR IS RED OXIDE.
- THIS PAINT IS NOT INTENDED FOR LONG TERM EXPOSURE TO THE ELEMENTS.
3. A325 BOLT TIGHTENING REQUIREMENTS
- ALL HIGH STRENGTH BOLTS ARE A325-N UNLESS SPECIFICALLY NOTED OTHERWISE.
- STRUCTURAL BOLTS SHALL BE TIGHTENED BY THE TURN-OF-THE-NUT METHOD IN ACCORDANCE WITH THE THIRTEEN EDITION, AISC "SPECIFICATION FOR STRUCTURAL JOINTS USING ASTM A325 DR A490 BOLTS", PER SECTION 8.2.
- A325 BOLTS MAY BE INSTALLED WITHOUT WASHERS WHEN TIGHTENED BY THE TURN-OF-THE NUT METHOD.
- ALL HIGH STRENGTH BOLTS, EXCEPT AS NOTED OTHERWISE, ARE SUBJECT TO DIRECT TENSION AND MAY REQUIRE INSPECTION AS DEFINED BY THE APPLICABLE BUILDING CODE OR STANDARD. IT IS THE RESPONSIBILITY OF THE ERECTOR TO ASSURE PROPER TIGHTNESS.
4. BUILDER/CONTRACTOR RESPONSIBILITIES
- THE METAL BUILDING MANUF.'S STANDARD PRODUCT SPECIFICATIONS APPLY AND UNLESS STIPULATED OTHERWISE IN THE CONTRACT DOCUMENTS, THE METAL BUILDING MANUF.'S DESIGN FABRICATION, QUALITY CRITERIA STANDARDS AND TOLERANCES WILL GOVERN THE WORK.
- IN CASE OF DISCREPANCIES BETWEEN METAL BUILDINGS MANUF., STRUCTURAL PLANS AND PLANS FOR OTHER TRADES, THE METAL BUILDING MANUF.'S PLANS SHALL GOVERN.
- IT IS THE RESPONSIBILITY OF THE BUILDER / CONTRACTOR TO OBTAIN APPROPRIATE APPROVALS AND NECESSARY PERMITS FROM CITY, COUNTY, STATE, OR FEDERAL AGENCIES, AS REQUIRED.
- APPROVAL OF METAL BUILDING MANUF.'S DRAWINGS CONSTITUTES THE BUILDER / CONTRACTOR'S ACCEPTANCE OF THE METAL BUILDING MANUF.'S INTERPRETATION OF THE CONTRACT PURCHASE ORDER.
- ONCE THE BUILDER / CONTRACTOR OR A/E FIRM HAS SIGNED MANUF.'S APPROVAL PACKAGE, CHANGES FROM THE PURCHASE ORDER BY THE BUILDER WILL BE BILLED TO THE BUILDER / CONTRACTOR FOR MATERIAL, ENGINEERING AND HANDLING FEES. SUCH CHANGES MAY CAUSE THE PROJECT TO BE MOVED FROM THE FABRICATION AND / OR SHIPPING SCHEDULE. A PENALTY FEE MAY BE CHARGED IF THE PROJECT MUST BE MOVED FROM THE FABRICATION AND / OR SHIPPING SCHEDULE, AS LONG AS THE MANUF.'S DESIGN AND DETAILING APPROACH COMPLIES WITH THE PURCHASE ORDER.
- THE BUILDER / CONTRACTOR OR A/E FIRM ARE RESPONSIBLE FOR THE OVERALL PROJECT CONDITION, ALL INTERFACE AND COORDINABILITY CONCERNING ANY MATERIALS NOT FURNISHED BY THE MANUF. ARE TO BE CONSIDERED AND COORDINATED BY THE BUILDER / CONTRACTOR OR A/E FIRM, UNLESS SPECIFIC DESIGN CRITERIA CONCERNING THIS ASSUMPTIONS WILL GOVERN.
- THE BUILDER / CONTRACTOR IS RESPONSIBLE TO INSURE THAT ALL OTHER PROJECT PLANS AND SPECIFICATIONS COMPLY WITH THE APPLICABLE REQUIREMENTS OF ANY GOVERNING BUILDING AUTHORITY, SUPPLYING SEALED ENGINEERING DESIGN DATA AND DRAWINGS BY THE BUILDING MANUF. DOES NOT IMPLY OR CONSTITUTE AN AGREEMENT THAT THE BUILDING MANUF. OR ITS DESIGN ENGINEER IS ACTING AS THE ENGINEER OF RECORD OR DESIGN PROFESSIONAL FOR THE CONSTRUCTION PROJECT. THESE DRAWINGS AND DESIGN DATA ARE SEALED AS TO THE STRUCTURAL SYSTEM FURNISHED BY THE METAL BUILDING MANUF. IN COMPLIANCE WITH ALL REQUIREMENTS OF THE PURCHASE ORDER.
- THE BUILDER / CONTRACTOR IS RESPONSIBLE FOR SETTING OF ANCHOR BOLTS AND ERECTION OF STEEL BUILDING COMPONENTS IN ACCORDANCE WITH THE METAL BUILDING MANUF.'S "FOR CONSTRUCTION" DRAWINGS. TEMPORARY SUPPORTS OR BRACING REQUIRED FOR THE BUILDING ERECTION WILL BE THE RESPONSIBILITY OF THE ERECTOR TO DETERMINE, FURNISH, AND INSTALL.
- THE METAL BUILDING MANUF. DOES NOT WARRANT STRUCTURAL INTEGRITY OF ANY COMPONENT'S FIELD MODIFIED OR DESIGNED AND FABRICATED BY OTHERS. NEITHER DO WE ACCEPT DESIGN RESPONSIBILITY FOR THE EFFECTS AND STANDARD COMPONENTS DESIGNED BY OTHERS MAY HAVE ON THE SYSTEM IN GENERAL.

BUILDING PARAMETERS	
BUILDING DESCRIPTION:	SNOW :
NOMINAL WIDTH	50 feet
NOMINAL LENGTH	100 feet
EAVE HEIGHT, BACK S.W.	16 feet
EAVE HEIGHT, FRONT S.W.	16 feet
ROOF SLOPE, LEFT	10:12
ROOF SLOPE, RIGHT	10:12
DESIGN LOADS	FLAT ROOF SNOW LOAD Pf : 0 psf
	GROUND SNOW LOAD Pg : 0 psf
	SNOW LOAD IMP. FACTOR N/A
	THERMAL FACTOR Ct : N/A
	SNOW EXP. FACTOR Ce : N/A

Richard T. Smith

PE # 43347

301 Buome Street Suite 100

Lakeland, Georgia

Phone: (770) 882-1000

Digitally signed by Richard T. Smith

DN: cn=Richard T. Smith,

o=Smith Engineering, ou,

email=rt_smith@charter.net,

c=US

Date: 2007.06.19 15:23:45 -0400

BUILDING CODE:	FGC 04 (WITH 06 AMENDMENTS) INCLUDED
FRAME SELF WEIGHT:	2 psf
ROOF DEAD LOAD:	0 psf
COLLATERAL LOAD:	20 psf
LIVE LOAD:	0 psf
SNOW LOAD, ROOF:	110 mph
WIND SPEED:	3 sec gust
WIND EXPOSURE:	B
CLOSURE "C, D, P":	Closed
IMP. FACTOR, WIND:	1.00
BUILDING CATEGORY:	II
SEISMIC PARAMETERS:	I
SEISMIC USE GROUP:	B
SEISMIC DESIGN CATEGORY:	B

26 GA. PBR PANEL - FERN GREEN	FL 5346.1
26 GA. PBR PANEL - FERN GREEN	FL 5335.1

FLORIDA PRODUCT APPROVAL INFORMATION

SHEETING	
26 GA. PBR PANEL - Fern Green	NO. 1
26 GA. PBR PANEL - Fern Green	NO. 2

SKYLIGHTS	
26 GA. PBR PANEL - Fern Green	NO. 1
26 GA. PBR PANEL - Fern Green	NO. 2



FRAMED OPENINGS	
26 GA. PBR PANEL - Fern Green	NO. 1
26 GA. PBR PANEL - Fern Green	NO. 2

VENTILATORS	
26 GA. PBR PANEL - FERN GREEN	NO. 1
26 GA. PBR PANEL - FERN GREEN	NO. 2

LINER PANELS	
26 GA. PBR PANEL - FERN GREEN	NO. 1
26 GA. PBR PANEL - FERN GREEN	NO. 2

DRAWING RELEASE HISTORY	
26 GA. PBR PANEL - FERN GREEN	NO. 1
26 GA. PBR PANEL - FERN GREEN	NO. 2

DRAWING REVISIONS	
26 GA. PBR PANEL - FERN GREEN	NO. 1
26 GA. PBR PANEL - FERN GREEN	NO. 2

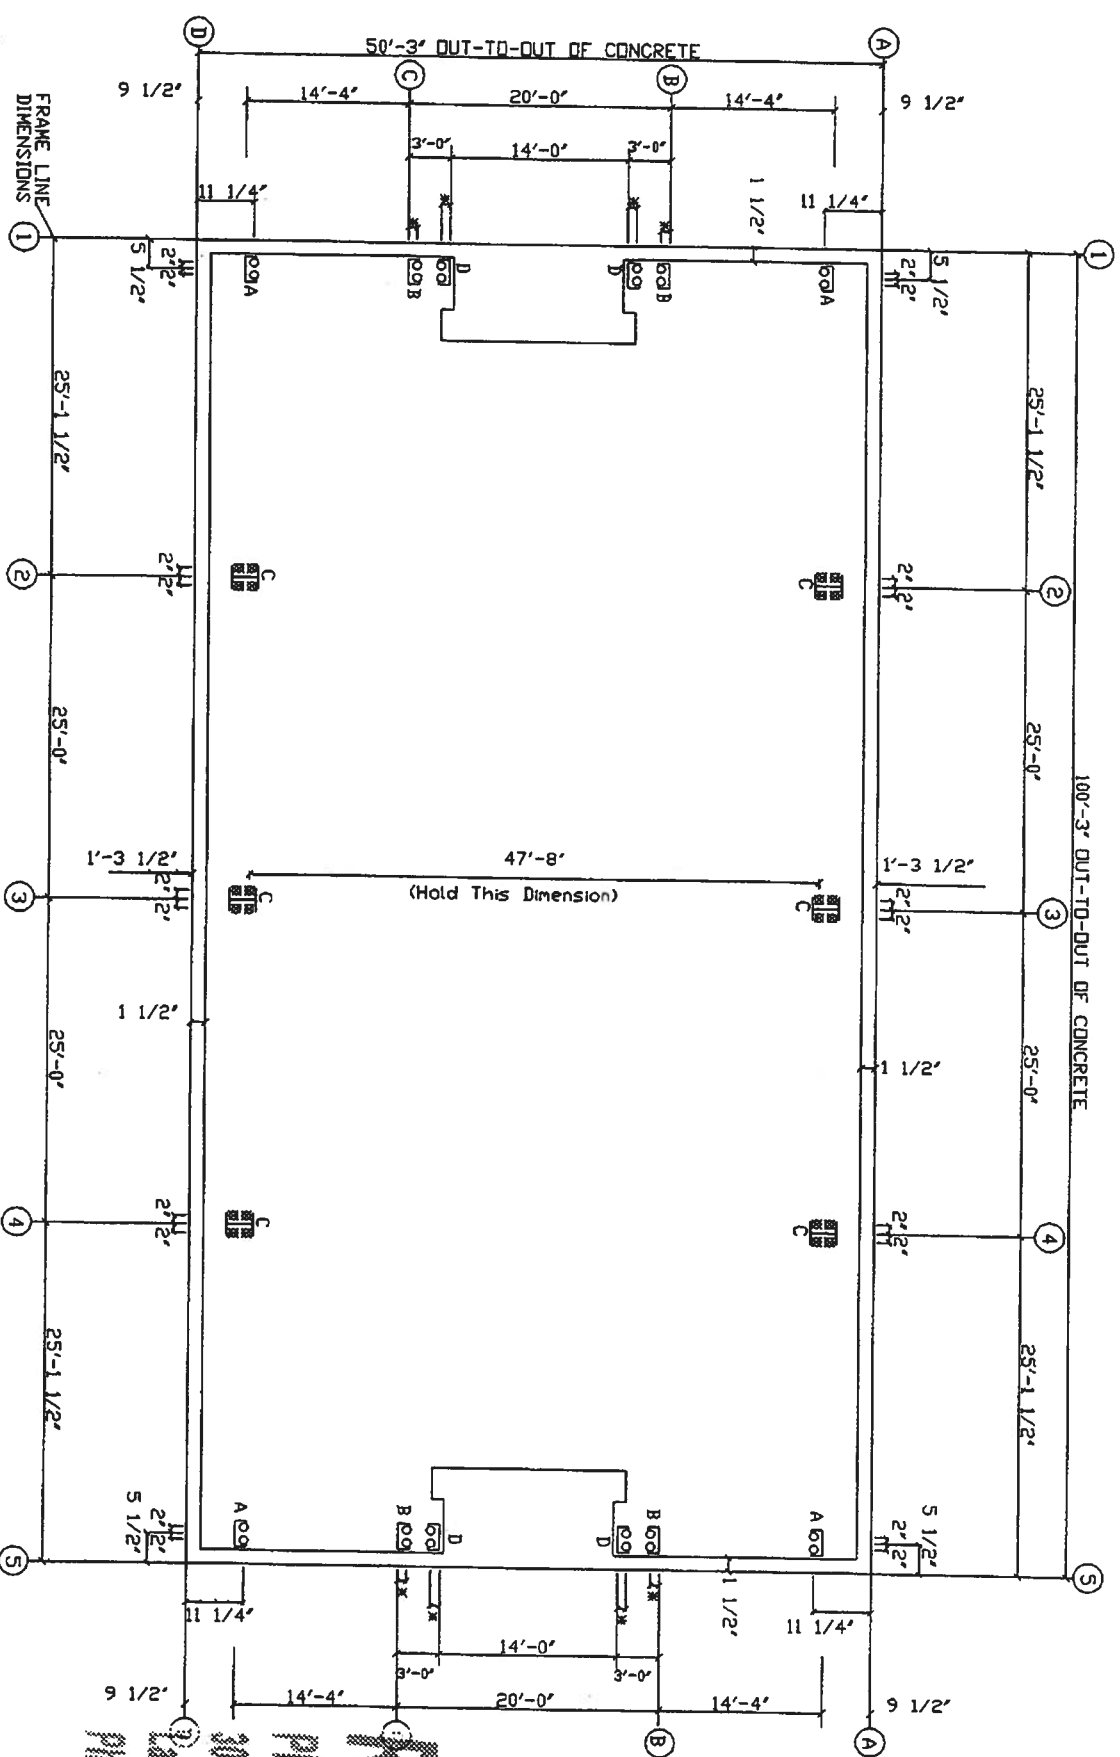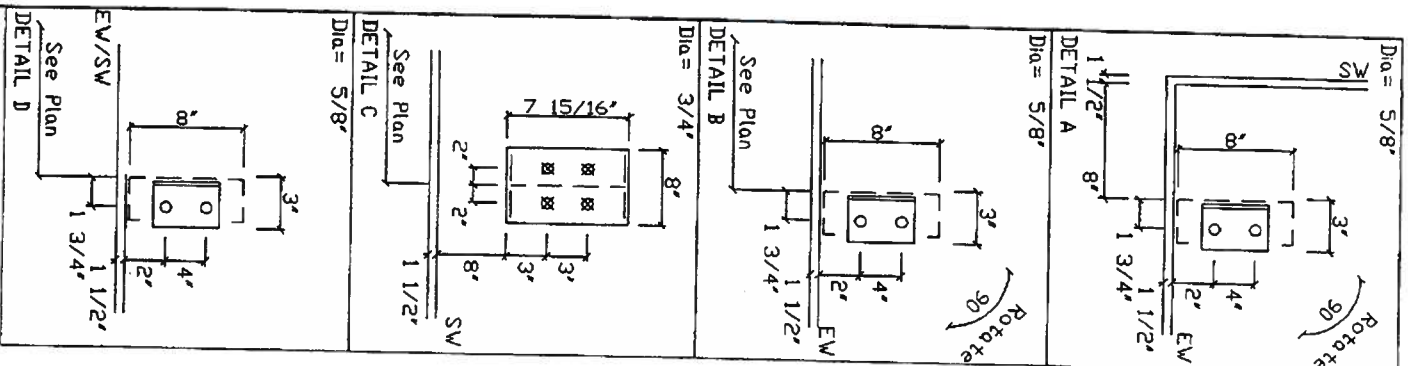

ANCHOR BOLT SUMMARY						
	Qnt	Loc	Dia (in)	Total Len (in)	Bend Len (in)	Proj (in)
○ 8	21		5/8"	9.00	3.00	3.00
○ 16	ELV		3/4"	12.00	3.00	3.00
⊗ 24	Rf			18.00	3.00	3.00

NOTE: * = 1 3/4"

Richard T. Smith
PE # 43547

[illegible]

1992

[illegible]

30

By Richard T. Smith at 3:24 pm, Jun 10, 2013

REVISIONS							DRAWING STATUS			EXPERT BLDG. SYSTEMS			UTILITY TRUCK & EQUIP.				
REV.	DESCRIPTION	DATE	DLR	DATE	CHKR	APPD	<input type="checkbox"/> FOR CONSTRUCTION	<input type="checkbox"/> FOR PERMIT ONLY	<input type="checkbox"/> FOR APPROVAL	<input type="checkbox"/> OTHER	EXPLAIN	PROJECT	ID	ANCHOR BOLT PLAN	DESIGN: SPV	DRAFT: PK	CHECK:
												LAKE CITY, FL	LAKE CITY, FL		DATE: 6/14/07		SHEET 1 OF 10

NOTES FOR REACTIONS

Building reactions are based on the following building data:

Width (ft)	= 50.0
Length (ft)	= 100.0
Roof Height (ft)	= 16.0/16.0
Roof Slope (rise/run)	= 10/10
Roof Live Load (psf)	= 20
Roof Dead Load (psf)	= 20
Roof Live Load (psf)	= 20
Roof Dead Load (psf)	= 20
Wind Speed (mph)	= 110
Wind Code (3 sec gust)	= FBC
Wind Code (3 sec gust)	= FBC


Exposure: Closed/Open = B
Importance Wind = C
Importance Seismic = 100
Seismic Coeff (FASs) = 0.20

Id Description

1	DL+CL+LL
2	0.60DL+VLI
3	0.60DL+VLI+VS
4	0.60DL+VLI+VS
5	0.60DL+VLI+VS
6	0.60DL+VLI+VS

GENERAL NOTES

- (1) APPLICATION OF ENGINEERS SEAL IS FOR METAL BUILDING ONLY AND DOES NOT REPRESENT THE PROFESSIONAL OF RECORD.
- (2) FOUNDATION DESIGN AND CONSTRUCTION ARE NOT THE RESPONSIBILITY OF THE METAL BUILDING MANUFACTURER.
- (3) ANCHOR BOLTS SHALL BE ACCURATELY SET TO A TOLERANCE OF +/- 1/8" IN BOTH ELEVATION AND LOCATION.
- (4) THE BUILDING REACTION DATA REPORTS THE LOADS WHICH THIS BUILDING PLACES ON THE FOUNDATION. THE FOUNDATION IS TO BE DESIGNED BY A QUALIFIED ENGINEER TO SUPPORT THE BUILDING REACTIONS IN ADDITION TO OTHER LOADS IMPOSED BY THE BUILDING USE OR OCCUPANCY WITH RESPECT TO JOB SITE CONDITIONS.
- (5) ALL ANCHOR BOLTS TO BE ASTM SPECIFICATION A307 UNLESS OTHERWISE NOTED.
- (6) VALUES GIVEN FOR BENDS AND ANCHOR BOLT TOTAL LENGTHS ARE SUGGESTED LENGTHS ONLY. IT IS THE RESPONSIBILITY OF THE FOUNDATION ENGINEER TO DETERMINE THESE VALUES SINCE THEY ARE A FUNCTION OF CONCRETE STRENGTH AS WELL AS OTHER FACTORS.

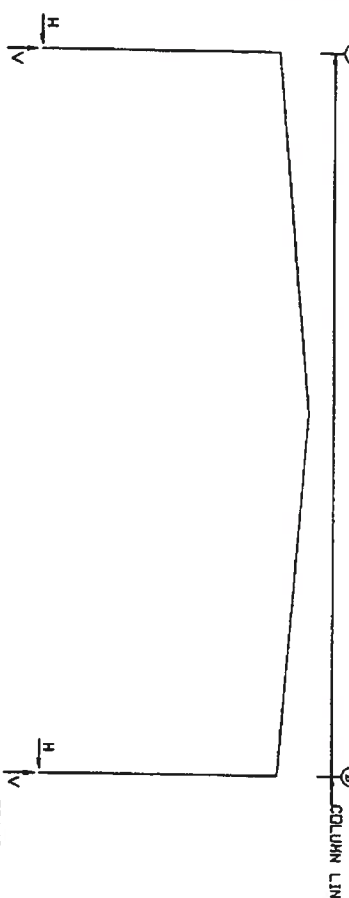

RIGID FRAME: ANCHOR BOLTS & BASE PLATES									
Frame Line	Col	Line	Anc Bolt No (mm)	Base Plate (in)	Base Plate (mm)	Grout	Grout	Grout	Grout
2	A	4	0.750	8.000	7.940	0.500	0.0		
2	A	4	0.750	8.000	7.940	0.500	0.0		

RIGID FRAME: BASIC COLUMN REACTIONS (k)									
Frame Line	Col	Line	Dead	Coll	Live	Wind-Left	Wind-Right	Wind-Left	Wind-Right
2	A	4	0.87	1.75	0.00	0.00	0.00	0.00	0.00
2	A	4	0.87	1.75	0.00	0.00	0.00	0.00	0.00

ENDWALL COLUMN: REACTIONS, ANCHOR BOLTS, & BASE PLATES									
Frame Line	Col	Line	Dead	Coll	Live	Wind-Left	Wind-Right	Wind-Left	Wind-Right
2	A	4	0.87	1.75	0.00	0.00	0.00	0.00	0.00
2	A	4	0.87	1.75	0.00	0.00	0.00	0.00	0.00

BRACING REACTIONS, PANEL SHEAR									
Frame Line	Col	Line	Dead	Coll	Live	Wind-Left	Wind-Right	Wind-Left	Wind-Right
2	A	4	0.87	1.75	0.00	0.00	0.00	0.00	0.00
2	A	4	0.87	1.75	0.00	0.00	0.00	0.00	0.00

This building is located in a wind-borne debris region. Exterior glazing is assumed to be impact resistant and meet the provisions of the missile test, or they should be protected by impact resistant covering meeting the requirements of SSTD 12. Openings may also be protected by structural wood panels having a min. thickness of 7/16" and maximum panel span of 8 feet. Attachment hardware and fastening schedule shall be in accordance with the following table.

WIND-BORNE DEBRIS PROTECTION FASTENING SCHEDULE FOR WOOD STRUCTURAL PANELS (PLYWOOD)				
FASTENER TYPE	PANEL SPAN < 2ft	2ft< PANEL SPAN < 4 ft.	4ft< PANEL SPAN < 6 ft.	6ft< PANEL SPAN < 8 ft.
2 1/2 #6 Wood Screw ²⁵	16	16	12	9
2 1/2 #8 Wood Screw ³	16	16	16	12
Double-Headed nails ⁴	12	6	4	3

SI: 1 inch=25.4 mm 1 foot=305 mm


Notes:

- 1) This table is based on a maximum wind speed of 130 m.p.h. (58 m/s) and mean roof height of 33 feet (10 m) or less.
- 2) Fasteners shall be installed at opposing ends of the wood structural panel.
- 3) Where screws are attached to masonry or stucco, they shall be attached using vibration-resistant anchors having a minimum withdrawal capacity of 490 lb. (2180 kN).
- 4) Nails shall be 10d common or 12d box double-headed nails.
- 5) Where screws are attached to pre-engineered metal building components, ie. Door Jamb, framed openings, etc., they shall be #12 self drilling screws secured to a minimum 16 ga. material. Screws should have a min. withdrawal strength of 500 lbs.

REVISIONS				
REV.	DESCRIPTION	DATE	DLR	CHKR

DRAWING STATUS				
03 FOR CONSTRUCTION	04 FOR PERMIT ONLY	05 FOR APPROVAL	06 OTHER	EXPLAIN

Richard T. Smith
PE #43547
301 Broome Street Suite 100
Lagrange, Georgia
Phone: (706) 882-1889

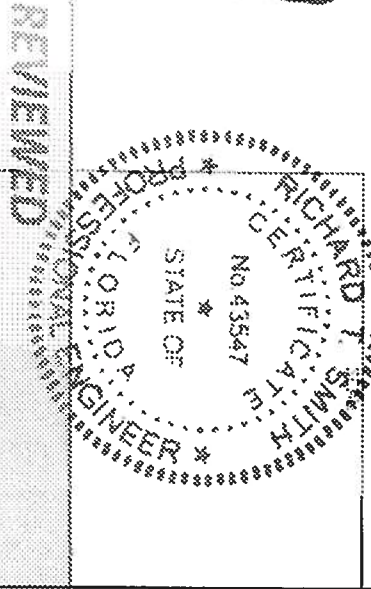


By Richard T. Smith on 5/24/2007, Jun 19, 2007

EXPERT BLDG. SYSTEMS				
PROJECT	3000' x 1000' x 160	ANCHOR BOLT REACTIONS	CHECK	
DESIGN: SPV	DRAFT: PK			
DATE: 6/14/07				

SPLICE BOLTS			-----Bolt-----		
Splice Mark	Quan	Top/Bot/Int	Type	Dia	Len
SP-1	4	4	0	A325	0.625 2.25
SP-2	4	4	0	A325	0.625 2.00

▽ FLANGE BRACES:
FBxxA(1): xx=inches, (1)=one side only
A - L2X2X14G

MEMBER SIZE TABLE (in)									
PIECE	WEB DEPTH		WEB PLATE		OUTSIDE FLANGE		INSIDE FLANGE		
	START	END	THICK	LENGTH					
RF1-1	7.5/21.0	0.120	160.5		5x3/16"x184.0		5x1/4" x161.1		
RF1-2	21.0/21.0	0.188	25.2		5x3/16"x 29.3				
	21.0/ 9.5	0.134	151.7		5x3/16"x240.0		5x1/4" x152.2		
	9.5/ 9.5	0.120	120.0		5x3/16" x 30.0		5x3/16"x119.2		

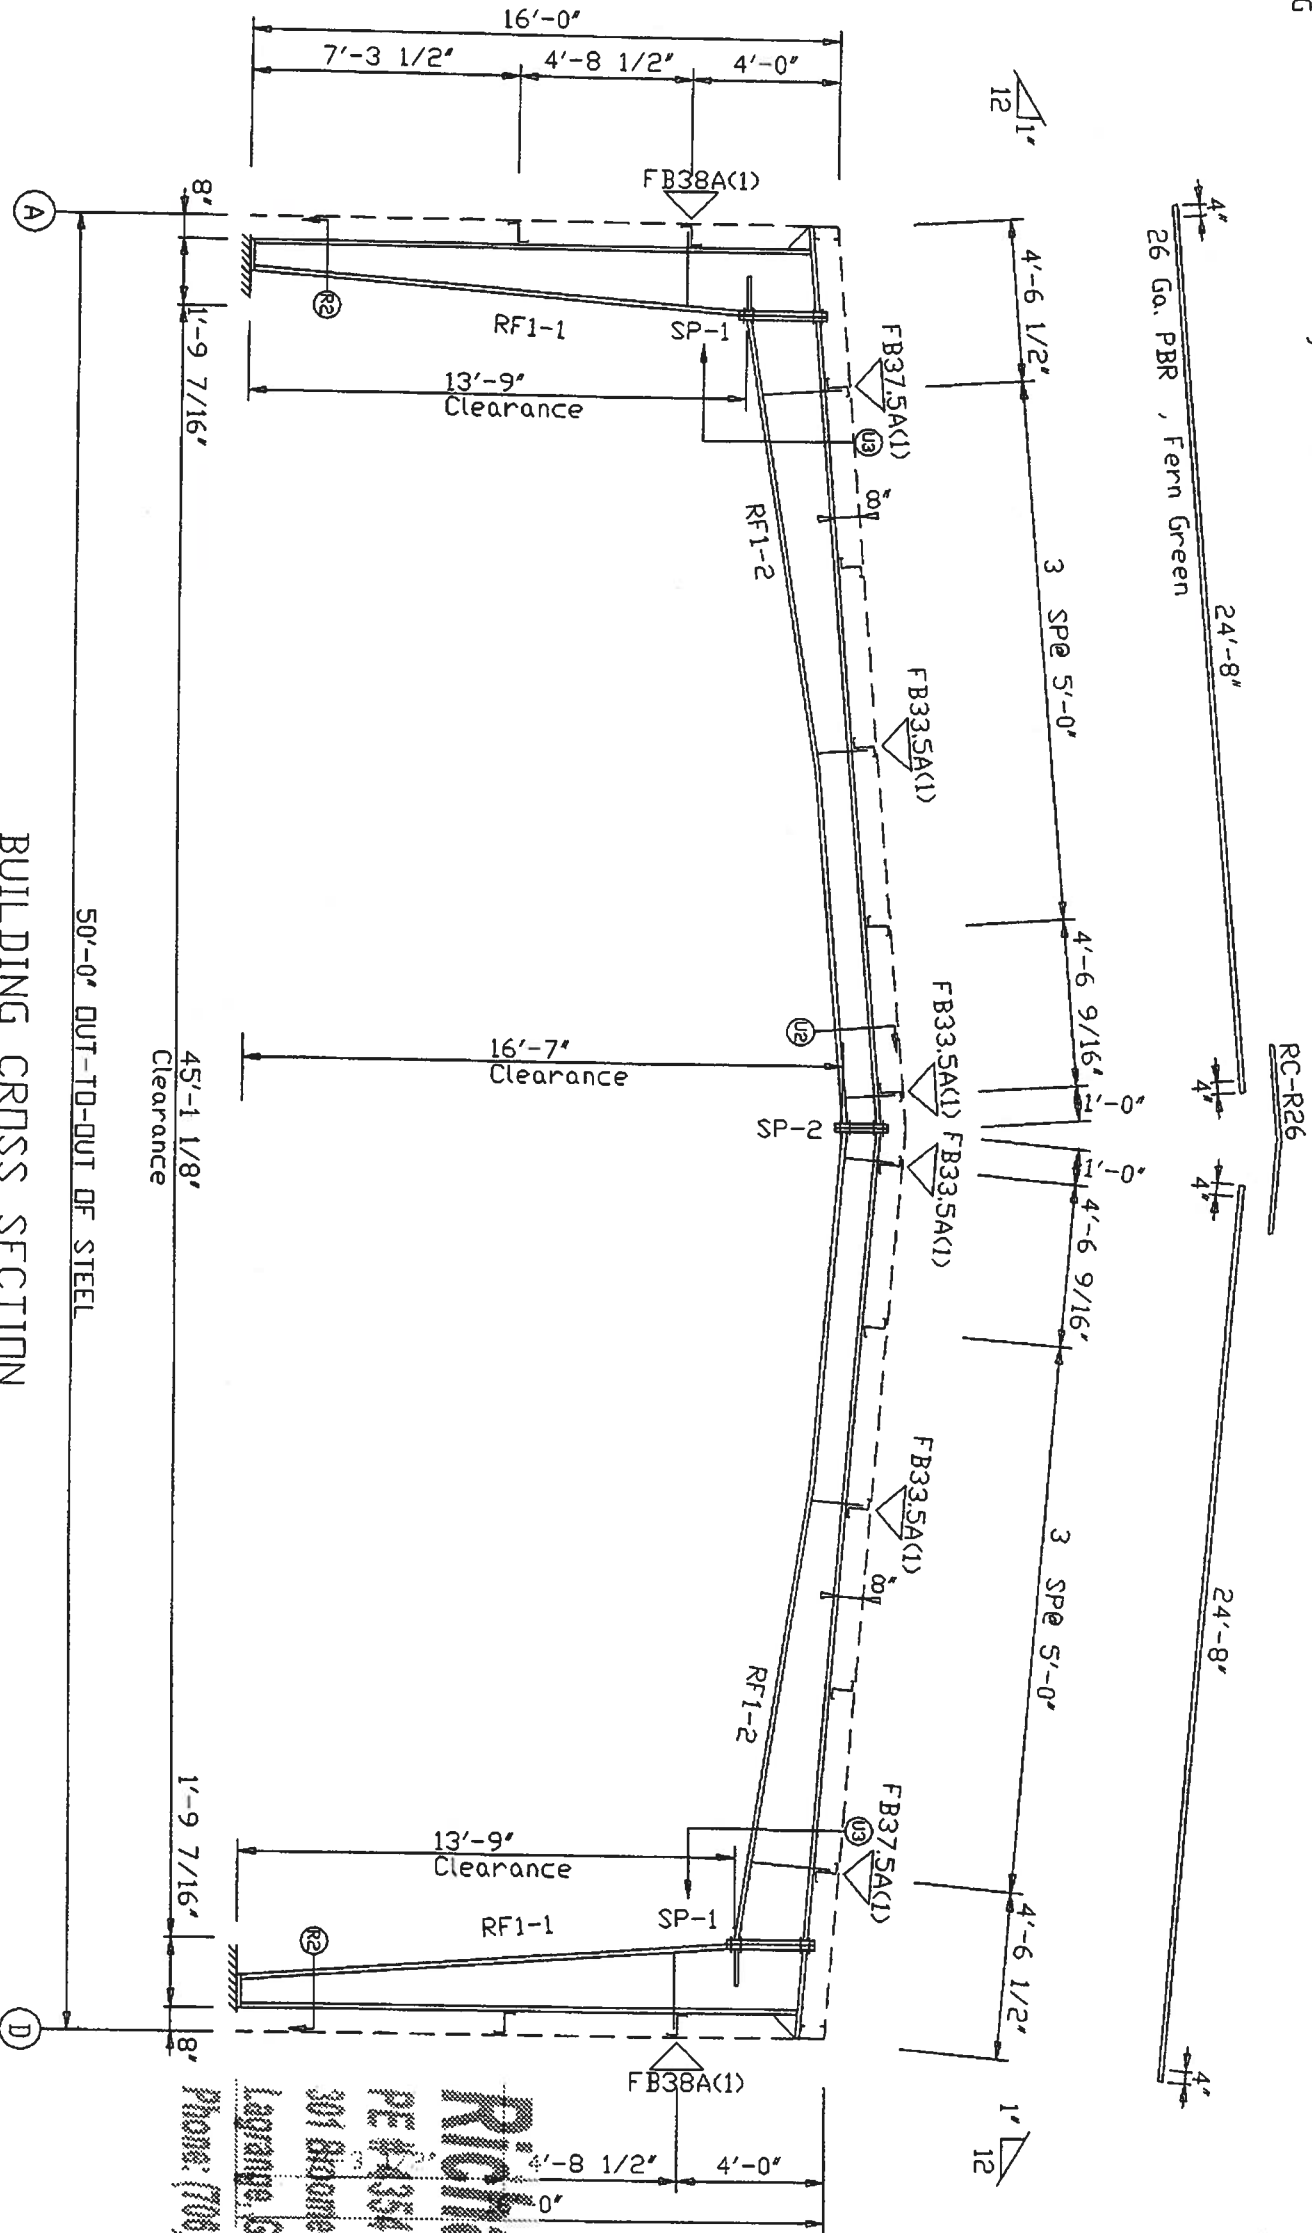

BUILDING CROSS SECTION
FOR FRAME LINE 2 3 4


GENERAL NOTES:

- * NOTICE TO ERECTOR *
- (A) It is IMPORTANT that for members exceeding 30 ft. in length that a spreader bar be used when lifting.
- (B) All flange braces and wind bracing must be installed prior to exterior finishes being applied.

REVISIONS						DRAWING STATUS						EXPERT BLDG. SYSTEMS				UTILITY TRUCK & EQUIP.						
REV.	DESCRIPTION	DATE	DTLR	DATE	CHKR	APPD	<input type="checkbox"/> FOR CONSTRUCTION	<input checked="" type="checkbox"/> FOR PERMIT ONLY	<input type="checkbox"/> FOR APPROVAL	<input type="checkbox"/> OTHER	EXPLAIN	PROJECT	ID	PROJECT	ADDRESS	DATE	DESIGN	SPV	DRAFT.	PK	CHECK:	
														17527								
															LAKE CITY, FL							
																	6/14/07				3	DF 10

REVIEWED

By Richard T. Smith at 3:21 pm, Jun 13, 2007

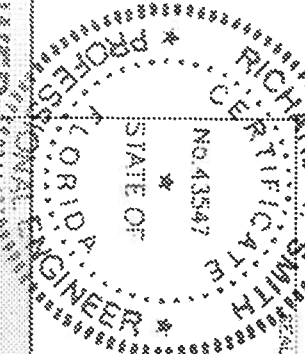


Phone: (708) 882-1880

301 Ardmore Street Suite 100
Lawrence, Georgia

PE #43547

Richard T. Smith





Richard T. Smith

Figure 1

5050

Figure 1. Schematic representation of the structure of the polyimide-epoxy resin system.

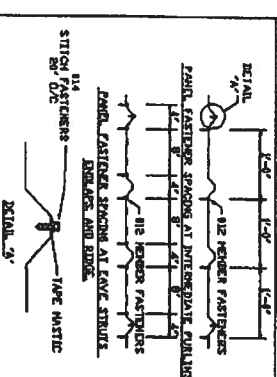

'PRR' ROTF PANEL ATTACHMENT DETAIL


ROOF
SHEETING
PANELS: 26 Ga. PBR -
Fern Green

[illegible]


By Richard T. Smith at 3:21 pm, Jun 19, 2007

REVISIONS				DRAWING STATUS			
REV.	DESCRIPTION	DATE	DLR	DATE	CHKR	APPD	
							<input type="checkbox"/> FOR CONSTRUCTION
							<input checked="" type="checkbox"/> FOR PERMIT ONLY
							<input type="checkbox"/> FOR APPROVAL
							<input type="checkbox"/> OTHER, EXPLAIN

EXPERT BLDG. SYSTEMS		UTILITY TRUCK & EQUIP.	
PROJECT	5000' x 1000' x 160	ROOF FRAMING	
ID	17527	DESIGN SPV	DRAFT: PK
PROJECT	LAKE CITY, FL	CHECKS	
ADDRESS		DATE 6/14/07	SHEET 4 OF 10

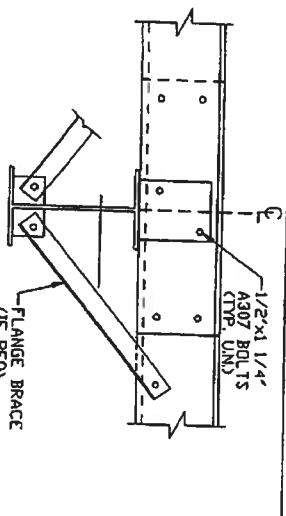

6 BOLTS TOTAL
ADDITIONAL HOLES ARE PRESENT FOR
ALIGNMENT PURPOSES ONLY

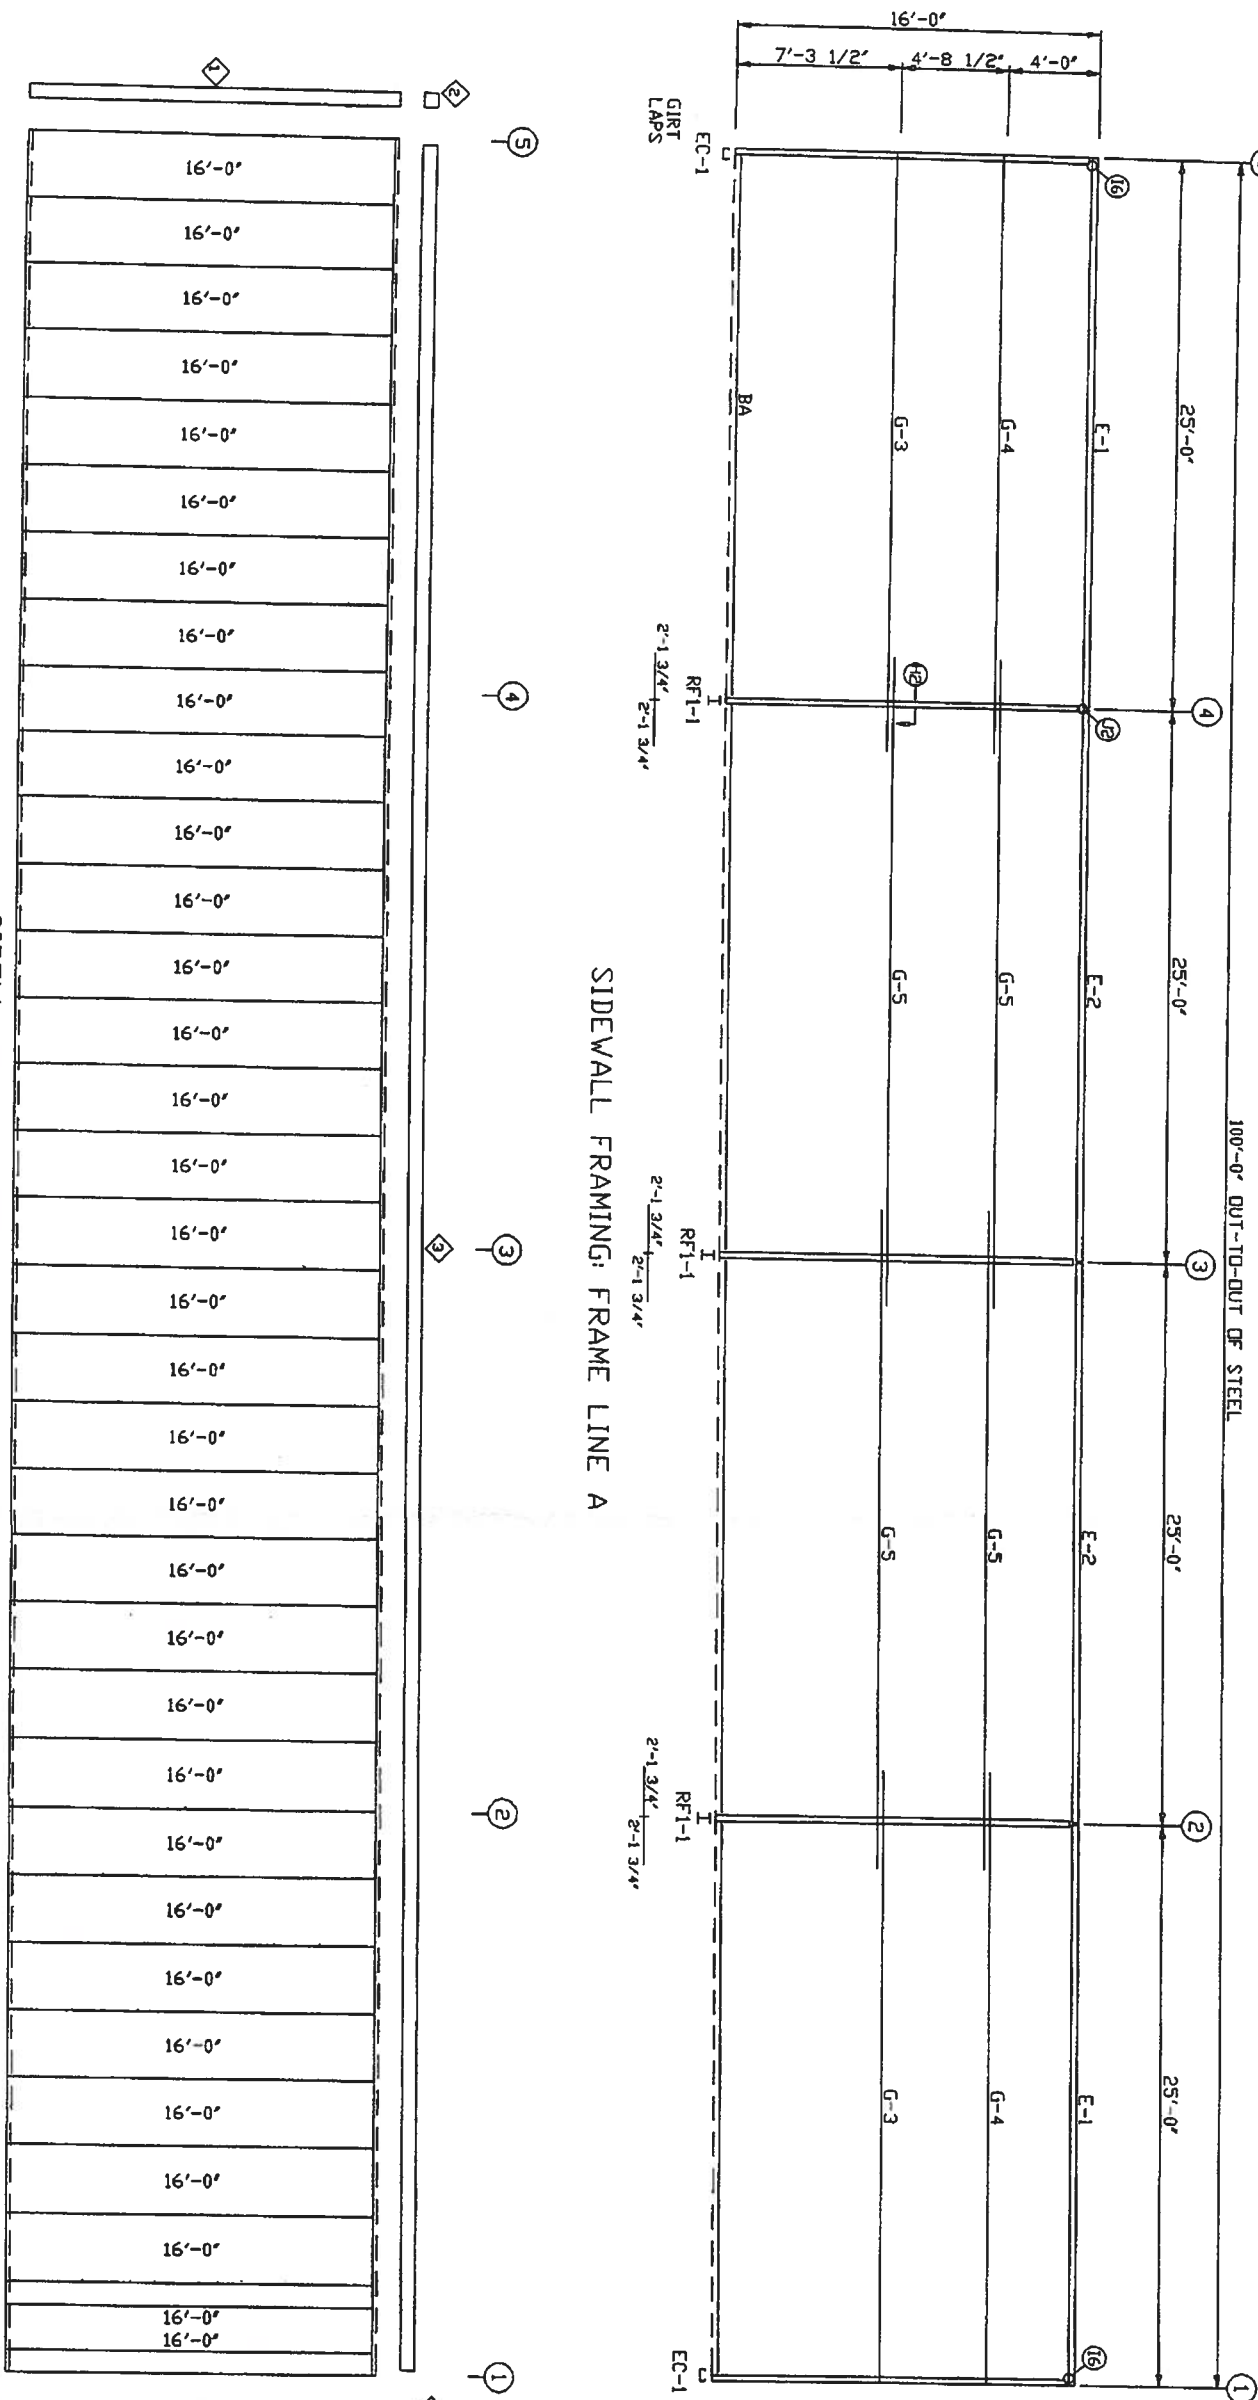

TRIM TABLE			
FRAME LINE A		DETAIL	
1	CTR	16'-2"	TM29
2	FL-765	6"	TM40
3	SET	20'-3"	TM12

MEMBER TABLE			
FRAME LINE A		LENGTH	
MARK	PART	24'-11 1/2"	
E-1	BE275D16	24'-11 1/2"	
E-2	BE275D16	27'-1 1/2"	
G-3	8X25Z13	27'-1 1/2"	
G-4	8X25Z16	29'-3 1/2"	
G-5	8X25Z16	29'-3 1/2"	

Richard T. Smith
PE # 43547

201 Broome Street Suite 100

Lagrange, Georgia

Phone: (706) 882-1880




REVIEWED



By Richard T. Smith at 3:21 pm, Jun 18, 2007

GENERAL NOTES:
(1) IF CABLE BRACING, WIND BENTS, WIND COLUMNS, OR WEAK AXIS DESIGN OF SIDE WALL COLUMNS WERE NOT PROVIDED IT HAS BEEN DETERMINED THAT DIAPHRAGM PANEL ACTION IS SUFFICIENT TO RESIST LONGITUDINAL FORCES. TEMPORARY BRACING SHOULD BE PROVIDED BY ERECTOR UNTIL ALL WALL AND ROOF PANELS ARE INSTALLED.

REVISIONS					DRAWING STATUS			EXPERT BLDG. SYSTEMS			UTILITY TRUCK & EQUIP.		
REV.	DESCRIPTION	DATE	DTR	DATE	CHKR	APRD	() FOR CONSTRUCTION	PROJECT	3000' x 1000' x 160	DESIGN: SPV	DATE: 6/14/07	SHEET 5	OF 10
							(X) FOR PERMIT ONLY						
							() FOR APPROVAL						
							() OTHER, EXPLAIN						

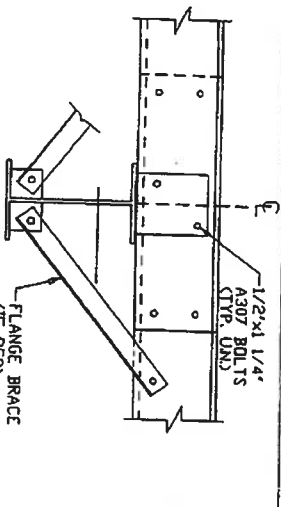

6 BOLTS TOTAL
ADDITIONAL HOLES ARE PRESENT FOR
ALIGNMENT PURPOSES ONLY

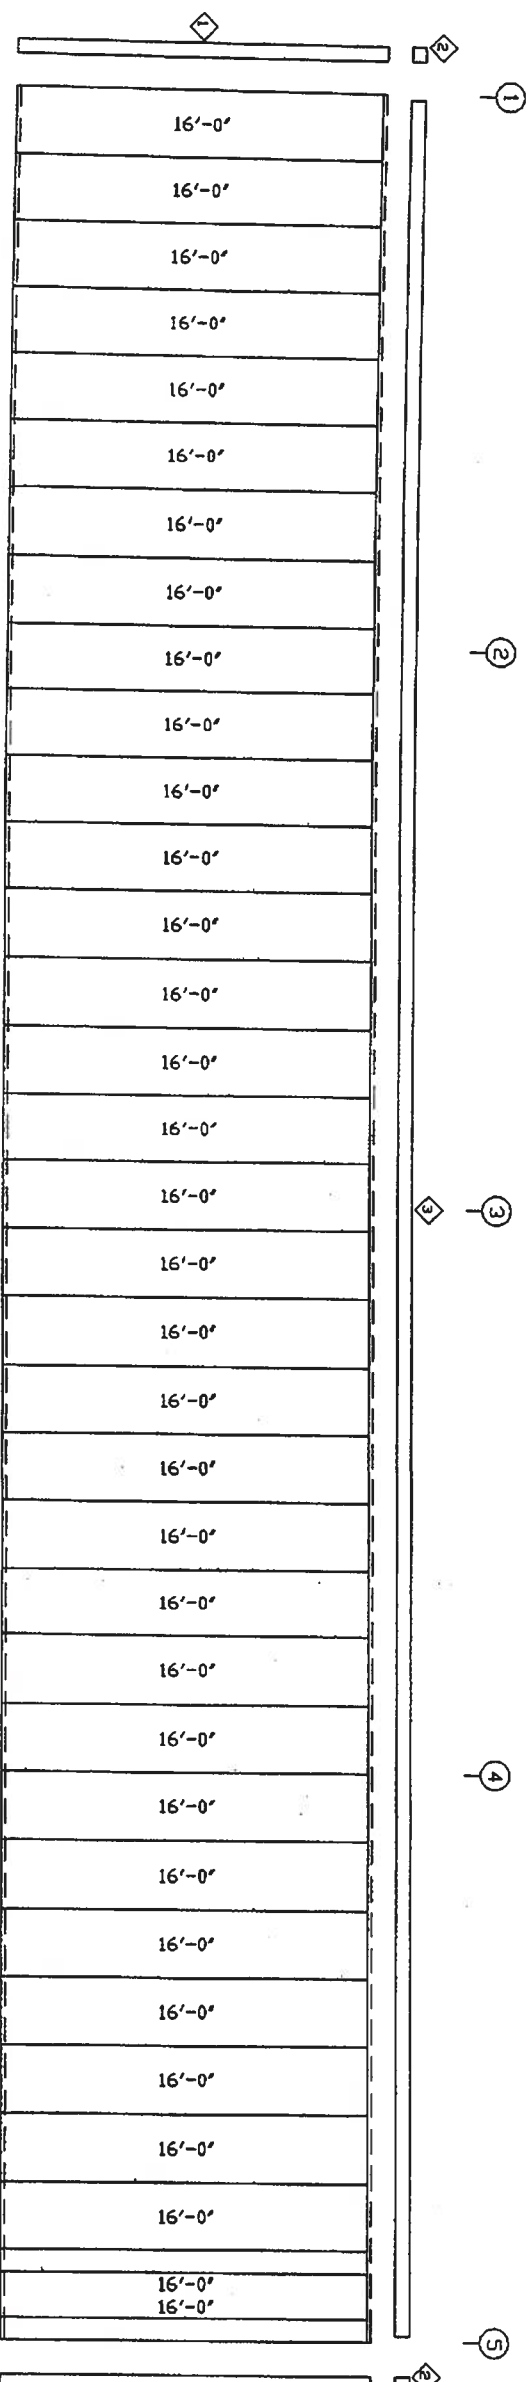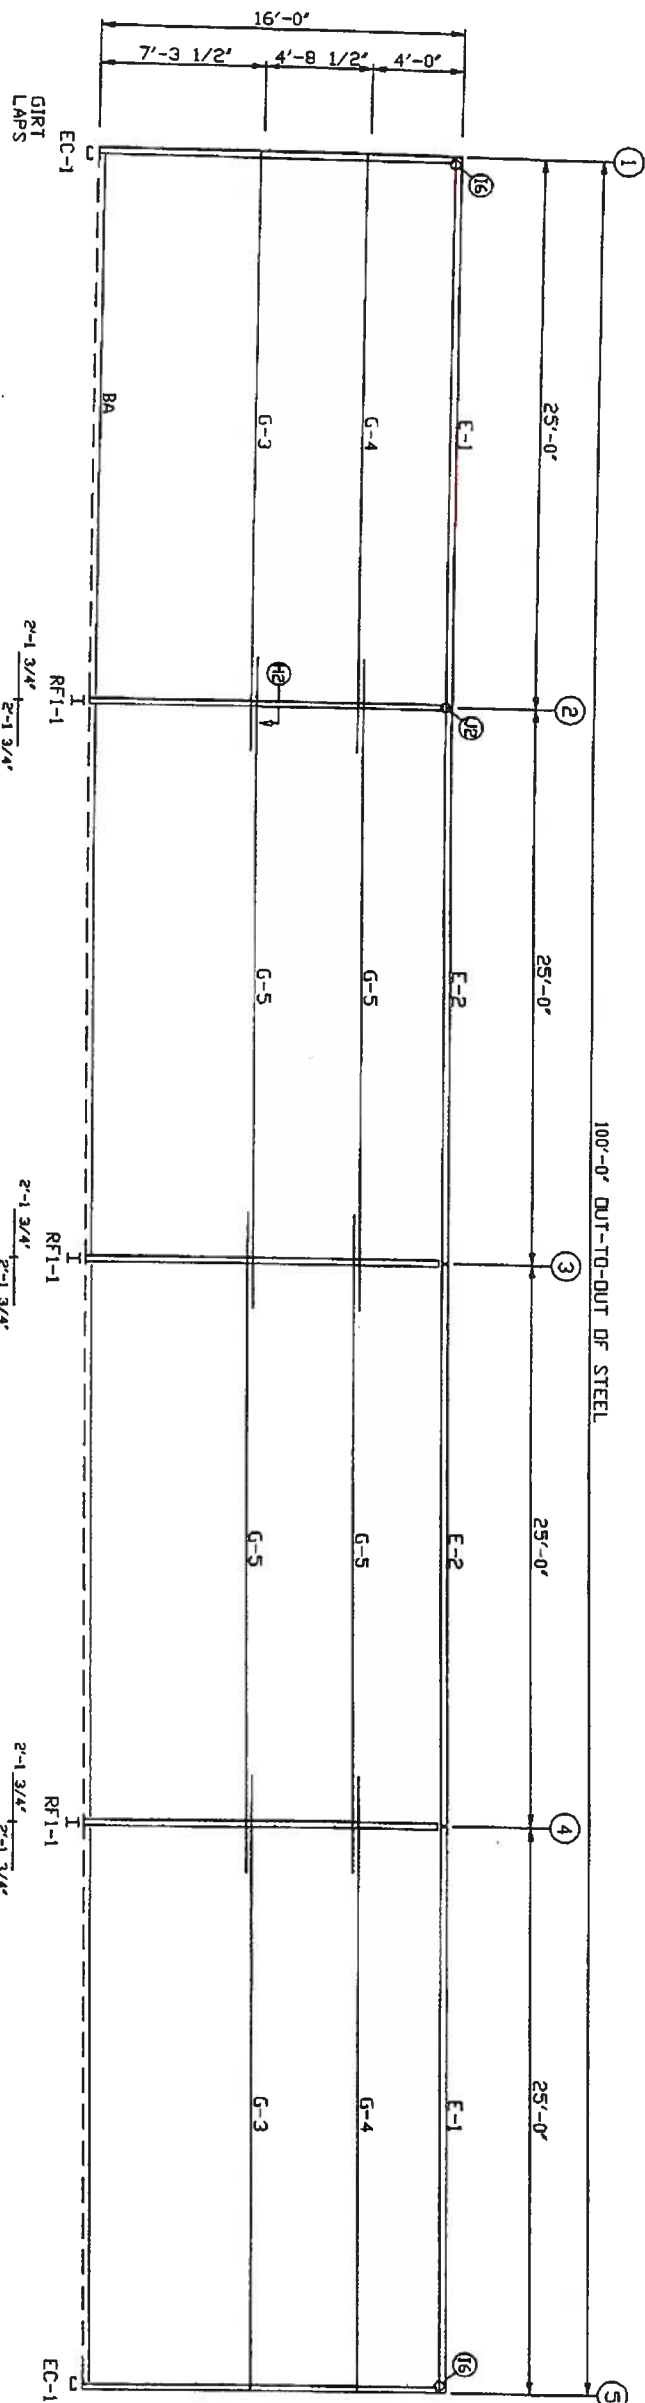


SIDEWALL SHEETING & TRIM FRAME LINE D
PANELS: 26 Ga. PBR - Fern Green


TRIM TABLE			
FRAME LINE D	LENGTH	DETAIL	
1 CTR	16'-2"	TM29	
2 FL-765	6'	TM40	
3 SET	20'-3"	TM12	

MEMBER TABLE			
FRAME LINE D	PART	LENGTH	
E-1	8E275D16	24'-11 1/2"	
E-2	8E275D16	24'-11 1/2"	
G-3	8X25Z13	27'-1 1/2"	
G-4	8X25Z16	27'-1 1/2"	
G-5	8X25Z16	29'-3 1/2"	

Richard T. Smith
PE # 43347
301 Briarwood Street Suite 100
Lagrange, Georgia
Phone: (706) 882-1000

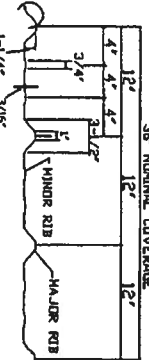

PBR WALL PANEL PROFILE

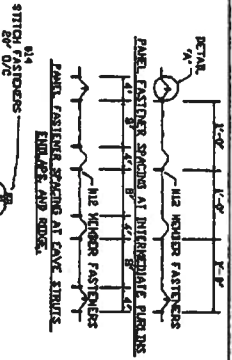

REVIEWED
By Richard T. Smith on 3.21 pm, Jun 19, 2007

STATE OF GEORGIA
PROFESSIONAL ENGINEER
No. 43347
RICHARD T. SMITH
C.E.

GENERAL NOTES:

(1) IF CABLE BRACING, WIND BENTS, WIND COLUMNS, OR WEAK AXIS DESIGN OF SIDE WALL COLUMNS WERE NOT PROVIDED IT HAS BEEN DETERMINED THAT DIAPHRAGM PANEL ACTION IS SUFFICIENT TO RESIST LONGITUDINAL FORCES. TEMPORARY BRACING SHOULD BE PROVIDED BY ERECTOR UNTIL ALL WALL AND ROOF PANELS ARE INSTALLED.

REVISIONS					
REV.	DESCRIPTION	DATE	BY	DATE	CHKR

DRAWING STATUS					

EXPERT BLDG. SYSTEMS					
PROJECT	5000' x 1000' x 150'				
DATE	1/15/27				
DESIGN	SPV	DRAFT	PK	CHECK	
DATE	6/14/07				

PROJECT ADDRESS: LAKE CITY, FL

UTILITY TRUCK & EQUIP.

SHEET 6 OF 10

Technical drawing showing a side elevation and a detail of a roof purlin connection.

Side Elevation:

- Roof Purlin
- End Wall Rafter
- Roof Truss
- Roof Joist
- Roof Deck
- Roof Siding
- Roof Gutter
- Roof Flashing
- Roof Vent
- Roof Ridge
- Roof Eave
- Roof Soffit
- Roof Fascia
- Roof Trim
- Roof Ornament
- Roof Access
- Roof Drain
- Roof Vent
- Roof Ridge
- Roof Eave
- Roof Soffit
- Roof Fascia
- Roof Trim
- Roof Ornament
- Roof Access
- Roof Drain

Detail of End Wall Rafter Connection:

- End Wall Rafter
- Roof Purlin
- Roof Truss
- Roof Joist
- Roof Deck
- Roof Siding
- Roof Gutter
- Roof Flashing
- Roof Vent
- Roof Ridge
- Roof Eave
- Roof Soffit
- Roof Fascia
- Roof Trim
- Roof Ornament
- Roof Access
- Roof Drain
- Roof Vent
- Roof Ridge
- Roof Eave
- Roof Soffit
- Roof Fascia
- Roof Trim
- Roof Ornament
- Roof Access
- Roof Drain


Diagram illustrating the connection of a corner column to endwall and sidewall girts using C-5 clips and A307 bolts.

Labels and Dimensions:


- C-5 CLIP
- 1/4"
- 3 3/4"
- C-5 CLIP
- CORNER COLUMN
- ENDWALL GIRT
- 1/2" x 1 1/4" A307 BOLTS
- SIDEWALL GIRT

Technical drawing of a door jamb assembly. The drawing shows a cross-section of the jamb with dimensions: 2" (width of the top flange), 4" (width of the main body), and 2" (width of the bottom flange). The height of the main body is 1 3/4". The assembly is labeled with components: "DOOR JAMB", "1/2\" x 1/4\" A307 BOLTS", "C-7A", and "BASE PLATE". The base plate is shown with dimensions 3" and 4" for the mounting holes.

E6 BASE PLATE FOR
DDOR JAMB OR ENDWALL COLUMN

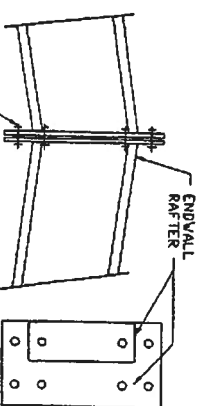


⑩ RAFTER SPLICE AT SURFACE CHANGE

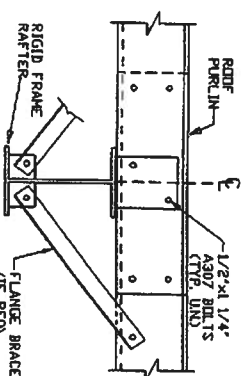


ROOF PURLIN TO
RIGID FRAME


6 BOLTS TOTAL
SEE FRAME CROSS
SECTION FOR LOCATIONS
ADDITIONAL HOLES ARE PRESENT FOR
ALIGNMENT PURPOSES ONLY

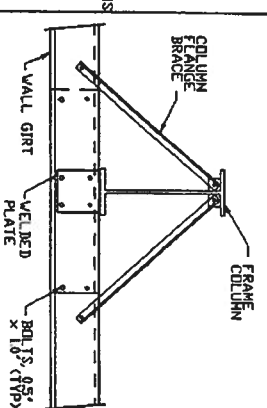


WALL GIRT TO FRAME COLUMN

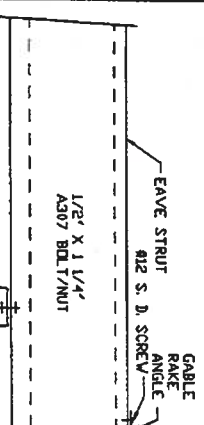


ENDWALL RAFTER —
16 LEAVE STRUT TO ENDWALL RAFTER

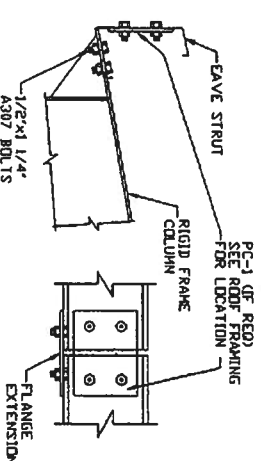


①2 EAVE STRUT TO
RIGID FRAME

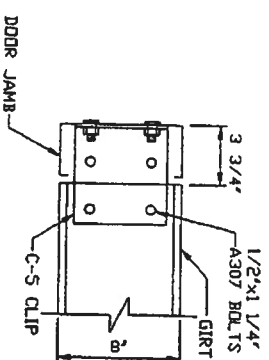


K2 GIRL TO
DOOR JAMB

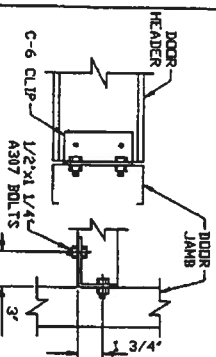


M1 DOOR HEADER TO
DOOR JAMB

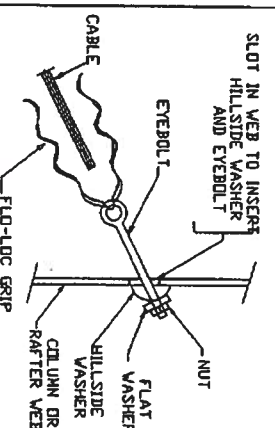

Q1 DIAGONAL CABLE, EYEBOLT END

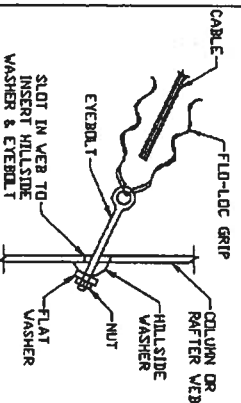

Q2 DIAGONAL CABLE
EYEBOLT END

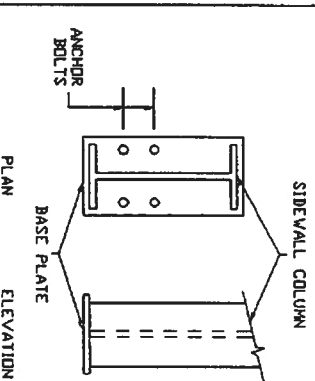


(R2) ANCHOR BOLTS AT SIDEWALL COLUMN

REVISIONS				DRAWING STATUS		EXPERT BLDG. SYSTEMS		UTILITY TRUCK & EQUIP.	
REV.	DESCRIPTION	DATE	DTLR	DATE	CHKR	APPD	PROJECT	5000' x 1000' x 160	Detailed Page
							ID	17527	DESIGN SPV DRAFT. PK CHECK.
							PROJECT	LAKE CITY, FL	DATE: 6/14/07 SHEET 9 OF 10
							ADDRESS		

BOLT TABLE			
FRAME LINE 1			
LOCATION	QUAN	TYPE	DIA
ER-1/ER-2	8	A325	5/8"
Columns	4	A325	1 1/4"
Jamb	2	A325	1 1/4"


TRIM TABLE			
FRAME LINE 1			
OLD MARK	LENGTH	DETAIL	
1 FL-766	20'-3"	TM11	
2 XFL-764	5'-5"	TM11	
3 FL-767	1'-4"	TM39	
4 JTR	14'-2"	TM31	
5 HT	14'-3"	TM33	

MEMBER TABLE			
FRAME LINE 1			
MARK	PART	LENGTH	
EC-1	8x35C16	14'-5" 5/8"	
EC-2	8x35C12	15'-7" 15/16"	
ER-1	10x25C13	25'-1" 1/16"	
ER-2	10x25C13	25'-1" 1/16"	
DJ-1	8x35C16	15'-10" 15/16"	
DH-1	8x35C16	14'-0"	
G-1	8x25Z16	14'-0"	
G-2	8x25Z16	2'-4" 1/2"	

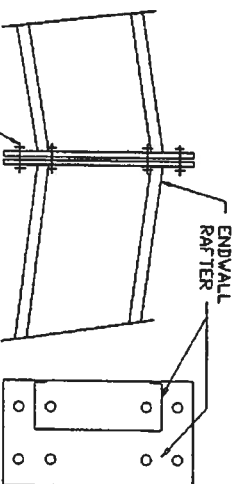


SEE ENDWALL DRAWING FOR BOLT DIA AND TYPE.

F10 RAFTER SPLICE AT SURFACE CHANGE

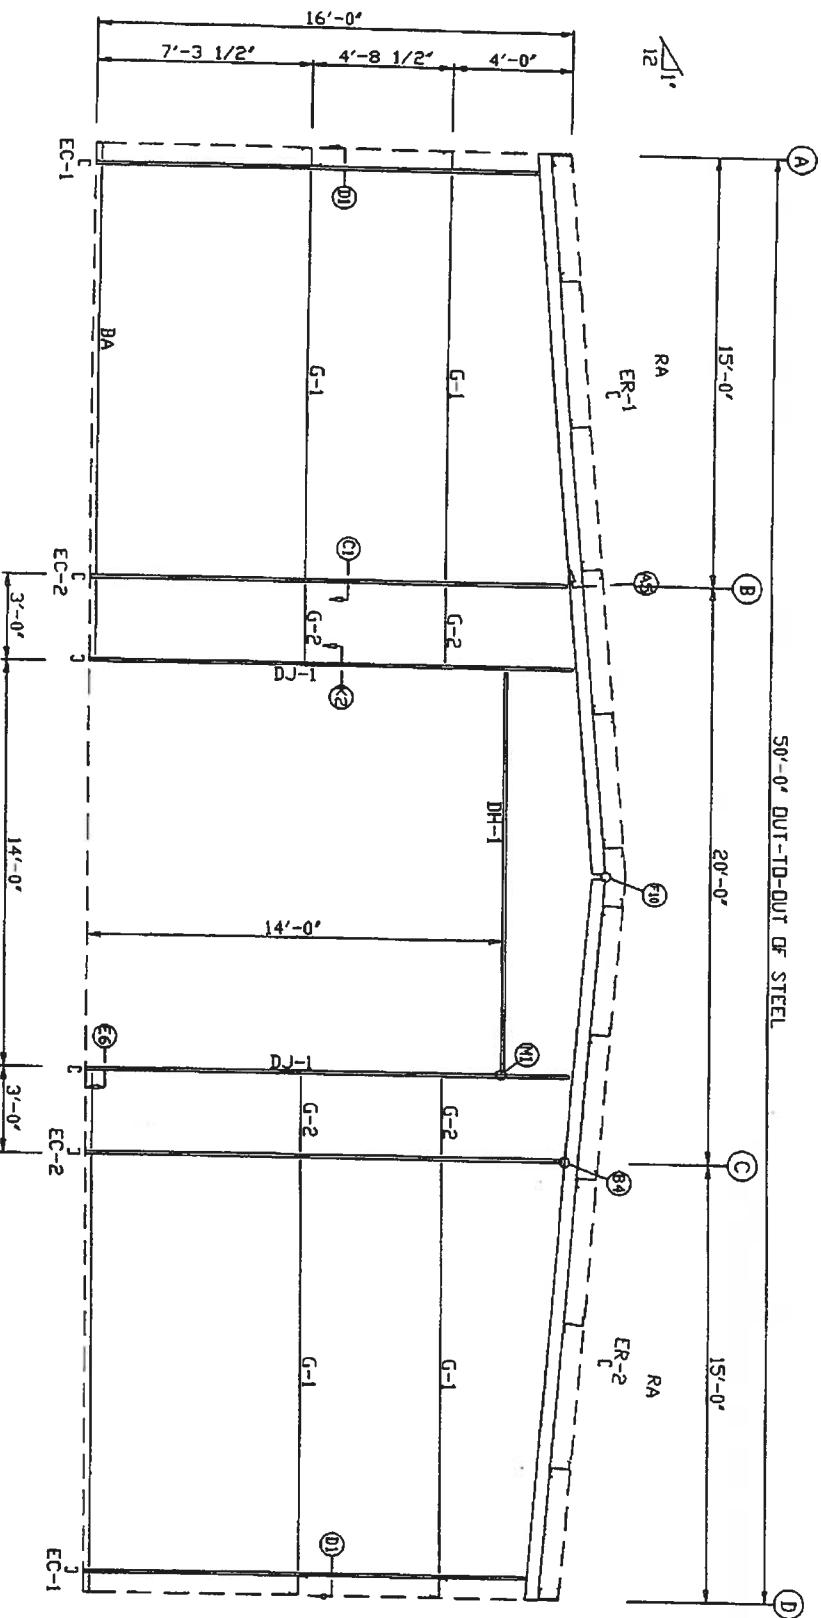

ENDWALL FRAMING: FRAME LINE 1

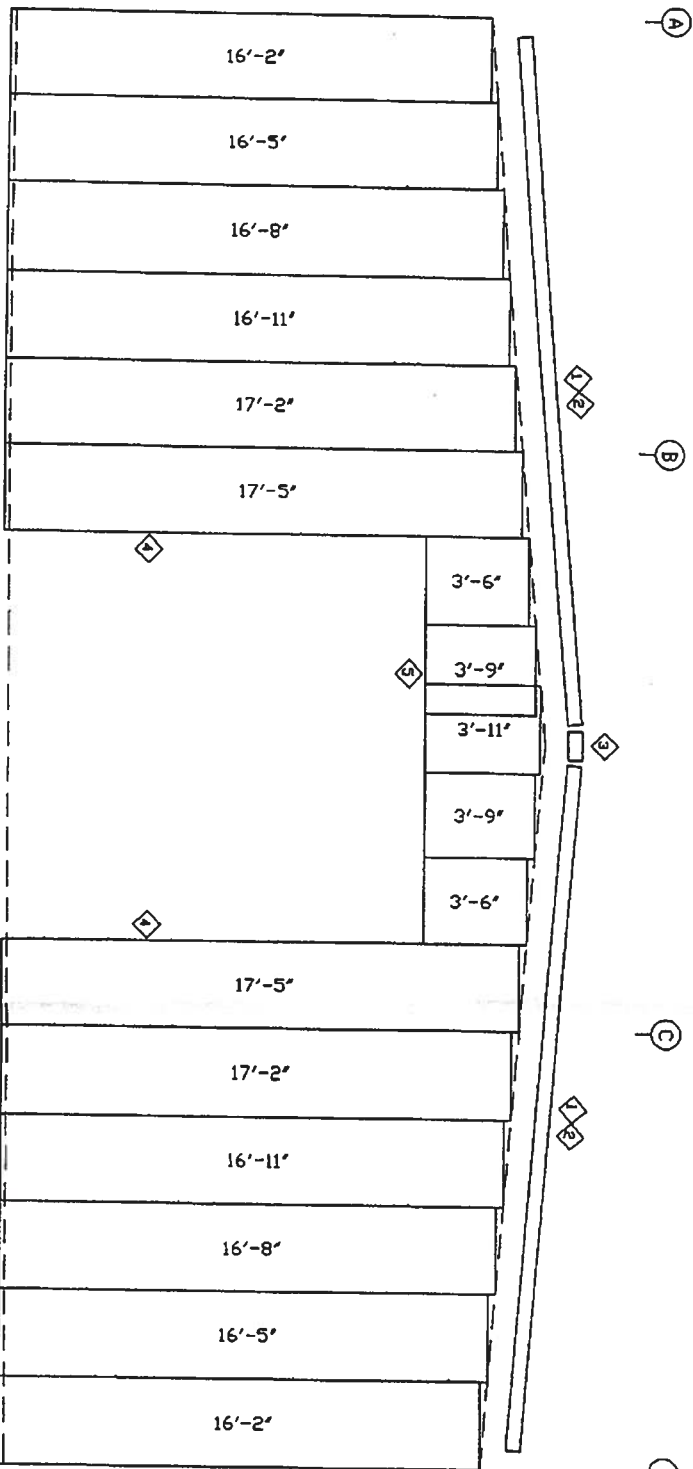

ENDWALL SHEETING & TRIM: FRAME LINE 1

PANELS: 26 Ga. PBR - Fern Green

Richard T. Smith

PE # 43347

301 Broome Street Suite 100

Lagrange, Georgia

Phone: (706) 882-1800

By Richard T. Smith #23-21 pm, Jun 19, 2007



GENERAL NOTES:
(1) IF CABLE BRACING FOR END WALL IS NOT SHOWN ON ERECTION DRAWINGS IT HAS BEEN DETERMINED THAT DIAPHRAGM PANEL ACTION IS SUFFICIENT TO RESIST LONGITUDINAL FORCES. TEMPORARY BRACING SHOULD BE PROVIDED BY ERECTOR UNTIL ALL WALL AND ROOF PANELS ARE INSTALLED.

REVISIONS					
REV.	DESCRIPTION	DATE	DLR	DATE	CHKR


DRAWING STATUS					

EXPERT BLDG. SYSTEMS					
PROJECT	5000' x 1000' x 160	ENDWALL FRAMING	DESIGN: SPV	DRAFT: PK	CHECK:
ID	17527				
PROJECT	LAKE CITY, FL				
ADDRESS					
DATE: 6/14/07		SHEET 7	OF 10		


BOLT TABLE			
FRAME LINE S	QUAN	TYPE	DIA
ER-1/ER-2	8	A325	5/8"
Columns	4	A325	1/2"
Jumbo	2	A325	1 1/4"

TRIM TABLE			
FRAME LINE S	OLD MARK	LENGTH	DETAIL
1	FL-766	20'-2"	TM11
2	XL-764	5'-5"	TM11
3	FL-767	1'-4"	TM39
4	JTR	14'-2"	TM31
5	HT	14'-3"	TM33


MEMBER TABLE			
MARK	PART	LENGTH	
EC-1	8x35C16	14'-5"	5/8"
EC-2	8x35C12	15'-7"	15/16"
ER-1	10x25C13	25'-1"	1/16"
ER-2	10x25C13	25'-1"	1/16"
DJ-1	8x35C16	15'-10"	15/16"
DH-1	8x35C16	14'-0"	
G-1	8x25Z16	14'-0"	
G-2	8x25Z16	2'-4"	1/2"

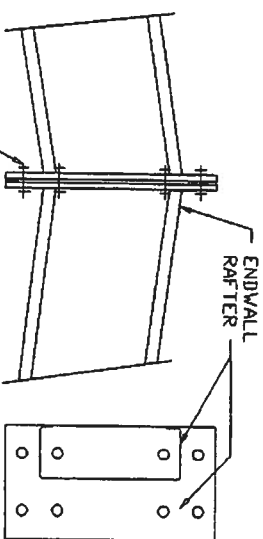

F10 RAFTER SPLICE AT SURFACE CHANGE

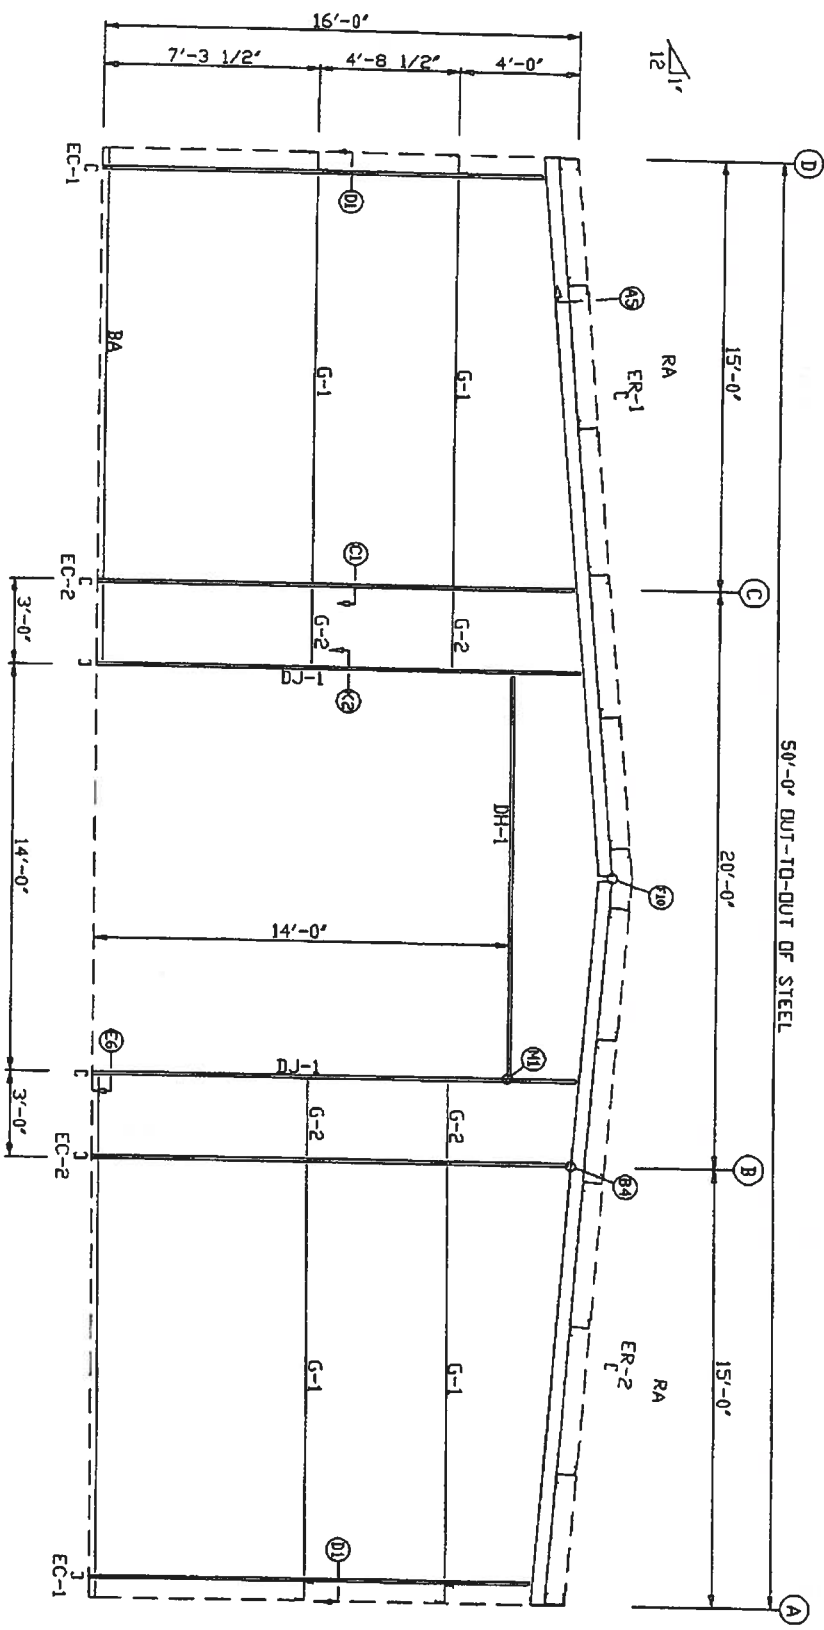

ENDWALL FRAMING: FRAME LINE S

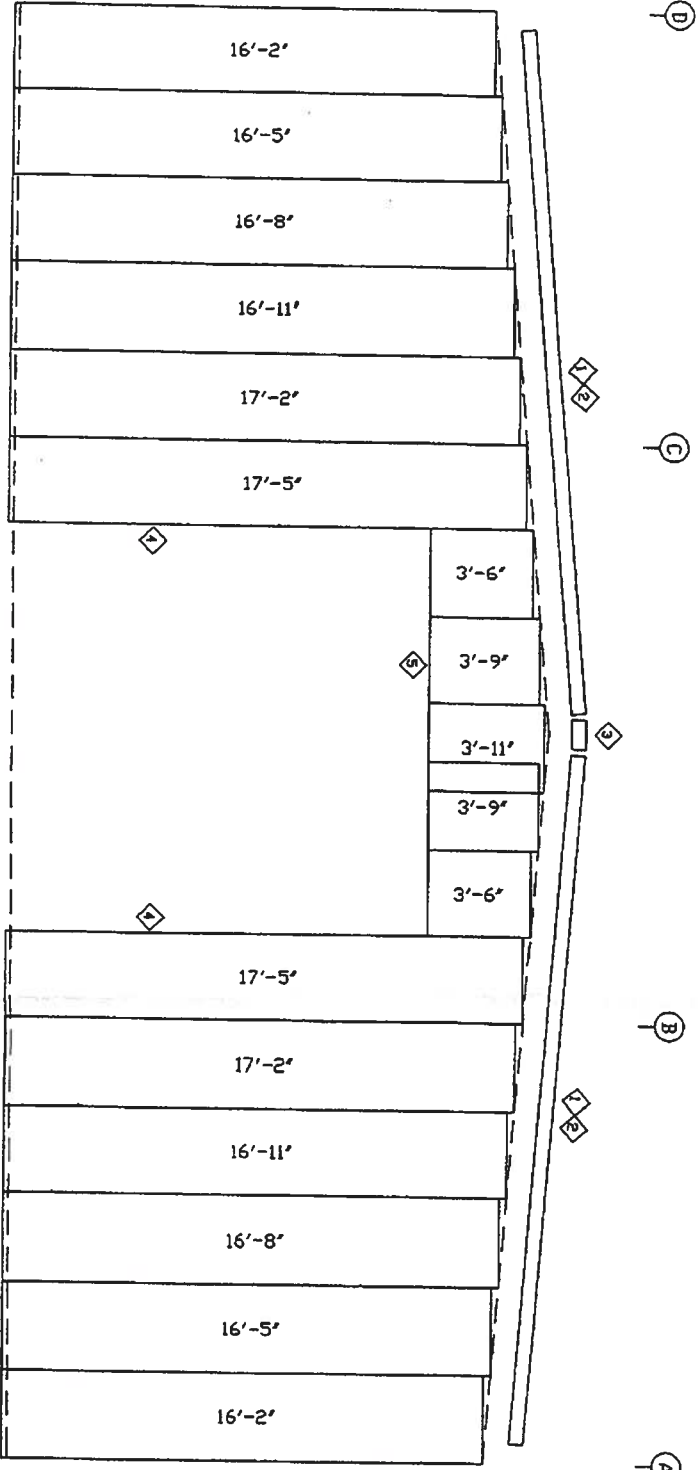

ENDWALL SHEETING & TRIM: FRAME LINE S


PANELS: 26 Ga. PBR - Fern Green

Richard T. Smith
PE # 43347

301 Broome Street Suite 100

Lagrange, Georgia

Phone: (770) 882-1200

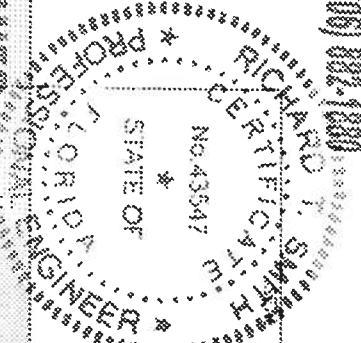

REVIEWED
By Richard T. Smith at 3:21 pm, Jun 18, 2007

GENERAL NOTES:

1) IF CABLE BRACING FOR END WALL IS NOT SHOWN ON ERECTION DRAWINGS IT HAS BEEN DETERMINED THAT DIAPHRAGM PANEL ACTION IS SUFFICIENT TO RESIST LONGITUDINAL FORCES. TEMPORARY BRACING SHOULD BE PROVIDED BY ERECTOR UNTIL ALL WALL AND ROOF PANELS ARE INSTALLED.

REVISIONS					
REV.	DESCRIPTION	DATE	DLR	DATE	CHKR

DRAWING STATUS					

EXPERT BLDG. SYSTEMS					
PROJECT	3000' x 1000' x 160'	ENDWALL FRAMING			
DESIGN	SPV	DRAFT	PK	CHECK	
DATE	6/14/07	SHEET	8	OF	10