

28'0"0


64'0"0

(31) T01

1'10"8

64'0"0

28'0"0

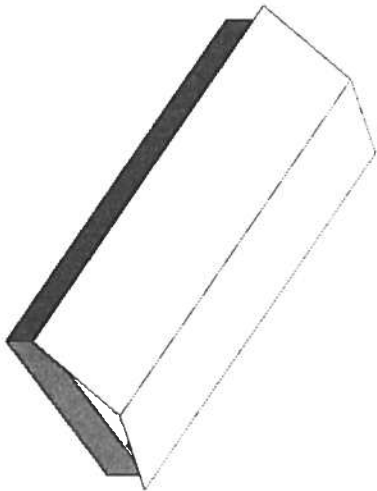

BEARING HEIGHT SCHEDULE

PLATE

NOTES:

- 1) REFER TO HIB 91 (RECOMMENDATIONS FOR HANDLING INSTALLATION AND TEMPORARY BRACING) REFER TO ENGINEERED DRAWINGS FOR PERMANENT BRACING REQUIRED
- 2) ALL TRUSSES (INCLUDING TRUSSES UNDER VALLEY FRAMING) MUST BE COMPLETELY DECKED OR REFER TO DETAIL V05 FOR ALTERNATE BRACING REQUIREMENTS
- 3) ALL VALLEYS ARE TO BE CONVENTIONALLY FRAMED BY BUILDER
- 4) ALL TRUSSES ARE DESIGNED FOR 2 OC MAXIMUM SPACING, UNLESS OTHERWISE NOTED
- 5) ALL WALLS SHOWN ON PLACEMENT PLAN ARE CONSIDERED TO BE LOAD BEARING, UNLESS OTHERWISE NOTED
- 6) S742 TRUSSES MUST BE INSTALLED WITH THE TOP BEING UP
- 7) ALL ROOF TRUSS HANGERS TO BE SAMPSON H4526 UNLESS OTHERWISE NOTED. ALL FLOOR TRUSS HANGERS TO BE SAMPSON TH4422 UNLESS OTHERWISE NOTED
- B) BEARING ADJUSTER (BAR) TO BE FURNISHED BY BUILDER

SHOP DRAWING APPROVAL

THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND JOISTS. ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS, REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.

Typical Detail Date _____

Approved By: _____ Date: _____



Burrell
PHONE 904-437-3349 FAX 904-437-3984

Jacksonville
PHONE 904-772-6100 FAX 904-772-1973

Lake City
PHONE 386-755-6884 FAX 386-755-7973

Sanford
PHONE 407-322-0059 FAX 407-322-5553

BUILDER
GRACE COVENANT CHURCH
COLUMBIA COUNTY

WORK 28X64		REVISION
DATE 10/23/07		SCALE NTS
DRAWN BY JRD		CHECKED L258934