



Lumber design values are in accordance with ANSI/TPI 1 section 6.3
These truss designs rely on lumber values established by others.

RE: 2564966 - EVANSTON CONT - AREA 36

MiTek USA, Inc.
6904 Parke East Blvd.
Tampa, FL 33610-4115

Site Information:

Customer Info: Evanston Cont/ Project Name: Area 36 Model: Custom
Lot/Block: N/A Subdivision: N/A
Address: TBD, TBD
City: Columbia Cty State: FL

Name Address and License # of Structural Engineer of Record, If there is one, for the building.

Name: License #:
Address:
City: State:

General Truss Engineering Criteria & Design Loads (Individual Truss Design Drawings Show Special Loading Conditions):

Design Code: FBC2020/TPI2014 Design Program: MiTek 20/20 8.4
Wind Code: N/A Wind Speed: 130 mph
Roof Load: 40.0 psf Floor Load: 65.0 psf


This package includes 77 individual, Truss Design Drawings and 0 Additional Drawings.
With my seal affixed to this sheet, I hereby certify that I am the Truss Design Engineer and this index sheet conforms to 61G15-31.003, section 5 of the Florida Board of Professional Engineers Rules.

No.	Seal#	Truss Name	Date	No.	Seal#	Truss Name	Date
1	T22511149	CJ01	1/19/21	23	T22511171	HJ10	1/19/21
2	T22511150	CJ03	1/19/21	24	T22511172	KW1	1/19/21
3	T22511151	CJ05	1/19/21	25	T22511173	KW2	1/19/21
4	T22511152	EJ01	1/19/21	26	T22511174	KW3	1/19/21
5	T22511153	EJ02	1/19/21	27	T22511175	KW4	1/19/21
6	T22511154	EJ03	1/19/21	28	T22511176	KW5	1/19/21
7	T22511155	F01	1/19/21	29	T22511177	KW6	1/19/21
8	T22511156	F02	1/19/21	30	T22511178	KW12	1/19/21
9	T22511157	F03	1/19/21	31	T22511179	KW13	1/19/21
10	T22511158	F04	1/19/21	32	T22511180	KW14	1/19/21
11	T22511159	F05	1/19/21	33	T22511181	KW15	1/19/21
12	T22511160	F06	1/19/21	34	T22511182	T01	1/19/21
13	T22511161	F07	1/19/21	35	T22511183	T02	1/19/21
14	T22511162	F08	1/19/21	36	T22511184	T03	1/19/21
15	T22511163	F09	1/19/21	37	T22511185	T04	1/19/21
16	T22511164	F10	1/19/21	38	T22511186	T05	1/19/21
17	T22511165	F11	1/19/21	39	T22511187	T06	1/19/21
18	T22511166	F12	1/19/21	40	T22511188	T07	1/19/21
19	T22511167	F14	1/19/21	41	T22511189	T08	1/19/21
20	T22511168	F15	1/19/21	42	T22511190	T09	1/19/21
21	T22511169	F16	1/19/21	43	T22511191	T10	1/19/21
22	T22511170	HJ06	1/19/21	44	T22511192	T11	1/19/21

The truss drawing(s) referenced above have been prepared by MiTek USA, Inc. under my direct supervision based on the parameters provided by Builders FirstSource-Jacksonville.

Truss Design Engineer's Name: Finn, Walter
My license renewal date for the state of Florida is February 28, 2021.

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek or TRENCO. Any project specific information included is for MiTek's or TRENCO's customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek or TRENCO has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.

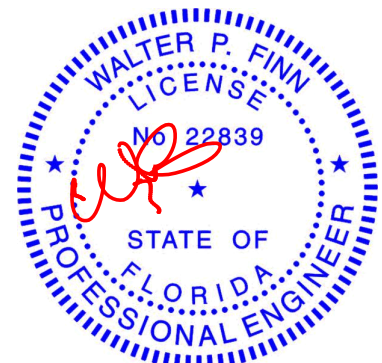

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021



RE: 2564966 - EVANSTON CONT - AREA 36

MiTek USA, Inc.
6904 Parke East Blvd.
Tampa, FL 33610-4115

Site Information:

Customer Info: Evanston Cont/ Project Name: Area 36 Model: Custom
Lot/Block: N/A Subdivision: N/A
Address: TBD, TBD
City: Columbia Cty State: FL


No.	Seal#	Truss Name	Date
45	T22511193	T12	1/19/21
46	T22511194	T13	1/19/21
47	T22511195	T13G	1/19/21
48	T22511196	T14	1/19/21
49	T22511197	T15	1/19/21
50	T22511198	T16	1/19/21
51	T22511199	T17	1/19/21
52	T22511200	T18	1/19/21
53	T22511201	T19	1/19/21
54	T22511202	T20	1/19/21
55	T22511203	T20G	1/19/21
56	T22511204	T21	1/19/21
57	T22511205	T22	1/19/21
58	T22511206	T23	1/19/21
59	T22511207	T24	1/19/21
60	T22511208	T25	1/19/21
61	T22511209	T25G	1/19/21
62	T22511210	T26	1/19/21
63	T22511211	T27	1/19/21
64	T22511212	T28	1/19/21
65	T22511213	T29	1/19/21
66	T22511214	T30	1/19/21
67	T22511215	T31	1/19/21
68	T22511216	T32	1/19/21
69	T22511217	T33	1/19/21
70	T22511218	T34	1/19/21
71	T22511219	T35	1/19/21
72	T22511220	T35G	1/19/21
73	T22511221	T36	1/19/21
74	T22511222	T37	1/19/21
75	T22511223	TFG01	1/19/21
76	T22511224	TFG02	1/19/21
77	T22511225	TFG03	1/19/21

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511149
2564966	CJ01	Jack-Open	16	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL),

Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:19 2021 Page 1
ID:ub_yh031H0hBlibYeMMTsO4zuVkt-3pqB1XWi08cYJejZnYyPRQvf3JqWXP5MzIScmEztqkU

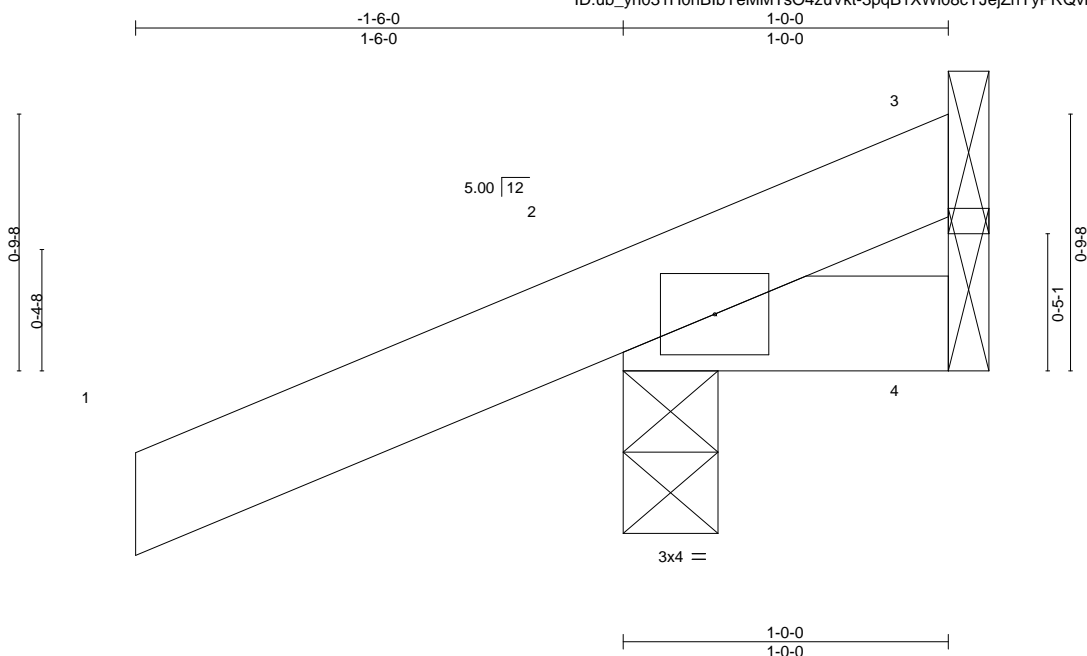

Scale = 1:7.1

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.14	Vert(LL)	0.00	7	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.03	Vert(CT)	0.00	7	>999	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	2	n/a	n/a		
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-MP						Weight: 6 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2

BRACING-


TOP CHORD Structural wood sheathing directly applied or 1-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 3=Mechanical, 2=0-3-8, 4=Mechanical
Max Horz 2=35(LC 8)
Max Uplift 3=-7(LC 1), 2=-89(LC 8), 4=-22(LC 1)
Max Grav 3=11(LC 8), 2=198(LC 1), 4=21(LC 8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 3, 2, 4.

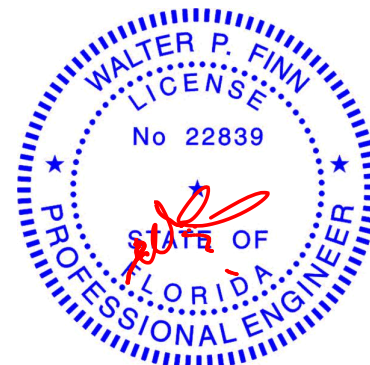

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511150
2564966	CJ03	Jack-Open	16	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL),

Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:20 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-X0NaFtWLnSkPwoILGTe_eSqj94GGLVCPB9JgztqkT

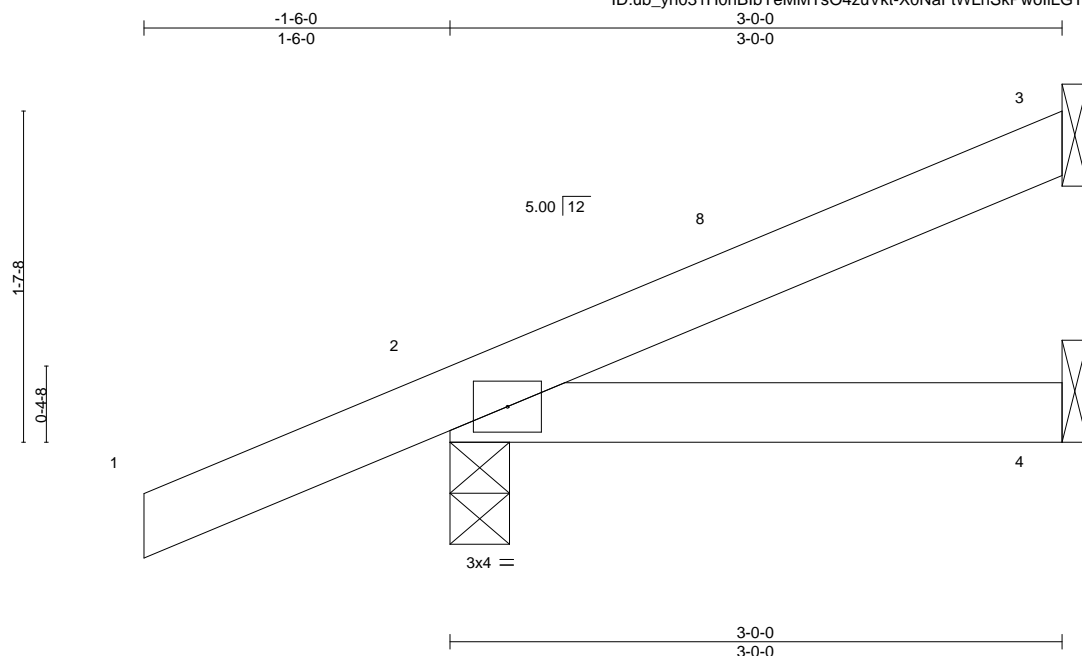

Scale = 1:11.3

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.14	Vert(LL)	-0.00	4-7	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.07	Vert(CT)	-0.01	4-7	>999	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.00	3	n/a	n/a		
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-MP						Weight: 12 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 3=Mechanical, 2=0-3-8, 4=Mechanical
Max Horz 2=65(LC 12)
Max Uplift 3=35(LC 12), 2=69(LC 8)
Max Grav 3=65(LC 1), 2=230(LC 1), 4=50(LC 3)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 2-11-4 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 3, 2.

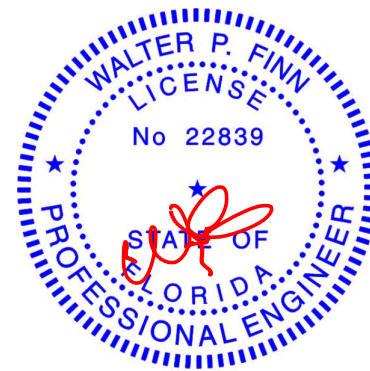

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511151
2564966	CJ05	Jack-Open	12	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:20 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-X0NaFtWLnSkPwollLGT_eSoGj7MGLVCPB9JgztqkT

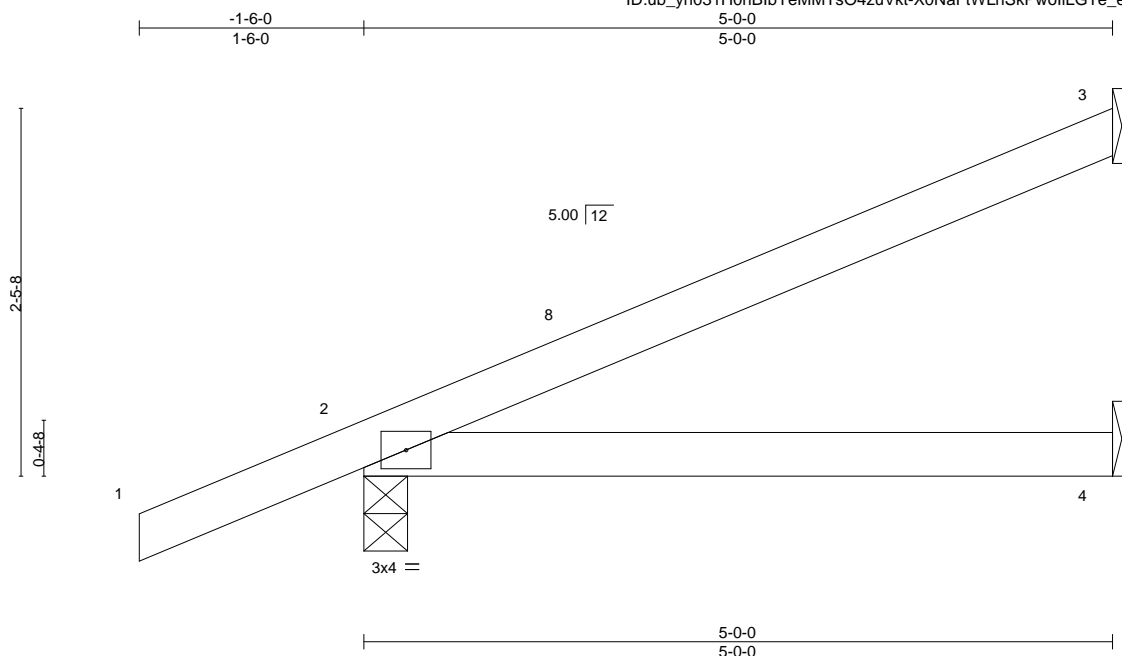

Scale = 1:15.4

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.30	Vert(LL)	0.03	4-7	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.24	Vert(CT)	-0.06	4-7	>999	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.00	3	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MP						Weight: 18 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2

BRACING-


TOP CHORD Structural wood sheathing directly applied or 5-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 3=Mechanical, 2=0-3-8, 4=Mechanical
Max Horz 2=95(LC 12)
Max Uplift 3=66(LC 12), 2=79(LC 12)
Max Grav 3=124(LC 1), 2=301(LC 1), 4=89(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 4-11-4 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 3, 2.

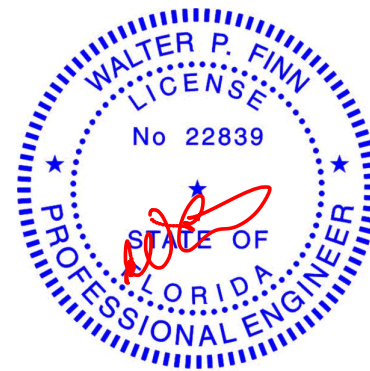

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511152
2564966	EJ01	Jack-Partial	17	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:21 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-?CxySDXzYmsGYytuz_tWr?t47O6?jbeQ3xjr6ztqkS

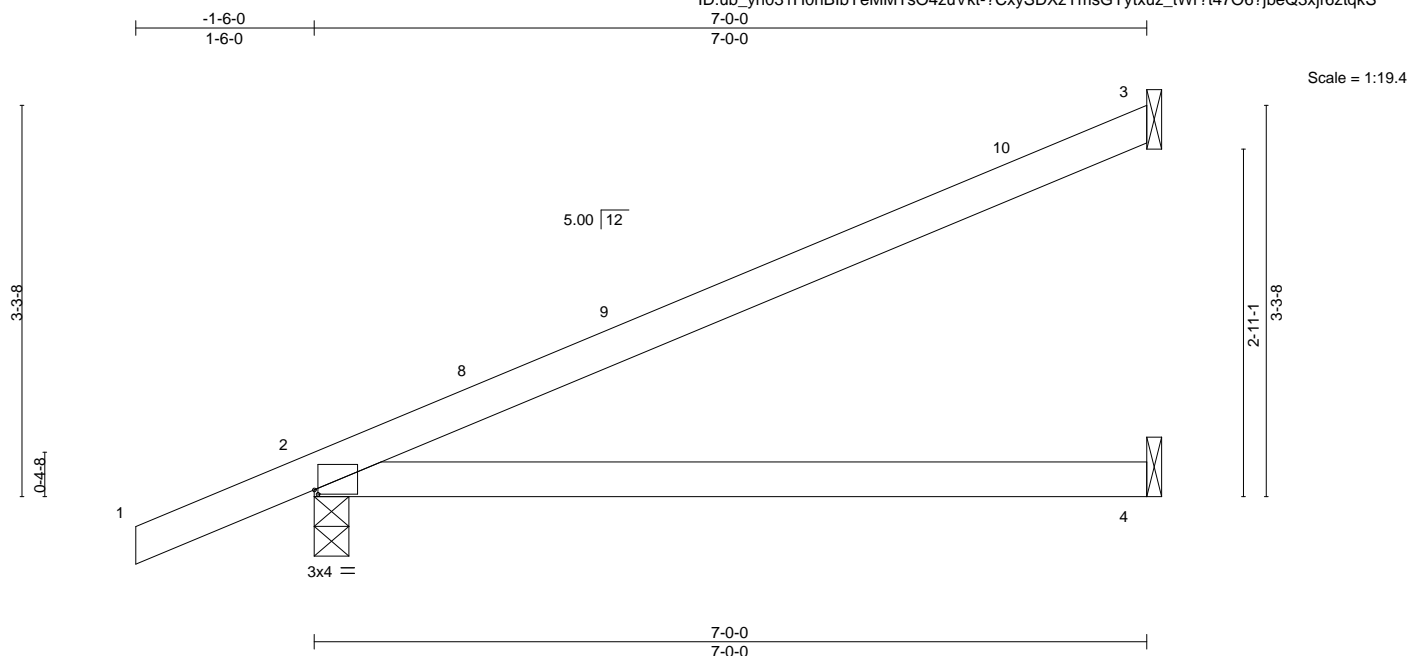


Plate Offsets (X,Y)-- [2:0-0-6,0-0-7]

LOADING (psf)	SPACING-		CSL	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.68	Vert(LL)	0.11	4-7	>789	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.53	Vert(CT)	-0.23	4-7	>369	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.01	2	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS						Weight: 24 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6'-0'-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10'-0'-0 oc bracing.

REACTIONS. (size) 3=Mechanical, 2=0-3-8, 4=Mechanical
Max Horz 2=121(LC 12)
Max Uplift 3=-85(LC 12), 2=-94(LC 12)
Max Grav 3=181(LC 1), 2=377(LC 1), 4=128(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 6-11-4 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-6"-0 tall by 2'-0"-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 3, 2.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511153
2564966	EJ02	Jack-Open Girder	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:22 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-UOVKgYYbJ3_7A6S7ShW633X9XWjnk3NofjgGNYztqkR

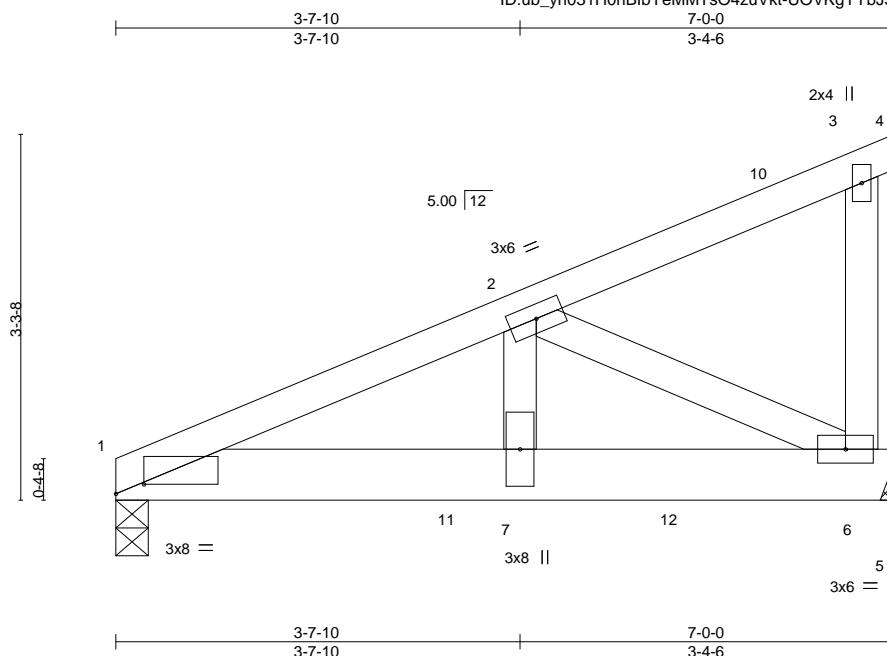

Scale = 1:20.7

Plate Offsets (X,Y)-- [1:0-3-0,0-1-0]

LOADING (psf)	SPACING-		CSI.		DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.25		Vert(LL)	-0.02	7-9	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.63		Vert(CT)	-0.05	7-9	>999	180		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.41		Horz(CT)	0.01	6	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS							Weight: 38 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x6 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-6-1 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 1=0-3-8, 6=Mechanical
Max Horz 1=102(LC 8)
Max Uplift 1=-254(LC 8), 6=-255(LC 8)
Max Grav 1=1100(LC 1), 6=962(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.


TOP CHORD 1-2=-1534/340
BOT CHORD 1-7=-382/1411, 6-7=-382/1411
WEBS 2-7=-219/1035, 2-6=-1571/426

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=254, 6=255.
- 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 508 lb down and 137 lb up at 1-0-12, and 503 lb down and 136 lb up at 3-0-12, and 503 lb down and 136 lb up at 5-0-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-3=-60, 3-4=-20, 1-5=-20
Concentrated Loads (lb)
Vert: 9=-508(F) 11=-503(F) 12=-503(F)

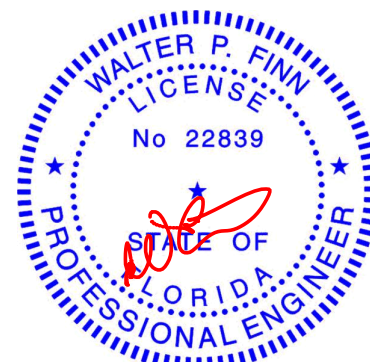

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511154
2564966	EJ03	Jack-Open	6	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:23 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-yb3ituZD4N6_nG1K0O1LcG4L1wBzTc4xuNQpv?ztqkQ

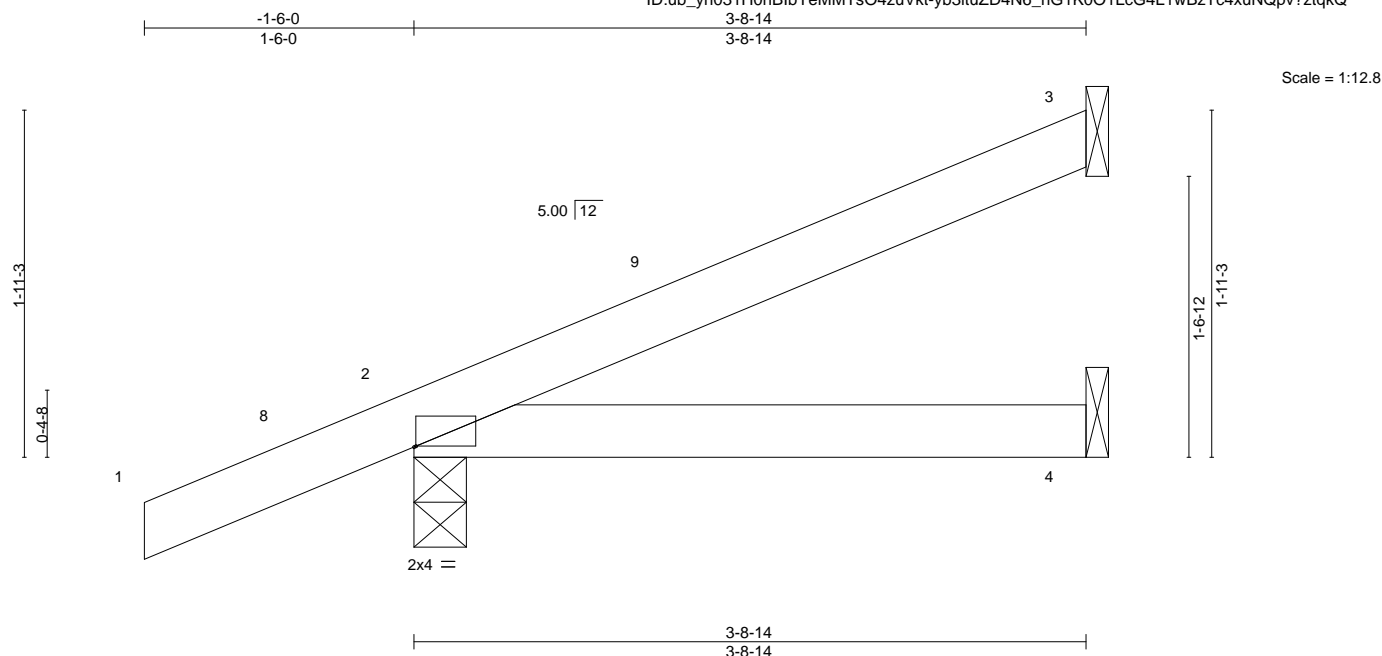


Plate Offsets (X,Y)--		[2:0-0-2,Edge]									
LOADING	(psf)	SPACING-		CSI.		DEFL.	in	(loc)	l/defl	L/d	PLATES
TCLL	20.0	Plate Grip DOL	1.25	TC	0.14	Vert(LL)	-0.01	4-7	>999	240	MT20
TCDL	10.0	Lumber DOL	1.25	BC	0.12	Vert(CT)	-0.02	4-7	>999	180	GRIP
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.00	Horz(CT)	0.00	3	n/a	n/a	244/190
BCDL	10.0	Code	FBC2020/TPI2014	Matrix-MP							Weight: 14 lb
											FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-8-14 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 3=Mechanical, 2=0-3-8, 4=Mechanical
Max Horz 2=76(LC 12)
Max Uplift 3=-47(LC 12), 2=-71(LC 12)
Max Grav 3=88(LC 1), 2=255(LC 1), 4=65(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 3-8-2 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 3, 2.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511155
2564966	F01	Floor	6	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:25 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-uzBTIaaTc_Ni1ZAI7p3phh9ZykhaxLZELhww_tztqkO

0-1-8

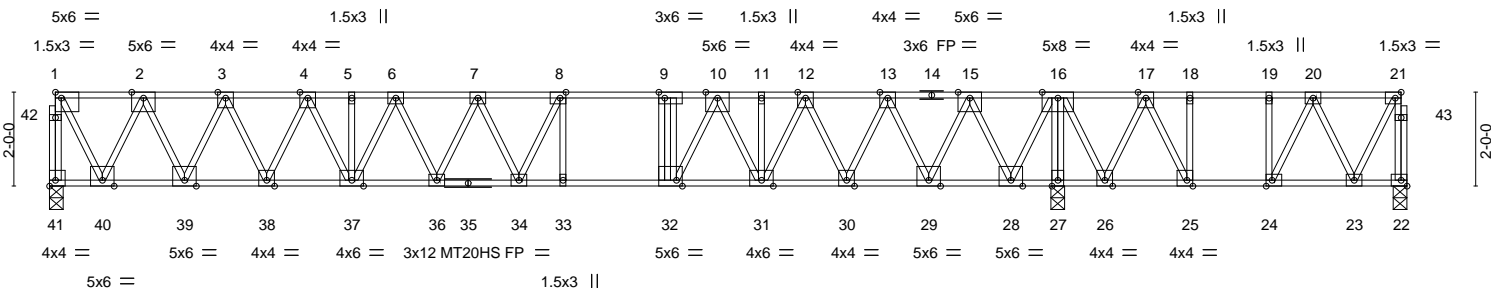

	6-4-8	11-0-0	12-11-12	15-2-12	21-5-12	28-11-0
	6-4-8	4-7-8	1-11-12	2-3-0	6-3-0	7-5-4
Plate Offsets (X,Y)--	[1:Edge,0-1-8], [8:0-1-8,Edge], [9:0-1-8,Edge], [21:0-1-8,Edge], [24:0-1-8,Edge], [25:0-1-8,Edge], [32:0-1-8,Edge], [41:Edge,0-1-8]					

LOADING (psf)	SPACING-	CSL	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.63	Vert(LL) -0.23	33-34	>999	360	MT20	244/190
TCDL 15.0	Lumber DOL 1.00	BC 0.82	Vert(CT) -0.37	33-34	>693	240	MT20HS	187/143
BCLL 0.0	Rep Stress Incr YES	WB 0.71	Horz(CT) 0.06	27	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-S					Weight: 200 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP M 31(flat)
BOT CHORD 2x4 SP M 31(flat)
WEBS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS. (size) 41=0-3-8, 22=0-3-8, 27=0-3-8
Max Uplift 22=-40(LC 3)
Max Grav 41=1311(LC 10), 22=374(LC 4), 27=2169(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-41=-1302/0, 21-22=-378/21, 1-2=-653/0, 2-3=-1665/0, 3-4=-2449/0, 4-5=-3055/0, 5-6=-3055/0, 6-7=-3412/0, 7-8=-3539/0, 8-9=-3424/0, 9-10=-3414/0, 10-11=-2716/0, 11-12=-2716/0, 12-13=-1991/0, 13-15=-1069/0, 15-16=0/267, 16-17=0/678, 17-18=-266/256, 18-19=-266/256, 19-20=-266/256
BOT CHORD 39-40=0/1211, 38-39=0/2101, 37-38=0/2781, 36-37=0/3271, 34-36=0/3546, 33-34=0/3424, 32-33=0/3424, 31-32=0/3012, 30-31=0/2377, 29-30=0/1576, 28-29=0/545, 27-28=-911/0, 26-27=-911/0, 25-26=-504/90, 24-25=-256/266, 23-24=-88/270
WEBS 16-27=-2035/0, 1-40=0/1364, 16-28=0/1481, 2-40=-1318/0, 15-28=-1460/0, 2-39=0/1074, 15-29=0/1258, 3-39=-1032/0, 13-29=-1218/0, 3-38=0/823, 13-30=0/995, 4-38=-786/0, 12-30=-925/0, 4-37=0/611, 12-31=0/773, 6-37=-483/0, 10-31=-680/0, 6-36=0/334, 10-32=0/1030, 7-36=-317/0, 9-32=-587/0, 21-23=-39/333, 16-26=0/564, 20-23=-256/164, 17-26=-663/0, 20-24=-376/0, 17-25=0/706, 18-25=-420/0, 8-33=-380/12, 8-34=-178/495

NOTES-

- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are MT20 plates unless otherwise indicated.
- 3) All plates are 3x4 MT20 unless otherwise indicated.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 22.
- 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 6) CAUTION, Do not erect truss backwards.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511156
2564966	F02	Floor	7	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,


8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:26 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-MAIrVwb5MIVZejlvhWa2Dvimr82ygo1NaLeUWKztqkN

0-1-8

H 0-10-8

2-1-0

0-1-8
Scale = 1:40.0

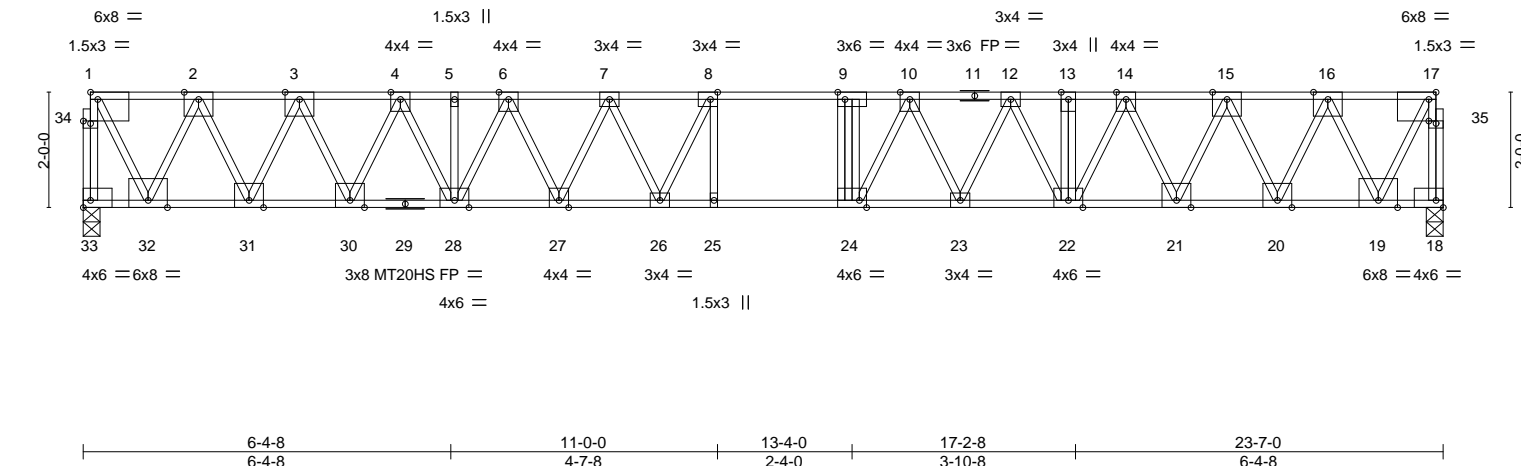

LOADING (psf)	SPACING-	CSL	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.49	Vert(LL) -0.25	25	>999	360		MT20	244/190
TCDL 15.0	Lumber DOL 1.00	BC 0.74	Vert(CT) -0.41	25	>685	240		MT20HS	187/143
BCLL 0.0	Rep Stress Incr YES	WB 0.76	Horz(CT) 0.09	18	n/a	n/a			
BCDL 10.0	Code FBC2020/TPI2014	Matrix-S							
								Weight: 165 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP M 31(flat)
BOT CHORD 2x4 SP M 31(flat)
WEBS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS. (size) 33=0-3-8, 18=0-3-8
Max Grav 33=1510(LC 1), 18=1510(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-33=-1500/0, 17-18=-1500/0, 1-2=-759/0, 2-3=-1956/0, 3-4=-2926/0, 4-5=-3722/0, 5-6=-3722/0, 6-7=-4271/0, 7-8=-4594/0, 8-9=-4686/0, 9-10=-4681/0, 10-12=-4294/0, 12-13=-3746/0, 13-14=-3746/0, 14-15=-2926/0, 15-16=-1956/0, 16-17=-759/0
BOT CHORD 31-32=0/1409, 30-31=0/2486, 28-30=0/3351, 27-28=0/4045, 26-27=0/4481, 25-26=0/4686, 24-25=0/4686, 23-24=0/4496, 22-23=0/4085, 21-22=0/3351, 20-21=0/2485, 19-20=0/1409
WEBS 17-19=0/1586, 1-32=0/1586, 16-19=-1537/0, 2-32=-1537/0, 16-20=0/1293, 2-31=0/1293, 15-20=-1251/0, 3-31=-1252/0, 15-21=0/1042, 3-30=0/1042, 14-21=-1005/0, 4-30=-1004/0, 14-22=0/839, 4-28=0/829, 12-22=-721/0, 6-28=-723/0, 12-23=0/495, 6-27=0/534, 10-23=-553/0, 7-27=-498/0, 10-24=-90/773, 7-26=0/488, 8-26=-626/227, 9-24=-446/0

NOTES-

- Unbalanced floor live loads have been considered for this design.
- All plates are MT20 plates unless otherwise indicated.
- All plates are 5x6 MT20 unless otherwise indicated.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

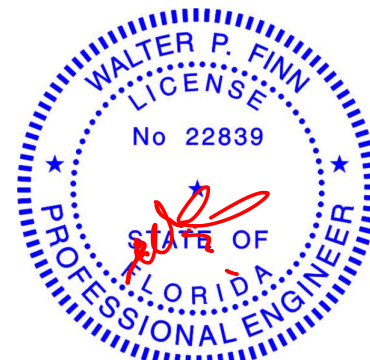

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:27 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-qMJDjGck7cdQGtK5FE5Hm6FsnXKZPDvXp?O13mztqkM

0-1-8
Scale = 1:36.5



FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD
1-31=-1688/0, 16-17=-1689/0, 1-2=-848/0, 2-3=-2173/0, 3-4=-3217/0, 4-5=-4043/0,
5-6=-4043/0, 6-8=-4565/0, 8-9=-4806/0, 9-10=-4757/0, 10-11=-4757/0, 11-12=-4059/0,
12-13=-4059/0, 13-14=-3221/0, 14-15=-2171/0, 15-16=-849/0

BOT CHORD
29-30=0/1576, 28-29=0/2751, 27-28=0/3667, 26-27=0/4357, 25-26=0/4764, 24-25=0/4757,
23-24=0/4757, 22-23=0/4393, 20-22=0/3661, 19-20=0/2753, 18-19=0/1576

WEBS
16-18=0/1772, 12-30=0/1771, 15-18=-1719/0, 2-30=-1721/0, 15-19=0/1409, 2-29=0/1410,
14-19=-1375/0, 3-29=-1368/0, 14-20=0/1106, 3-28=0/1102, 13-20=-1041/0,
4-28=-1065/0, 13-22=0/845, 4-27=0/841, 11-22=-755/0, 6-27=-701/0, 11-23=0/1189,
6-26=0/491, 8-26=-171/0, 8-25=-154/432, 10-23=-707/0, 9-24=-438/163, 9-25=-508/528

- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are MT20 plates unless otherwise indicated.
- 3) All plates are 5x6 MT20 unless otherwise indicated.
- 4) Recommend 2x6 strongbacks, on edge, spaced at 10'-0" oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.



January 19, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511158
2564966	F04	Floor	6	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,


8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:28 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-IYsbwccMuvIGu1vHpXcWJkn0mxhi8nng1f7abCztqkL

0-1-8

0-10-8

1-11-14

Scale = 1:22.5

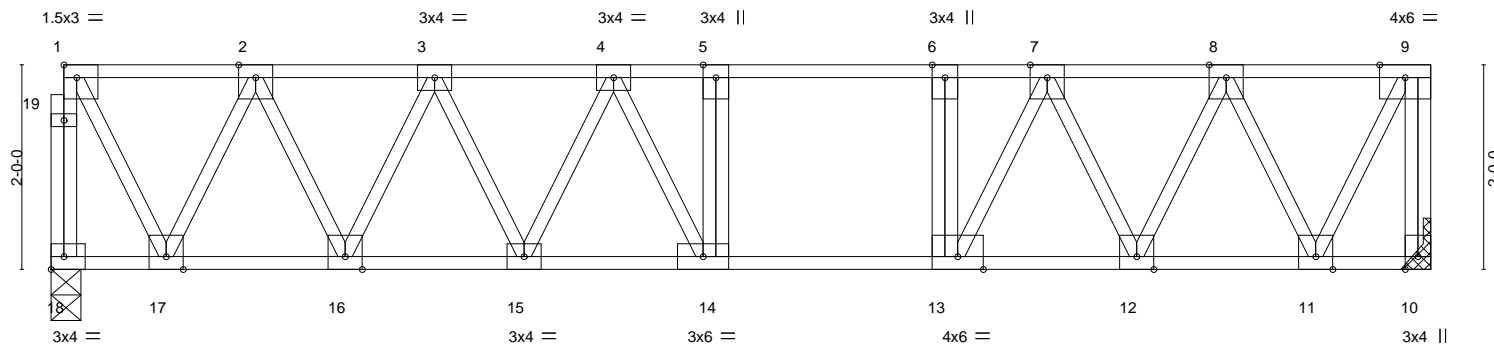

4-7-8	6-7-8	8-7-6	8-10-6	13-5-14
4-7-8	2-0-0	1-11-14	0-3-0	4-7-8

Plate Offsets (X,Y)-- [1:Edge,0-1-8]

LOADING (psf)	SPACING-	CSL	DEFL.	in (loc)	I/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.85	Vert(LL)	-0.12 14-15	>999	360	MT20	244/190
TCDL 15.0	Lumber DOL 1.00	BC 0.92	Vert(CT)	-0.17 14-15	>941	240		
BCLL 0.0	Rep Stress Incr YES	WB 0.42	Horz(CT)	0.02 10	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-S					Weight: 95 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6'-0" oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10'-0" oc bracing, Except: 2'-2" oc bracing: 13-14.

REACTIONS. (size) 18=0-3-8, 10=Mechanical
Max Grav 18=854(LC 1), 10=861(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-18=-847/0, 9-10=-857/0, 1-2=-412/0, 2-3=-993/0, 3-4=-1364/0, 4-5=-1470/0,
5-6=-1470/0, 6-7=-1470/0, 7-8=-982/0, 8-9=-415/0
BOT CHORD 16-17=0/754, 15-16=0/1221, 14-15=0/1468, 13-14=0/1470, 12-13=0/1213, 11-12=0/757
WEBS 9-11=0/881, 1-17=0/857, 8-11=-809/0, 2-17=-810/0, 8-12=0/533, 2-16=0/564,
7-12=-546/0, 3-16=-539/0, 3-15=0/337, 4-15=-251/0, 6-13=-413/0, 7-13=0/667,
4-14=-149/267

NOTES-

- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are 4x4 MT20 unless otherwise indicated.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Recommend 2x6 strongbacks, on edge, spaced at 10'-0" oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 5) CAUTION, Do not erect truss backwards.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511159
2564966	F05	Floor	10	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,


8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:28 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-IYsbwccMuvIGu1vHpccWJkn45xow8mWg1f7abCztqkL

0-1-8

0-10-8

1-11-4

Scale = 1:26.5

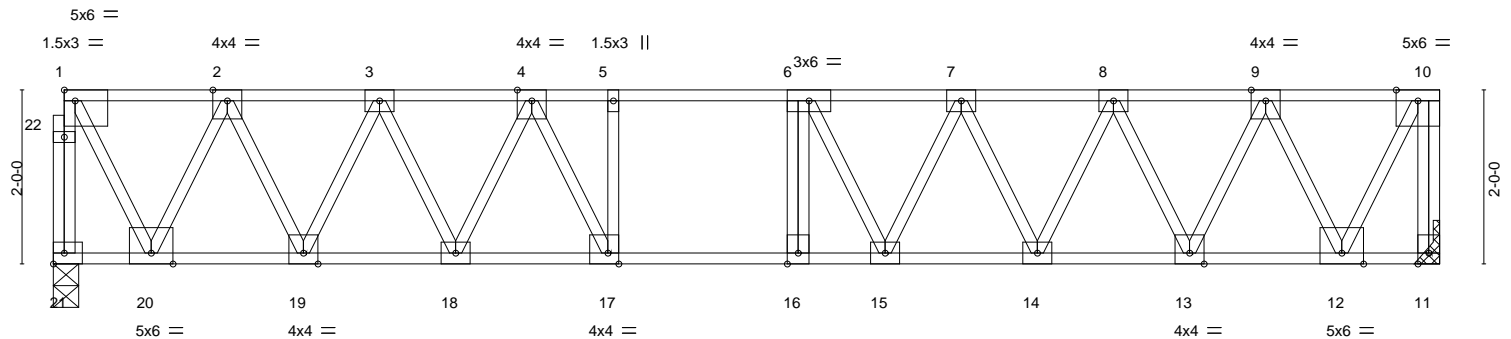

6-6-0	8-6-12	15-11-4
6-6-0	2-0-12	7-4-8

Plate Offsets (X,Y)-- [1:Edge,0-1-8], [17:0-1-8,Edge]

LOADING (psf)	SPACING-	CSL	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	2-0-0	TC 0.63	Vert(LL)	-0.11 15-16	>999	360	MT20	244/190
TCDL 15.0	Plate Grip DOL 1.00	BC 0.45	Vert(CT)	-0.16 15-16	>999	240		
BCLL 0.0	Lumber DOL 1.00	WB 0.50	Horz(CT)	0.03 11	n/a	n/a		
BCDL 10.0	Rep Stress Incr YES	Matrix-S						
	Code FBC2020/TPI2014						Weight: 109 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP M 31(flat)
WEBS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 21=0-3-8, 11=Mechanical
Max Grav 21=1013(LC 1), 11=1020(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-21=-1003/0, 10-11=-1010/0, 1-2=-494/0, 2-3=-1230/0, 3-4=-1728/0, 4-5=-2104/0, 5-6=-2104/0, 6-7=-2035/0, 7-8=-1737/0, 8-9=-1228/0, 9-10=-495/0
BOT CHORD 19-20=0/914, 18-19=0/1526, 17-18=0/1930, 16-17=0/2104, 15-16=0/2104, 14-15=0/1937, 13-14=0/1524, 12-13=0/915
WEBS 10-12=0/1051, 1-20=0/1031, 9-12=-994/0, 2-20=-991/0, 9-13=0/741, 2-19=0/749, 8-13=-698/0, 3-19=-698/0, 8-14=0/504, 3-18=0/479, 7-14=-473/0, 4-18=-478/0, 7-15=0/335, 4-17=0/593, 5-17=-327/0, 6-15=-391/90

NOTES-

- Unbalanced floor live loads have been considered for this design.
- All plates are 3x4 MT20 unless otherwise indicated.
- Refer to girder(s) for truss to truss connections.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:29 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-mIQz8yd_fDt7VBUUMf8lrXKliL6NtBxqGJt87eztqkK

Scale = 1:32.4



LUMBER-		BRACING-	
TOP CHORD	2x4 SP M 31 (flat)	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD	2x4 SP M 31 (flat)		
WEBS	2x4 SP No.3(flat)	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD
1-26=-1221/0, 13-14=-1227/0, 1-2=-610/0, 2-3=-1545/0, 3-4=-2255/0, 4-5=-2777/0,
5-6=-2777/0, 6-7=-3069/0, 7-8=-3051/0, 8-9=-3051/0, 9-10=-2763/0, 10-11=-2254/0,
11-12=-1546/0, 12-13=-610/0


BOT CHORD
24-25=0/1129, 23-24=0/1945, 22-23=0/2548, 21-22=0/2966, 20-21=0/3125, 19-20=0/3051,
18-19=0/3051, 17-18=0/2538, 16-17=0/1947, 15-16=0/1130

WEBS
13-15=0/1295, 1-25=0/1274, 12-15=-1231/0, 2-25=-1228/0, 12-16=0/984, 2-24=0/984,
11-16=-947/0, 3-24=-944/0, 11-17=0/726, 3-23=0/735, 10-17=-672/0, 4-23=-691/0,
10-18=0/610, 4-22=0/512, 6-22=-424/0, 6-21=0/279, 9-18=-816/0, 7-21=-254/18,
7-20=-404/264, 9-19=-13/356

- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are 4x4 MT20 unless otherwise indicated.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 5) CAUTION, Do not erect truss backwards.



Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCS1 Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:30 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-Fx_MLHecQX?_7L3gwMf_OltPulQVceXzVzchf5ztqkJ

0-1-8
Scale: 3/8"=1'



NOTES-


- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are 4x4 MT20 unless otherwise indicated.
- 3) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.



Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personnel injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building C**

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511162
2564966	F08	Floor	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:31 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-j7YkZdfEBq7rlUesU4ADwyPhi9tLBp7jdMECxtqkl

0-1-8



Scale = 1:20.9

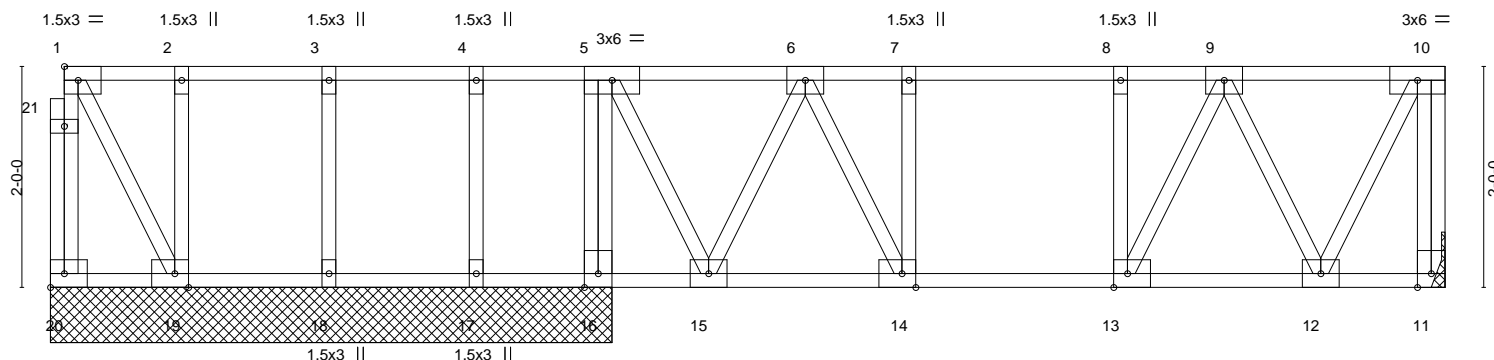


Plate Offsets (X,Y)-- [13:0-1-8,Edge], [14:0-1-8,Edge], [19:0-1-8,Edge]

LOADING (psf)	SPACING-		CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	2-0-0	TC 0.23	Vert(LL)	-0.01	13	>999	360	MT20	244/190
TCDL 15.0	Lumber DOL	1.00	BC 0.20	Vert(CT)	-0.02	13	>999	240		
BCLL 0.0	Rep Stress Incr	YES	WB 0.21	Horz(CT)	0.00	11	n/a	n/a		
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-S						Weight: 86 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.


All bearings 5-1-0 except (jt=length) 11=Mechanical.
(lb) - Max Uplift All uplift 100 lb or less at joint(s) except 20=-152(LC 13)
Max Grav All reactions 250 lb or less at joint(s) 20, 18, 17 except 11=478(LC 4), 16=597(LC 1), 19=366(LC 13)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 10-11=-472/0, 6-7=-451/0, 7-8=-451/0, 8-9=-451/0
BOT CHORD 14-15=0/340, 13-14=0/451, 12-13=0/370
WEBS 5-16=-566/0, 10-12=0/438, 5-15=0/432, 9-12=-388/0, 6-15=-402/0, 6-14=0/269

NOTES-

- Unbalanced floor live loads have been considered for this design.
- All plates are 3x4 MT20 unless otherwise indicated.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 152 lb uplift at joint 20.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails.
Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.

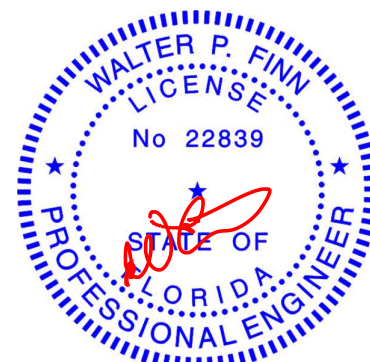

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511163
2564966	F09	Floor	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:32 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-BJ66mzgsy8FiMeD22nhSTAYrnYDV4eyGyH5okzztqkH

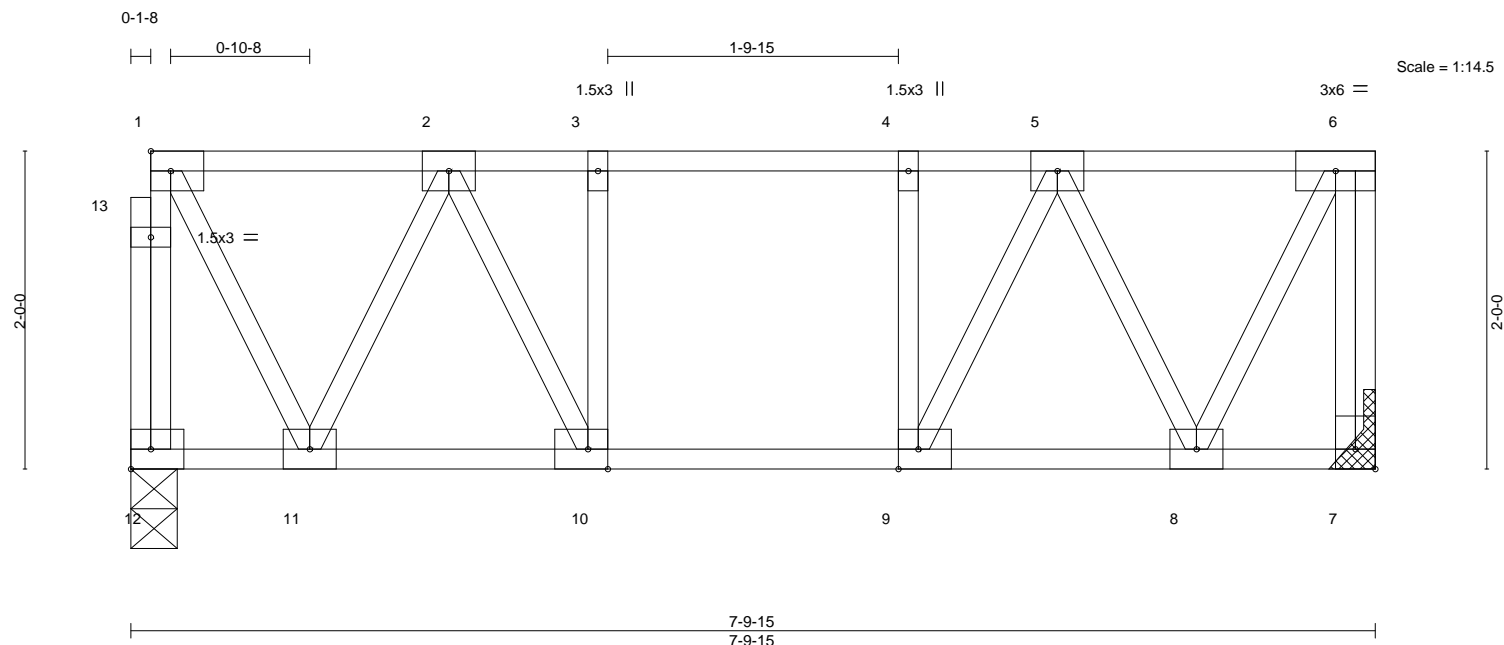


Plate Offsets (X,Y)-- [7:Edge,0-1-8], [9:0-1-8,Edge], [10:0-1-8,Edge]

LOADING (psf)	SPACING-	CSL.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	2-0-0	TC 0.27	Vert(LL)	-0.02	10	>999	360	MT20	244/190
TCDL 15.0	Plate Grip DOL 1.00	BC 0.22	Vert(CT)	-0.02	10	>999	240		
BCLL 0.0	Lumber DOL 1.00	WB 0.22	Horz(CT)	0.00	7	n/a	n/a		
BCDL 10.0	Rep Stress Incr YES	Matrix-S						Weight: 56 lb	FT = 20%F, 11%E
	Code FBC2020/TPI2014								

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 12=0-3-8, 7=Mechanical
Max Grav 12=486(LC 1), 7=493(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-12=-479/0, 6-7=-485/0, 2-3=-480/0, 3-4=-480/0, 4-5=-480/0
BOT CHORD 10-11=0/384, 9-10=0/480, 8-9=0/385
WEBS 6-8=0/452, 1-11=0/441, 5-8=-407/0, 2-11=-403/0, 5-9=0/295, 2-10=0/296

NOTES-

- Unbalanced floor live loads have been considered for this design.
- All plates are 3x4 MT20 unless otherwise indicated.
- Refer to girder(s) for truss to truss connections.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511164
2564966	F10	Floor Girder	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:33 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-fWgUzJgUjSNZ_ooFbUCh?NVyZyUA00PBxrLGQztqkG

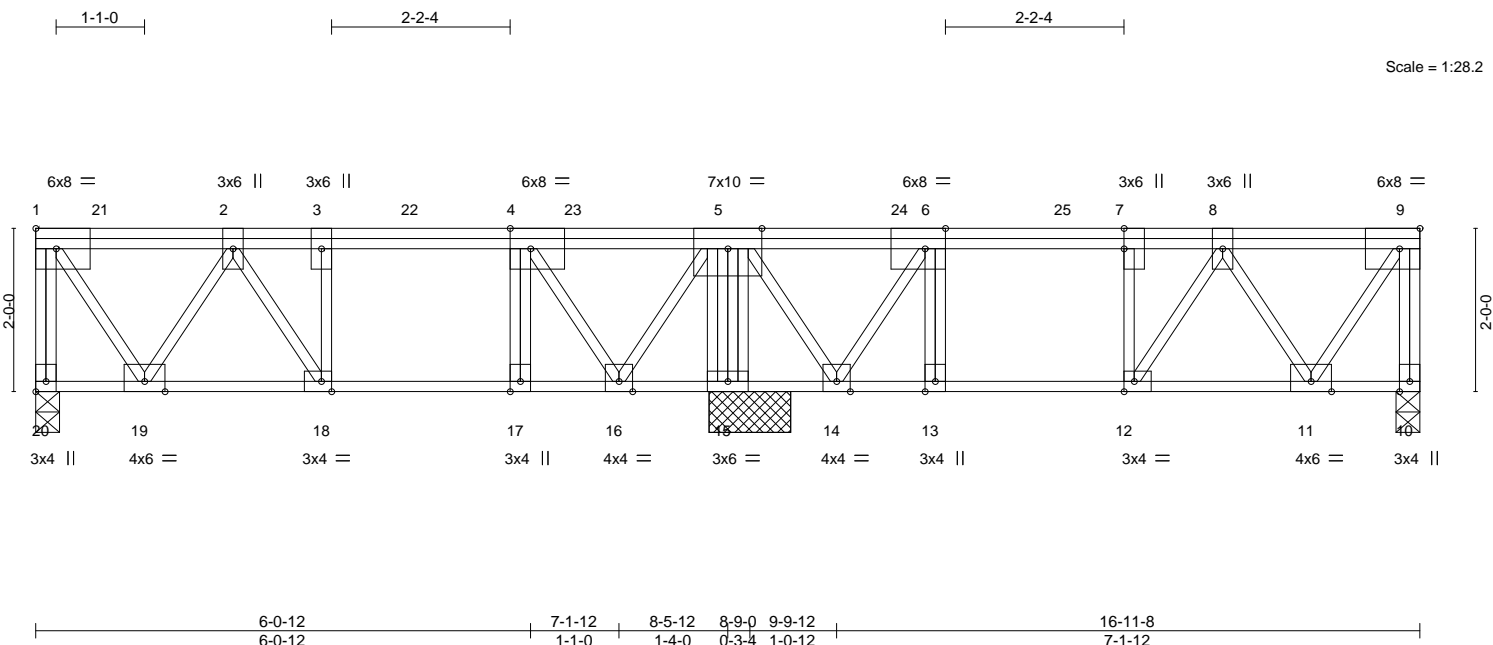

LOADING (psf)		SPACING-		CSI.		DEFL.		PLATES		GRIP	
TCCL	40.0	Plate Grip DOL	1.00	TC	0.52	Vert(LL)	-0.03 18 >999 360	MT20		244/190	
TCDL	15.0	Lumber DOL	1.00	BC	0.51	Vert(CT)	-0.05 18-19 >999 240				
BCLL	0.0	Rep Stress Incr	NO	WB	0.55	Horz(CT)	0.02 10 n/a n/a				
BCDL	10.0	Code FBC2020/TPI2014		Matrix-S							
								Weight: 139 lb		FT = 20%F, 11%E	

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 20=0-3-8, 10=0-3-8, 15=1-0-0
Max Grav 20=1728(LC 10), 10=1272(LC 7), 15=1900(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.


TOP CHORD 1-20=-1721/0, 9-10=-1266/0, 1-2=-638/0, 2-3=-1286/0, 3-4=-1286/0, 4-5=-755/0,
5-6=-726/0, 6-7=-1236/0, 7-8=-1236/0, 8-9=-566/0
BOT CHORD 18-19=0/1183, 17-18=0/1286, 16-17=0/1286, 13-14=0/1236, 12-13=0/1236, 11-12=0/1046
WEBS 5-15=-1840/0, 1-19=0/1149, 5-16=0/994, 2-19=-1063/0, 4-16=-983/0, 9-11=0/1021,
5-14=0/951, 8-11=-935/0, 6-14=-943/0, 8-12=0/383, 7-12=-291/0

NOTES-

- Unbalanced floor live loads have been considered for this design.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 462 lb down at 0-1-8, 467 lb down at 0-10-4, 344 lb down at 2-7-12, 344 lb down at 4-7-12, 344 lb down at 6-7-12, 344 lb down at 10-7-12, 344 lb down at 12-7-12, and 344 lb down at 14-7-12, and 356 lb down at 16-10-0 on top chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
- Uniform Loads (plf)
Vert: 10-20=-20, 1-9=-110
- Concentrated Loads (lb)
Vert: 9=-308(B) 1=-421(F) 2=-264(B) 8=-264(B) 21=-397(F) 22=-264(B) 23=-264(B) 24=-264(B) 25=-264(B)

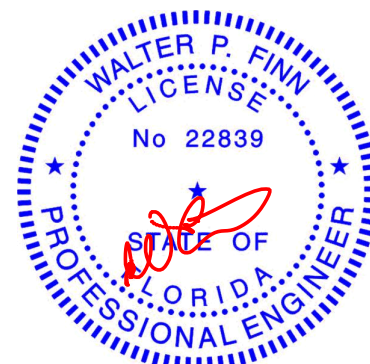

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511165
2564966	F11	Floor	9	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:34 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-7iEsBfh7UIVQcyMR9CjwYb1CmMvoYZTZQabvosztqkF

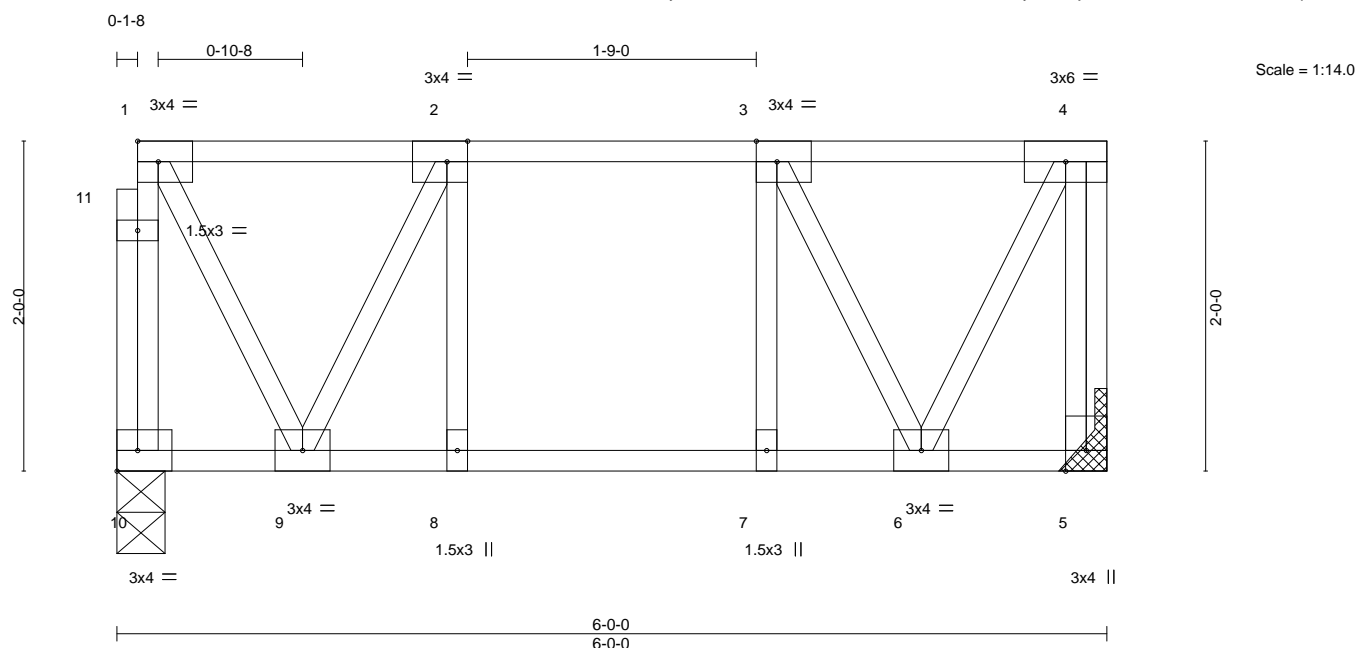


Plate Offsets (X,Y)-- [2:0-1-8,Edge], [3:0-1-8,Edge]

LOADING (psf)	SPACING-	CSL	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.24	Vert(LL)	-0.01	7	>999	360	MT20	244/190
TCDL 15.0	Lumber DOL 1.00	BC 0.23	Vert(CT)	-0.01	7	>999	240		
BCLL 0.0	Rep Stress Incr YES	WB 0.15	Horz(CT)	0.00	5	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-S						Weight: 45 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 10=0-3-8, 5=Mechanical
Max Grav 10=367(LC 1), 5=374(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-10=-357/0, 4-5=-364/0, 2-3=-278/0
BOT CHORD 8-9=0/278, 7-8=0/278, 6-7=0/278
WEBS 4-6=0/315, 1-9=0/307, 3-6=-291/0, 2-9=-289/0

NOTES-

- Unbalanced floor live loads have been considered for this design.
- Refer to girder(s) for truss connections.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610


8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:35 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-bunFO?iIF3dHD6xdjvE95oaHrm4sHxPieEKSLLztqKE

Scale = 1:26.0




Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
Rigid ceiling directly applied or 10-0-0 oc bracing, Except:
2-2-0 oc bracing: 15-16.

- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are 3x4 MT20 unless otherwise indicated.
- 3) Recommend 2x6 strongbacks, on edge, spaced at 10'-0" oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 4) CAUTION, Do not erect truss backwards.



Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCS1 Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511167
2564966	F14	Floor	10	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:35 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-bunFO?ilF3dHD6xdjvE95oaGnm4sHy8ieEKSILztqkE

0-1-8

0-10-8

2-1-8

Scale = 1:23.6

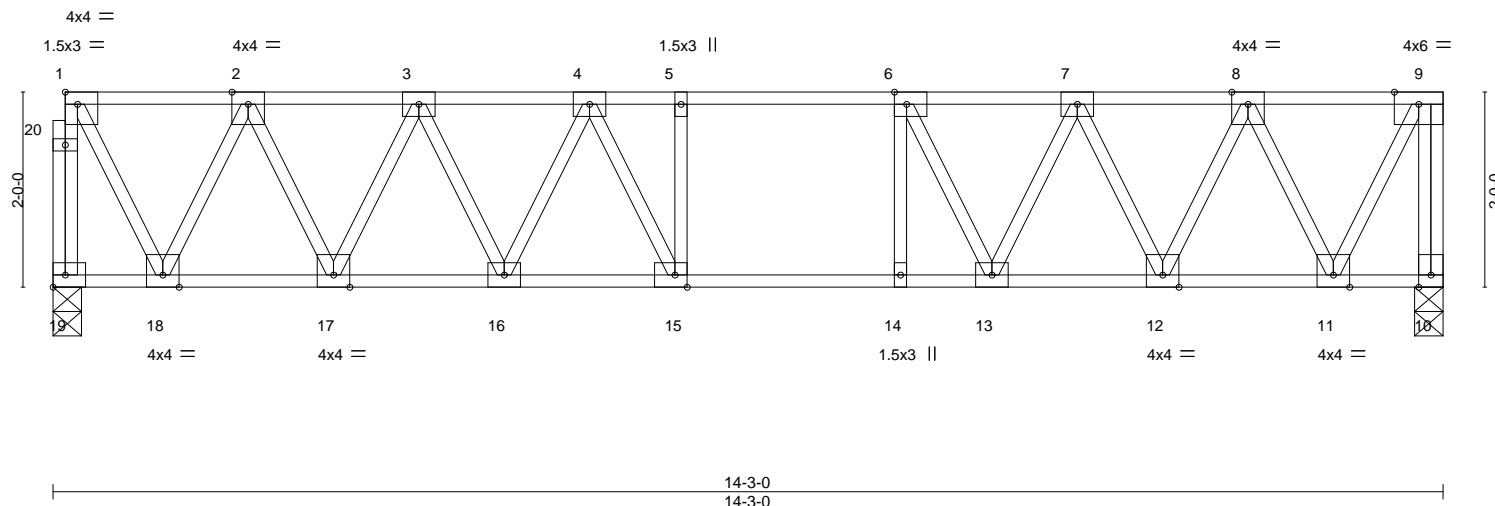


Plate Offsets (X,Y)-- [1:Edge,0-1-8], [6:0-1-8,Edge], [15:0-1-8,Edge]

LOADING (psf)	SPACING-		CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	2-0-0	TC 0.67	Vert(LL)	-0.11 15-16	>999	360	MT20	244/190
TCDL 15.0	Lumber DOL	1.00	BC 0.95	Vert(CT)	-0.15 15-16	>999	240		
BCLL 0.0	Rep Stress Incr	YES	WB 0.44	Horz(CT)	0.03 10	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-S					Weight: 95 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 2-2-0 oc bracing: 14-15.


REACTIONS. (size) 19=0-3-8, 10=0-3-8
Max Grav 19=903(LC 1), 10=910(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-19=-896/0, 9-10=-901/0, 1-2=-437/0, 2-3=-1067/0, 3-4=-1476/0, 4-5=-1670/0, 5-6=-1670/0, 6-7=-1477/0, 7-8=-1067/0, 8-9=-437/0
BOT CHORD 17-18=0/804, 16-17=0/1316, 15-16=0/1610, 14-15=0/1670, 13-14=0/1670, 12-13=0/1307, 11-12=0/807
WEBS 9-11=0/928, 1-18=0/911, 8-11=-875/0, 2-18=-866/0, 8-12=0/615, 2-17=0/622, 7-12=-567/0, 3-17=-589/0, 7-13=0/450, 3-16=0/380, 6-13=-566/0, 4-16=-320/0, 4-15=-70/380

NOTES-

- Unbalanced floor live loads have been considered for this design.
- All plates are 3x4 MT20 unless otherwise indicated.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.

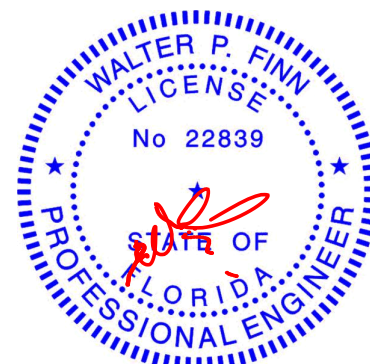

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511168
2564966	F15	Floor	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:36 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-35LdcLjN0NI8rGWqHdmOd07YZAbR0S3stu4?tkztqkD

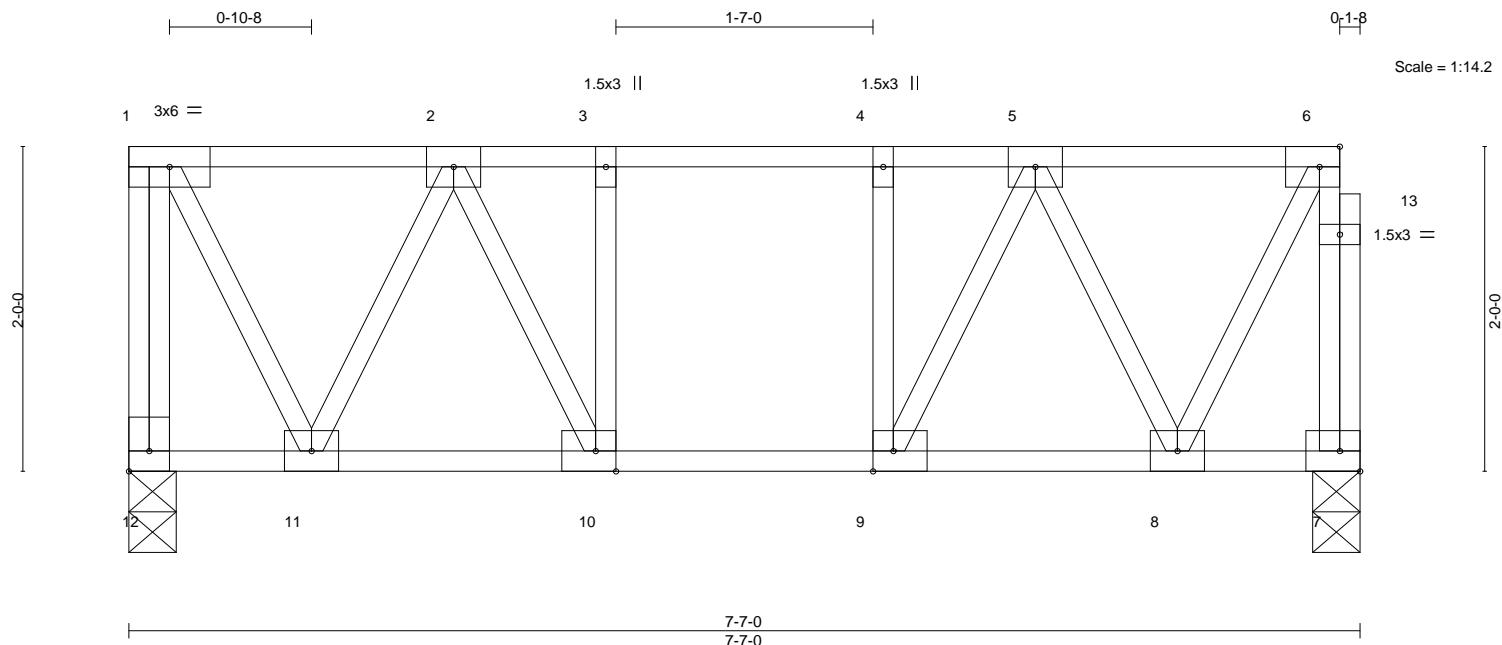


Plate Offsets (X,Y)-- [6:0-1-8,Edge], [9:0-1-8,Edge], [10:0-1-8,Edge], [12:Edge,0-1-8]

LOADING (psf)	SPACING-		CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	2-0-0	TC 0.22	Vert(LL)	-0.02	9	>999	360	MT20	244/190
TCDL 15.0	Lumber DOL	1.00	BC 0.22	Vert(CT)	-0.02	8-9	>999	240		
BCLL 0.0	Rep Stress Incr	YES	WB 0.21	Horz(CT)	0.00	7	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-S						Weight: 55 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 12=0-3-8, 7=0-3-8
Max Grav 12=477(LC 1), 7=470(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-12=-470/0, 6-7=-463/0, 2-3=-452/0, 3-4=-452/0, 4-5=-452/0
BOT CHORD 10-11=0/370, 9-10=0/452, 8-9=0/368
WEBS 6-8=0/425, 1-11=0/435, 5-8=-385/0, 2-11=-390/0, 5-9=0/265, 2-10=0/264

NOTES-

- Unbalanced floor live loads have been considered for this design.
- All plates are 3x4 MT20 unless otherwise indicated.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511169
2564966	F16	Floor	2	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:36 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-35LdcLjN0NI8rGWqHdmOd07aCAdm0Uhtu4?tkztqkD

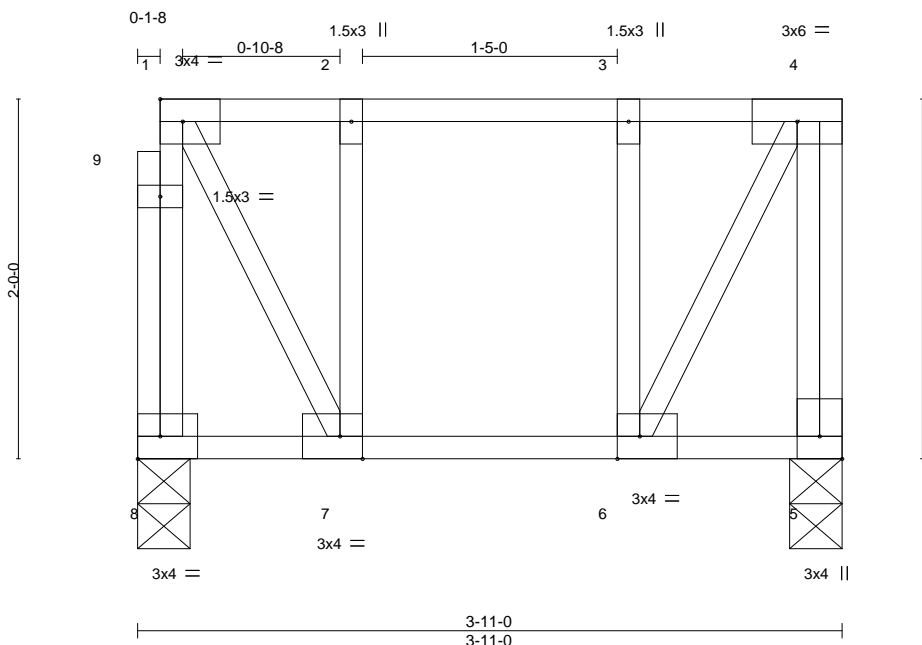

Scale = 1:12.8

Plate Offsets (X,Y)-- [5:Edge,0-1-8], [6:0-1-8,Edge], [7:0-1-8,Edge]

LOADING (psf)	SPACING-	2'-0'-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.11	Vert(LL)	-0.00	6	>999	360	MT20	244/190
TCDL 15.0	Lumber DOL	1.00	BC 0.07	Vert(CT)	-0.00	6	>999	240		
BCLL 0.0	Rep Stress Incr	YES	WB 0.10	Horz(CT)	0.00	5	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-S						Weight: 33 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-11-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 8=0-3-8, 5=0-3-8
Max Grav 8=232(LC 1), 5=238(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced floor live loads have been considered for this design.
- Recommend 2x6 strongbacks, on edge, spaced at 10'-0" oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511170
2564966	HJ06	Diagonal Hip Girder	2	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:37 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-XHv?phj?ngt?TP50qKHeADfhYZw2lyY?6YpZPBztqkC

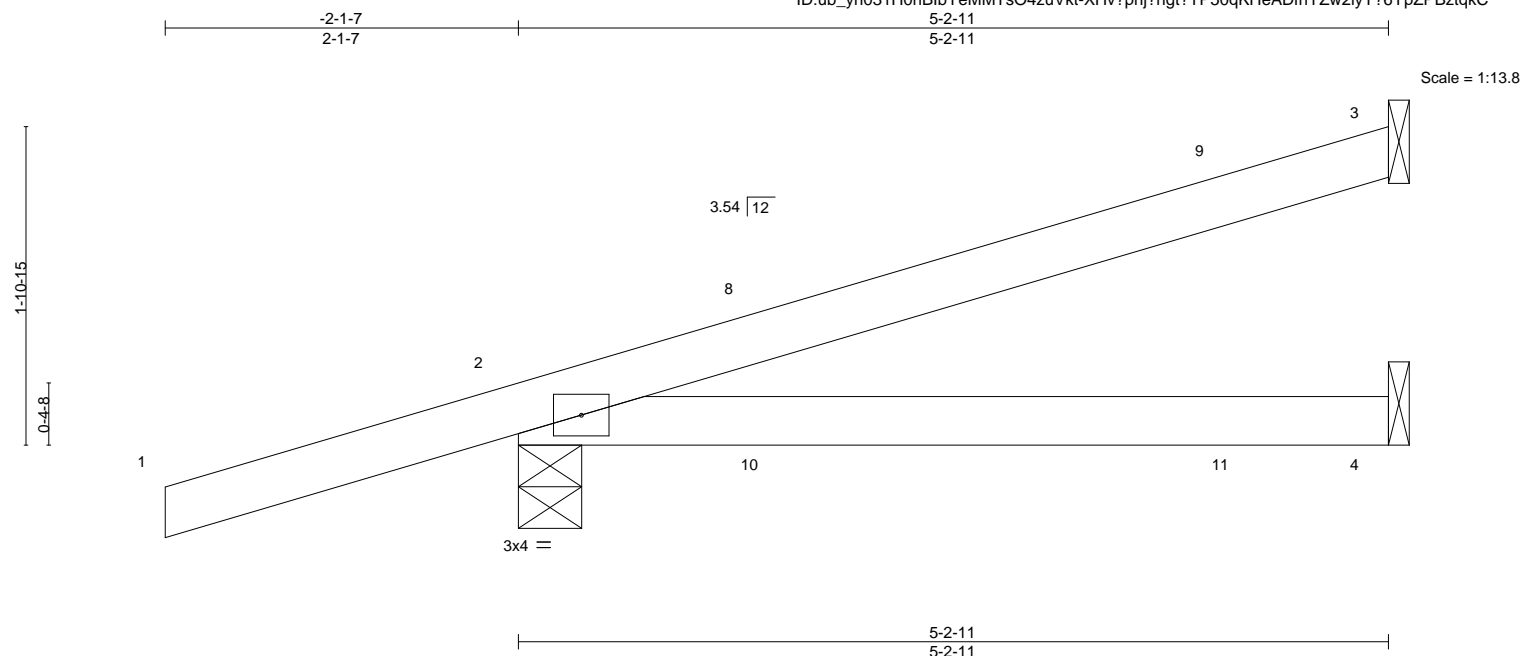

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.33	Vert(LL)	-0.04	4-7	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.20	Vert(CT)	-0.05	4-7	>999	180		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.00	Horz(CT)	0.00	2	n/a	n/a		
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-MP						Weight: 19 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-2-11 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 3=Mechanical, 2=0-4-9, 4=Mechanical
Max Horz 2=86(LC 4)
Max Uplift 3=57(LC 9), 2=115(LC 4)
Max Grav 3=112(LC 1), 2=279(LC 1), 4=82(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 57 lb uplift at joint 3 and 115 lb uplift at joint 2.
- 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 55 lb down and 92 lb up at 1-6-1, 55 lb down and 92 lb up at 1-6-1, and 29 lb down and 38 lb up at 4-4-0, and 29 lb down and 38 lb up at 4-4-0 on top chord, and 14 lb down and 50 lb up at 1-6-1, 14 lb down and 50 lb up at 1-6-1, and 22 lb down at 4-4-0, and 22 lb down at 4-4-0 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-3=-60, 4-5=-20
Concentrated Loads (lb)
Vert: 8=57(F=29, B=29) 9=-6(F=-3, B=-3) 10=62(F=31, B=31) 11=-14(F=-7, B=-7)



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511171
2564966	HJ10	Diagonal Hip Girder	6	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:38 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-0TTN11kdY_?s4ZgCO2otiRCpGzBdUJn9KCZ6xdztqkB

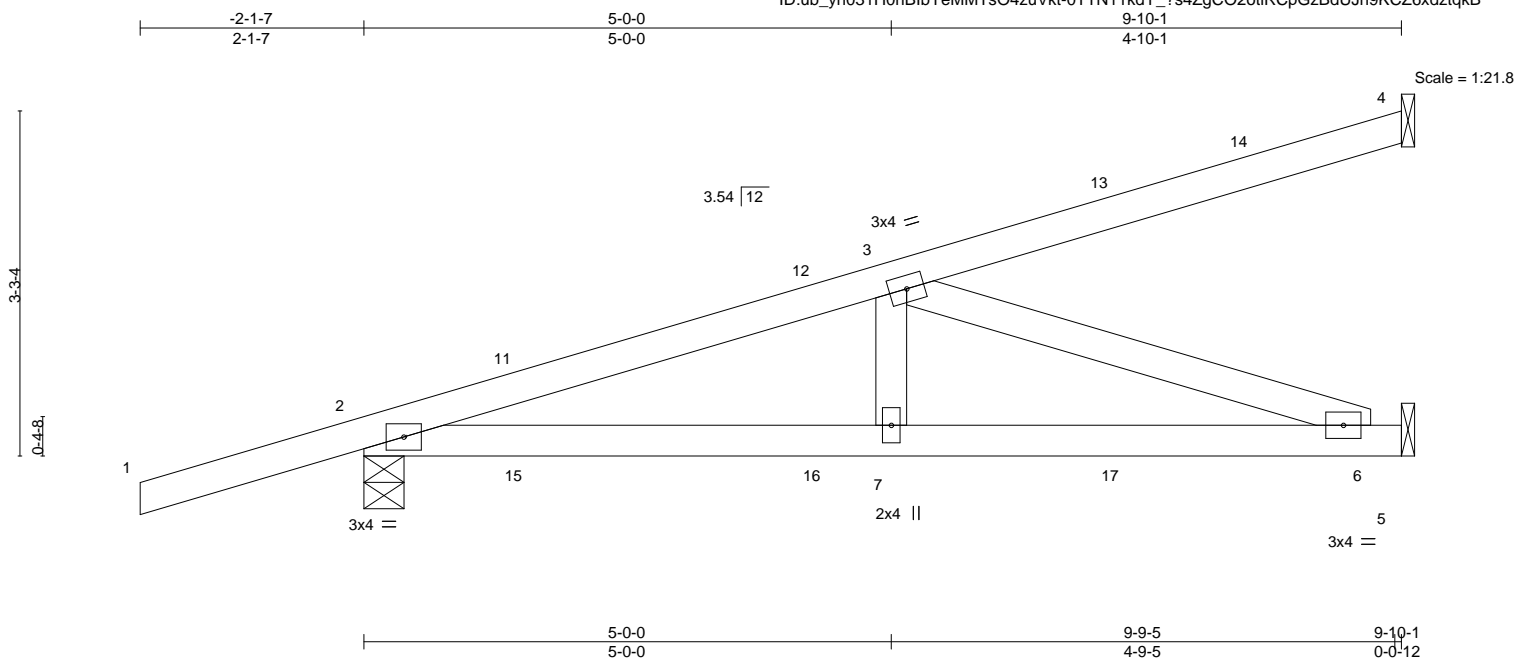

LOADING (psf)	SPACING-	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.52	Vert(LL) -0.04	6-7	>999	240		MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.56	Vert(CT) -0.10	6-7	>999	180			
BCLL 0.0 *	Rep Stress Incr NO	WB 0.39	Horz(CT) 0.01	5	n/a	n/a			
BCDL 10.0	Code FBC2020/TPI0214	Matrix-MS						Weight: 42 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 4=Mechanical, 2=0-4-9, 5=Mechanical
Max Horz 2=132(LC 22)
Max Uplift 4=70(LC 4), 2=153(LC 4), 5=57(LC 8)
Max Grav 4=151(LC 1), 2=473(LC 1), 5=315(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-818/180
BOT CHORD 2-7=-218/766, 6-7=-218/766
WEBS 3-7=0/253, 3-6=-809/231

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 70 lb uplift at joint 4, 153 lb uplift at joint 2 and 57 lb uplift at joint 5.
- 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 55 lb down and 92 lb up at 1-6-1, 55 lb down and 92 lb up at 1-6-1, 28 lb down and 37 lb up at 4-4-0, 28 lb down and 37 lb up at 4-4-0, and 55 lb down and 77 lb up at 7-1-15, and 55 lb down and 77 lb up at 7-1-15 on top chord, and 14 lb down and 50 lb up at 1-6-1, 14 lb down and 50 lb up at 1-6-1, 21 lb down at 4-4-0, 21 lb down at 4-4-0, and 39 lb down at 7-1-15, and 39 lb down at 7-1-15 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25

Uniform Loads (plf)

Vert: 1-4=-60, 5-8=-20

Concentrated Loads (lb)

Vert: 11=57(F=29, B=29) 13=-79(F=-39, B=-39) 15=62(F=31, B=31) 16=-7(F=-4, B=-4) 17=-63(F=-31, B=-31)



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511172
2564966	KW1	GABLE	1	1	Job Reference (optional)	


Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:39 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-Ug1IEMIFJ17jjFPyJ6Fek5cNfHDSRIZslgU3ztqkA

0-1-8

0-1-8

Scale = 1:21.9

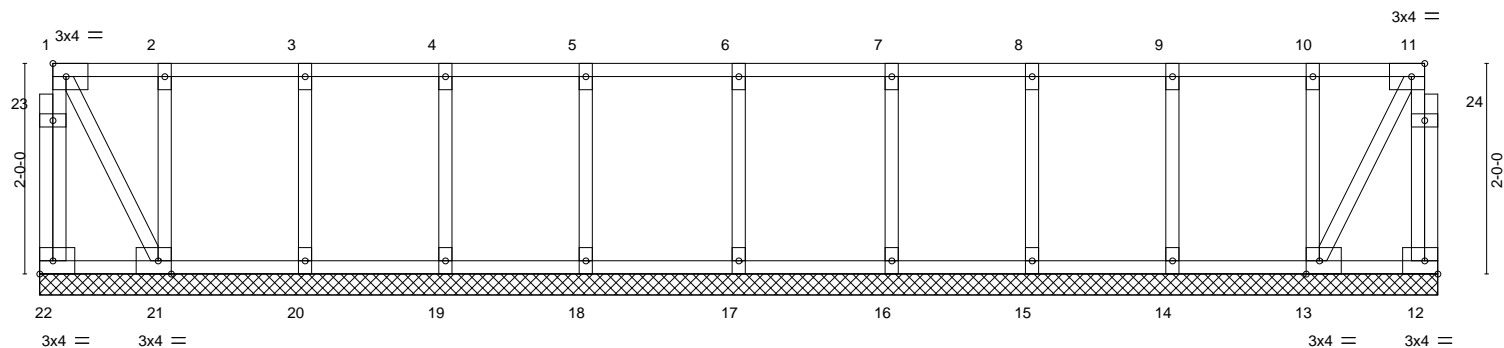

1-2-4	2-6-4	3-10-4	5-2-4	6-7-11	8-1-2	9-5-2	10-9-2	12-1-2	13-3-6
1-2-4	1-4-0	1-4-0	1-4-0	1-5-7	1-5-7	1-4-0	1-4-0	1-4-0	1-2-4

Plate Offsets (X,Y)-- [11:0-1-8,Edge], [13:0-1-8,Edge], [21:0-1-8,Edge]

LOADING (psf)	SPACING-	CSL	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.10	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL 15.0	Lumber DOL 1.00	BC 0.02	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr YES	WB 0.04	Horz(CT)	-0.00	13	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-S						Weight: 78 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 10-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing, Except: 10-0-0 oc bracing: 21-22,12-13.

REACTIONS.

All bearings 13-3-6.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 22, 12, 21, 13, 17, 14, 15, 16, 20, 19, 18

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) All plates are 1.5x3 MT20 unless otherwise indicated.
- 2) Gable requires continuous bottom chord bearing.
- 3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- 4) Gable studs spaced at 1-4-0 oc.
- 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511173
2564966	KW2	GABLE	1	1	Job Reference (optional)	


Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:45 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-lqO0VQq0u8usQeiYI0QWVv_6NoildZ_Axol_hjztqk4

0-1-8
H

0-1-8
H

Scale = 1:39.3

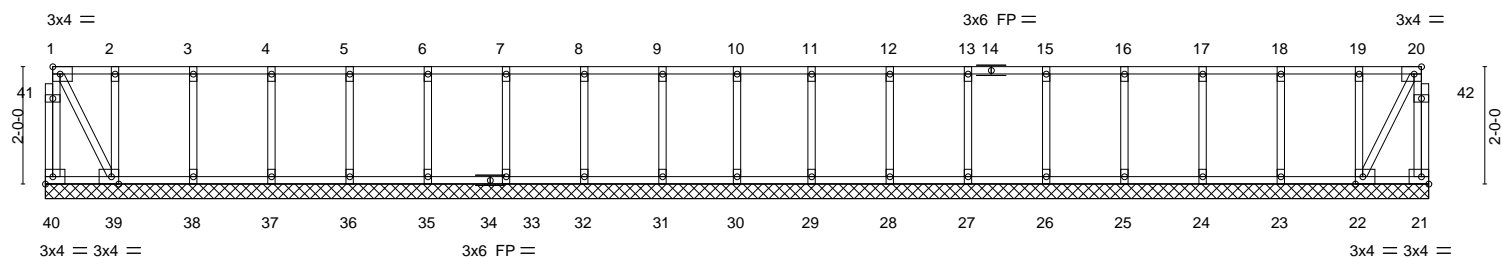

1-2-4	2-6-4	3-10-4	5-2-4	6-6-4	7-10-4	9-2-4	10-6-4	11-9-8	13-0-12	14-4-12	15-8-12	17-0-12	18-4-12	19-8-12	21-0-12	22-4-12	23-7-0
1-2-4	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-3-4	1-3-4	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-2-4

Plate Offsets (X,Y)-- [20:0-1-8,Edge], [22:0-1-8,Edge], [39:0-1-8,Edge]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.08	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL 15.0	Lumber DOL	1.00	BC 0.02	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.04	Horz(CT)	-0.00	22	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-S						Weight: 130 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 10-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing, Except: 10-0-0 oc bracing: 39-40,21-22.

REACTIONS.


All bearings 23-7-0.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 40, 21, 39, 22, 30, 23, 24, 25, 26, 27, 28, 29, 38, 37, 36, 35, 33, 32, 31

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) All plates are 1.5x3 MT20 unless otherwise indicated.
- 2) Gable requires continuous bottom chord bearing.
- 3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- 4) Gable studs spaced at 1-4-0 oc.
- 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

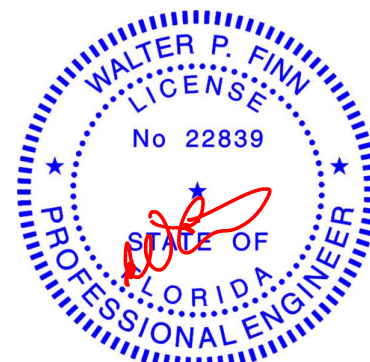

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component


Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:47 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-FCWnrv6rGQl8agysxQRS_aK4QFbM55NiTP6E5mcmztqk2

0-1-8
Scale = 1:35.9



NOTES-

- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are 1.5x3 MT20 unless otherwise indicated.
- 3) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 28 except (jt=lb) 34=483.
- 4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.




January 19, 2021

Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building system. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, D5B-89 and BCSI Building C**

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511175
2564966	KW4	GABLE	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:48 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-jO497RsvB3GRH6R7_8zD6Ycd5?kLqwc dem_el2ztqk1

0-1-8

Scale = 1:22.2

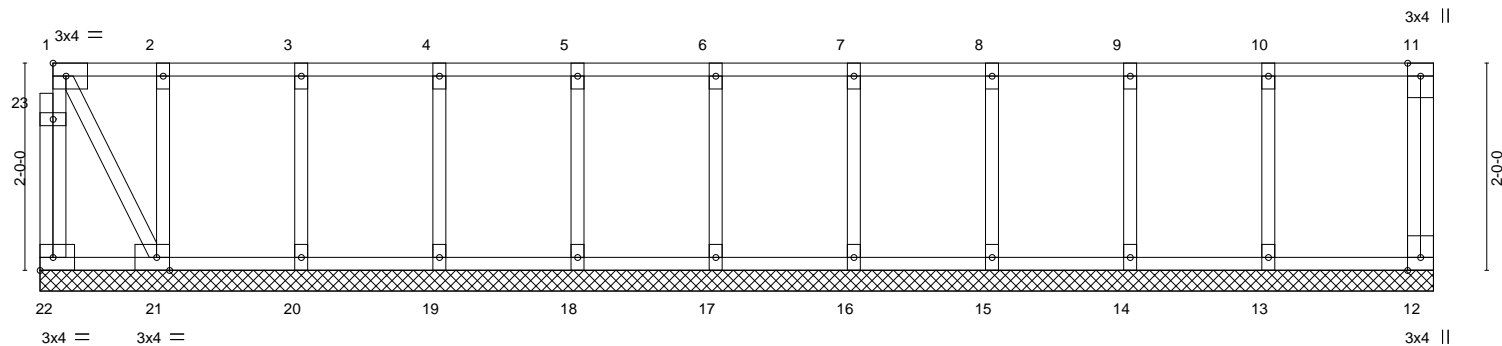

1-2-4	2-6-4	3-10-4	5-2-4	6-6-4	7-10-4	9-2-4	10-6-4	11-10-4	13-5-6
1-2-4	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-7-2

Plate Offsets (X,Y)-- [21:0-1-8,Edge]

LOADING (psf)	SPACING-		CSL.		DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	2-0-0	TC 0.12		Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL 15.0	Lumber DOL	1.00	BC 0.02		Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.04		Horz(CT)	0.00	12	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-S							Weight: 76 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 10-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 13-5-6.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 22, 12, 21, 20, 19, 18, 17, 16, 15, 14, 13

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) All plates are 1.5x3 MT20 unless otherwise indicated.
- 2) Gable requires continuous bottom chord bearing.
- 3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- 4) Gable studs spaced at 1-4-0 oc.
- 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails.
Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 6) CAUTION, Do not erect truss backwards.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511176
2564966	KW5	GABLE	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:49 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-BbeXKntXyMOlvF0KXsVSf9oJP4gZNyMsQjBqUztqk0

0-1-8

Scale = 1:14.1

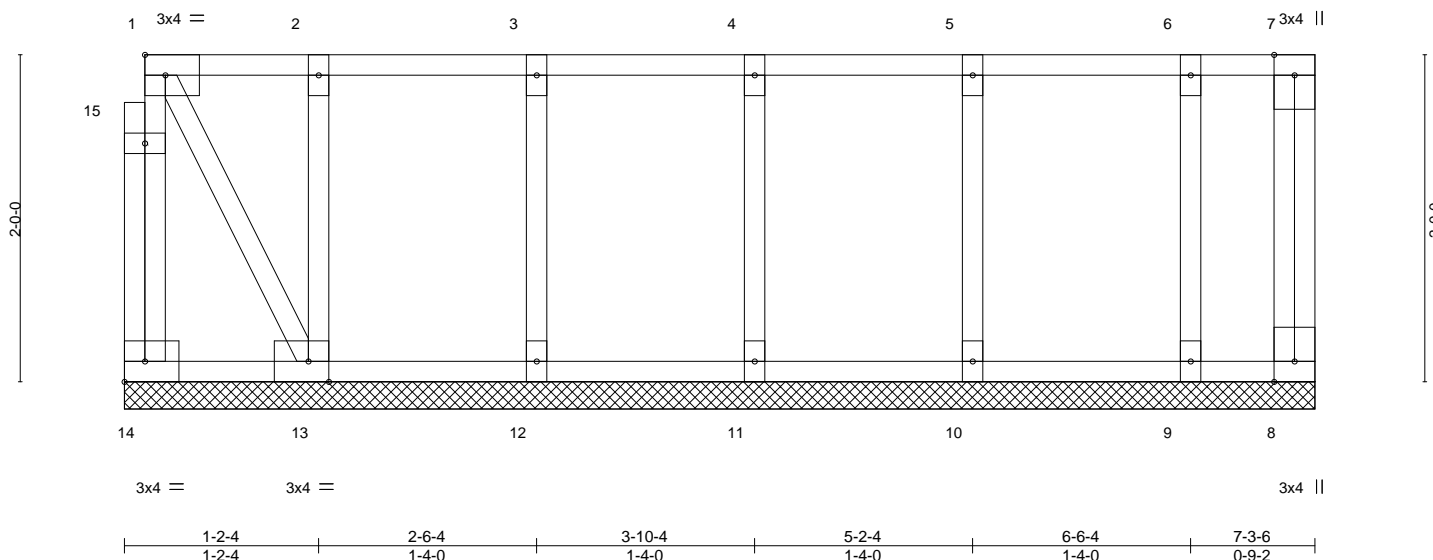


Plate Offsets (X,Y)-- [13:0-1-8,Edge]

LOADING (psf)	SPACING-		CSL	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	2-0-0	TC 0.09	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL 15.0	Lumber DOL	1.00	BC 0.02	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.04	Horz(CT)	0.00	8	n/a	n/a		
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-S						Weight: 48 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 7-3-6 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

All bearings 7-3-6.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 14, 8, 13, 12, 11, 10, 9

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) All plates are 1.5x3 MT20 unless otherwise indicated.
- 2) Gable requires continuous bottom chord bearing.
- 3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- 4) Gable studs spaced at 1-4-0 oc.
- 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails.
Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 6) CAUTION, Do not erect truss backwards.

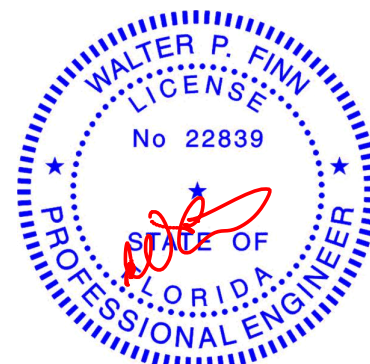

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511177
2564966	KW6	GABLE	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:49 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-BbeXKntXyMOIvF0KXsVSfl9oVP4hZN_msQjBqUztqk0

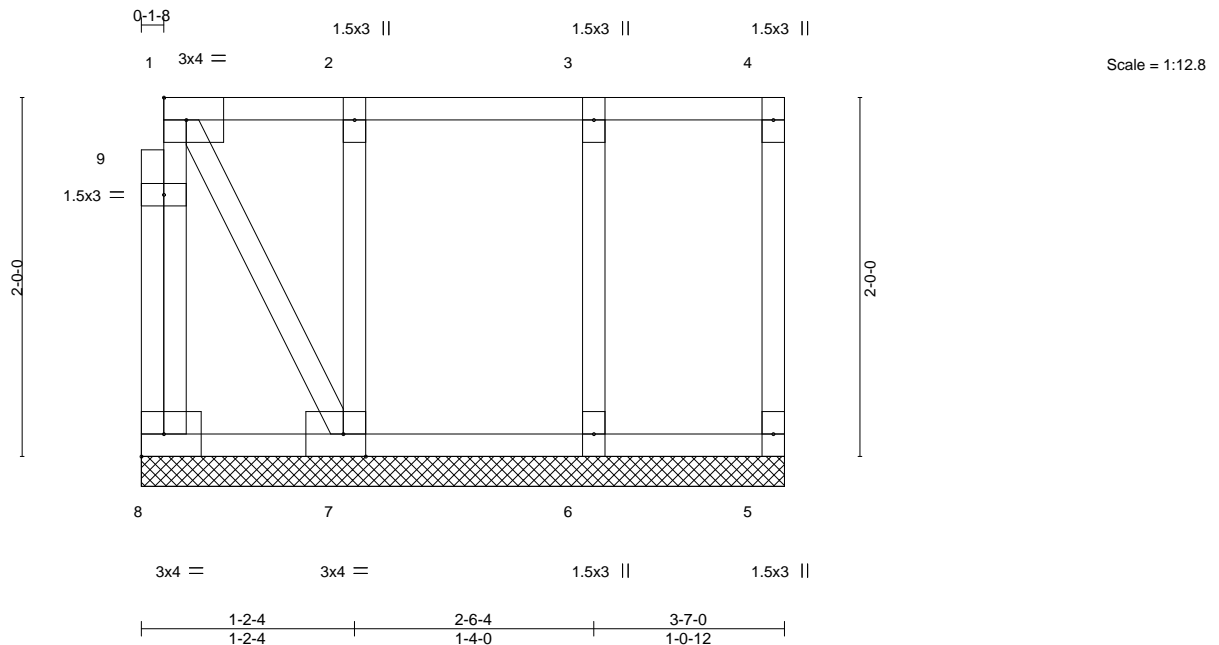


Plate Offsets (X,Y)-- [7:0-1-8,Edge]									
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	I/defl	L/d
TCLL	40.0	Plate Grip DOL	1.00	TC	0.08	Vert(LL)	n/a	-	n/a
TCDL	15.0	Lumber DOL	1.00	BC	0.02	Vert(CT)	n/a	-	n/a
BCLL	0.0	Rep Stress Incr	YES	WB	0.03	Horz(CT)	0.00	5	n/a
BCDL	10.0	Code	FBC2020/TPI2014	Matrix-P					
						PLATES	GRIP		
						MT20	244/190		
						Weight: 26 lb		FT = 20%F, 11%E	

LUMBER-
TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 3-7-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 3-7-0.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 8, 5, 7, 6

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-
1) Gable requires continuous bottom chord bearing.
2) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
3) Gable studs spaced at 1-4-0 oc.
4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails.
Strongbacks to be attached to walls at their outer ends or restrained by other means.
5) CAUTION, Do not erect truss backwards.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

MiTek
6904 Parke East Blvd.
Tampa, FL 36610


Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511178
2564966	KW12	GABLE	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:40 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-ysb8Rimt3bGZKtqbWTqLosHGSn?XyliRoW2D0Wztqk9

0-1-8

Scale = 1:17.0

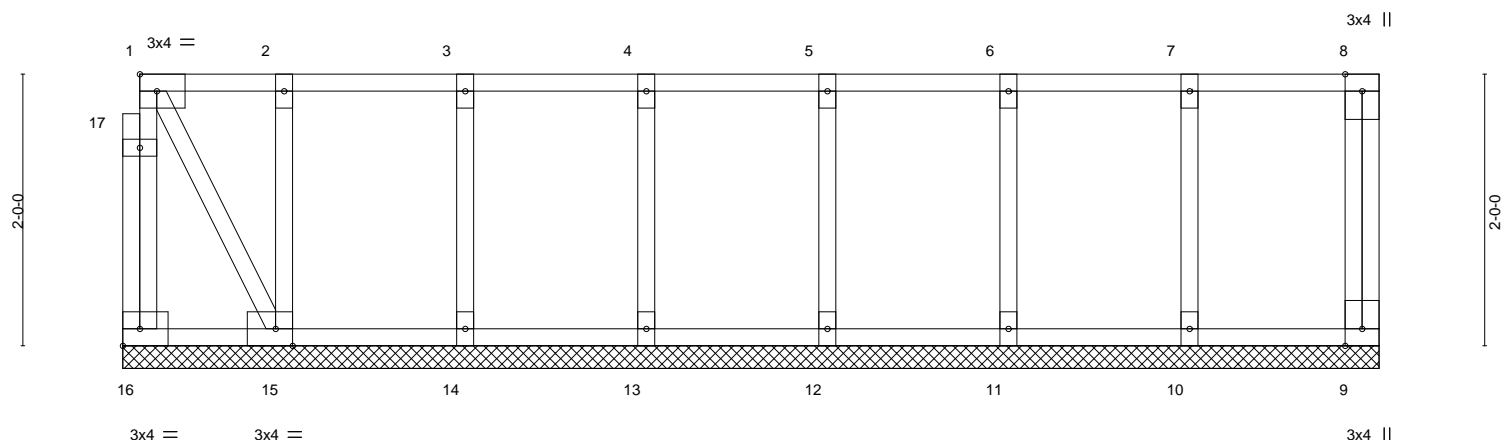

1-2-4	2-6-4	3-10-4	5-2-4	6-6-4	7-10-4	9-3-0
1-2-4	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-12

Plate Offsets (X,Y)-- [15:0-1-8,Edge]

LOADING (psf)	SPACING-		CSL	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	2-0-0	TC 0.10	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL 15.0	Lumber DOL	1.00	BC 0.02	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.04	Horz(CT)	0.00	9	n/a	n/a		
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-S						Weight: 56 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 9-3-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

All bearings 9-3-0.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 16, 9, 15, 14, 13, 12, 11, 10

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) All plates are 1.5x3 MT20 unless otherwise indicated.
- 2) Gable requires continuous bottom chord bearing.
- 3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- 4) Gable studs spaced at 1-4-0 oc.
- 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails.
Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 6) CAUTION, Do not erect truss backwards.

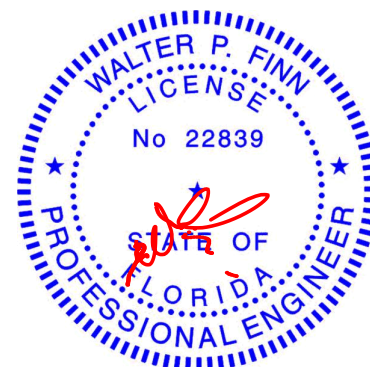

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610


Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511179
2564966	KW13	GABLE	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:41 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-Q29Wf2nWqvOQy1Pn3ALaK3qQOALohI?b1AnmYyztqk8

0-1-8

Scale = 1:25.9

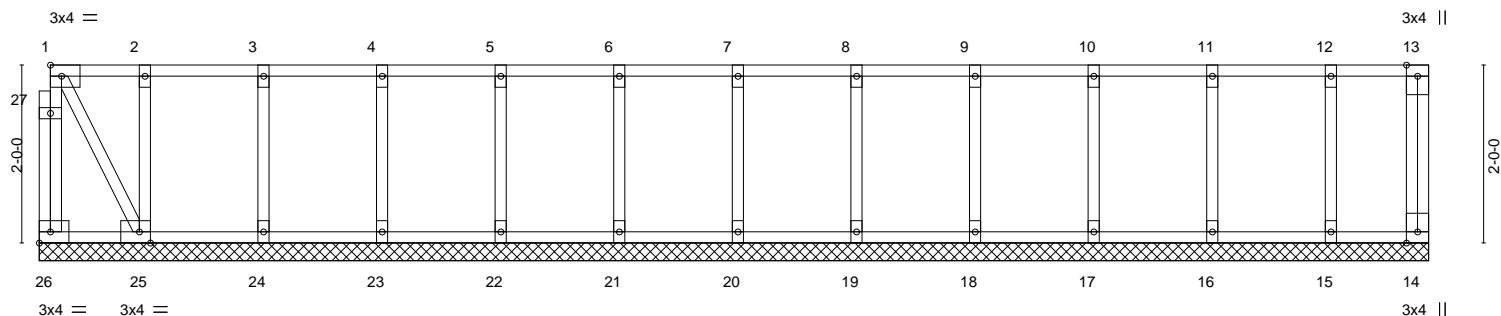

1-2-4	2-6-4	3-10-4	5-2-4	6-6-4	7-10-4	9-2-4	10-6-4	11-10-4	13-2-4	14-6-4	15-7-7
1-2-4	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-1-3

Plate Offsets (X,Y)-- [25:0-1-8,Edge]

LOADING (psf)	SPACING-		CSL.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	2-0-0	TC 0.08	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL 15.0	Lumber DOL	1.00	BC 0.02	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.04	Horz(CT)	0.00	14	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-S						Weight: 88 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 10-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 15-7-7.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 26, 14, 25, 24, 23, 22, 21, 20, 19, 18, 17, 16, 15

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) All plates are 1.5x3 MT20 unless otherwise indicated.
- 2) Gable requires continuous bottom chord bearing.
- 3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- 4) Gable studs spaced at 1-4-0 oc.
- 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails.
Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 6) CAUTION, Do not erect truss backwards.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610


Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511180
2564966	KW14	GABLE	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:42 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-uFjusOn8bDWHZB_zdtpHmb5ah1QCdKFqXK4Oztqk7

0.1-8

Scale = 1:23.1

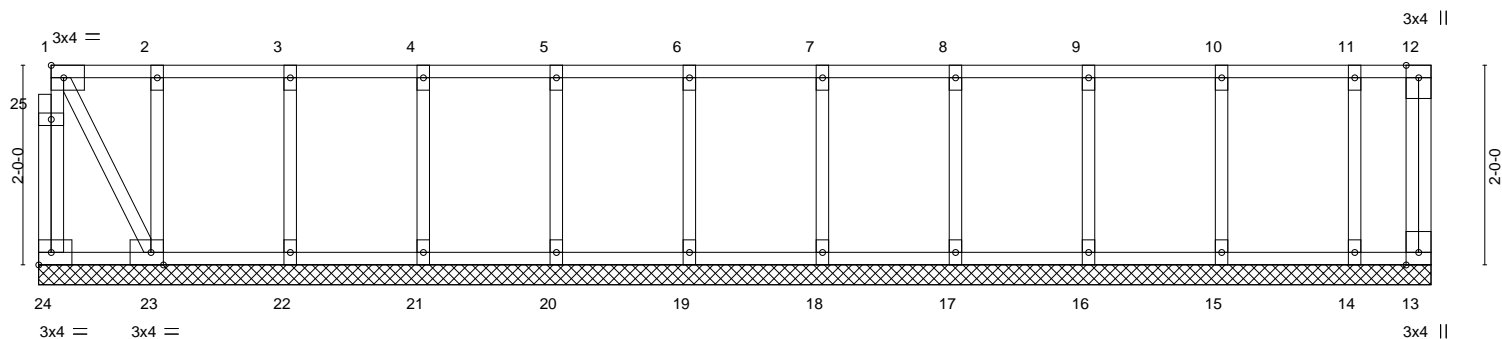

1-2-4	2-6-4	3-10-4	5-2-4	6-6-4	7-10-4	9-2-4	10-6-4	11-10-4	13-2-4	13-11-7
1-2-4	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	0-9-3

Plate Offsets (X,Y)-- [23:0-1-8,Edge]

LOADING (psf)	SPACING-		CSL	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	2.0-0	TC 0.09	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL 15.0	Lumber DOL	1.00	BC 0.02	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.04	Horz(CT)	0.00	13	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-S						Weight: 80 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 10-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 13-11-7.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 24, 13, 23, 22, 21, 20, 19, 18, 17, 16, 15, 14

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) All plates are 1.5x3 MT20 unless otherwise indicated.
- 2) Gable requires continuous bottom chord bearing.
- 3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- 4) Gable studs spaced at 1-4-0 oc.
- 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails.
Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 6) CAUTION, Do not erect truss backwards.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610


Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511181
2564966	KW15	GABLE	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:43 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-MRGG4komMW8BKZABbO2PUvmr_0G9fTuUUGtdqztqk6

0-1-8

Scale = 1:23.1

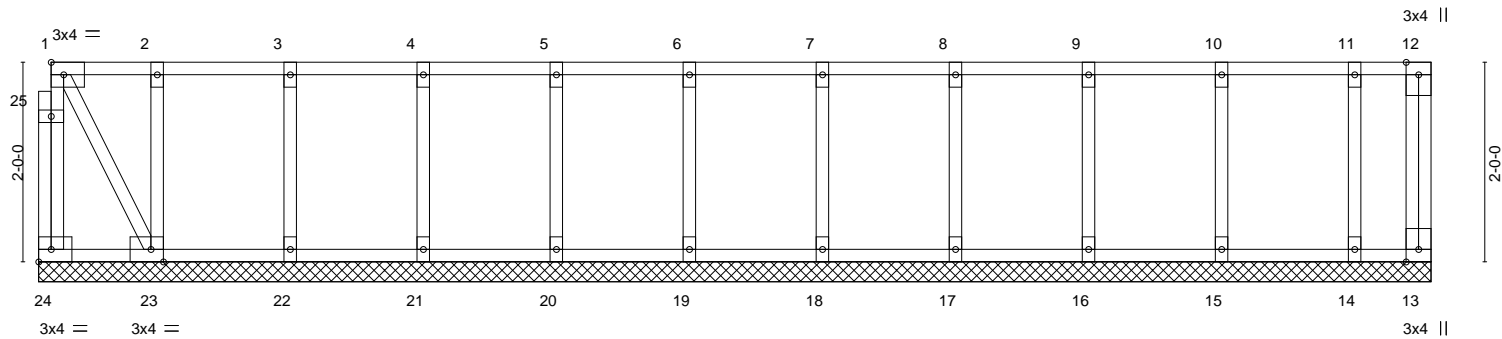

1-2-4	2-6-4	3-10-4	5-2-4	6-6-4	7-10-4	9-2-4	10-6-4	11-10-4	13-2-4	13-11-7
1-2-4	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	0-9-3

Plate Offsets (X,Y)-- [23:0-1-8,Edge]

LOADING (psf)	SPACING-	CSL.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.09	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL 15.0	Lumber DOL 1.00	BC 0.02	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr YES	WB 0.04	Horz(CT)	0.00	13	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-S						Weight: 80 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 10-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


All bearings 13-11-7.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 24, 13, 23, 22, 21, 20, 19, 18, 17, 16, 15, 14

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) All plates are 1.5x3 MT20 unless otherwise indicated.
- 2) Gable requires continuous bottom chord bearing.
- 3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- 4) Gable studs spaced at 1-4-0 oc.
- 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails.
Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 6) CAUTION, Do not erect truss backwards.

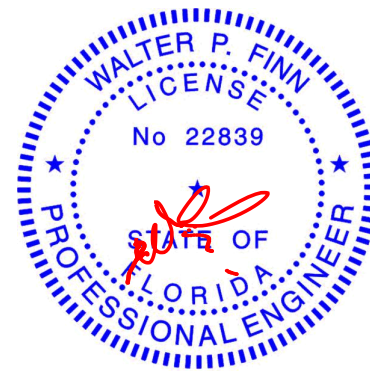

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511182
2564966	T01	Hip Girder	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:51 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-7zllITunU_e08ZAifGXwkAE3uCY_1C33KkCivNztqk_



Scale = 1:43.4

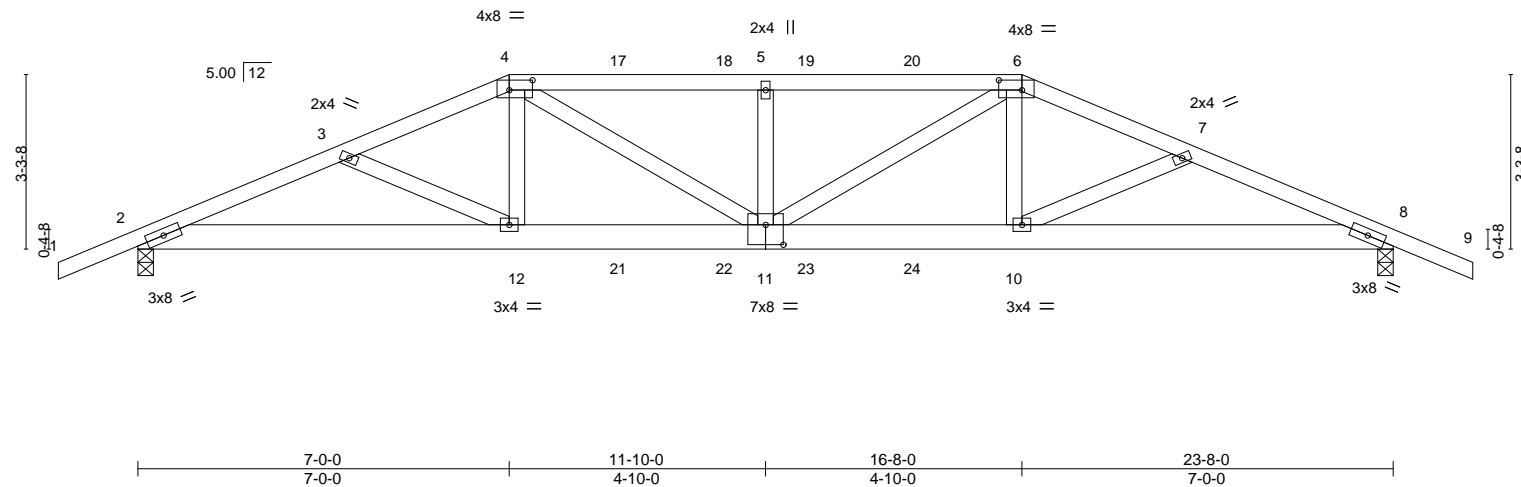


Plate Offsets (X,Y)-- [4:0-5-4,0-2-4], [6:0-5-4,0-2-4], [11:0-4-0,0-4-8]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES GRIP		
TCLL	20.0	Plate Grip DOL	1.25	TC	0.40	Vert(LL)	-0.19	11	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.25	BC	0.86	Vert(CT)	-0.37	11	>763	180		
BCLL	0.0 *	Rep Stress Incr	NO	WB	0.38	Horz(CT)	0.10	8	n/a	n/a		
BCDL	10.0	Code FBC2020/TPI2014		Matrix-MS							Weight: 134 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2 *Except*
4-6: 2x4 SP M 31
BOT CHORD 2x6 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-7-7 oc purlins.
BOT CHORD Rigid ceiling directly applied or 7-7-11 oc bracing.

REACTIONS.

(size) 2=0-3-8, 8=0-3-8
Max Horz 2=-56(LC 32)
Max Uplift 2=-473(LC 8), 8=-478(LC 9)
Max Grav 2=1906(LC 1), 8=1933(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-4221/1024, 3-4=-4025/958, 4-5=-4522/1100, 5-6=-4522/1100, 6-7=-4094/971,
7-8=-4289/1038
BOT CHORD 2-12=-939/3861, 11-12=-838/3726, 10-11=-825/3789, 8-10=-896/3924
WEBS 4-12=-59/693, 4-11=-282/1001, 5-11=-676/323, 6-11=-237/911, 6-10=-59/693

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 473 lb uplift at joint 2 and 478 lb uplift at joint 8.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 139 lb down and 95 lb up at 7-0-0, 121 lb down and 95 lb up at 9-0-12, 121 lb down and 93 lb up at 11-0-12, 121 lb down and 93 lb up at 12-7-4, and 121 lb down and 95 lb up at 14-7-4, and 234 lb down and 173 lb up at 16-8-0 on top chord, and 354 lb down and 84 lb up at 7-0-0, 88 lb down at 9-0-12, 88 lb down at 11-0-12, 88 lb down at 12-7-4, and 88 lb down at 14-7-4, and 354 lb down and 84 lb up at 16-7-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-4=-60, 4-6=-60, 6-9=-60, 2-8=-20

Continued on page 2



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511182
2564966	T01	Hip Girder	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:51 2021 Page 2
ID:ub_yh031H0hBibYeMMTsO4zuVkt-7zllITunU_e08ZAifGXwkAE3uCY_1C33KkCivNztqk_

LOAD CASE(S) Standard

Concentrated Loads (lb)

Vert: 4=-121(B) 6=-187(B) 12=-354(B) 10=-354(B) 17=-121(B) 18=-121(B) 19=-121(B) 20=-121(B) 21=-67(B) 22=-67(B) 23=-67(B) 24=-67(B)

 **WARNING** - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601 **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511183
2564966	T02	Hip	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:52 2021 Page 1

ID:ub_yh031H0hBibYeMMTsO4zuVkt-bAJgzpVPFHmtmjUd_29HOnDKcwgmOCYOysQpztqjz

-1-6-0	4-7-11	9-0-0	14-8-0	19-0-6	23-8-0	25-2-0
1-6-0	4-7-11	4-4-6	5-8-0	4-4-5	4-7-10	1-6-0

Scale = 1:43.4

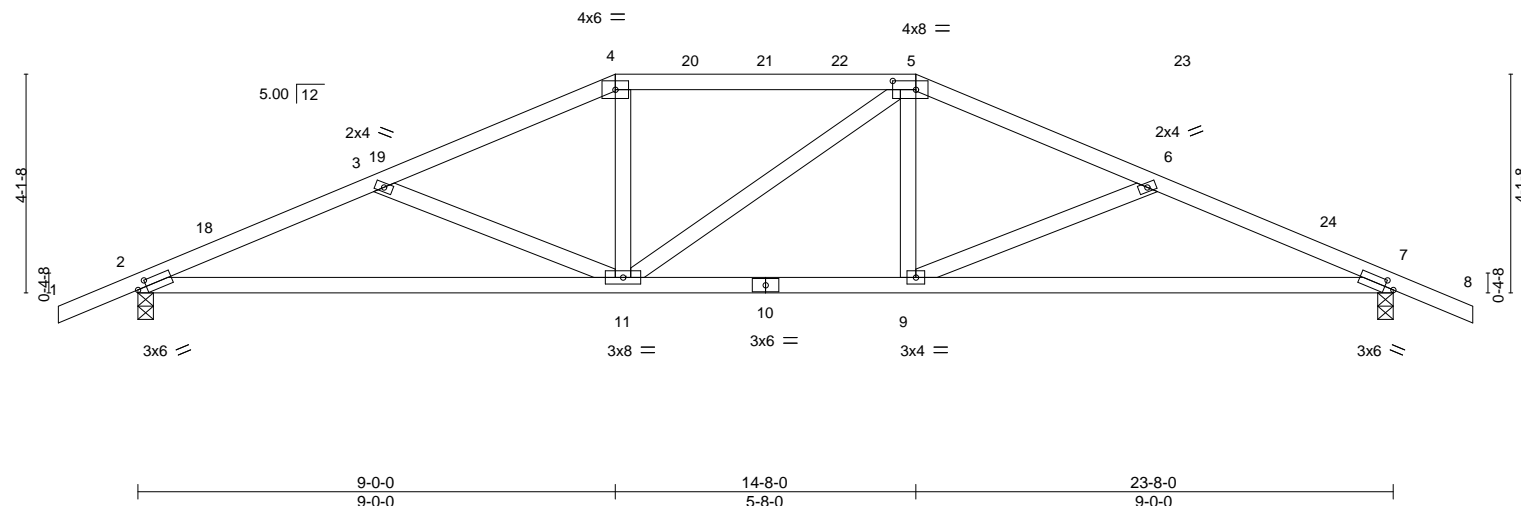


Plate Offsets (X,Y)--		[2:0-2-1,0-1-8], [5:0-5-4,0-2-0], [7:0-2-1,0-1-8]							
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	l/defl	L/d
TCLL	20.0	Plate Grip DOL	1.25	TC	0.49	Vert(LL)	-0.16 9-17	>999	240
TCDL	10.0	Lumber DOL	1.25	BC	0.77	Vert(CT)	-0.34 9-17	>839	180
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.18	Horz(CT)	0.06 7	n/a	n/a
BCDL	10.0	Code	FBC2020/TPI2014	Matrix-MS					
								PLATES	
								GRIP	
								MT20	
								244/190	
								Weight: 112 lb	
								FT = 20%	

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-1-2 oc purlins.
BOT CHORD Rigid ceiling directly applied or 9-1-10 oc bracing.

REACTIONS.


(size) 2=0-3-8, 7=0-3-8
Max Horz 2=-70(LC 17)
Max Uplift 2=-247(LC 12), 7=-247(LC 13)
Max Grav 2=1037(LC 1), 7=1037(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1911/455, 3-4=-1568/363, 4-5=-1407/363, 5-6=-1567/363, 6-7=-1911/455
BOT CHORD 2-11=-414/1740, 9-11=-229/1407, 7-9=-367/1740
WEBS 3-11=-375/189, 4-11=-28/357, 5-9=-30/357, 6-9=-375/189

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 9-0-0, Exterior(2R) 9-0-0 to 13-2-15, Interior(1) 13-2-15 to 14-8-0, Exterior(2R) 14-8-0 to 18-10-15, Interior(1) 18-10-15 to 25-2-0 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 247 lb uplift at joint 2 and 247 lb uplift at joint 7.

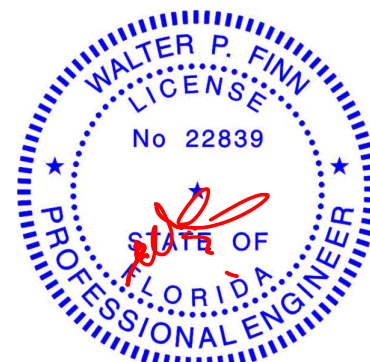

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511184
2564966	T03	Hip	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:53 2021 Page 1

ID:ub_yh031H0hBlbYeMMTsO4zuVkt-3Mt2A9w10buJQtJ5mhZOpbKQ60K8V4MMn2hPyFztqjy



Scale = 1:41.1

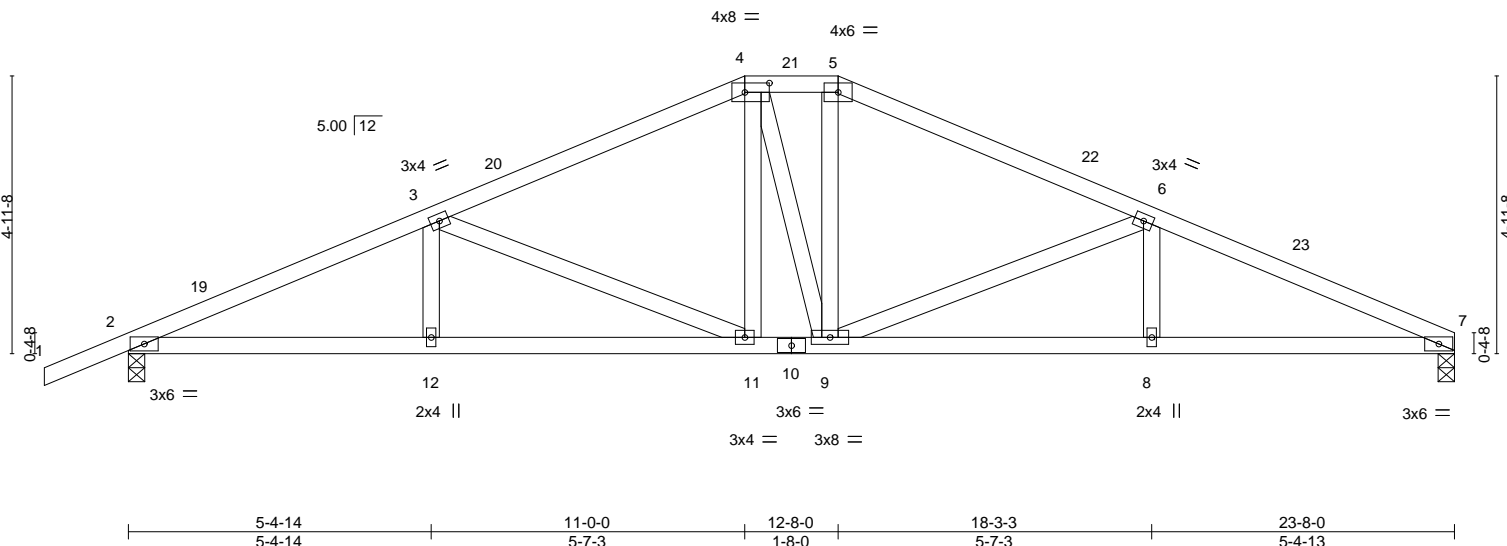


Plate Offsets (X,Y)--	[4:0-5-4,0-2-0]
-----------------------	-----------------

LOADING (psf)	SPACING-	CSL	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	2-0-0	TC 0.36	Vert(LL)	-0.08 11-12	>999	240	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.25	BC 0.49	Vert(CT)	-0.18 11-12	>999	180		
BCLL 0.0 *	Lumber DOL 1.25	WB 0.46	Horz(CT)	0.06 7	n/a	n/a		
BCDL 10.0	Rep Stress Incr YES	Matrix-MS						
	Code FBC2020/TPI2014						Weight: 119 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-11-14 oc purlins.
BOT CHORD Rigid ceiling directly applied or 9-3-11 oc bracing.

REACTIONS.

(size) 7=0-3-8, 2=0-3-8
Max Horz 2=92(LC 12)
Max Uplift 7=209(LC 13), 2=245(LC 12)
Max Grav 7=944(LC 1), 2=1040(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1950/415, 3-4=-1374/328, 4-5=-1213/329, 5-6=-1376/330, 6-7=-1971/423
BOT CHORD 2-12=-403/1755, 11-12=-403/1755, 9-11=-197/1211, 8-9=-344/1777, 7-8=-344/1777
WEBS 3-11=-605/225, 4-11=-62/305, 5-9=-72/311, 6-9=-627/236

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 11-0-0, Exterior(2E) 11-0-0 to 12-8-0, Exterior(2R) 12-8-0 to 16-10-15, Interior(1) 16-10-15 to 23-8-0 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 209 lb uplift at joint 7 and 245 lb uplift at joint 2.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601





6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511185
2564966	T04	Common	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:54 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-YYRQNVxgmv0a?1uHKP4dMpsalQdJEbKV0iRyViztqjx

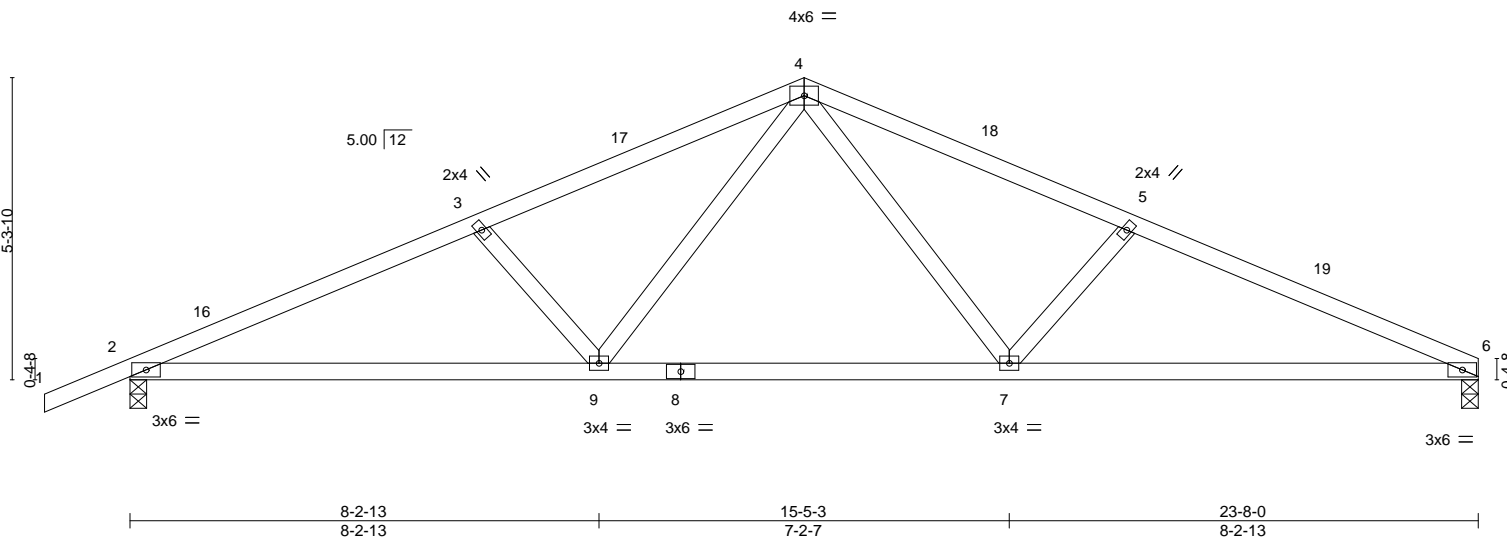

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.43	Vert(LL)	-0.10	7-12	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.69	Vert(CT)	-0.25	7-12	>999	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.22	Horz(CT)	0.05	6	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI0214		Matrix-MS						Weight: 103 lb	FT = 20%

LUMBER-			BRACING-	
TOP CHORD	2x4 SP No.2		TOP CHORD	Structural wood sheathing directly applied or 3-10-9 oc purlins.
BOT CHORD	2x4 SP No.2		BOT CHORD	Rigid ceiling directly applied or 9-3-13 oc bracing.
WEBS	2x4 SP No.3			

REACTIONS. (size) 6=0-3-8, 2=0-3-8
Max Horz 2=98(LC 12)
Max Uplift 6=-208(LC 13), 2=-244(LC 12)
Max Grav 6=944(LC 1), 2=1040(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-1874/477, 3-4=-1637/441, 4-5=-1649/450, 5-6=-1876/484
BOT CHORD 2-9=-397/1681, 7-9=-210/1125, 6-7=-394/1697
WEBS 4-7=-155/577, 5-7=-392/214, 4-9=-147/560, 3-9=-383/209

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 11-10-0, Exterior(2R) 11-10-0 to 14-10-0, Interior(1) 14-10-0 to 23-8-0 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 208 lb uplift at joint 6 and 244 lb uplift at joint 2.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511186
2564966	T05	Common	5	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:55 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-0l?obrxIXC9RdATTu6bsv0PlpqztzzXfFMAW18ztqjw

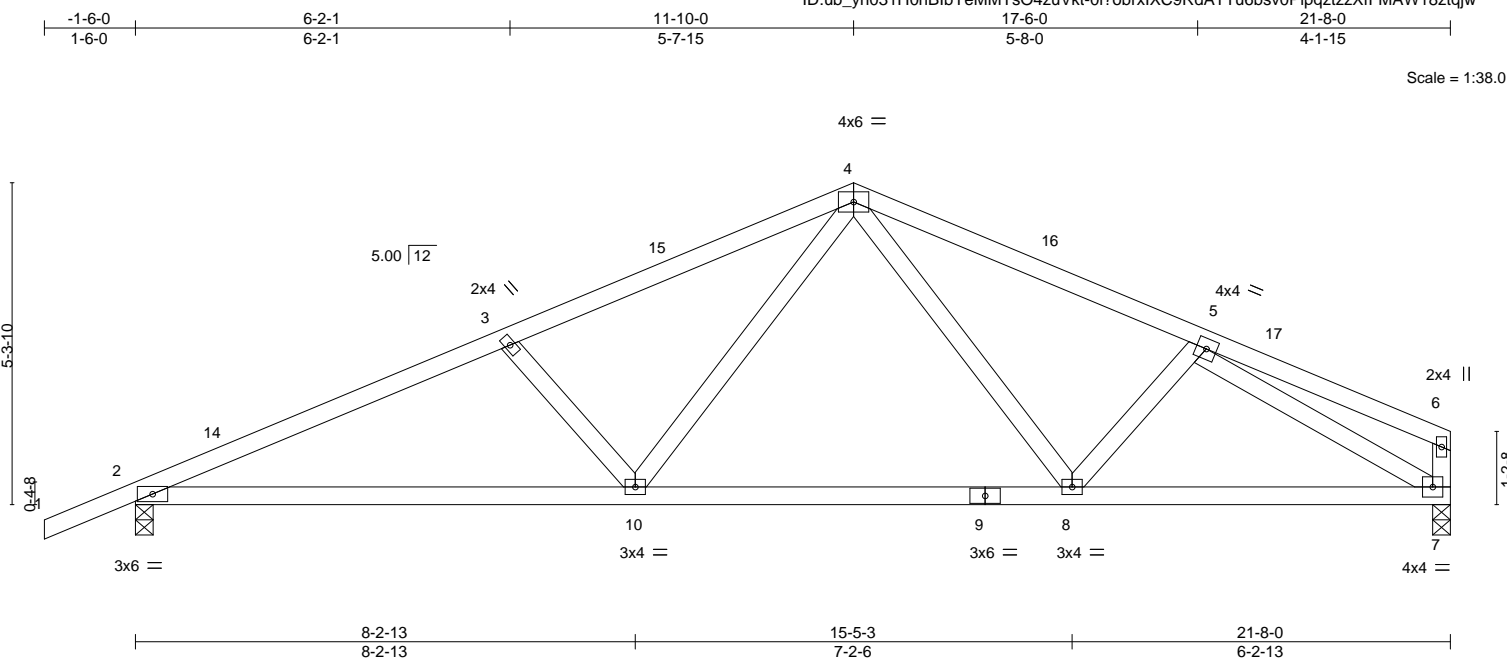

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.41	Vert(LL) -0.10	10-13	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.67	Vert(CT) -0.22	10-13	>999	180		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.54	Horz(CT) 0.04	7	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI0214	Matrix-MS					Weight: 105 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-3-5 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 9-4-6 oc bracing.

REACTIONS.


(size) 2=0-3-8, 7=0-3-8
Max Horz 2=116(LC 12)
Max Uplift 2=-232(LC 12), 7=-179(LC 13)
Max Grav 2=954(LC 1), 7=858(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1648/447, 3-4=-1424/409, 4-5=-1213/363
BOT CHORD 2-10=-395/1484, 8-10=-199/921, 7-8=-291/1102
WEBS 3-10=-383/210, 4-10=-147/569, 4-8=-79/283, 5-7=-1223/337

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 11-10-0, Exterior(2R) 11-10-0 to 14-10-0, Interior(1) 14-10-0 to 21-6-4 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 232 lb uplift at joint 2 and 179 lb uplift at joint 7.

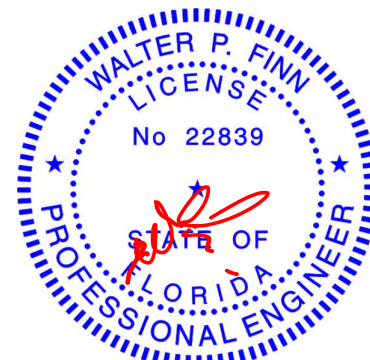

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511187
2564966	T06	Roof Special Girder	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:57 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-y77Z0WzY3qP9sUds?XeK_RU4ndfIRsRxiffd51ztaju



Scale = 1:39.1

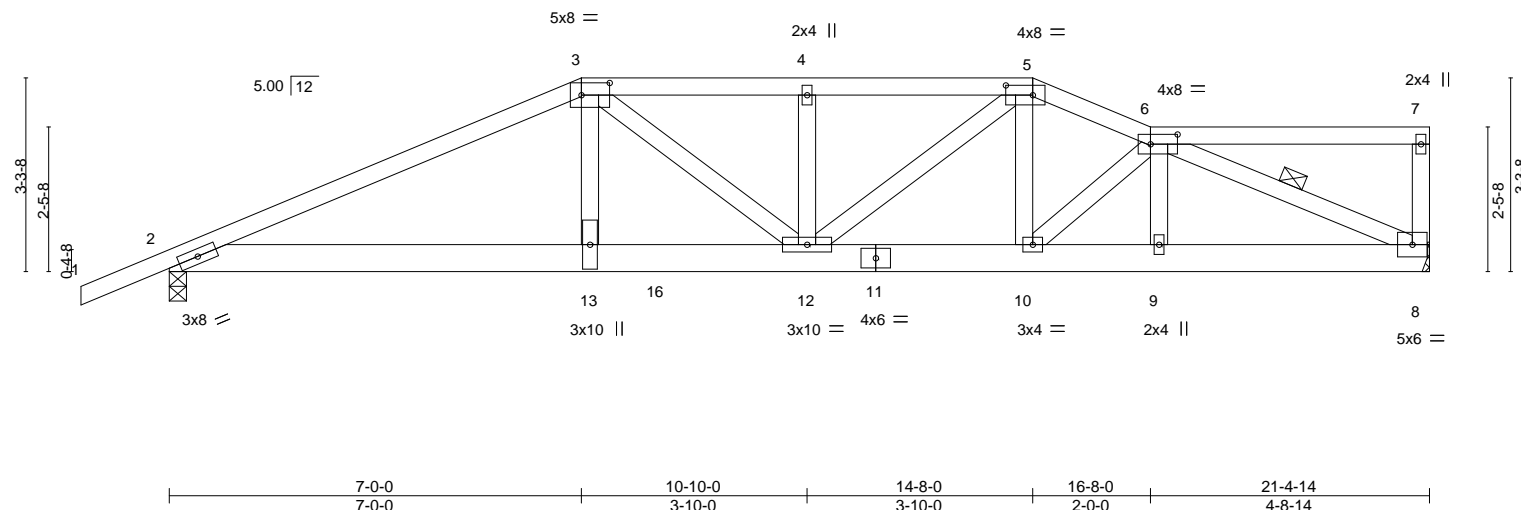


Plate Offsets (X,Y)-- [3:0-5-12,0-2-8], [5:0-5-8,0-2-0], [6:0-5-8,0-2-0]

LOADING (psf)	SPACING-		CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	2-0-0	TC 0.44	Vert(LL)	-0.13	12-13	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.58	Vert(CT)	-0.25	12-13	>999	180		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.58	Horz(CT)	0.06	8	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS						Weight: 125 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2 *Except*
1-3: 2x4 SP M 31
BOT CHORD 2x6 SP M 26 *Except*
8-11: 2x6 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-11-6 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 9-2-7 oc bracing.
WEBS 1 Row at midpt 6-8

REACTIONS.

(size) 8=Mechanical, 2=0-3-8
Max Horz 2=110(LC 27)
Max Uplift 8=348(LC 5), 2=441(LC 4)
Max Grav 8=1372(LC 1), 2=1835(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-3968/964, 3-4=-3454/896, 4-5=-3454/896, 5-6=-2749/696
BOT CHORD 2-13=-886/3592, 12-13=-898/3654, 10-12=-628/2527, 9-10=-639/2565, 8-9=-635/2561
WEBS 3-13=-248/1248, 3-12=-318/226, 5-12=-326/1234, 6-8=-2736/674


NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 348 lb uplift at joint 8 and 441 lb uplift at joint 2.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 139 lb down and 95 lb up at 7-0-0 on top chord, and 354 lb down and 84 lb up at 7-0-0, and 942 lb down and 275 lb up at 8-3-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-3=-60, 3-5=-60, 5-6=-60, 6-7=-60, 2-8=-20

Continued on page 2

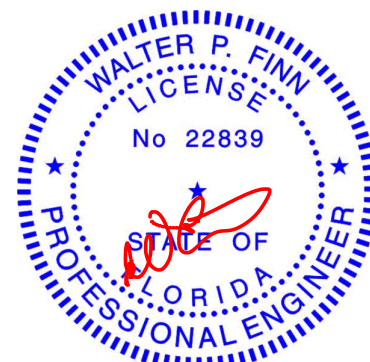

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511187
2564966	T06	Roof Special Girder	1	1	Job Reference (optional)	

LOAD CASE(S) Standard
Concentrated Loads (lb)
Vert: 3=-121(F) 13=-354(F) 16=-942(F)

6904 Parke East Blvd.
Tampa, FL 36610


Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511189
2564966	T08	Roof Special	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:25:59 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-uWEJRC?obRft6onF7ygo3sZQQRK8vICE9z8jAvztqjs



Scale = 1:38.8

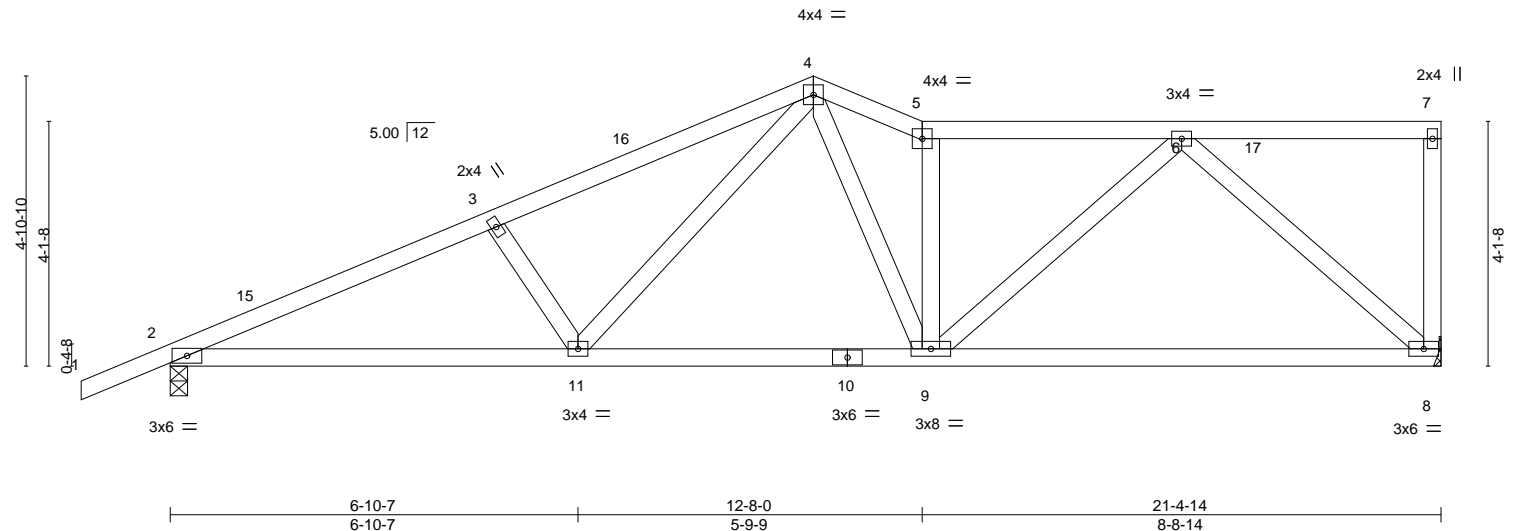

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.43	Vert(LL)	-0.15	8-9	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.65	Vert(CT)	-0.32	8-9	>809	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.63	Horz(CT)	0.04	8	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI0214		Matrix-MS						Weight: 114 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-4-12 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 8-6-4 oc bracing.

REACTIONS.

(size) 8=Mechanical, 2=0-3-8
Max Horz 2=170(LC 12)
Max Uplift 8=200(LC 9), 2=217(LC 12)
Max Grav 8=847(LC 1), 2=944(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-1680/427, 3-4=-1514/416, 4-5=-1280/357, 5-6=-1152/314
BOT CHORD 2-11=-483/1508, 9-11=-294/995, 8-9=-231/754
WEBS 3-11=-331/184, 4-11=-165/525, 4-9=-103/491, 5-9=-616/187, 6-9=-112/537, 6-8=-989/313

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 10-10-0, Exterior(2E) 10-10-0 to 12-8-0, Interior(1) 12-8-0 to 21-3-2 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 200 lb uplift at joint 8 and 217 lb uplift at joint 2.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511190
2564966	T09	Half Hip	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:00 2021 Page 1

ID:ub_yh031H0hBibYeMMTsO4zuVkt-MioheY?QMknkjyMRhfB1c46cnrhOe81OOduHILztqjr



Scale = 1:38.2

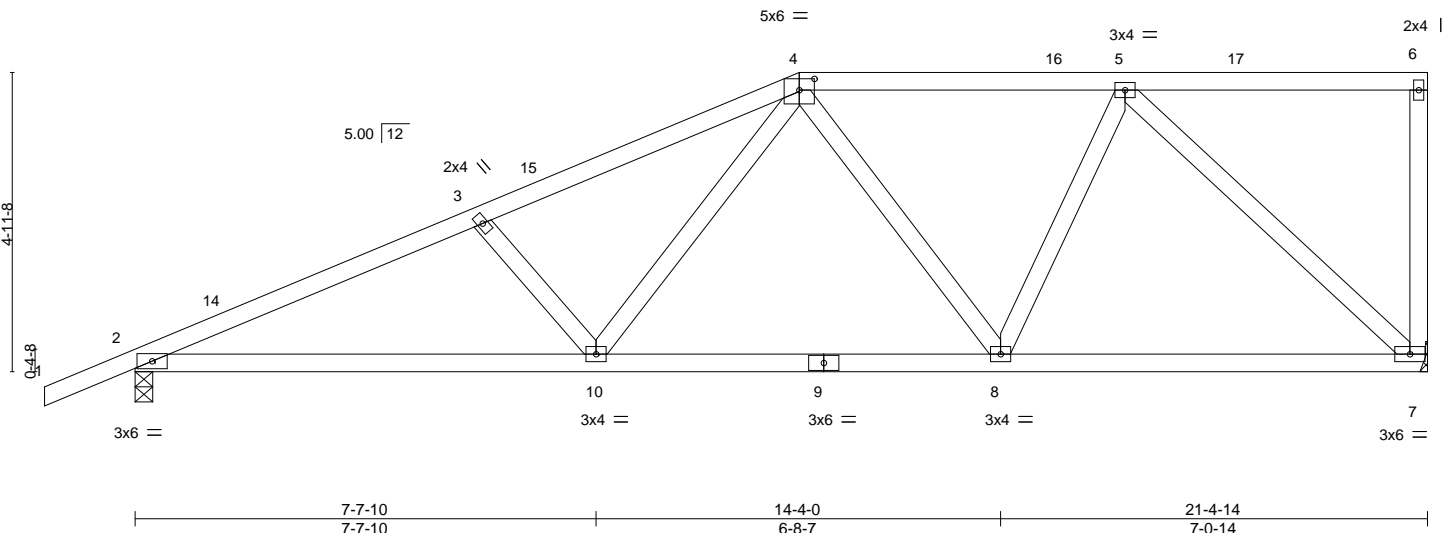


Plate Offsets (X,Y)-- [4:0-3-0,0-2-4]

LOADING (psf)	SPACING-		CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	2-0-0	TC 0.33	Vert(LL)	-0.08 10-13	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.58	Vert(CT)	-0.17 10-13	>999	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.85	Horz(CT)	0.04 7	n/a	n/a		
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-MS						
								Weight: 112 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-4-5 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 8-4-7 oc bracing.

REACTIONS.

(size) 7=Mechanical, 2=0-3-8
Max Horz 2=188(LC 12)
Max Uplift 7=219(LC 8), 2=245(LC 12)
Max Grav 7=847(LC 1), 2=944(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1658/412, 3-4=-1443/375, 4-5=-848/220
BOT CHORD 2-10=-496/1485, 8-10=-298/970, 7-8=-192/709
WEBS 3-10=-344/190, 4-10=-134/509, 5-8=-70/392, 5-7=-963/267

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 11-0-0, Exterior(2R) 11-0-0 to 15-2-15, Interior(1) 15-2-15 to 21-3-2 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 6) Refer to girder(s) for truss to truss connections.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 219 lb uplift at joint 7 and 245 lb uplift at joint 2.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511191
2564966	T10	Half Hip	1	1	Job Reference (optional)	


Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:01 2021 Page 1

ID:ub_yh031H0hBibYeMMTsO4zuVkt-qvM4ru0372vbL5xdENiG8Hfi6E?ANcLXdHdqEoztqjq



Scale = 1:38.2

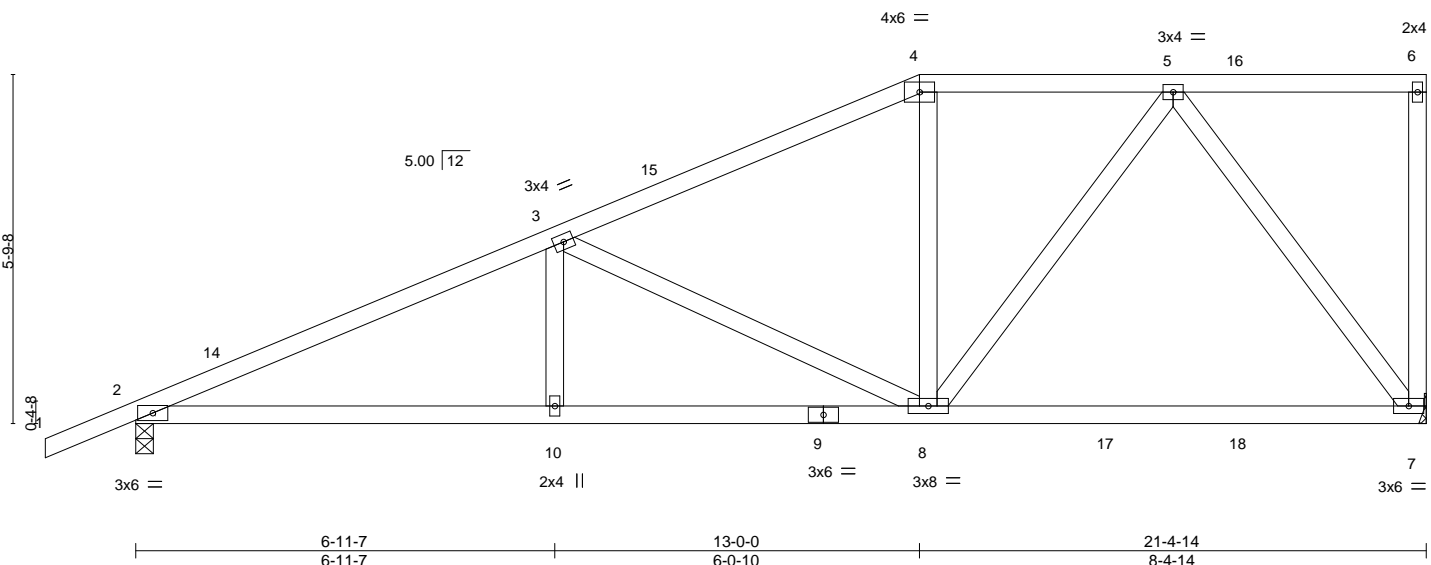

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.48	Vert(LL)	-0.19	7-8	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.74	Vert(CT)	-0.33	7-8	>774	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.78	Horz(CT)	0.04	7	n/a	n/a		
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-MS						Weight: 116 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-0-8 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 8-4-8 oc bracing.

REACTIONS.


(size) 7=Mechanical, 2=0-3-8
Max Horz 2=219(LC 12)
Max Uplift 7=-213(LC 8), 2=-241(LC 12)
Max Grav 7=928(LC 2), 2=988(LC 2)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1700/375, 3-4=-1021/224, 4-5=-882/237
BOT CHORD 2-10=-482/1533, 8-10=-482/1533, 7-8=-151/534
WEBS 3-8=-726/270, 5-8=-145/587, 5-7=-865/257

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 13-0-0, Exterior(2R) 13-0-0 to 17-2-8, Interior(1) 17-2-8 to 21-3-2 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- 6) Refer to girder(s) for truss to truss connections.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 213 lb uplift at joint 7 and 241 lb uplift at joint 2.

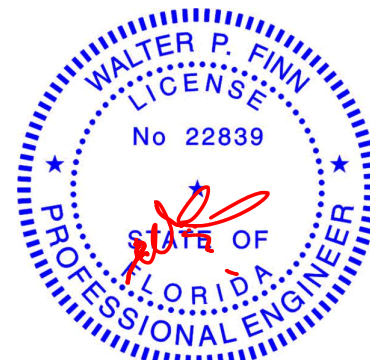

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511192
2564966	T11	Half Hip	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:02 2021 Page 1

ID:ub_yh031H0hBibYeMMTsO4zuVkt-J5wS3E1huM1SzFVpo4DVhVBuAeLI69vhsxNNnEztqjp

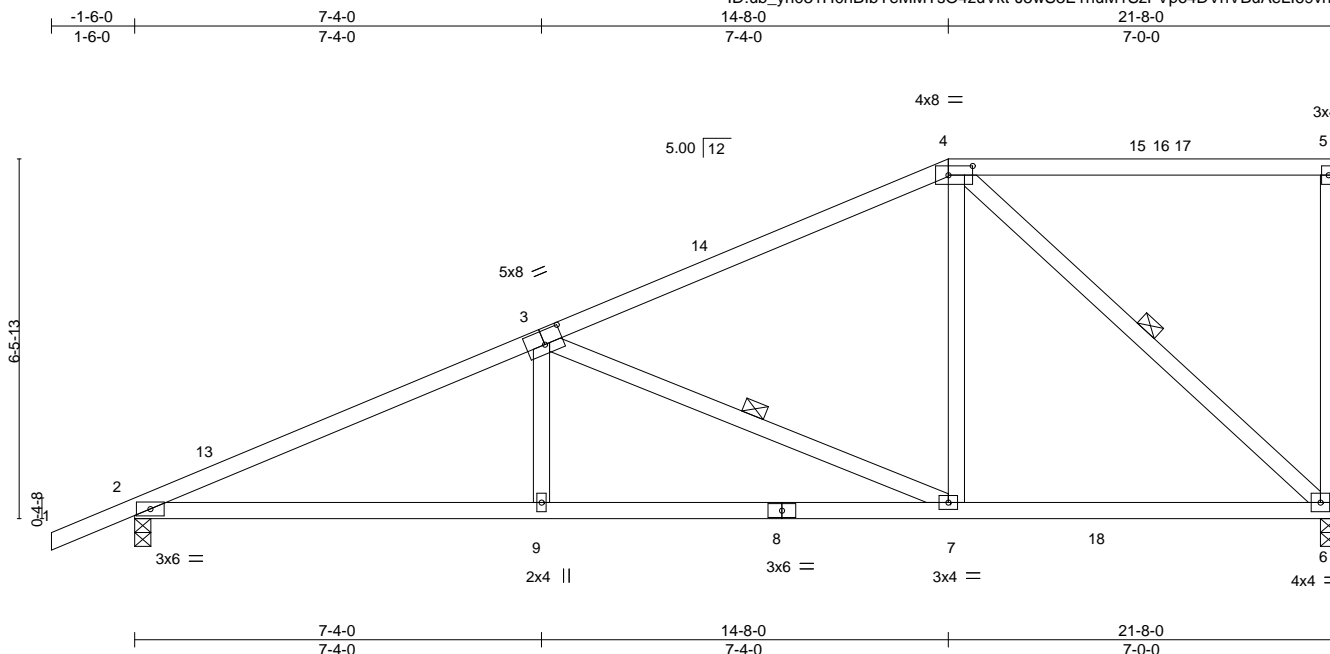

Scale = 1:41.5

Plate Offsets (X,Y)-- [3:0-4-0,0-3-0], [4:0-5-4,0-2-0]

LOADING (psf)	SPACING-		CSL	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.59	Vert(LL)	-0.10	9-12	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.68	Vert(CT)	-0.20	9-12	>999	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.44	Horz(CT)	0.05	6	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS						Weight: 115 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-11-11 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 8-2-13 oc bracing.
WEBS 1 Row at midpt 3-7, 4-6

REACTIONS.

(size) 6=0-3-8, 2=0-3-8
Max Horz 2=244(LC 12)
Max Uplift 6=221(LC 12), 2=239(LC 12)
Max Grav 6=941(LC 2), 2=1002(LC 2)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1730/367, 3-4=-888/183
BOT CHORD 2-9=-498/1560, 7-9=-498/1560, 6-7=-211/763
WEBS 3-9=0/307, 3-7=-880/313, 4-7=-71/639, 4-6=-1001/280

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 14-8-0, Exterior(2R) 14-8-0 to 18-10-15, Interior(1) 18-10-15 to 21-6-4 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 221 lb uplift at joint 6 and 239 lb uplift at joint 2.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511193
2564966	T12	Half Hip	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:03 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-nHUqGa2Jff9JaP40MolkDik5D2e_rWBq4b6xJgztqjo

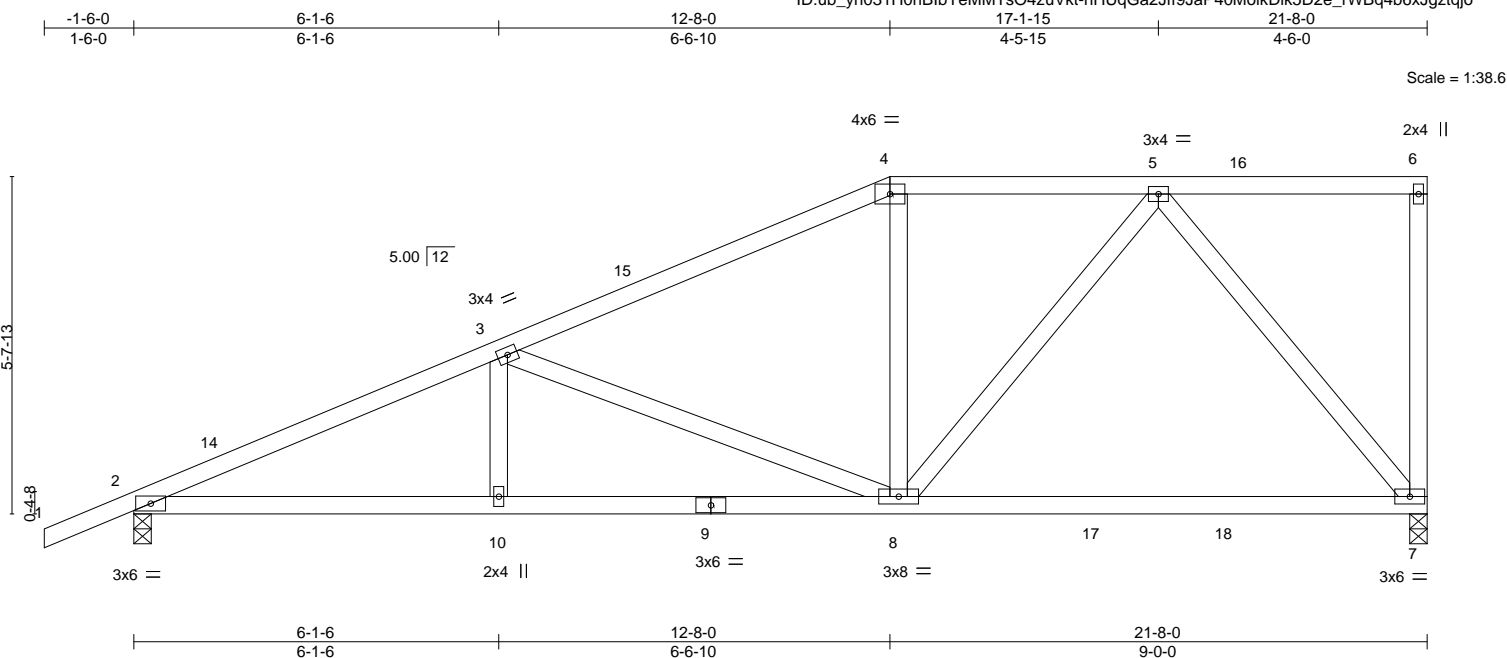

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.51	Vert(LL)	-0.24	7-8	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.85	Vert(CT)	-0.41	7-8	>624	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.82	Horz(CT)	0.04	7	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS						Weight: 117 lb	FT = 20%

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 4-2-9 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied or 8-2-11 oc bracing.
WEBS 2x4 SP No.3	

REACTIONS. (size) 7=0-3-8, 2=0-3-8
Max Horz 2=214(LC 12)
Max Uplift 7=-217(LC 8), 2=-244(LC 12)
Max Grav 7=939(LC 2), 2=999(LC 2)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-1797/402, 3-4=-1102/237, 4-5=-956/253
BOT CHORD 2-10=-512/1630, 8-10=-512/1630, 7-8=-164/586
WEBS 3-8=-727/275, 5-8=-141/586, 5-7=-892/263

- NOTES-**
- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 12-8-0, Exterior(2R) 12-8-0 to 17-1-15, Interior(1) 17-1-15 to 21-6-4 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
 - 3) Provide adequate drainage to prevent water ponding.
 - 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
 - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 217 lb uplift at joint 7 and 244 lb uplift at joint 2.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610


Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511194
2564966	T13	Common	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:03 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-nHUqGa2Jff9JaP40MolkDik4g2klrh9q4b6xJgztqjo

6-8-0	6-8-0	13-4-0	14-10-0
6-8-0	6-8-0	6-8-0	1-6-0

Scale = 1:24.5

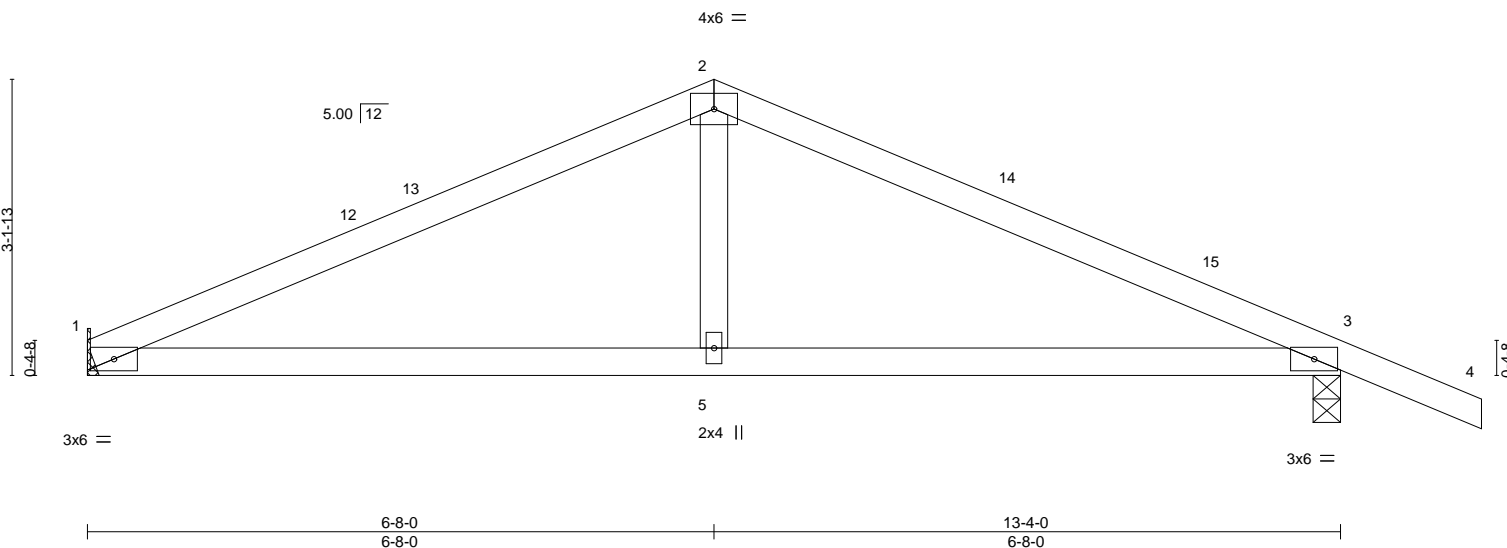

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.54	Vert(LL)	-0.07	5-8	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.51	Vert(CT)	-0.13	5-8	>999	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.12	Horz(CT)	0.01	3	n/a	n/a		
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-MS						Weight: 48 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-2-9 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 1=Mechanical, 3=0-3-8
Max Horz 1=-64(LC 13)
Max Uplift 1=-117(LC 12), 3=-154(LC 13)
Max Grav 1=528(LC 1), 3=628(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-2=-841/330, 2-3=-842/320
BOT CHORD 1-5=-198/715, 3-5=-198/715
WEBS 2-5=-10/309

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 3-0-0, Interior(1) 3-0-0 to 6-8-0, Exterior(2R) 6-8-0 to 9-8-0, Interior(1) 9-8-0 to 14-10-0 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 117 lb uplift at joint 1 and 154 lb uplift at joint 3.

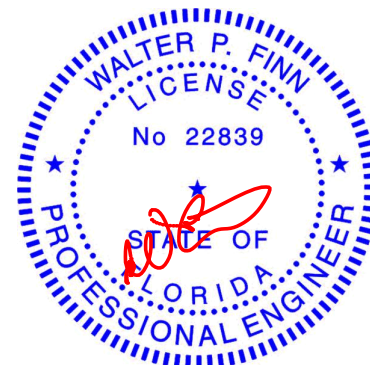

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 33610


Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244, 8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:05 2021 Page 1
 ID:ub_yh031H0hBlbYeMMTsO4zuVktjgbahF3ZBHP0qjEOTDnCi7pWTsXxJcz7Yvb2NZztqjm
 -1-6-0 6-8-0 13-4-0 14-10-0
 1-6-0 6-8-0 6-8-0 1-6-0
 Scale = 1:27.0

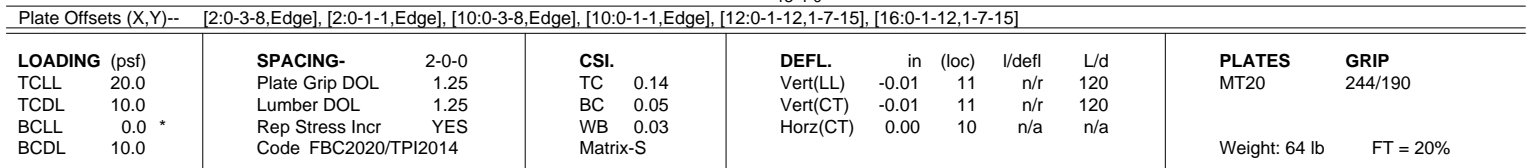

REACTIONS. All bearings 13-4-0.
(lb) - Max Horz 2=49(LC 16)
Max Uplift All uplift 100 lb or less at joint(s) 2, 10, 15, 16, 13, 12
Max Grav All reactions 250 lb or less at joint(s) 2, 10, 14, 15, 16, 13, 12

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Corner(3E) -1-6-0 to 1-6-0, Exterior(2N) 1-6-0 to 6-8-0, Corner(3R) 6-8-0 to 9-8-0, Exterior(2N) 9-8-0 to 14-10-0 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- 4) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 5) Gable requires continuous bottom chord bearing.
- 6) Gable studs spaced at 2-0-0 oc.
- 7) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 8) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 9) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 10, 15, 16, 13, 12.

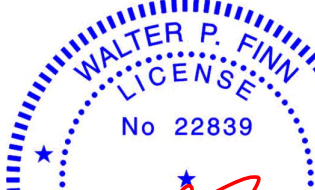


January 19, 2021

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511196
2564966	T14	Common	2	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:06 2021 Page 1

ID:ub_yh031H0hBibYeMMTsO4zuVkt-Bs9zvb4ByaXtrtpb1wlRrLMbpFm?22zGnZLbw?ztqjl

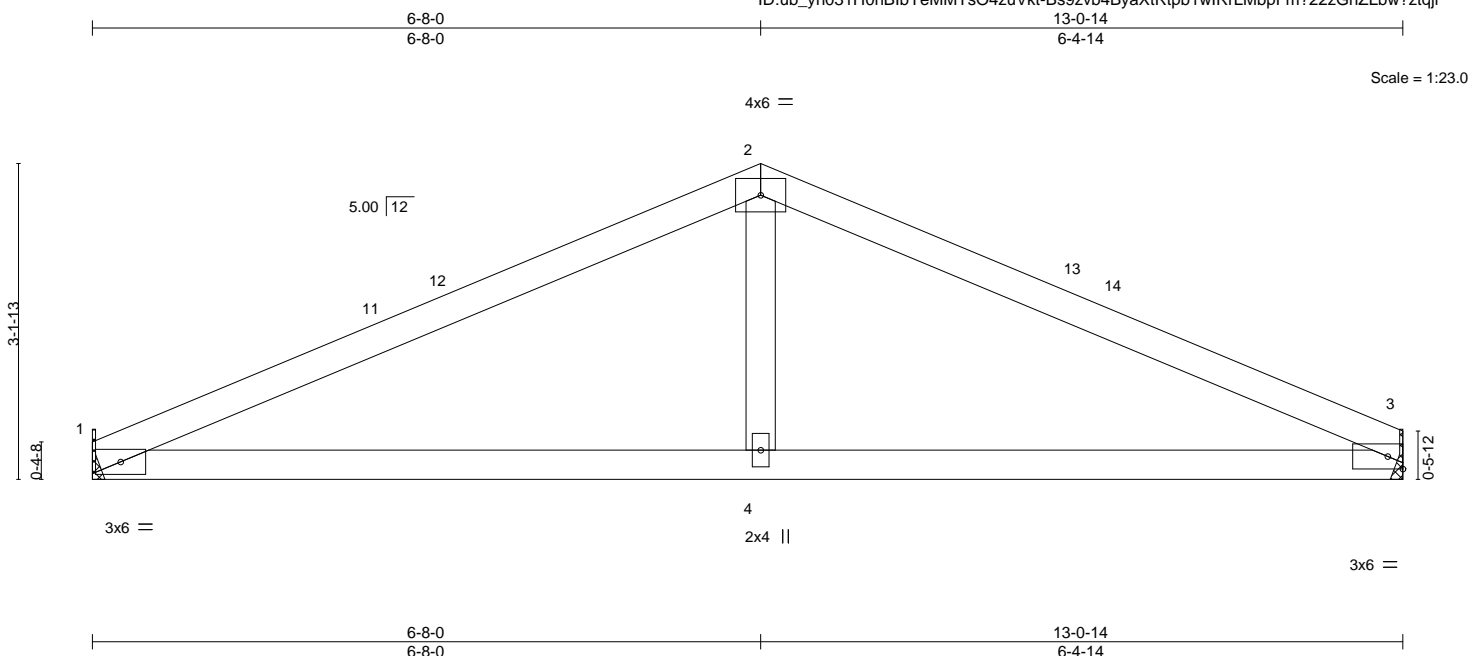

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.55	Vert(LL)	-0.07	4-7	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.51	Vert(CT)	-0.14	4-7	>999	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.11	Horz(CT)	0.01	3	n/a	n/a		
BCDL 10.0	Code	FBC2020/TPI0214	Matrix-MS						Weight: 45 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-3-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 1=Mechanical, 3=Mechanical
Max Horz 1=46(LC 12)
Max Uplift 1=-116(LC 12), 3=-114(LC 13)
Max Grav 1=523(LC 1), 3=523(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-2=-822/330, 2-3=-826/332
BOT CHORD 1-4=-233/698, 3-4=-233/698
WEBS 2-4=-9/299

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 3-0-0, Interior(1) 3-0-0 to 6-8-0, Exterior(2R) 6-8-0 to 9-8-0, Interior(1) 9-8-0 to 13-0-14 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=116, 3=114.

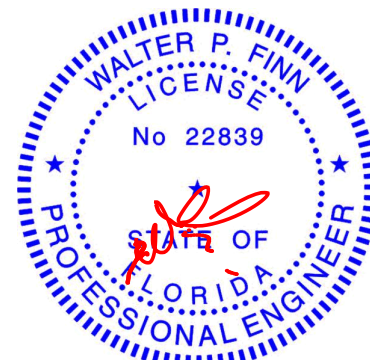

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511197
2564966	T15	Monopitch Girder	1	2	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:07 2021 Page 1

ID:ub_yh031H0hBibYeMMTsO4zuVkt-f2jL6x5pjufk30OnbdpgOYvpmf9PnM4Q?D48SRztqjk

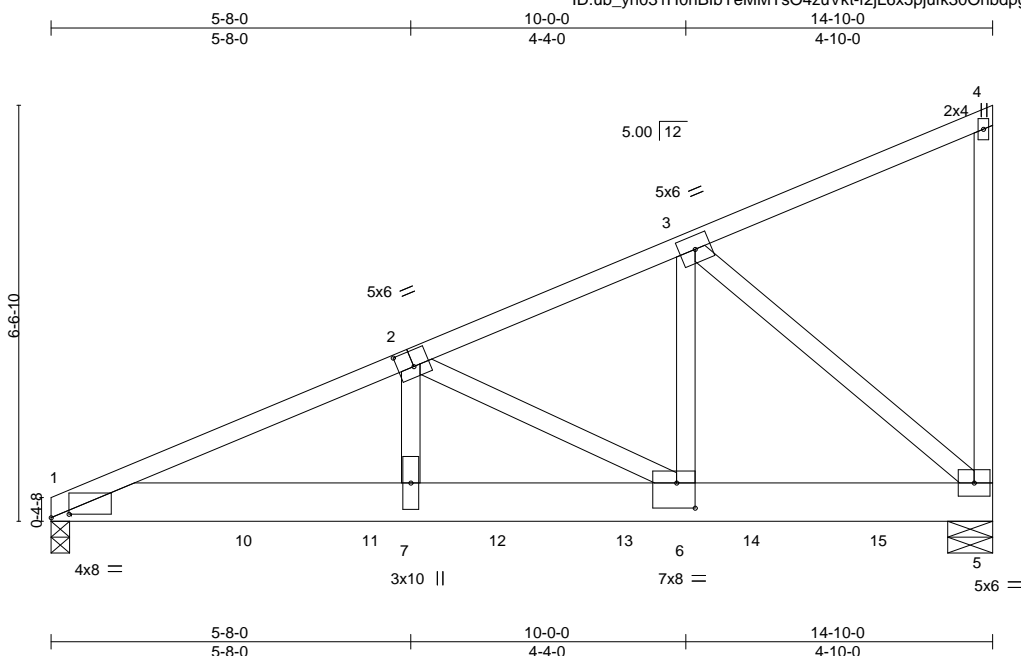

Scale = 1:36.3

Plate Offsets (X,Y)-- [1:0-3-6,0-0-10], [2:0-3-0,0-3-0], [6:0-3-8,0-4-12]

LOADING (psf)	SPACING-	CSL	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	TC 0.34	Vert(LL)	-0.06	7	>999	MT20	244/190
TCDL 10.0	Lumber DOL 1.25	BC 0.30	Vert(CT)	-0.12	7-9	>999		
BCLL 0.0 *	Rep Stress Incr NO	WB 0.70	Horz(CT)	0.02	5	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-MS						
							Weight: 203 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x8 SP 2400F 2.0E
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-8-4 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 1=0-3-8, 5=0-8-8
Max Horz 1=222(LC 8)
Max Uplift 1=826(LC 8), 5=952(LC 8)
Max Grav 1=3394(LC 1), 5=3437(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-6480/1578, 2-3=-3400/811
BOT CHORD 1-7=-1622/5948, 6-7=-1624/5957, 5-6=-849/3098
WEBS 2-7=-581/2429, 2-6=-3226/875, 3-6=-911/3663, 3-5=-4086/1118

NOTES-

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-9-0 oc.
Bottom chords connected as follows: 2x8 - 2 rows staggered at 0-9-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (it=lb) 1=826, 5=952.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 504 lb down and 133 lb up at 1-0-12, 503 lb down and 134 lb up at 3-0-12, 1352 lb down and 368 lb up at 5-0-12, 827 lb down and 224 lb up at 7-0-12, 827 lb down and 220 lb up at 9-0-12, and 827 lb down and 239 lb up at 11-0-12, and 908 lb down and 233 lb up at 13-0-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-4=-60, 1-5=-20



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

Continued on page 2

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610


Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511197
2564966	T15	Monopitch Girder	1	2	Job Reference (optional)	

LOAD CASE(S) Standard
Concentrated Loads (lb)
Vert: 9=-504(B) 10=-503(B) 11=-1352(B) 12=-827(B) 13=-827(B) 14=-827(B) 15=-827(B)

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511198
2564966	T16	Common	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:08 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-7FHjKH5STCnbhAzz9LKvwmRul3OEWhZEtqi_uztqjj



Scale = 1:48.6

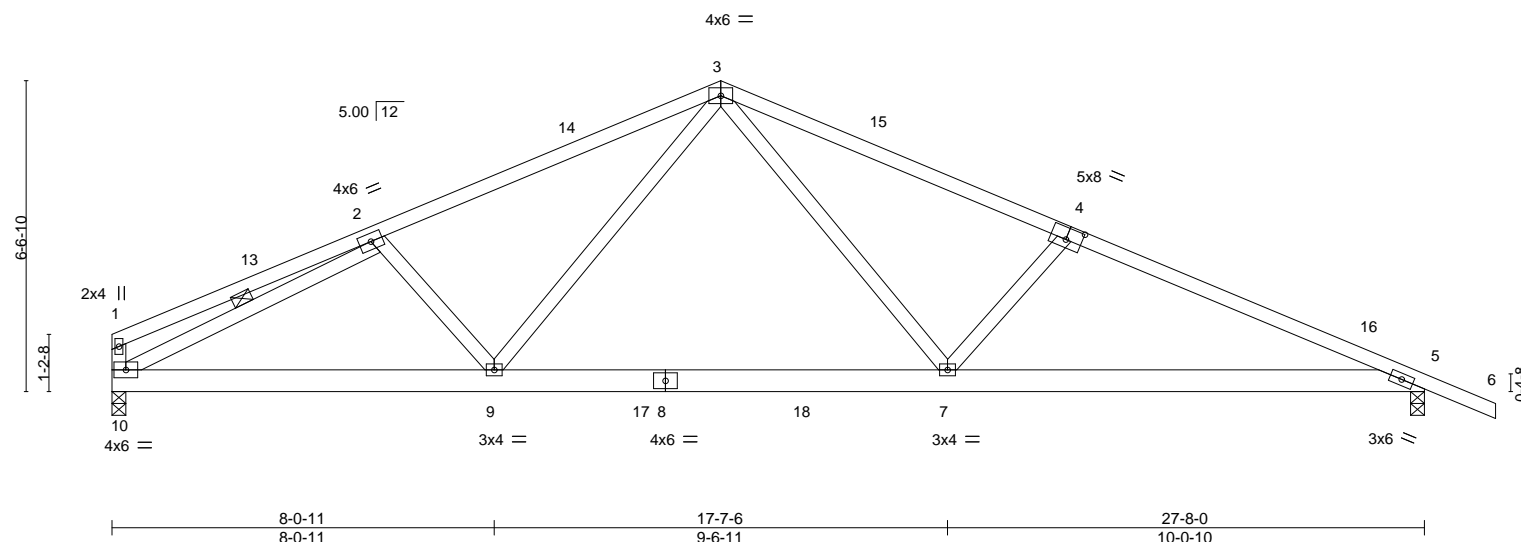


Plate Offsets (X,Y)-- [4:0-4-0,0-3-0]

LOADING (psf)	SPACING-		CSL	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	2-0-0	TC 0.74	Vert(LL)	-0.14	7-9	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.71	Vert(CT)	-0.28	7-12	>999	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.44	Horz(CT)	0.05	5	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS						Weight: 155 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x6 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 2-10

REACTIONS.


(size) 10=0-3-8, 5=0-3-8
Max Horz 10=-136(LC 13)
Max Uplift 10=-232(LC 12), 5=-285(LC 13)
Max Grav 10=1195(LC 2), 5=1270(LC 2)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-268/84, 2-3=-1859/418, 3-4=-2140/462, 4-5=-2366/498
BOT CHORD 9-10=-376/1712, 7-9=-173/1334, 5-7=-386/2149
WEBS 3-9=-121/557, 3-7=-199/937, 4-7=-469/262, 2-10=-1738/363

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-1-12 to 3-1-12, Interior(1) 3-1-12 to 12-10-0, Exterior(2R) 12-10-0 to 15-10-0, Interior(1) 15-10-0 to 29-2-0 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 10=232, 5=285.

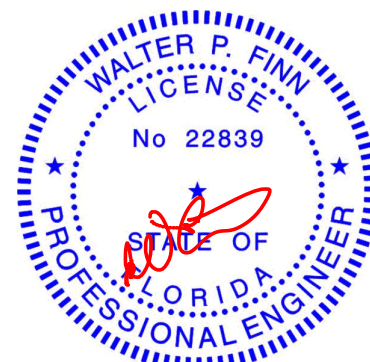

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511199
2564966	T17	Common	2	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:10 2021 Page 1

ID:ub_yh031H0hBlbYeMMTsO4zuVkt-4dPTkz7i?p1JwU7MGmNN?BXect3o_m9shBjp3mztqjh



Scale = 1:52.4

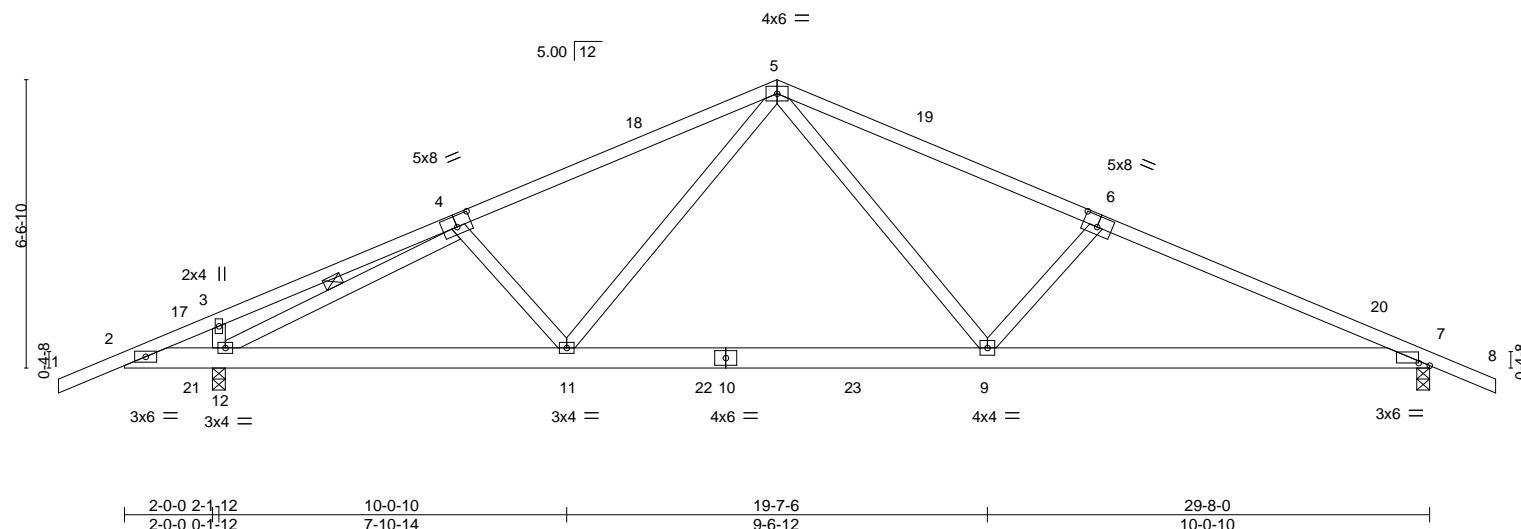


Plate Offsets (X,Y)-- [4:0-4-0,0-3-0], [6:0-4-0,0-3-0], [7:0-3-0,0-0-11]

LOADING (psf)	SPACING-		CSI.		DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	2-0-0	TC 0.75		Vert(LL)	-0.15	9-11	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.71		Vert(CT)	-0.27	9-16	>999	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.48		Horz(CT)	0.05	7	n/a	n/a		
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-MS							Weight: 165 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x6 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except:
6-0-0 oc bracing: 2-12.
WEBS 1 Row at midpt 4-12

REACTIONS.

(size) 12=0-3-8, 7=0-3-8
Max Horz 12=-108(LC 13)
Max Uplift 12=-320(LC 12), 7=-283(LC 13)
Max Grav 12=1467(LC 2), 7=1255(LC 2)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-251/196, 4-5=-1772/354, 5-6=-2103/439, 6-7=-2330/491
BOT CHORD 2-12=-140/274, 11-12=-337/1610, 9-11=-161/1296, 7-9=-365/2115
WEBS 5-11=-99/488, 5-9=-199/942, 6-9=-468/262, 4-12=-1902/533, 3-12=-265/142

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 14-10-0, Exterior(2R) 14-10-0 to 17-10-0, Interior(1) 17-10-0 to 31-2-0 zone; cantilever left exposed ;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 12=320, 7=283.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511200
2564966	T18	ATTIC	7	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:11 2021 Page 1

ID:ub_yh031H0hBibYeMMTsO4zuVkt-YqzsyJ8Km7AAyYqTucYO3MXGUXj92?wr2MbDztqig



Scale = 1:52.4

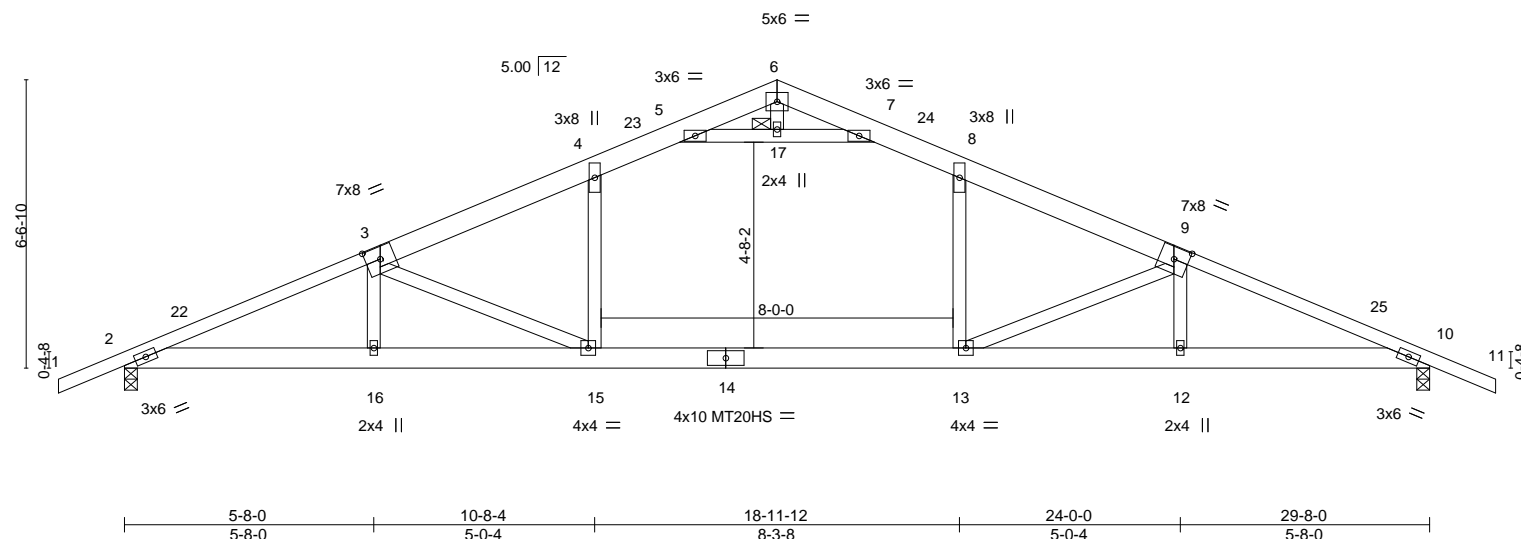


Plate Offsets (X,Y)--		[3:0-4-0,0-3-4], [9:0-4-0,0-3-4]									
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0		Plate Grip DOL	1.25	TC 0.93		Vert(LL)	-0.27 13-15	>999	240	MT20	244/190
TCDL 10.0		Lumber DOL	1.25	BC 0.42		Vert(CT)	-0.52 13-15	>689	180	MT20HS	187/143
BCLL 0.0 *		Rep Stress Incr	YES	WB 0.76		Horz(CT)	0.06 10	n/a	n/a		
BCDL 10.0		Code FBC2020/TPI2014		Matrix-MS		Attic	-0.11 13-15	904	360		
										Weight: 180 lb	FT = 20%

LUMBER-

TOP CHORD 2x6 SP No.2 "Except"
1-3,9-11: 2x4 SP No.2
BOT CHORD 2x6 SP M 26
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
JOINTS 1 Brace at Jt(s): 17

REACTIONS.


(size) 2=0-3-8, 10=0-3-8
Max Horz 2=-106(LC 17)
Max Uplift 2=-179(LC 12), 10=-179(LC 13)
Max Grav 2=1530(LC 2), 10=1530(LC 2)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-3275/260, 3-4=-2869/129, 4-5=-2459/167, 5-6=0/470, 6-7=0/470, 7-8=-2459/167,
8-9=-2869/129, 9-10=-3275/260
BOT CHORD 2-16=-270/3000, 15-16=-268/3001, 13-15=-3/2561, 12-13=-162/3001, 10-12=-164/3000
WEBS 5-17=-3120/118, 7-17=-3120/118, 4-15=0/788, 8-13=0/788, 3-15=-740/296, 6-17=0/267,
9-13=-740/296

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 14-10-0, Exterior(2R) 14-10-0 to 17-10-0, Interior(1) 17-10-0 to 31-2-0 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- All plates are MT20 plates unless otherwise indicated.
- The Fabrication Tolerance at joint 14 = 12%
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Ceiling dead load (5.0 psf) on member(s). 4-5, 7-8, 5-17, 7-17; Wall dead load (5.0psf) on member(s).4-15, 8-13
- Bottom chord live load (40.0 psf) and additional bottom chord dead load (10.0 psf) applied only to room. 13-15
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=179, 10=179.
- Attic room checked for L/360 deflection.

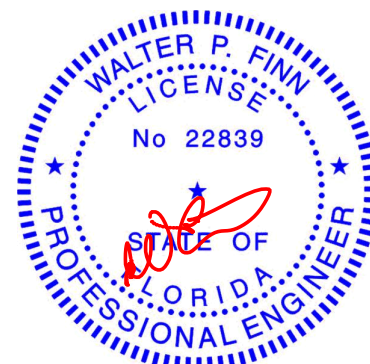

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511201
2564966	T19	Common	3	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:12 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-00XE9fyXQl1AoGkOBPr5ccZggk0Sih99Vov7fztqjf

7-7-0 14-10-0 22-1-0 29-8-0 31-2-0
7-7-0 7-3-0 7-3-0 7-7-0 1-6-0

Scale = 1:51.1

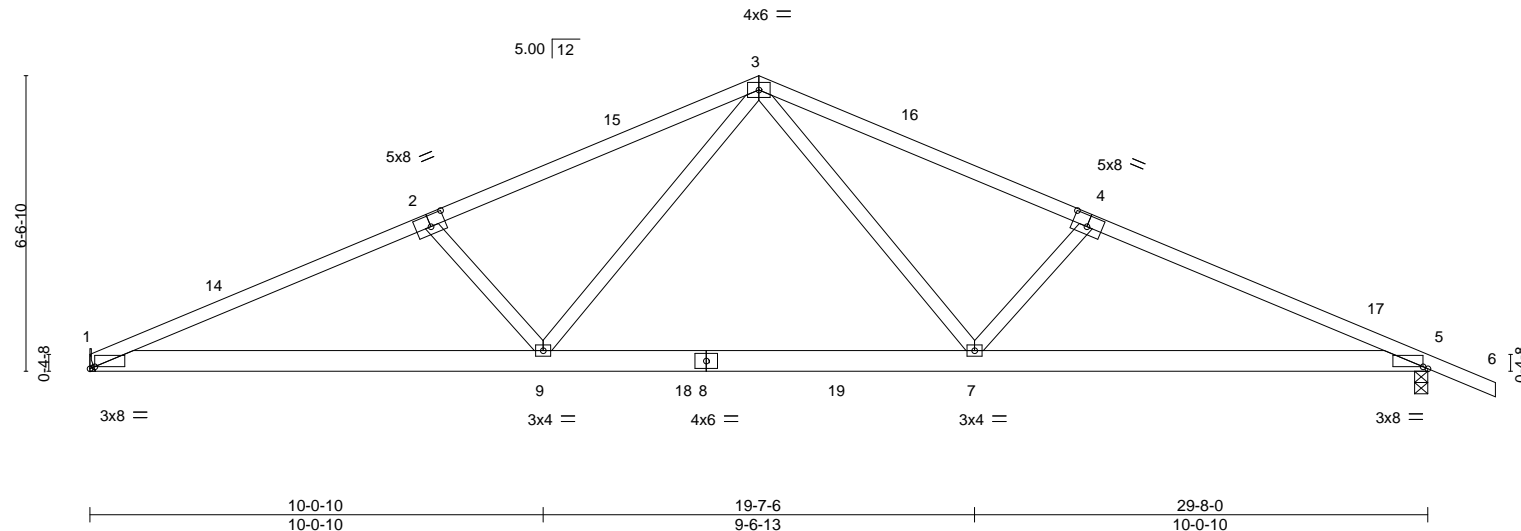


Plate Offsets (X,Y)--		[1:0-1-4,Edge], [2:0-4-0,0-3-0], [4:0-4-0,0-3-0], [5:0-1-4,Edge]									
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0		Plate Grip DOL	1.25	TC 0.78		Vert(LL)	-0.17 7-9	>999	240	MT20	244/190
TCDL 10.0		Lumber DOL	1.25	BC 0.79		Vert(CT)	-0.34 9-11	>999	180		
BCLL 0.0 *		Rep Stress Incr	YES	WB 0.35		Horz(CT)	0.07 5	n/a	n/a		
BCDL 10.0		Code FBC2020/TPI2014		Matrix-MS						Weight: 153 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x6 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 1=Mechanical, 5=0-3-8
Max Horz 1=-118(LC 17)
Max Uplift 1=-261(LC 12), 5=-297(LC 13)
Max Grav 1=1284(LC 2), 5=1363(LC 2)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-2608/534, 2-3=-2382/495, 3-4=-2373/483, 4-5=-2600/526
BOT CHORD 1-9=-513/2375, 7-9=-220/1564, 5-7=-406/2365
WEBS 3-7=-198/917, 4-7=-470/262, 3-9=-205/929, 2-9=-473/264

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 3-0-0, Interior(1) 3-0-0 to 14-10-0, Exterior(2R) 14-10-0 to 17-10-0, Interior(1) 17-10-0 to 31-2-0 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=261, 5=297.

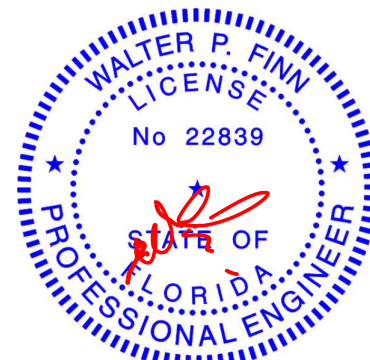

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511202
2564966	T20	Common	5	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:13 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-UC4cN?9alkQunxrxxuw4dp9jS44EB9ylO9XTg5ztzje

7-7-0 14-10-0 22-1-0 29-8-0
7-7-0 7-3-0 7-3-0 7-7-0

Scale = 1:48.7

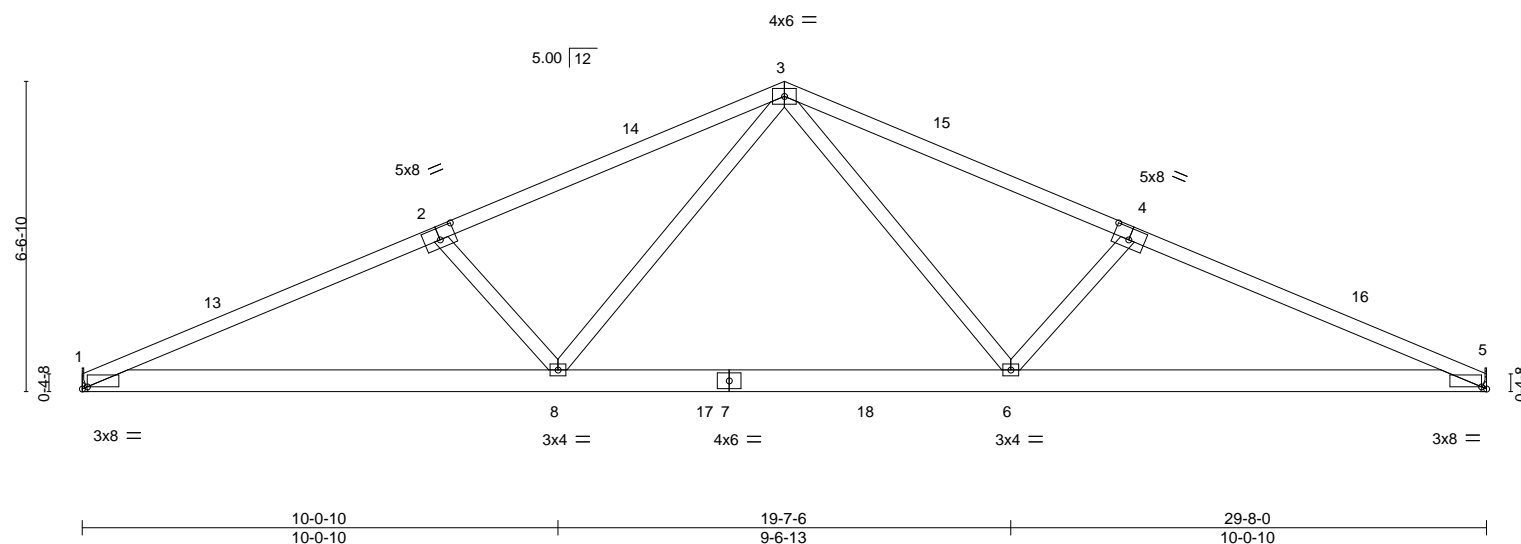


Plate Offsets (X,Y)-- [1:0-1-4,Edge], [2:0-4-0,0-3-0], [4:0-4-0,0-3-0], [5:0-1-4,Edge]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES GRIP		
TCLL	20.0	Plate Grip DOL	1.25	TC	0.78	Vert(LL)	-0.17	6-8	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.25	BC	0.79	Vert(CT)	-0.34	8-10	>999	180		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.35	Horz(CT)	0.07	5	n/a	n/a		
BCDL	10.0	Code	FBC2020/TPI2014	Matrix-MS							Weight: 151 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x6 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied.
BOT CHORD Rigid ceiling directly applied or 9-11-12 oc bracing.

REACTIONS.


(size) 1=Mechanical, 5=Mechanical
Max Horz 1=-98(LC 13)
Max Uplift 1=-262(LC 12), 5=-262(LC 13)
Max Grav 1=1286(LC 2), 5=1286(LC 2)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-2612/535, 2-3=-2386/497, 3-4=-2386/497, 4-5=-2612/534
BOT CHORD 1-8=-523/2379, 6-8=-231/1569, 5-6=-426/2379
WEBS 3-6=-205/929, 4-6=-473/264, 3-8=-205/929, 2-8=-473/264

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 3-0-0, Interior(1) 3-0-0 to 14-10-0, Exterior(2R) 14-10-0 to 17-10-0, Interior(1) 17-10-0 to 29-8-0 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=262, 5=262.

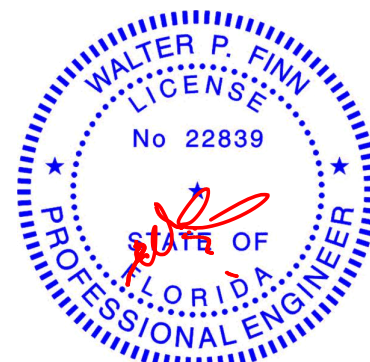

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511203
2564966	T20G	GABLE	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:14 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-yPe_aKAC32YIP5Q7VcRJA1hvfUVrwbIScpH0CXztqjd

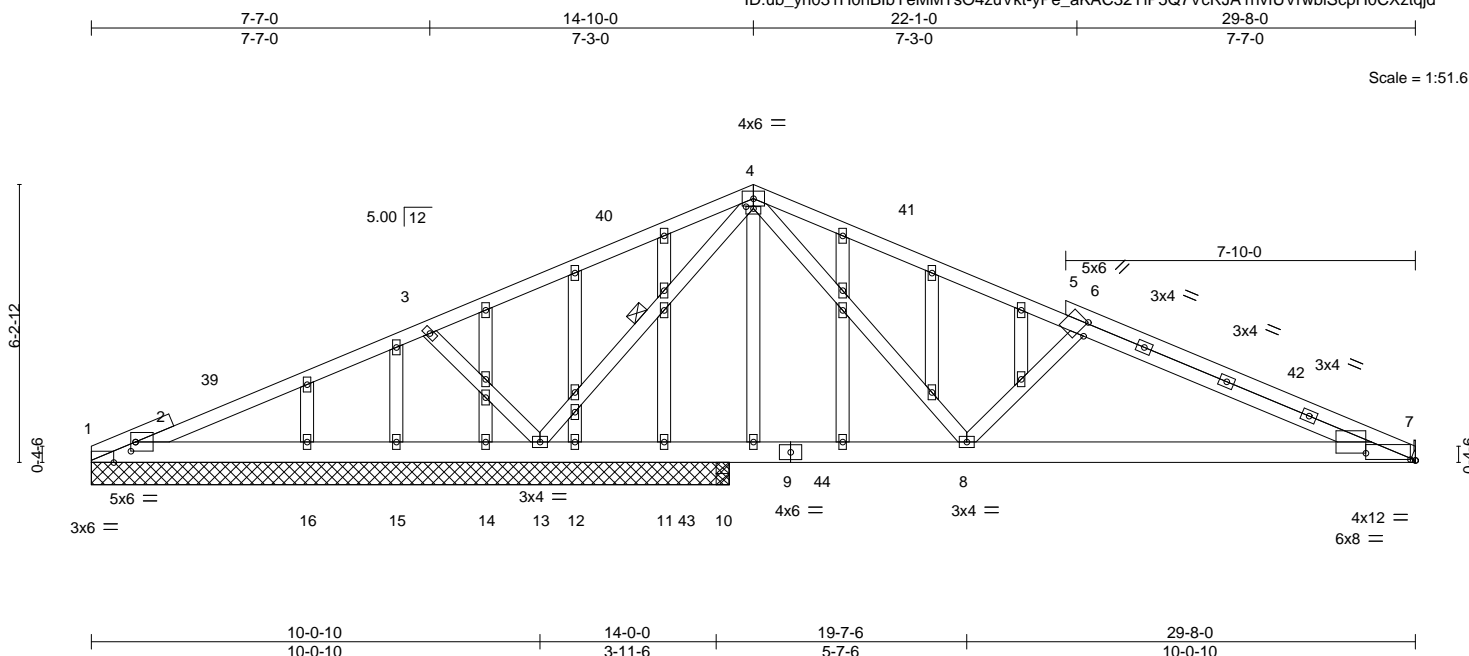


Plate Offsets (X,Y)-- [1:0-1-4,0-2-7], [1:0-5-14,Edge], [4:0-2-0,0-0-8], [6:0-3-8,0-1-12], [7:1-1-5,0-1-15], [7:0-1-6,0-0-4]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES GRIP		
TCLL	20.0	Plate Grip DOL	1.25	TC	0.75	Vert(LL)	-0.10	8-38	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.25	BC	0.51	Vert(CT)	-0.21	8-38	>885	180		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.45	Horz(CT)	0.01	7	n/a	n/a		
BCDL	10.0	Code FBC2020/TPI2014		Matrix-MS							Weight: 205 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x6 SP No.2
WEBS 2x4 SP No.3
OTHERS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-2-13 oc purlins.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing, Except:
10-0-0 oc bracing: 7-8.
WEBS 1 Row at midpt 4-13

REACTIONS. All bearings 14-3-8 except (jt=length) 7=Mechanical, 10=0-3-8.

(lb) - Max Horz 1=93(LC 12)
Max Uplift All uplift 100 lb or less at joint(s) 11, 14, 16, 10 except 7=179(LC 13), 13=395(LC 12), 15=158(LC 23)
Max Grav All reactions 250 lb or less at joint(s) 11, 12, 14, 15 except 7=696(LC 26), 13=1334(LC 1), 16=362(LC 25), 10=250(LC 26)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-3=-130/591, 3-4=-197/896, 4-6=-885/280, 6-7=-1162/354
BOT CHORD 1-16=-485/159, 15-16=-485/159, 14-15=-485/159, 13-14=-485/159, 7-8=-271/1069
WEBS 4-8=-219/872, 6-8=-547/287, 4-13=-1354/342, 3-13=-444/257

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 3-0-0, Interior(1) 3-0-0 to 14-10-0, Exterior(2R) 14-10-0 to 17-10-0, Interior(1) 17-10-0 to 29-7-4 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 11, 14, 16, 10 except (jt=lb) 7=179, 13=395, 15=158.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601





6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511204
2564966	T21	Hip Girder	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:16 2021 Page 1

ID:ub_yh031H0hBibYeMMTsO4zuVkt-unm!0CTbfoTePaWd0UnFSnKMH4jOYIk47m7GQztqjb

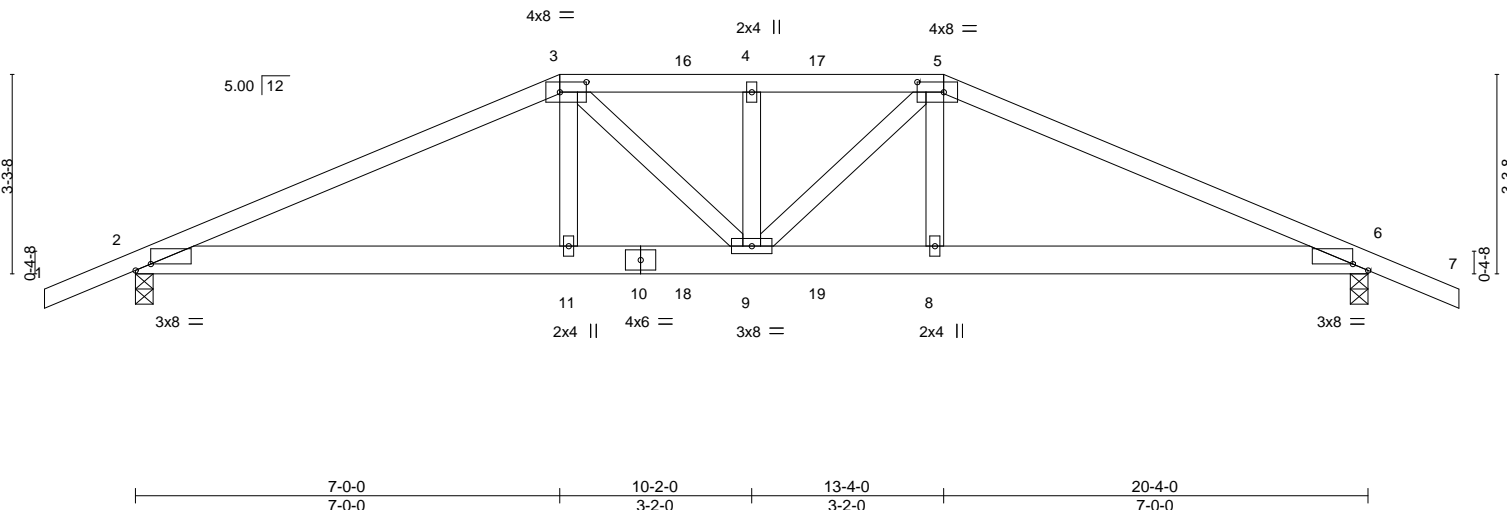

LOADING (psf)		SPACING-		CSI.		DEFL.		PLATES		GRIP	
TCLL	20.0	Plate Grip DOL	1.25	TC	0.42	Vert(LL)	-0.12	MT20		244/190	
TCDL	10.0	Lumber DOL	1.25	BC	0.87	Vert(CT)	-0.23				
BCLL	0.0 *	Rep Stress Incr	NO	WB	0.25	Horz(CT)	0.07				
BCDL	10.0	Code FBC2020/TPI2014		Matrix-MS							
								Weight: 107 lb		FT = 20%	

LUMBER-
TOP CHORD 2x4 SP M 31 "Except"
3-5: 2x4 SP No.2
BOT CHORD 2x6 SP No.2
WEBS 2x4 SP No.3

BRACING-
TOP CHORD Structural wood sheathing directly applied or 2-10-14 oc purlins.
BOT CHORD Rigid ceiling directly applied or 8-4-10 oc bracing.

REACTIONS. (size) 2=0-3-8, 6=0-3-8
Max Horz 2=56(LC 31)
Max Uplift 2=-422(LC 8), 6=-423(LC 9)
Max Grav 2=1682(LC 1), 6=1702(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-3525/836, 3-4=-3532/867, 4-5=-3532/867, 5-6=-3577/840
BOT CHORD 2-11=-736/3186, 9-11=-739/3217, 8-9=-709/3265, 6-8=-708/3235
WEBS 3-11=-61/657, 3-9=-234/551, 4-9=-479/236, 5-9=-168/472, 5-8=-61/657

- NOTES-**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; Lumber DOL=1.60 plate grip DOL=1.60
 - 3) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
 - 4) Provide adequate drainage to prevent water ponding.
 - 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (it=lb) 2=422, 6=423.
 - 8) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 139 lb down and 95 lb up at 7-0-0, 121 lb down and 95 lb up at 9-0-12, 121 lb down and 87 lb up at 10-2-0, and 121 lb down and 95 lb up at 11-3-4, and 234 lb down and 173 lb up at 13-4-0 on top chord, and 354 lb down and 84 lb up at 7-0-0, 88 lb down at 9-0-12, 88 lb down at 10-2-0, and 88 lb down at 11-3-4, and 354 lb down and 84 lb up at 13-3-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
 - 9) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard
1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-3=-60, 3-5=-60, 5-7=-60, 2-6=-20



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

Continued on page 2

January 19,2021


WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

MiTek
6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511204
2564966	T21	Hip Girder	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244, 8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:16 2021 Page 2
ID:ub_yh031H0hBibYeMMTsO4zuVkt-unml?0CTbfoTePaWd0UnFSnKMH4jOYIk47m7GQztqjb

LOAD CASE(S) Standard
Concentrated Loads (lb)
Vert: 3=-121(F) 5=-187(F) 11=-354(F) 9=-67(F) 4=-121(F) 8=-354(F) 16=-121(F) 17=-121(F) 18=-67(F) 19=-67(F)

 **WARNING** - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511205
2564966	T22	Hip	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:17 2021 Page 1

ID:ub_yh031H0hBibYeMMTsO4zuVkt-M_K7CMC5MzwJGZ9iAk?0ofJVJhST7_LuInVgpszqtja



Scale = 1:38.0

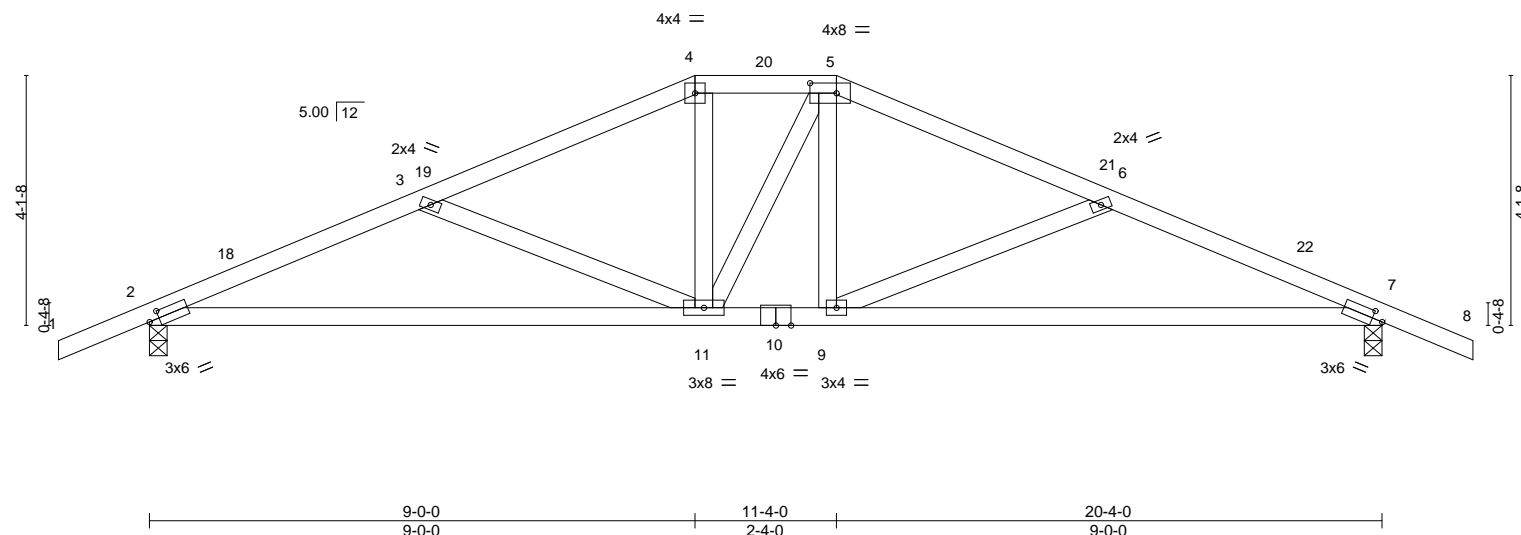


Plate Offsets (X,Y)-- [2:0-2-1,0-1-8], [5:0-5-4,0-2-0], [7:0-2-1,0-1-8]

LOADING (psf)	SPACING-		CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	2-0-0	TC 0.40	Vert(LL)	-0.14	9-17	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.70	Vert(CT)	-0.31	9-17	>799	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.20	Horz(CT)	0.04	7	n/a	n/a		
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-MS						Weight: 99 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-6-1 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 2=0-3-8, 7=0-3-8
Max Horz 2=-70(LC 13)
Max Uplift 2=-216(LC 12), 7=-216(LC 13)
Max Grav 2=903(LC 1), 7=903(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1587/409, 3-4=-1224/303, 4-5=-1084/308, 5-6=-1223/303, 6-7=-1587/409
BOT CHORD 2-11=-344/1444, 9-11=-169/1083, 7-9=-326/1444
WEBS 3-11=-403/197, 4-11=-44/297, 5-9=-43/297, 6-9=-404/198

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 9-0-0, Exterior(2E) 9-0-0 to 11-4-0, Exterior(2R) 11-4-0 to 15-6-15, Interior(1) 15-6-15 to 21-10-0 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=216, 7=216.

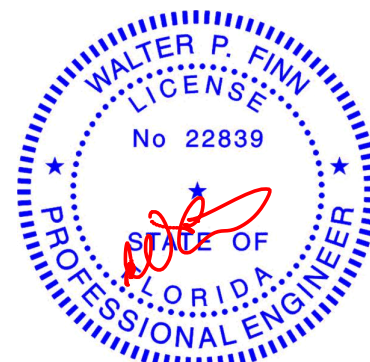

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610


Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511206
2564966	T23	Common	2	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:19 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-JMStd2ELuaA1VsJ5I91Ut4OtcVBfbvGBm5_ntlztqjY



Scale = 1:37.4

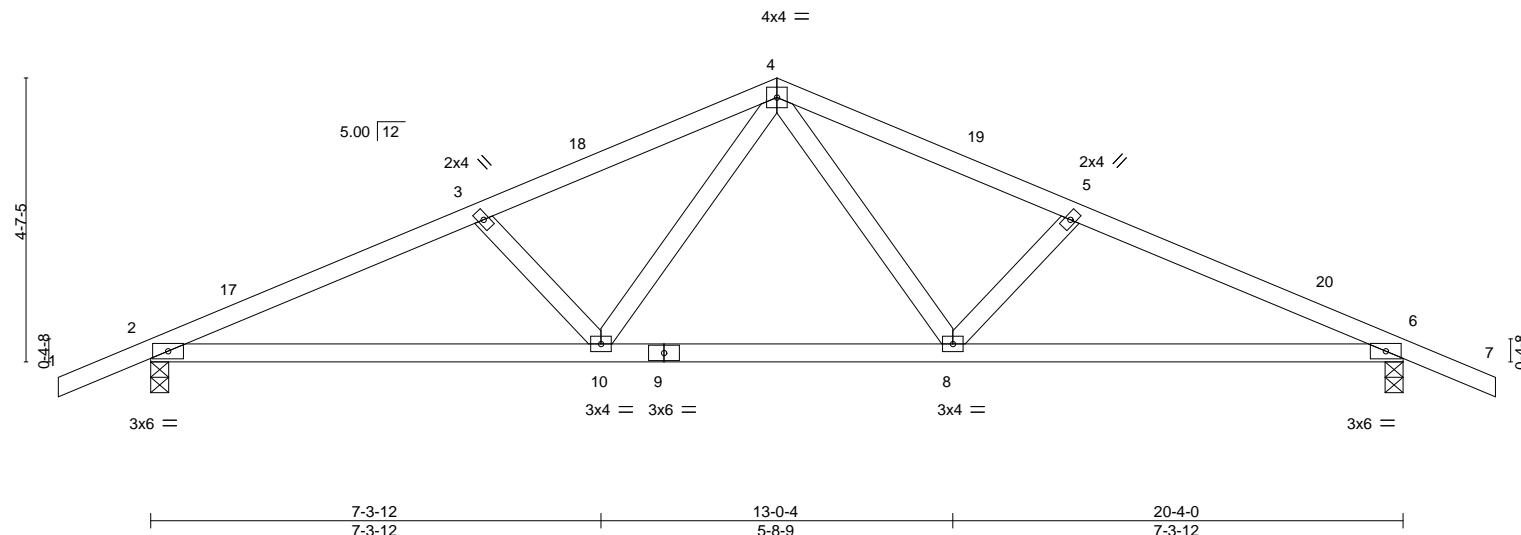

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.29	Vert(LL)	-0.07	8-16	>999	240	MT20
TCDL 10.0	Lumber DOL	1.25	BC 0.53	Vert(CT)	-0.16	8-16	>999	180	244/190
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.17	Horz(CT)	0.04	6	n/a	n/a	
BCDL 10.0	Code FBC2020/TPI0214		Matrix-MS						
								Weight: 91 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-6-6 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 2=0-3-8, 6=0-3-8
Max Horz 2=77(LC 16)
Max Uplift 2=-215(LC 12), 6=-215(LC 13)
Max Grav 2=903(LC 1), 6=903(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1573/442, 3-4=-1361/402, 4-5=-1361/402, 5-6=-1573/442
BOT CHORD 2-10=-329/1409, 8-10=-168/955, 6-8=-342/1409
WEBS 4-8=-119/454, 5-8=-328/178, 4-10=-118/454, 3-10=-328/178

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 10-2-0, Exterior(2R) 10-2-0 to 13-2-0, Interior(1) 13-2-0 to 21-10-0 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=215, 6=215.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511207
2564966	T24	Common Girder	1	2	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:20 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-nY?FrOFzfulu70uHssYjPlx0TvbFKDtK?IkKPBztqjX

5-6-12 10-2-0 14-9-4 20-4-0
5-6-12 4-7-4 4-7-4 5-6-12

Scale = 1:32.6

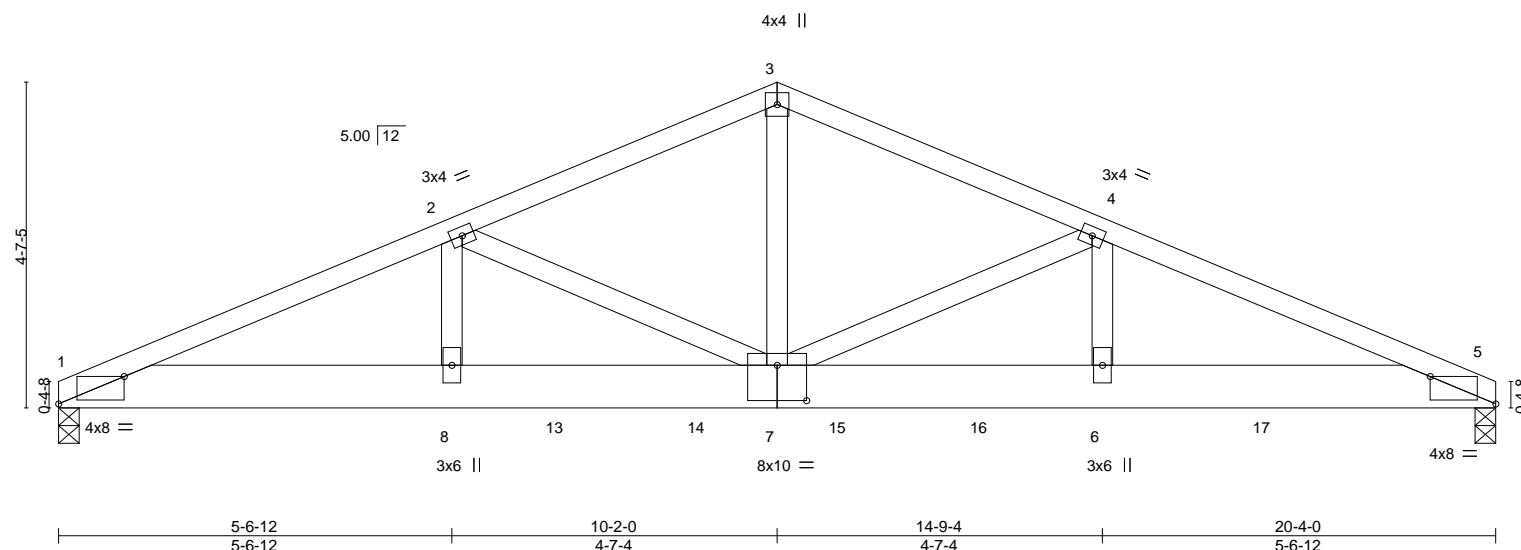


Plate Offsets (X,Y)-- [1:0-11-2,Edge], [5:0-11-2,Edge], [7:0-5-0,0-6-0]															
LOADING (psf)		SPACING-		2-0-0		CSI.		DEFL.		in (loc) l/defl L/d		PLATES		GRIP	
TCLL	20.0	Plate Grip DOL		1.25		TC	0.41	Vert(LL)	-0.11	7-8	>999	240	MT20	244/190	
TCDL	10.0	Lumber DOL		1.25		BC	0.32	Vert(CT)	-0.21	7-8	>999	180			
BCLL	0.0 *	Rep Stress Incr		NO		WB	0.72	Horz(CT)	0.04	5	n/a	n/a			
BCDL	10.0	Code FBC2020/TPI2014				Matrix-MS								Weight: 241 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x8 SP 2400F 2.0E
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-4-4 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 1=0-3-8, 5=0-3-8
Max Horz 1=-66(LC 13)
Max Uplift 1=-702(LC 8), 5=-928(LC 9)
Max Grav 1=2839(LC 1), 5=3786(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-6867/1695, 2-3=-5373/1343, 3-4=-5375/1344, 4-5=-7437/1838
BOT CHORD 1-8=-1575/6287, 7-8=-1575/6287, 6-7=-1643/6833, 5-6=-1643/6833
WEBS 3-7=-930/3805, 4-7=-2152/602, 4-6=-322/1463, 2-7=-1545/452, 2-8=-208/1006

NOTES-

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-9-0 oc.
Bottom chords connected as follows: 2x8 - 2 rows staggered at 0-7-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCCL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=702, 5=928.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 1421 lb down and 369 lb up at 7-0-12, 596 lb down and 176 lb up at 9-0-12, 596 lb down and 175 lb up at 11-0-12, 596 lb down and 181 lb up at 13-0-12, 602 lb down and 157 lb up at 15-0-12, and 602 lb down and 157 lb up at 17-0-12, and 607 lb down and 158 lb up at 19-0-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511207
2564966	T24	Common Girder	1	2	Job Reference (optional)	

LOAD CASE(S) Standard
Uniform Loads (plf)
Vert: 1-3=-60, 3-5=-60, 1-5=-20
Concentrated Loads (lb)
Vert: 6=-602(B) 12=-607(B) 13=-1421(B) 14=-596(B) 15=-596(B) 16=-596(B) 17=-602(B)


Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511208
2564966	T25	Common	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:21 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-FIZd2kGbQBQIIASTPa3yyVU61IrR3pKUDOTuyeztqjW



Scale = 1:29.4

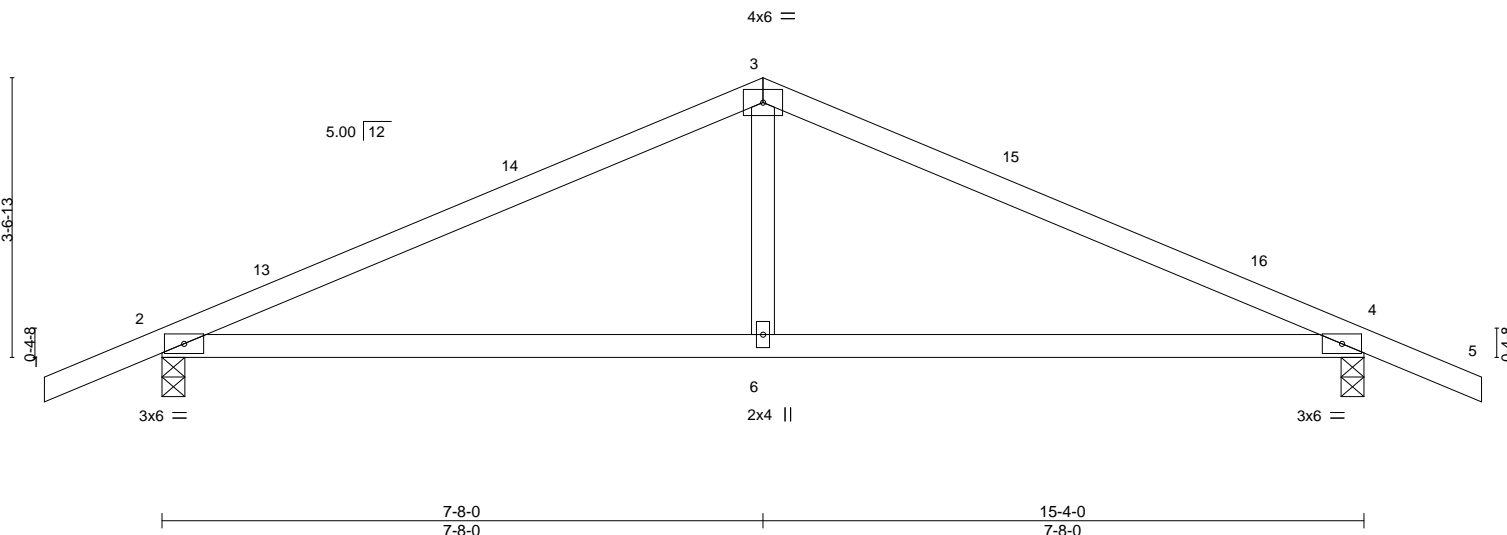

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.74	Vert(LL)	-0.10	6-9	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.64	Vert(CT)	-0.20	6-9	>916	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.14	Horz(CT)	0.01	4	n/a	n/a		
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-MS						Weight: 57 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-1-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 2=0-3-8, 4=0-3-8
Max Horz 2=61(LC 12)
Max Uplift 2=-171(LC 12), 4=-171(LC 13)
Max Grav 2=703(LC 1), 4=703(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-964/325, 3-4=-964/325
BOT CHORD 2-6=-188/817, 4-6=-188/817
WEBS 3-6=0/356

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 7-8-0, Exterior(2R) 7-8-0 to 10-8-0, Interior(1) 10-8-0 to 16-10-0 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=171, 4=171.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511209
2564966	T25G	Common Supported Gable	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:22 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-jx70G3GEAVYcMK1fzHaBVj0QBiJJol3dS2DRU4ztqjV



Scale = 1:30.4

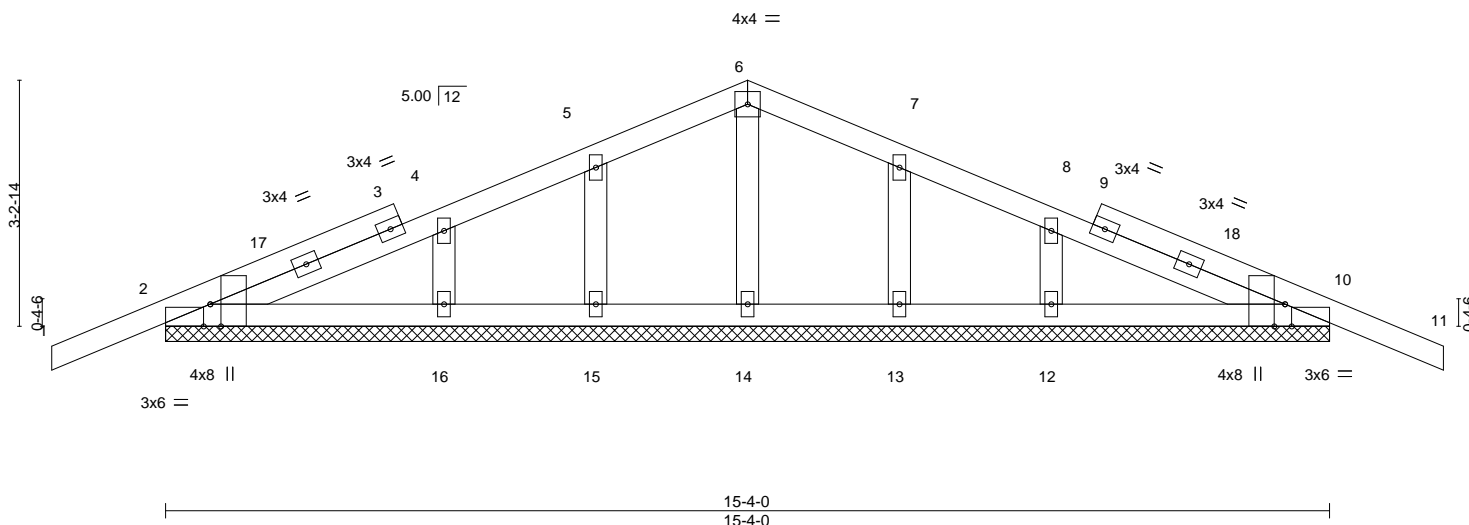


Plate Offsets (X,Y)-- [2:0-3-8,Edge], [2:0-1-1,Edge], [10:0-3-8,Edge], [10:0-1-1,Edge]

LOADING (psf)	SPACING-		CSI.		DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.14		Vert(LL)	-0.00	11	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.09		Vert(CT)	-0.01	11	n/r	120		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.04		Horz(CT)	0.00	10	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-S							Weight: 73 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
OTHERS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

- All bearings 15-4-0.
(lb) - Max Horz 2=56(LC 12)
Max Uplift All uplift 100 lb or less at joint(s) 2, 10, 15, 16, 13, 12
Max Grav All reactions 250 lb or less at joint(s) 2, 10, 14, 15, 16, 13, 12

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Corner(3E) -1-6-0 to 1-6-0, Exterior(2N) 1-6-0 to 7-8-0, Corner(3R) 7-8-0 to 10-8-0, Exterior(2N) 10-8-0 to 16-10-0 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 10, 15, 16, 13, 12.
- Beveled plate or shim required to provide full bearing surface with truss chord at joint(s) 2, 10.

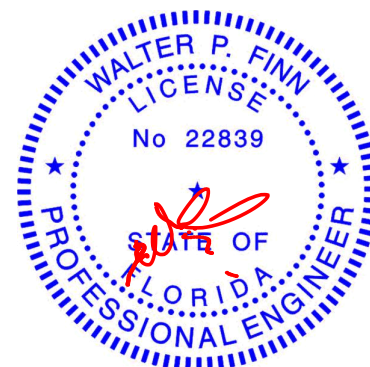

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511210
2564966	T26	Common Girder	1	2	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:24 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-fKFmgllUI6oKceB25idfa86gFWw3G_9wvMiYyztqjT

4-3-12 7-8-0 11-0-4 15-4-0
4-3-12 3-4-4 3-4-4 4-3-12

Scale = 1:24.6

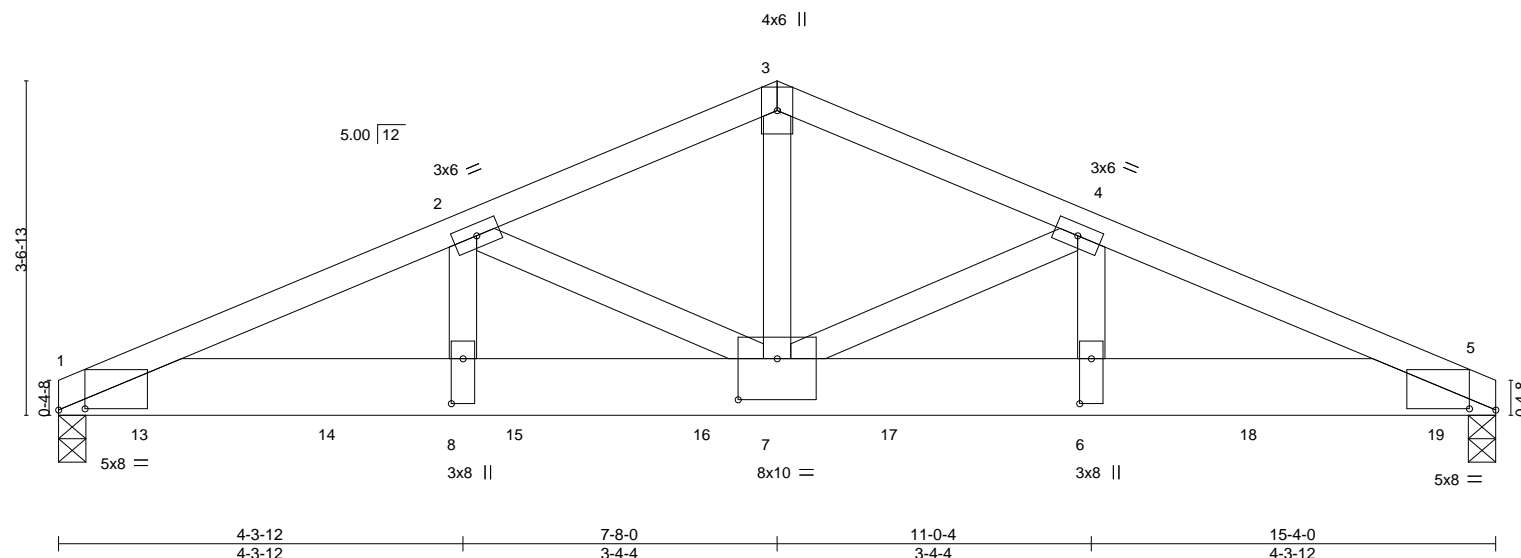


Plate Offsets (X,Y)-- [1:0-3-6,0-0-3], [5:0-3-6,0-0-3], [6:0-5-12,0-1-8], [7:0-5-0,0-5-4], [8:0-5-12,0-1-8]

LOADING (psf)	SPACING-		CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.55	Vert(LL)	-0.10	7-8	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.39	Vert(CT)	-0.18	7-8	>986	180		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.90	Horz(CT)	0.03	5	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS						Weight: 180 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x8 SP 2400F 2.0E
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-10-8 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 1=0-3-8, 5=0-3-8
Max Horz 1=50(LC 31)
Max Uplift 1=-1122(LC 8), 5=-950(LC 9)
Max Grav 1=5129(LC 2), 5=4025(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-9068/1991, 2-3=-6451/1436, 3-4=-6450/1437, 4-5=-7855/1806
BOT CHORD 1-8=-1844/8349, 7-8=-1844/8349, 6-7=-1622/7215, 5-6=-1622/7215
WEBS 3-7=-1021/4718, 4-7=-1537/448, 4-6=-261/1119, 2-7=-2717/640, 2-8=-416/2114


NOTES-

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-7-0 oc.
Bottom chords connected as follows: 2x8 - 2 rows staggered at 0-6-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCCL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=1122, 5=950.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 1268 lb down and 279 lb up at 0-11-4, 1266 lb down and 282 lb up at 2-11-4, 1266 lb down and 282 lb up at 4-11-4, 1266 lb down and 282 lb up at 6-11-4, 1266 lb down and 282 lb up at 8-11-4, 676 lb down and 199 lb up at 10-11-4, and 602 lb down and 157 lb up at 12-9-4, and 608 lb down and 151 lb up at 14-9-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25

Continued on page 2

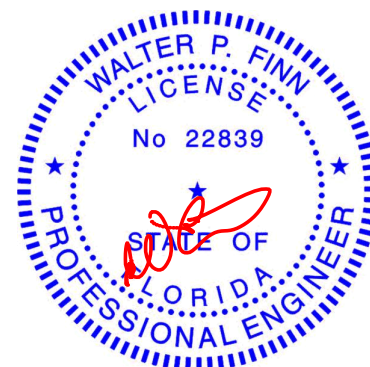

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511210
2564966	T26	Common Girder	1	2	Job Reference (optional)	

LOAD CASE(S)
Standard

Uniform Loads (plf)

Vert: 1-3=-60, 3-5=-60, 1-5=-20

Concentrated Loads (lb)

Vert: 6=-648(B) 13=-1169(B) 14=-1167(B) 15=-1167(B) 16=-1167(B) 17=-1167(B) 18=-602(B) 19=-608(B)



Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511211
2564966	T27	Half Hip Girder	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:25 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-7Wp8u5J6TQwBDnmEeP8u6Leo6wB2?SE380R55PztqjS

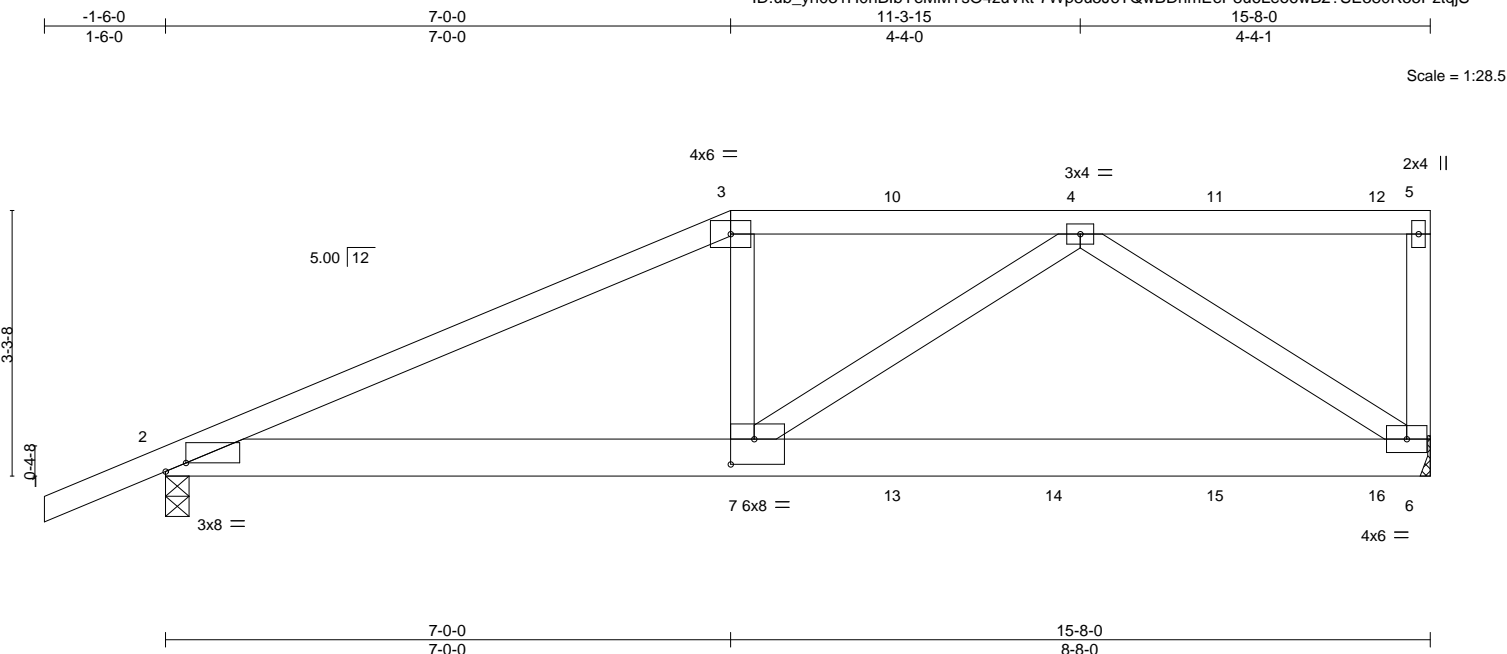


Plate Offsets (X,Y)-- [2:0-3-0,Edge], [7:0-3-8,0-3-12]

LOADING (psf)	SPACING-		CSL	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.25	2-0-0	TC 0.74	Vert(LL)	-0.10	6-7	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL 1.25		BC 0.72	Vert(CT)	-0.21	6-7	>880	180		
BCLL 0.0 *	Rep Stress Incr NO		WB 0.85	Horz(CT)	0.03	6	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS						Weight: 85 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x6 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-0-1 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 2=0-3-8, 6=Mechanical
Max Horz 2=127(LC 23)
Max Uplift 2=289(LC 8), 6=348(LC 4)
Max Grav 2=1138(LC 1), 6=1441(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=2174/468, 3-4=1955/465, 5-6=269/126
BOT CHORD 2-7=467/1938, 6-7=413/1417
WEBS 3-7=0/478, 4-7=63/735, 4-6=1657/501

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 6) Refer to girder(s) for truss to truss connections.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=289, 6=348.
- 8) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 121 lb down and 95 lb up at 7-0-0, 121 lb down and 95 lb up at 9-0-12, 121 lb down and 89 lb up at 11-0-12, and 121 lb down and 95 lb up at 13-0-12, and 137 lb down and 92 lb up at 15-0-12 on top chord, and 354 lb down and 84 lb up at 7-0-0, 88 lb down at 9-0-12, 88 lb down at 11-0-12, and 88 lb down at 13-0-12, and 99 lb down at 15-0-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 9) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard


- 1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25

Uniform Loads (plf)

Vert: 1-3=-60, 3-5=-60, 2-6=-20

Concentrated Loads (lb)

Vert: 3=-121(F) 7=-354(F) 4=-121(F) 10=-121(F) 11=-121(F) 12=-137(F) 13=-67(F) 14=-67(F) 15=-67(F) 16=-73(F)

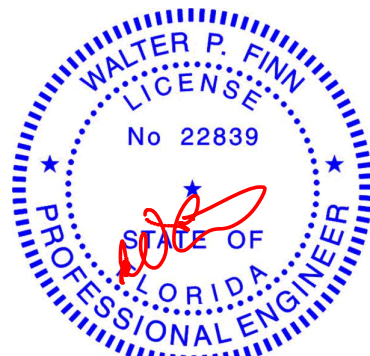

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511212
2564966	T28	Half Hip	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:26 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-ciNW5RJkEk22rxLRC7f7ZB?_JY8k2NDNgBfdrztqjR

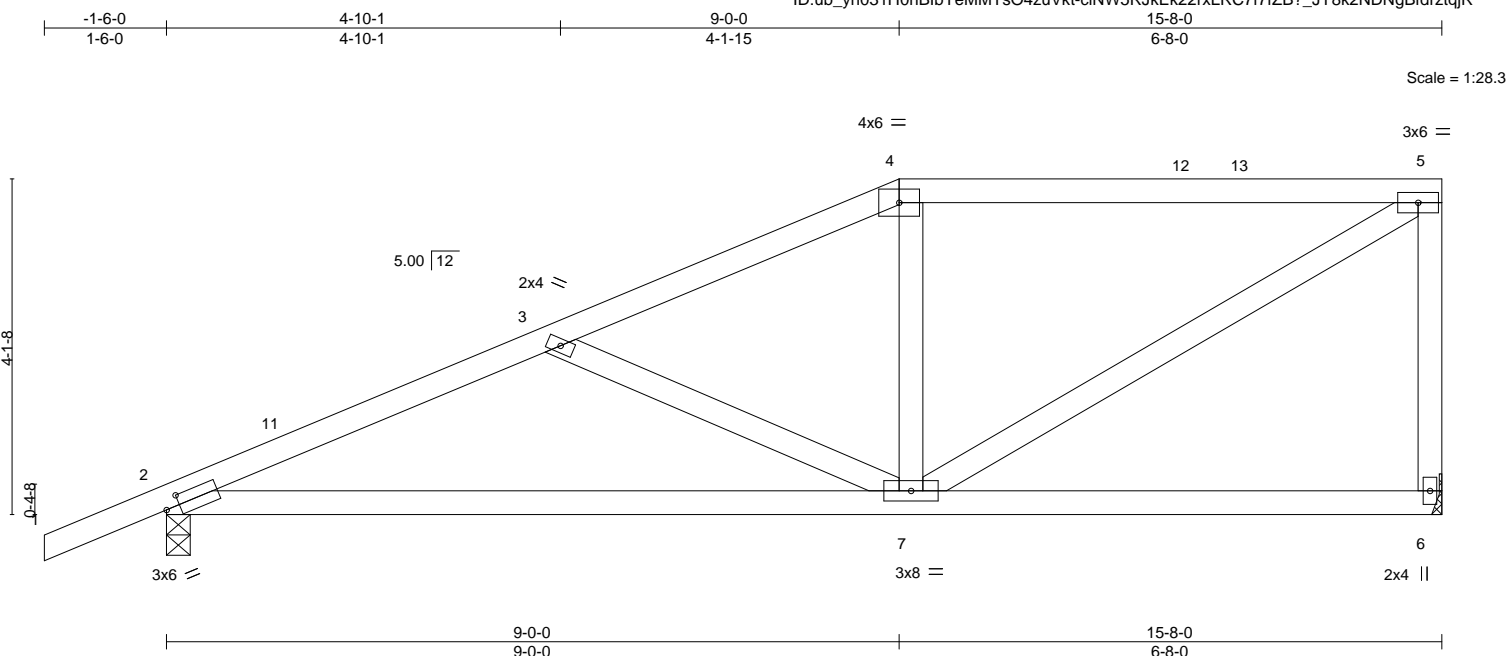


Plate Offsets (X,Y)--	[2:0-2-1,0-1-8]
-----------------------	-----------------

LOADING (psf)	SPACING-		CSL		DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	2-0-0	TC 0.60		Vert(LL)	-0.13	7-10	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.67		Vert(CT)	-0.27	7-10	>699	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.28		Horz(CT)	0.01	6	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS							Weight: 78 lb	FT = 20%

LUMBER-
TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-
TOP CHORD Structural wood sheathing directly applied or 5-3-11 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 9-7-10 oc bracing.

REACTIONS. (size) 6=Mechanical, 2=0-3-8
Max Horz 2=158(LC 12)
Max Uplift 6=156(LC 8), 2=187(LC 12)
Max Grav 6=616(LC 1), 2=715(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=1095/298, 3-4=760/186, 4-5=653/202, 5-6=567/214
BOT CHORD 2-7=373/988
WEBS 3-7=366/184, 5-7=222/723

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 9-0-0, Exterior(2R) 9-0-0 to 13-2-15, Interior(1) 13-2-15 to 15-6-4 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Refer to girder(s) for truss to truss connections.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 6=156, 2=187.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511213
2564966	T29	Half Hip	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:27 2021 Page 1

ID:ub_yh031H0hBlbYeMMTsO4zuVkt-4vxxvJnKM?1BvT5wdmqAMCmkBQju5TVhMcKwC9HztqIQ

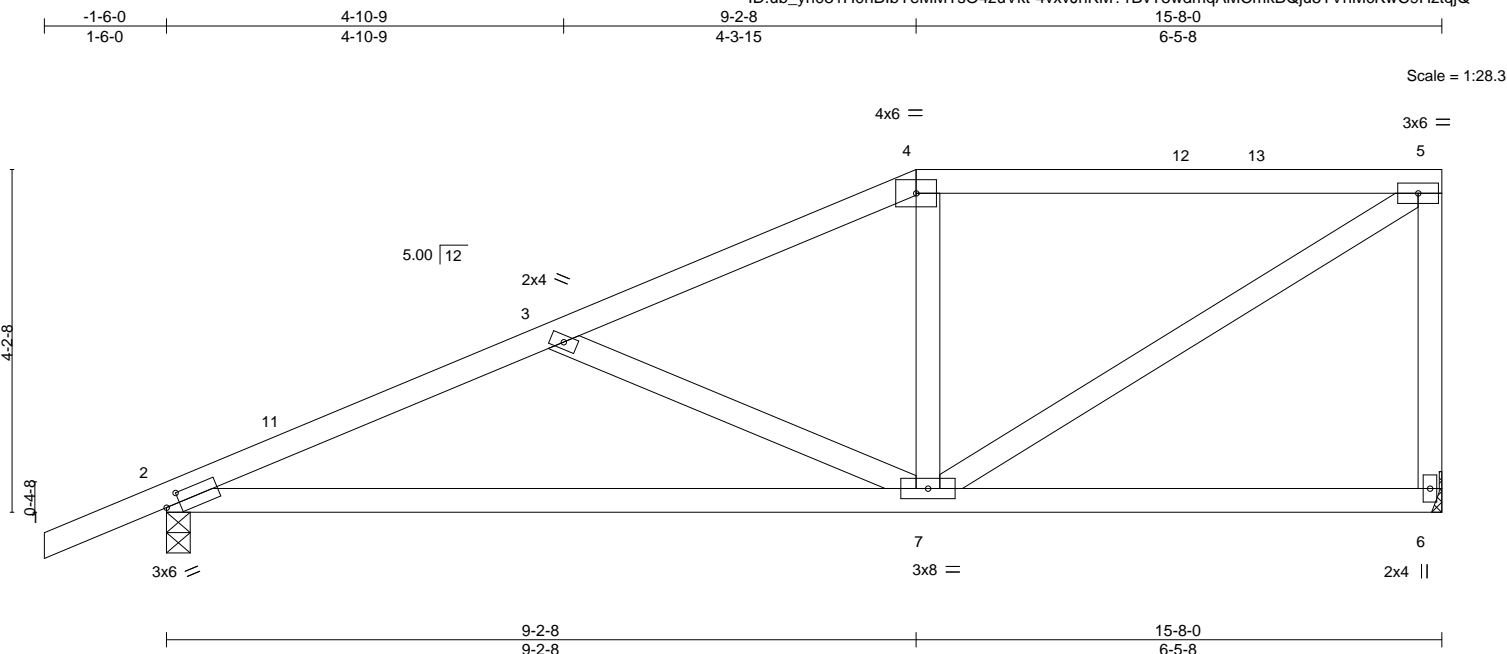

Scale = 1:28.3

Plate Offsets (X,Y)-- [2:0-2-1,0-1-8]

LOADING (psf)	SPACING-		CSL		DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	2-0-0	TC 0.56		Vert(LL)	-0.14	7-10	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.69		Vert(CT)	-0.29	7-10	>635	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.27		Horz(CT)	0.01	6	n/a	n/a		
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-MS							Weight: 79 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-3-12 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 9-6-9 oc bracing.

REACTIONS.


(size) 6=Mechanical, 2=0-3-8
Max Horz 2=161(LC 12)
Max Uplift 6=155(LC 8), 2=187(LC 12)
Max Grav 6=616(LC 1), 2=715(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1094/300, 3-4=-741/180, 4-5=-632/198, 5-6=-570/215
BOT CHORD 2-7=-379/988
WEBS 3-7=-386/194, 5-7=-221/714

NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 9-2-8, Exterior(2R) 9-2-8 to 13-5-7, Interior(1) 13-5-7 to 15-6-4 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 6) Refer to girder(s) for truss to truss connections.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 6=155, 2=187.

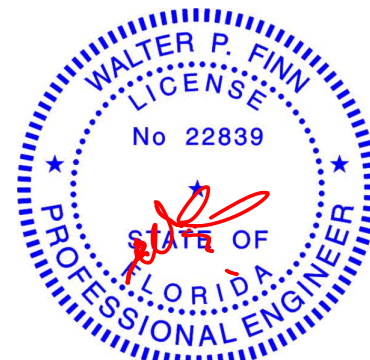

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component





6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511214
2564966	T30	Half Hip	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:28 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-Y5UHW7L_mLJm4FVpKYhbk_GKj7DjCxFWq_gmhkztqjP

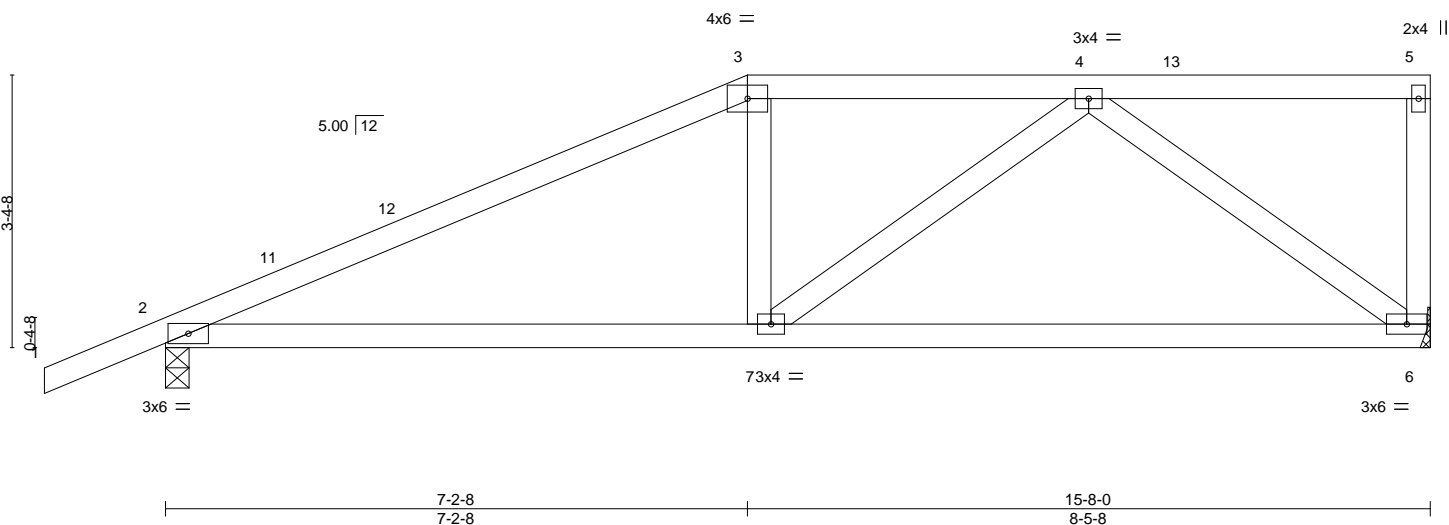

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.65	Vert(LL)	-0.11	6-7	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.66	Vert(CT)	-0.22	6-7	>854	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.38	Horz(CT)	0.02	6	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS						Weight: 73 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-3-12 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 2=0-3-8, 6=Mechanical
Max Horz 2=130(LC 12)
Max Uplift 2=-190(LC 12), 6=-161(LC 8)
Max Grav 2=715(LC 1), 6=616(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-998/231, 3-4=-851/257
BOT CHORD 2-7=-260/850, 6-7=-196/605
WEBS 4-7=-82/340, 4-6=-729/249

NOTES-

- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 7-2-8, Exterior(2R) 7-2-8 to 11-5-3, Interior(1) 11-5-3 to 15-6-4 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=190, 6=161.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511215
2564966	T31	Common	2	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:28 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-Y5UHW7L_mLJm4FVpKYhbk_Glz7DJC_?Wq_gmhkztqjP

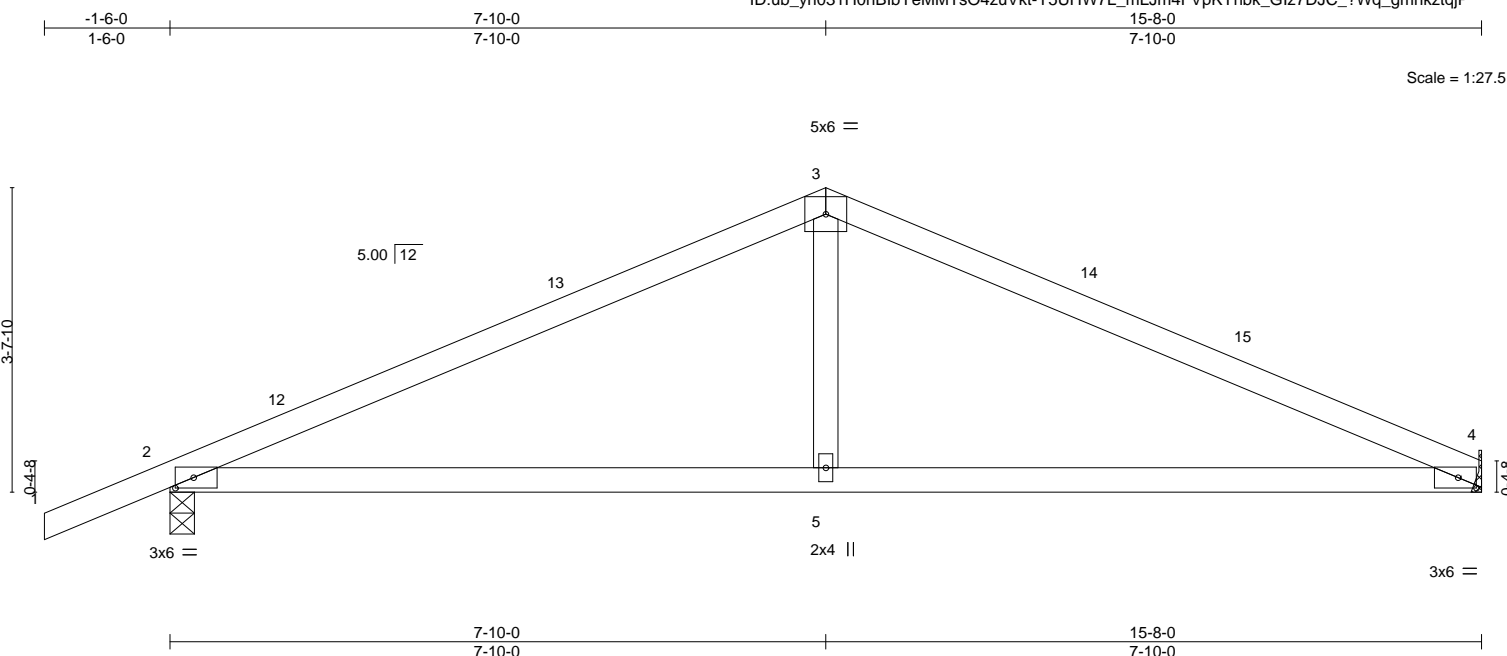


Plate Offsets (X,Y)-- [2:0-2-10,0-1-8], [4:0-2-10,0-1-8]

LOADING (psf)	SPACING-		CSL	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.82	Vert(LL)	-0.13	5-8	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.69	Vert(CT)	-0.24	5-8	>772	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.14	Horz(CT)	0.01	4	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS						Weight: 56 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 4=Mechanical, 2=0-3-8
Max Horz 2=71(LC 16)
Max Uplift 4=137(LC 13), 2=174(LC 12)
Max Grav 4=622(LC 1), 2=721(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1002/336, 3-4=-1001/345
BOT CHORD 2-5=-236/851, 4-5=-236/851
WEBS 3-5=-6/367

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 7-10-0, Exterior(2R) 7-10-0 to 10-10-0, Interior(1) 10-10-0 to 15-8-0 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 4=137, 2=174.

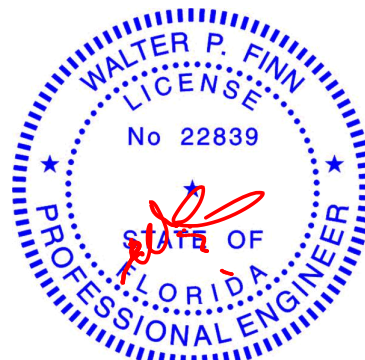

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511216
2564966	T32	Common	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:29 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-0H2fktMdXfRdiP40tFCqHBpSIXZVxREF3ePJEAztqjO

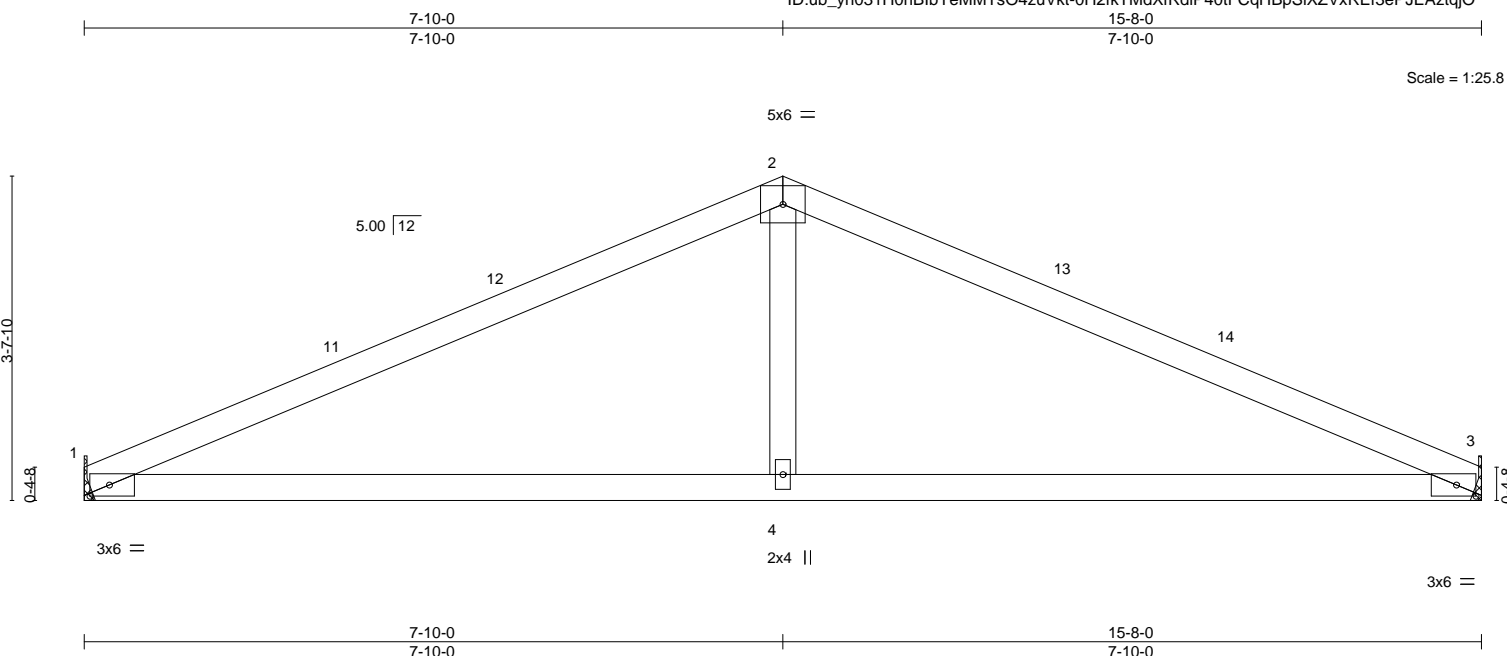


Plate Offsets (X,Y)--		[1:0-2-10,0-1-8], [3:0-2-10,0-1-8]									
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0		Plate Grip DOL	1.25	TC 0.82		Vert(LL)	-0.13 4-7	>999	240	MT20	244/190
TCDL 10.0		Lumber DOL	1.25	BC 0.69		Vert(CT)	-0.24 4-7	>779	180		
BCLL 0.0 *		Rep Stress Incr	YES	WB 0.14		Horz(CT)	0.01 3	n/a	n/a		
BCDL 10.0		Code	FBC2020/TPI2014	Matrix-MS						Weight: 53 lb	FT = 20%

LUMBER-
TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-
TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS. (size) 1=Mechanical, 3=Mechanical
Max Horz 1=52(LC 12)
Max Uplift 1=138(LC 12), 3=138(LC 13)
Max Grav 1=627(LC 1), 3=627(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-1016/353, 2-3=-1016/353
BOT CHORD 1-4=-243/865, 3-4=-243/865
WEBS 2-4=-9/369

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 3-0-0, Interior(1) 3-0-0 to 7-10-0, Exterior(2R) 7-10-0 to 10-10-0, Interior(1) 10-10-0 to 15-8-0 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=138, 3=138.

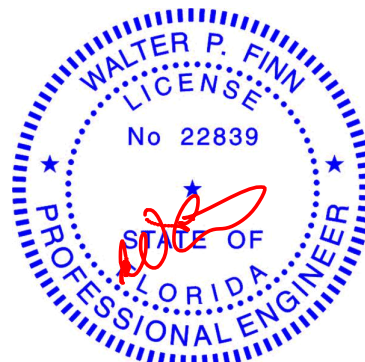

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511217
2564966	T33	Common	5	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:30 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-UUC1xpNFlyZTKZeCRzk3pPMdSxvnguVoll9smcztqjN

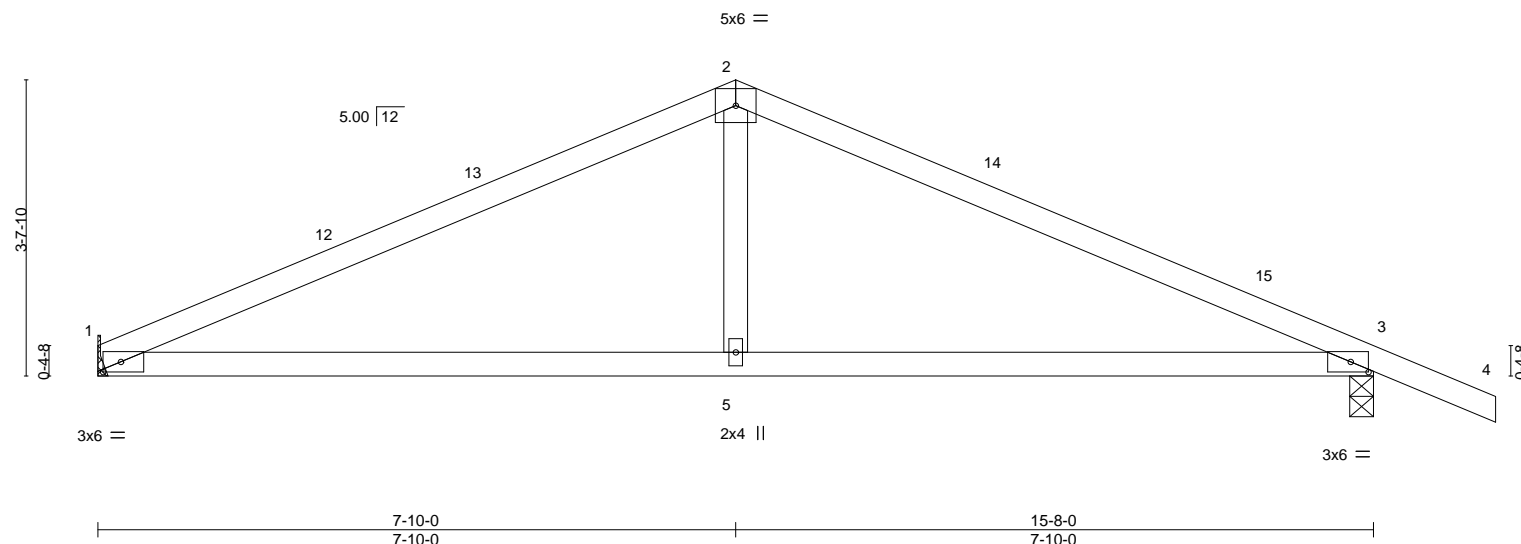



Plate Offsets (X,Y)--		[1:0-2-10,0-1-8], [3:0-2-10,0-1-8]													
LOADING (psf)		SPACING-		CSL		DEFL.		in	(loc)	l/defl	L/d	PLATES		GRIP	
TCLL	20.0	Plate Grip DOL	1.25	TC	0.82	Vert(LL)	-0.13	5-8	>999	240		MT20		244/190	
TCDL	10.0	Lumber DOL	1.25	BC	0.69	Vert(CT)	-0.24	5-8	>772	180					
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.14	Horz(CT)	0.01	3	n/a	n/a					
BCDL	10.0	Code	FBC2020/TPI2014	Matrix-MS											
												Weight: 56 lb		FT = 20%	

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 1=Mechanical, 3=0-3-8
Max Horz 1=-71(LC 13)
Max Uplift 1=-137(LC 12), 3=-174(LC 13)
Max Grav 1=622(LC 1), 3=721(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-1001/346, 2-3=-1002/336
BOT CHORD 1-5=-208/851, 3-5=-208/851
WEBS 2-5=-6/367

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 3-0-0, Interior(1) 3-0-0 to 7-10-0, Exterior(2R) 7-10-0 to 10-10-0, Interior(1) 10-10-0 to 17-2-0 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=137, 3=174.

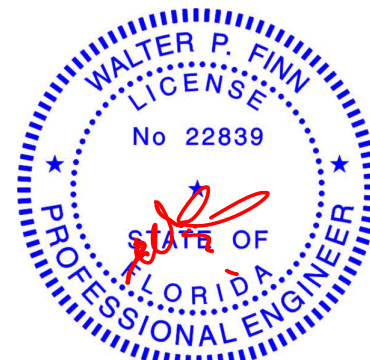

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511218
2564966	T34	Common	4	1	Job Reference (optional)	


Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:31 2021 Page 1

ID:ub_yh031H0hBibYeMMTsO4zuVkt-ygAP88Nt3GhKxiDO?gFIMcuooKFMPMyWyuQI2ztqjM



Scale = 1:29.9

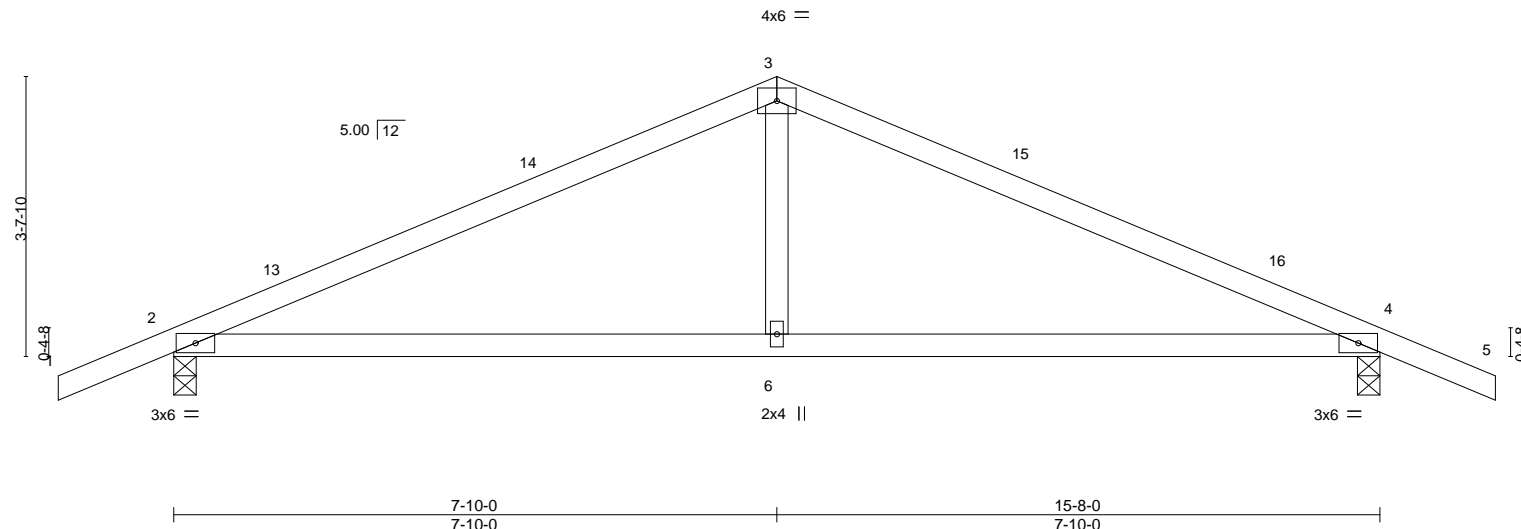

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.79	Vert(LL)	-0.11	6-9	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.67	Vert(CT)	-0.22	6-9	>859	180		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.14	Horz(CT)	0.01	4	n/a	n/a		
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-MS						Weight: 58 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-7-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 2=0-3-8, 4=0-3-8
Max Horz 2=62(LC 12)
Max Uplift 2=-174(LC 12), 4=-174(LC 13)
Max Grav 2=717(LC 1), 4=717(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-987/328, 3-4=-987/328
BOT CHORD 2-6=-190/837, 4-6=-190/837
WEBS 3-6=0/365

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 7-10-0, Exterior(2R) 7-10-0 to 10-10-0, Interior(1) 10-10-0 to 17-2-0 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=174, 4=174.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511219
2564966	T35	Common	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:32 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-QskoMUOVqapBZsoaZNmXvqR7ZkjH8pA5lcezvZtqjL



Scale = 1:20.3

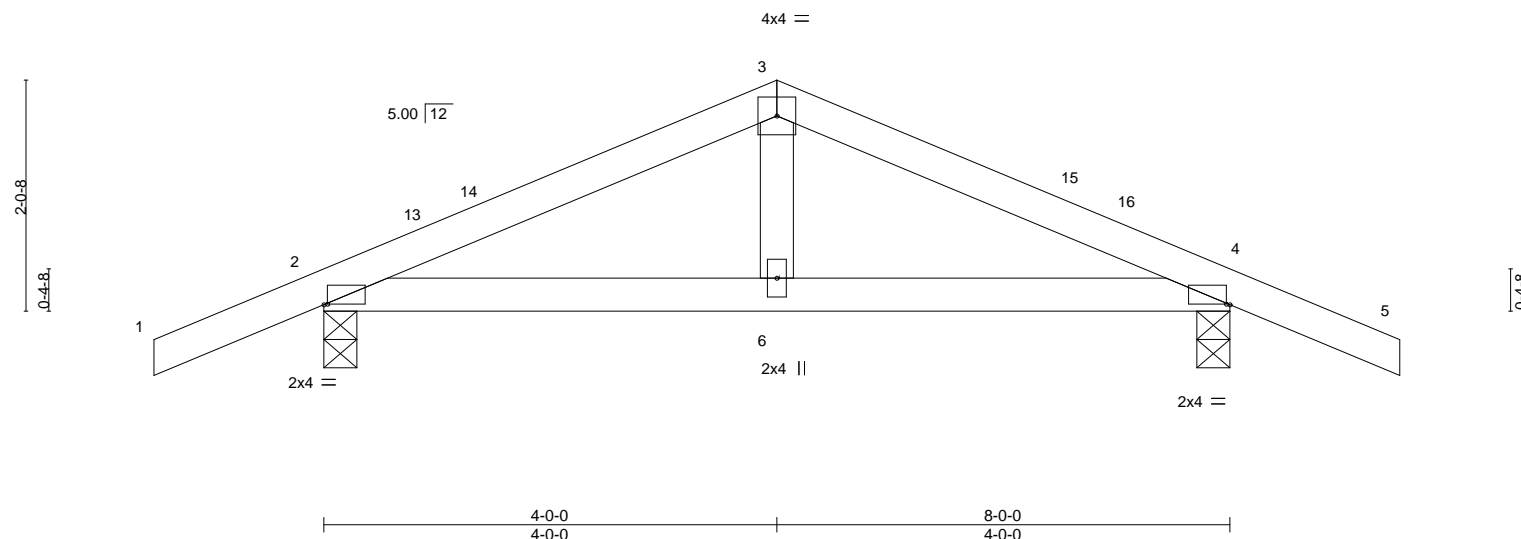


Plate Offsets (X,Y)--		[2:0-0-6,0-0-1], [4:0-0-6,0-0-1]									
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0		Plate Grip DOL	1.25	TC 0.15		Vert(LL)	-0.01 6-9	>999	240	MT20	244/190
TCDL 10.0		Lumber DOL	1.25	BC 0.17		Vert(CT)	-0.02 6-9	>999	180		
BCLL 0.0 *		Rep Stress Incr	YES	WB 0.06		Horz(CT)	0.00 4	n/a	n/a		
BCDL 10.0		Code FBC2020/TPI2014		Matrix-MS						Weight: 32 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6'-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10'-0-0 oc bracing.

REACTIONS.

(size) 2=0-3-8, 4=0-3-8
Max Horz 2=36(LC 12)
Max Uplift 2=-107(LC 12), 4=-107(LC 13)
Max Grav 2=410(LC 1), 4=410(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-443/230, 3-4=-443/230
BOT CHORD 2-6=-112/373, 4-6=-112/373

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -1-6-0 to 1-6-0, Interior(1) 1-6-0 to 4-0-0, Exterior(2R) 4-0-0 to 7-0-0, Interior(1) 7-0-0 to 9-6-0 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-6-0 tall by 2'-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=107, 4=107.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 33610


Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511220
2564966	T35G	Common Supported Gable	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:32 2021 Page 1
ID:ub_yh031H0hBlbYeMMTsO4zuVkt-QskoMUOVqapBZsoaZNmXvqR79kjp25lcezvZtqjL



Scale = 1:21.0

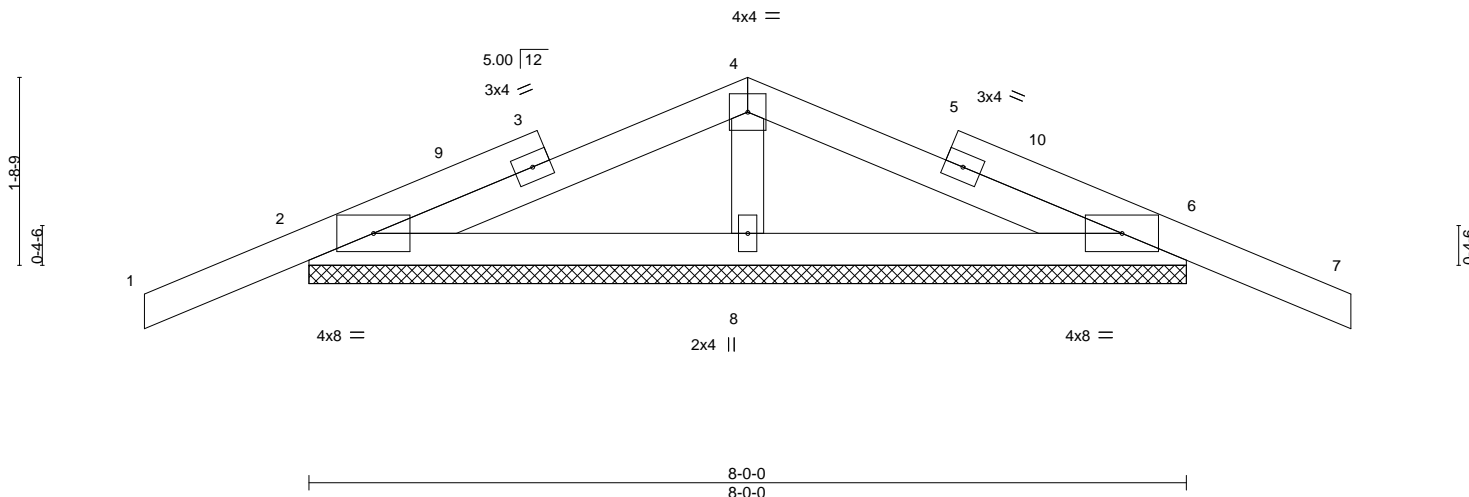

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.25	TC 0.17	Vert(LL)	0.00	6	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.14	Vert(CT)	0.00	7	n/r	120		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.07	Horz(CT)	0.00	6	n/a	n/a		
BCDL 10.0	Code	FBC2020/TPI2014	Matrix-S						Weight: 36 lb	FT = 20%


LUMBER-
TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
OTHERS 2x4 SP No.3

BRACING-
TOP CHORD Structural wood sheathing directly applied or 8-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS. (size) 2=8-0-0, 6=8-0-0, 8=8-0-0
Max Horz 2=-31(LC 13)
Max Uplift 2=-74(LC 8), 6=-79(LC 13), 8=-69(LC 12)
Max Grav 2=231(LC 23), 6=231(LC 24), 8=384(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
WEBS 4-8=-285/245

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Corner(3E) -1-6-0 to 1-6-0, Exterior(2N) 1-6-0 to 4-0-0, Corner(3R) 4-0-0 to 7-0-0, Exterior(2N) 7-0-0 to 9-6-0 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
 - Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
 - Gable requires continuous bottom chord bearing.
 - Gable studs spaced at 2-0-0 oc.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 6, 8.

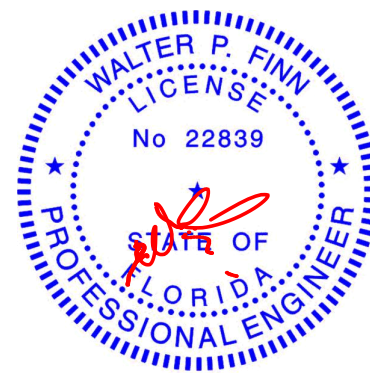

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511221
2564966	T36	COMMON GIRDER	1	1	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:33 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-u3IAZqP7btX2B0Nn65HmR1_EF8uM9QF_GNWNxztqjK



Scale = 1:15.1

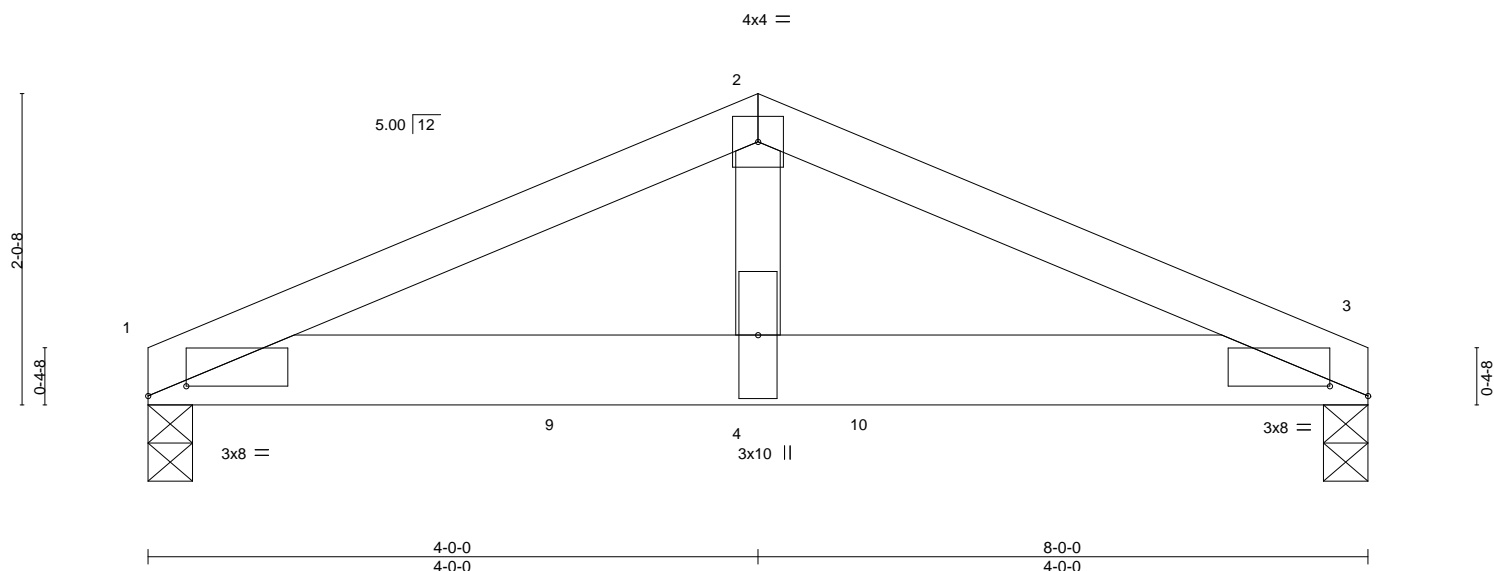


Plate Offsets (X,Y)-- [1:0-3-0,0-0-12], [3:0-3-0,0-0-12]

LOADING (psf)	SPACING-		CSL	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	2-0-0	TC 0.41	Vert(LL)	-0.04	4-6	>999	240	MT20	244/190
TCDL 10.0	Lumber DOL	1.25	BC 0.89	Vert(CT)	-0.08	4-6	>999	180		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.58	Horz(CT)	0.02	3	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS						Weight: 34 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SP No.2
BOT CHORD 2x6 SP No.2
WEBS 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-5-13 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 1=0-3-8, 3=0-3-8
Max Horz 1=26(LC 27)
Max Uplift 1=-365(LC 8), 3=-349(LC 9)
Max Grav 1=1562(LC 1), 3=1494(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.


TOP CHORD 1-2=-2339/542, 2-3=-2342/542
BOT CHORD 1-4=-478/2152, 3-4=-478/2152
WEBS 2-4=-329/1511

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=365, 3=349.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 605 lb down and 155 lb up at 0-9-4, 602 lb down and 157 lb up at 2-9-4, and 602 lb down and 157 lb up at 4-9-4, and 607 lb down and 158 lb up at 6-9-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-2=-60, 2-3=-60, 1-3=-20
Concentrated Loads (lb)
Vert: 6=-605(B) 8=-607(B) 9=-602(B) 10=-602(B)

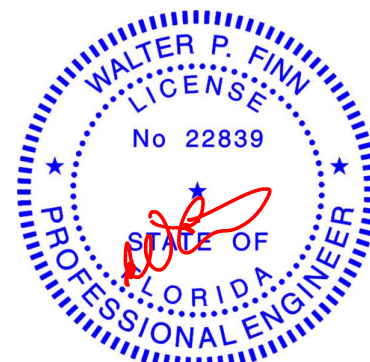

Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601





6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511222
2564966	T37	Hip Girder	1	2	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:37 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-nqXhPCSee6RUgdhYLxMib8p?IKopvpqvLkWiztqJG

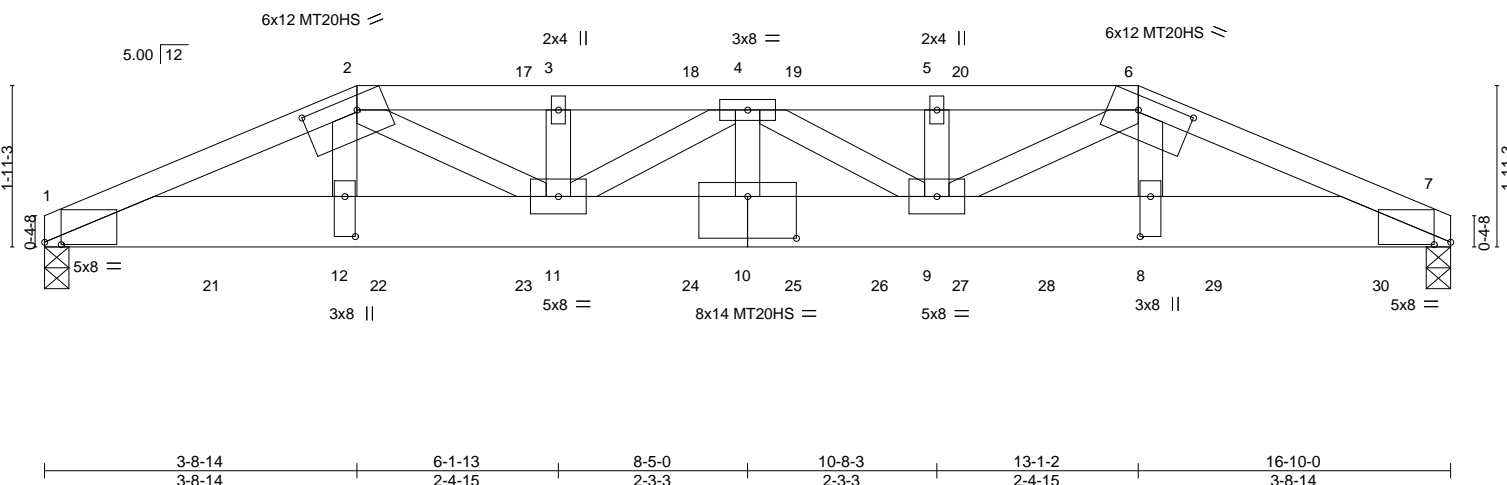

LOADING (psf)		SPACING-		CSI.		DEFL.		PLATES		GRIP	
TCLL	20.0	Plate Grip DOL	1.25	TC	0.87	Vert(LL)	-0.23	MT20	244/190		
TCDL	10.0	Lumber DOL	1.25	BC	0.54	Vert(CT)	-0.44	MT20HS	187/143		
BCLL	0.0 *	Rep Stress Incr	NO	WB	0.74	Horz(CT)	0.06				
BCDL	10.0	Code FBC2020/TPI2014		Matrix-MS							
								Weight: 200 lb FT = 20%			

LUMBER-		BRACING-	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 2-3-2 oc purlins.
BOT CHORD	2x8 SP 2400F 2.0E	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS	2x4 SP No.3		

REACTIONS. (size) 1=0-3-8, 7=0-3-8 (req. 0-3-10)
Max Horz 1=-24(LC 28)
Max Uplift 1=-1202(LC 8), 7=-1350(LC 9)
Max Grav 1=5436(LC 2), 7=6147(LC 2)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-2=-12098/2671, 2-3=-14187/3158, 3-4=-14187/3158, 4-5=-14028/3125,
5-6=-14028/3125, 6-7=-11996/2649
BOT CHORD 1-12=-2444/11129, 11-12=-2395/10889, 10-11=-3563/16119, 9-10=-3563/16119,
8-9=-2363/10798, 7-8=-2411/11038
WEBS 2-12=-502/2459, 2-11=-868/3900, 4-11=-2320/546, 4-10=-478/2334, 4-9=-2510/585,
6-9=-851/3820, 6-8=-502/2456

- NOTES-**
- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-4-0 oc.
Bottom chords connected as follows: 2x8 - 2 rows staggered at 0-4-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc, Except member 3-11 2x4 - 1 row at 0-3-0 oc.
 - All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=25ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; Lumber DOL=1.60 plate grip DOL=1.60
 - Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
 - Provide adequate drainage to prevent water ponding.
 - All plates are MT20 plates unless otherwise indicated.
 - The Fabrication Tolerance at joint 6 = 16%, joint 2 = 16%
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - WARNING: Required bearing size at joint(s) 7 greater than input bearing size.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=1202, 7=1350.



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

Continued on page 2

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511222
2564966	T37	Hip Girder	1	2	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:37 2021 Page 2
ID:ub_yh031H0hBibYeMMTsO4zuVkt-nqXhPCSee6RUgdhYLxMibt8p?IKopvpqvLkWiztqjG

NOTES-

13) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 46 lb down and 50 lb up at 3-8-14, 40 lb down and 50 lb up at 5-9-10, 40 lb down and 47 lb up at 7-9-10, 40 lb down and 47 lb up at 9-0-6, and 40 lb down and 50 lb up at 11-0-6, and 46 lb down and 50 lb up at 13-1-2 on top chord, and 1266 lb down and 282 lb up at 2-0-12, 86 lb down at 3-8-14, 1266 lb down and 282 lb up at 4-0-12, 29 lb down at 5-9-10, 1266 lb down and 282 lb up at 6-0-12, 29 lb down at 7-9-10, 1266 lb down and 282 lb up at 8-0-12, 29 lb down at 9-0-6, 1266 lb down and 282 lb up at 10-0-12, 29 lb down at 11-0-6, 1264 lb down and 281 lb up at 12-0-12, 86 lb down at 13-0-6, and 1264 lb down and 281 lb up at 14-0-12, and 1268 lb down and 277 lb up at 16-0-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard

1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25

Uniform Loads (plf)

Vert: 1-2=-60, 2-6=-60, 6-7=-60, 1-7=-20

Concentrated Loads (lb)

Vert: 6=-28(F) 12=-43(F) 2=-28(F) 8=-43(F) 17=-28(F) 18=-28(F) 19=-28(F) 20=-28(F) 21=-1167(B) 22=-1167(B) 23=-1188(F=-21, B=-1167) 24=-1188(F=-21, B=-1167) 25=-21(F) 26=-1167(B) 27=-21(F) 28=-1164(B) 29=-1164(B) 30=-1168(B)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601 **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**




6904 Parke East Blvd.
Tampa, FL 36610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511223
2564966	TFG01	FLOOR	1	3	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:38 2021 Page 1

ID:ub_yh031H0hBibYeMMTsO4zuVkt-F053cYTGPQZLHnGkvex85h4z9iYLI_7Y5H28ztqjF



Scale = 1:28.5


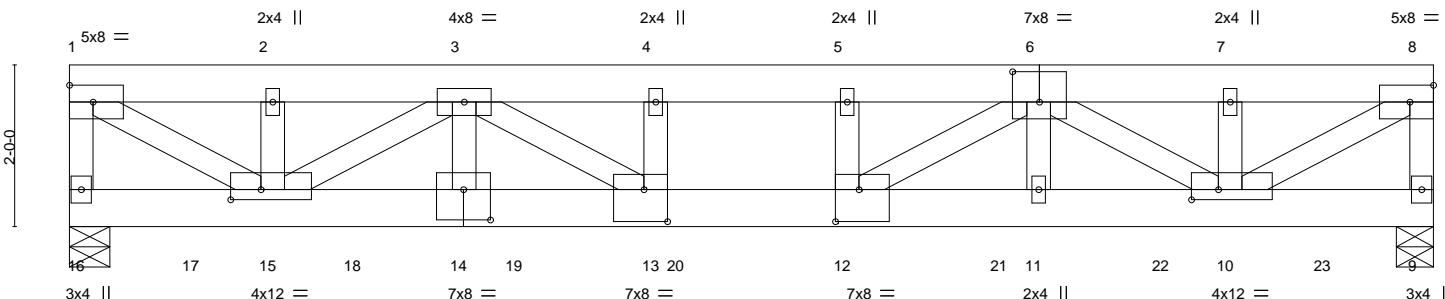


Plate Offsets (X,Y)-- [6:0-4-0,0-4-8], [10:0-4-0,0-1-8], [12:0-3-8,0-4-12], [13:0-3-8,0-4-12], [14:0-4-0,0-4-8], [15:0-4-8,0-1-8]

LOADING (psf)	SPACING-	CSL	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCCL 40.0	Plate Grip DOL 1.00	TC 0.47	Vert(LL) -0.14	12-13	>999	360	MT20	244/190
TCDL 15.0	Lumber DOL 1.00	BC 0.39	Vert(CT) -0.23	12-13	>871	240		
BCLL 0.0	Rep Stress Incr YES	WB 0.83	Horz(CT) 0.04	9	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI2014	Matrix-MS						
							Weight: 338 lb	FT = 20%

LUMBER-

TOP CHORD 2x6 SP No.2
 BOT CHORD 2x6 SP M 26
 WEBS 2x4 SP No.3 *Except*
 1-15,3-15,3-13,6-12,6-10,8-10: 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 16=0-6-0, 9=0-5-8
 Max Grav 16=8885(LC 1), 9=5887(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-16=-4798/0, 1-2=-7155/0, 2-3=-7155/0, 3-4=-15017/0, 4-5=-15017/0, 5-6=-15017/0,
 6-7=-7643/0, 7-8=-7643/0, 8-9=-5121/0
 BOT CHORD 15-16=0/251, 14-15=0/12294, 13-14=0/12287, 12-13=0/15017, 11-12=0/12885,
 10-11=0/12876, 9-10=0/278
 WEBS 1-15=0/8237, 3-15=-6131/0, 3-14=0/1281, 3-13=0/3454, 4-13=-283/0, 6-12=0/2737,
 6-11=0/1667, 6-10=-6250/0, 8-10=0/8788

NOTES-

- 3-ply truss to be connected together with 10d (0.131"x3") nails as follows:
 Top chords connected as follows: 2x4 - 1 row at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc.
 Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-5-0 oc.
 Webs connected as follows: 2x4 - 1 row at 0-9-0 oc, Except member 4-13 2x4 - 2 rows staggered at 0-4-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced floor live loads have been considered for this design.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails.
 Strongbacks to be attached to walls at their outer ends or restrained by other means.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 3535 lb down at 0-1-12, 1000 lb down at 1-6-12, 1000 lb down at 3-6-12, 1000 lb down at 5-6-12, 1216 lb down at 7-6-12, 1216 lb down at 9-6-12, 1216 lb down at 11-6-12, and 1216 lb down at 13-6-12, and 1216 lb down at 15-6-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard

- Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
 Uniform Loads (plf)
 Vert: 1-8=-110, 9-16=-20
 Concentrated Loads (lb)
 Vert: 16=-3535(B) 12=-1216(F) 17=-1000(F) 18=-1000(F) 19=-1000(F) 20=-1216(F) 21=-1216(F) 22=-1216(F) 23=-1216(F)



Walter P. Finn PE No.22839
 MiTek USA, Inc. FL Cert 6634
 6904 Parke East Blvd. Tampa FL 33610
 Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.
 Tampa, FL 36610


Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511224
2564966	TFG02	FLOOR	1	3	Job Reference (optional)	

Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:39 2021 Page 1
ID:ub_yh031H0hBibYeMMTsO4zuVkt-jCfRqtTuAjhCvxrxTMOAhIDIVZ_nHnI7MCqgrabztqjE

2-3-11	4-5-9	6-7-8	8-9-7	10-11-5	13-3-0
2-3-11	2-1-15	2-1-15	2-1-15	2-1-15	2-3-11

Scale = 1:22.3

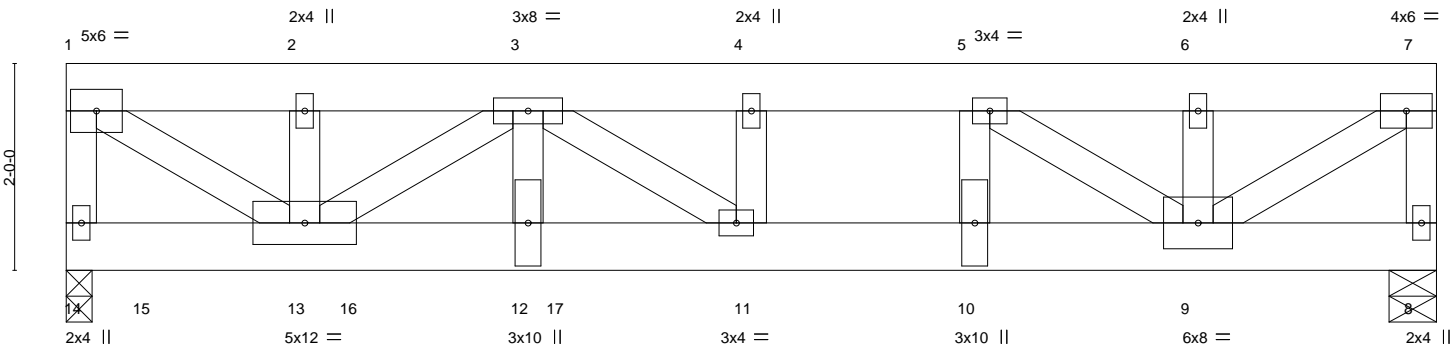

2-3-11	4-5-9	6-7-8	8-9-7	10-11-5	13-3-0
2-3-11	2-1-15	2-1-15	2-1-15	2-1-15	2-3-11

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	I/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.29	Vert(LL)	-0.07 11	>999	360	MT20	244/190
TCDL 15.0	Lumber DOL	1.00	BC 0.69	Vert(CT)	-0.11 11-12	>999	240		
BCLL 0.0	Rep Stress Incr	YES	WB 0.87	Horz(CT)	0.02 8	n/a	n/a		
BCDL 10.0	Code FBC2020/TPI0214		Matrix-MS					Weight: 268 lb	FT = 20%

LUMBER-	BRACING-
TOP CHORD 2x6 SP No.2	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x6 SP No.2	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3	

REACTIONS. (size) 14=0-3-0, 8=0-5-8
Max Grav 14=4227(LC 1), 8=3459(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-14=-3447/0, 1-2=-4651/0, 2-3=-4651/0, 3-4=-7761/0, 4-5=-7761/0, 5-6=-4337/0, 6-7=-4337/0, 7-8=-3255/0
BOT CHORD 12-13=0/7507, 11-12=0/7507, 10-11=0/7761, 9-10=0/7761
WEBS 1-13=0/5484, 3-13=-3508/0, 3-12=0/1373, 3-11=0/521, 4-11=0/457, 5-10=0/1627, 5-9=-4213/0, 6-9=0/321, 7-9=0/5141

- NOTES-**
- 3-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-6-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc, Except member 3-12 2x4 - 2 rows staggered at 0-7-0 oc, member 4-11 2x4 - 2 rows staggered at 0-7-0 oc, member 5-10 2x4 - 2 rows staggered at 0-7-0 oc, member 6-9 2x4 - 2 rows staggered at 0-7-0 oc.
 - All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - Unbalanced floor live loads have been considered for this design.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails.
Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 1003 lb down at 0-9-12, 1000 lb down at 2-9-12, 1000 lb down at 4-9-12, 1000 lb down at 6-9-12, and 1000 lb down at 8-9-12, and 1000 lb down at 10-9-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard
1) Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (plf)
Vert: 1-7=-110, 8-14=-20
Concentrated Loads (lb)
Vert: 11=-1000(F) 10=-1000(F) 9=-1000(F) 15=-1003(F) 16=-1000(F) 17=-1000(F)



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601


MiTek
6904 Parke East Blvd.
Tampa, FL 33610

Job	Truss	Truss Type	Qty	Ply	EVANSTON CONT - AREA 36	T22511225
2564966	TFG03	FLOOR	1	2	Job Reference (optional)	


Builders FirstSource (Jacksonville, FL), Jacksonville, FL - 32244,

8.430 s Nov 30 2020 MiTek Industries, Inc. Tue Jan 19 09:26:40 2021 Page 1

ID:ub_yh031H0hBibYeMMTsO4zuVkt-BPDp1DUWx1p3X5P713vPDWmR2zP80GgHbsaO71ztqjD



Scale = 1:22.4

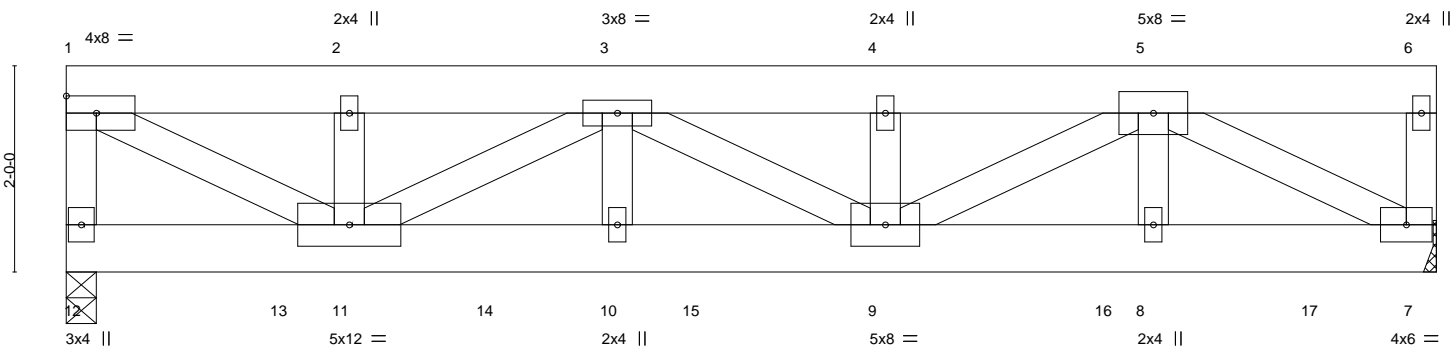

	2-8-15	5-4-2	7-11-6	10-6-9	13-3-8	
	2-8-15	2-7-3	2-7-3	2-7-3	2-8-15	
LOADING (psf)	SPACING- 2-0-0		CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00		TC 0.43	Vert(LL) -0.08 9-10 >999 360	MT20	244/190
TCDL 15.0	Lumber DOL 1.00		BC 0.37	Vert(CT) -0.12 9-10 >999 240		
BCLL 0.0	Rep Stress Incr NO		WB 0.73	Horz(CT) 0.02 7 n/a n/a		
BCDL 10.0	Code FBC2020/TPI2014		Matrix-MS		Weight: 181 lb	FT = 20%

LUMBER-

TOP CHORD 2x6 SP No.2
BOT CHORD 2x6 SP M 26
WEBS 2x4 SP No.3 *Except*
1-11,3-11,3-9,5-9,5-7: 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-8-4 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 12=0-3-8, 7=Mechanical
Max Grav 12=3186(LC 1), 7=3548(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-12=-2903/0, 1-2=-4643/0, 2-3=-4643/0, 3-4=-7075/0, 4-5=-7075/0
BOT CHORD 10-11=0/7172, 9-10=0/7172, 8-9=0/4771, 7-8=0/4771
WEBS 1-11=0/5205, 3-11=-2940/0, 3-10=0/1209, 5-9=0/2679, 5-8=0/1113, 5-7=-5344/0

NOTES-

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Refer to girder(s) for truss to truss connections.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails.
Strongbacks to be attached to walls at their outer ends or restrained by other means.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 841 lb down at 2-1-12, 841 lb down at 4-1-12, 841 lb down at 6-1-12, 841 lb down at 8-1-12, and 841 lb down at 10-1-12, and 841 lb down at 12-1-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard

- Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (plf)
Vert: 1-6=-110, 7-12=-20
Concentrated Loads (lb)
Vert: 9=-841(F) 13=-841(F) 14=-841(F) 15=-841(F) 16=-841(F) 17=-841(F)



Walter P. Finn PE No.22839
MiTek USA, Inc. FL Cert 6634
6904 Parke East Blvd. Tampa FL 33610
Date:

January 19,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.
Tampa, FL 36610

Symbols

PLATE LOCATION AND ORIENTATION



Center plate on joint unless x, y offsets are indicated. Dimensions are in ft-in-sixteenths. Apply plates to both sides of truss and fully embed teeth.


For 4 x 2 orientation, locate plates 0- 1/16" from outside edge of truss.

PLATE SIZE


4 X 4

The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION

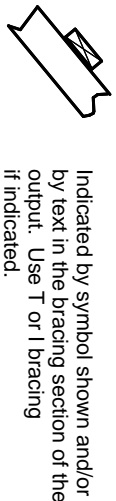


BEARING

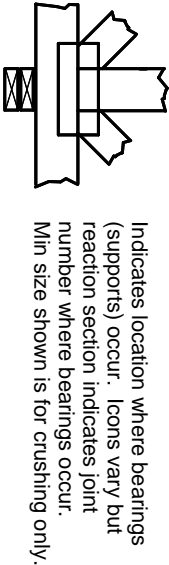

Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number where bearings occur. Min size shown is for crushing only.

Industry Standards:
ANSI/TP1: National Design Specification for Metal Plate Connected Wood Truss Construction.
DSB-89: Design Standard for Bracing.
BCSI: Building Component Safety Information, Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses.

Numbering System

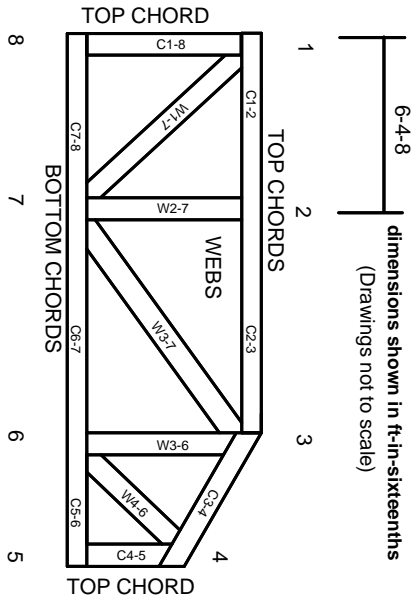

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

PRODUCT CODE APPROVALS

ICC-ES Reports:
ESR-1311, ESR-1352, ESR1988
ER-3907, ESR-2362, ESR-1397, ESR-3282

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.

Lumber design values are in accordance with ANSI/TP1 1 section 6.3 These truss designs rely on lumber values established by others.

© 2012 MITek® All Rights Reserved



Mitek Engineering Reference Sheet: MII-7473 rev. 5/19/2020

General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative Tor I bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TP1 1.
7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TP1 1.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with ANSI/TP1 1 Quality Criteria.
21. The design does not take into account any dynamic or other loads other than those expressly stated.