


Typ. Exterior Door Jamb Details

SCALE : NONE

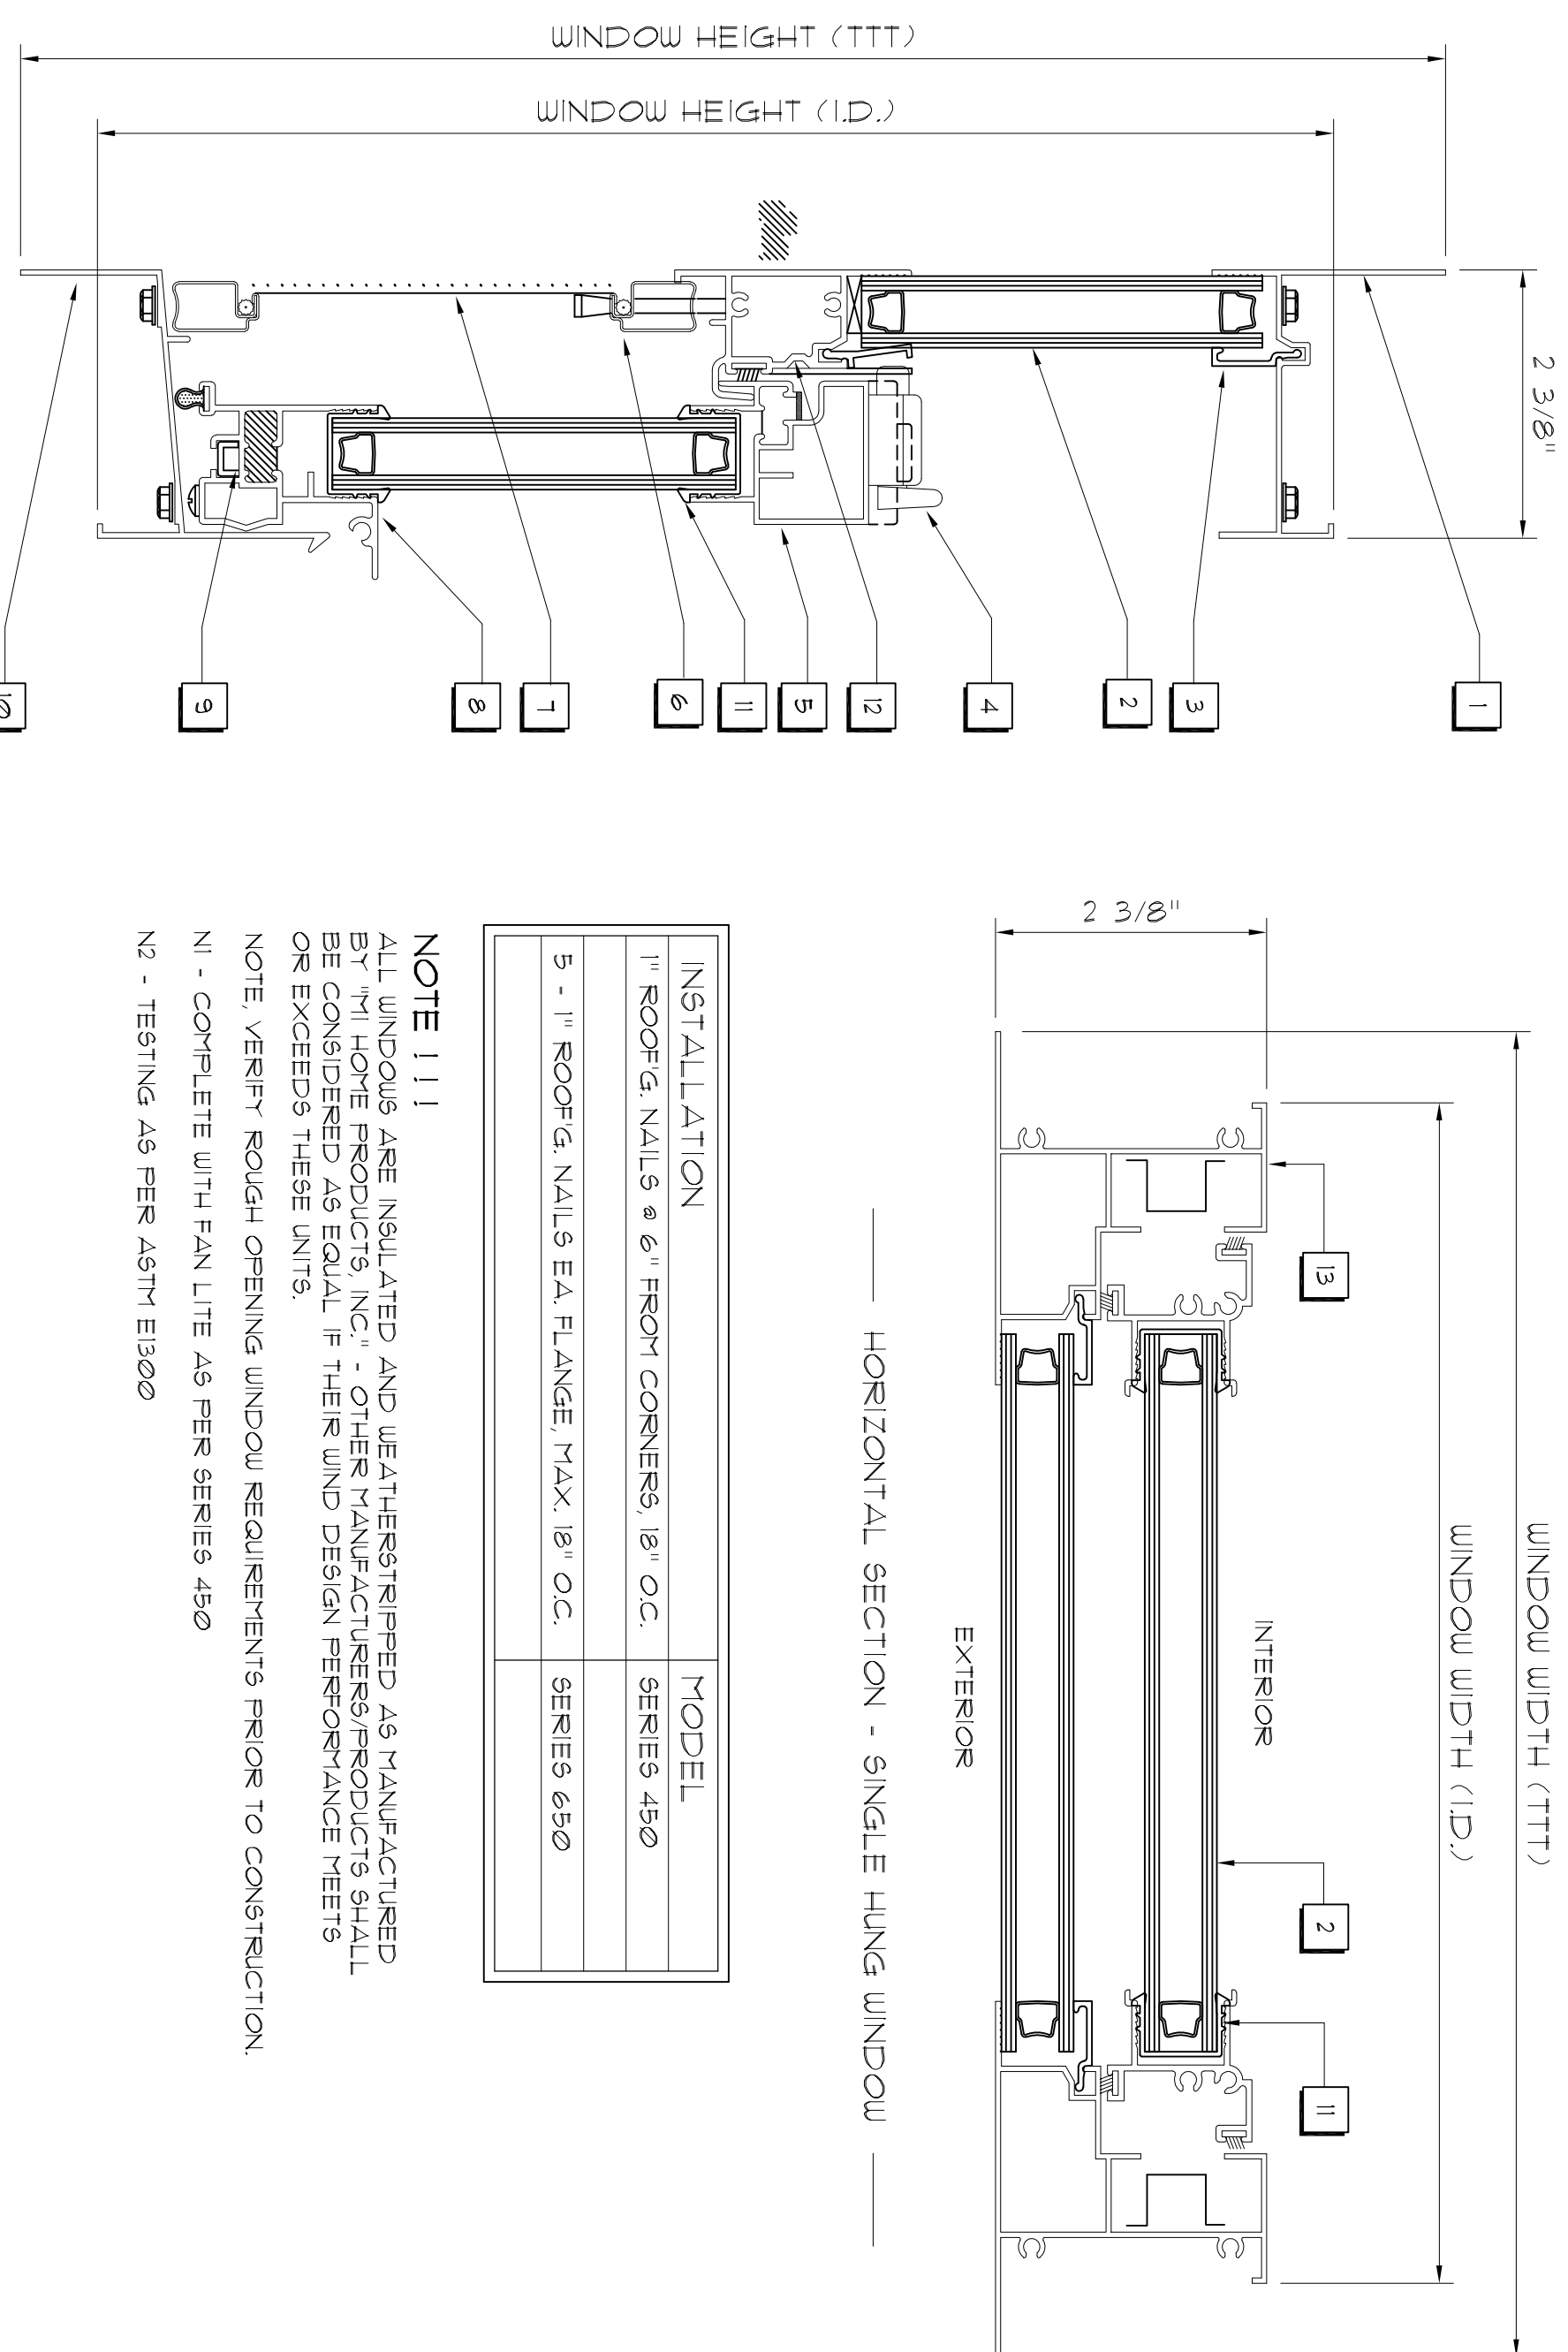

Typ. Window Jamb Details

SCALE : NONE

Door Notes

- A STEEL SKIN - 16 GA.
- B POLYURETHANE FOAM CORE
- C COMPRESSION WEATHER STRIP
- D WOOD HEAD JAMB
- E ALUMINUM BUMPER THRESHOLD
- F #0-24 X 1/2" F.H.W.S. (4) SCREWS PER HINGE INTO DOOR
- G #0 X 2" F.H.W.S. (5) SCREWS THROUGH HINGE JAMB 8" DOWN FROM TOP, MAX. 18" O.C. THEREAFTER
- H #0 X 2" F.H.W.S. (10) SCREWS THROUGH STRIKE JAMB INTO SIDELITE JAMB, 4" DOWN FROM TOP, MAX. 18" O.C. THEREAFTER INTO DOOR JAMB.
- J #0 X 2" F.H.W.S. (4) SCREWS THROUGH EACH SIDELITE JAMB INTO SIDELITE, 4" DOWN FROM TOP, MAX. 18" O.C. THEREAFTER
- K #0 X 2" F.H.W.S. (6) SCREWS THROUGH EACH SIDELITE JAMB INTO SIDELITE, 4" DOWN FROM TOP, MAX. 18" O.C. THEREAFTER
- L #0 F.H.W.S. W/ MIN. 1 1/2" EMBEDMENT OR 3/16" FPH TAPCONS W/ MIN. 1 1/2" EMBEDMENT, (14) PER HEAD & SILL, (6) PER JAMB
- M #0 X 1 3/4" F.H.W.S. (3) PER SIDE FROM JAMB INTO THRESHOLD
- N SHERWIN WILLIAMS 8504 EXTERIOR GRADE LATEX CAULK
- O TEMPERED / INSULATED GLASS WINDOW

DESIGN PRESSURE RATINGS *		
POSITIVE	+16.0 PSF	
NEGATIVE	-16.0 PSF	

NOTE !!!
EXTERIOR DOORS SHALL MEET OR EXCEED THE WIND RESISTANCE OF THE FOLLOWING PRODUCT:
SERIES ENERGY 6-8 W/IE INSULING OPGASIE RESIDENTIAL INSULATED STEEL DOOR W/ STEEL FRAME AS MFD BY "PREVIMOR ENTRY SYSTEMS"

Window Notes

NOTE !!!
OTHER MANUFACTURERS/PRODUCTS SHALL BE CONSIDERED AS EQUAL IF THEIR WIND DESIGN PERFORMANCE MEETS OR EXCEEDS THESE UNITS.

- 1 FLANGED HEAD
- 2 INSULATED GLASS
- 3 GLAZING BEAD
- 4 LOCK
- 5 SASH TOP RAIL
- 6 SCREEN FRAME
- 7 FIBERGLASS MESH
- 8 BOTTOM SASH RAIL
- 9 PIVOT BAR
- 10 FLANGED SILL
- 11 MARINE GLAZING
- 12 FIXED MEETING RAIL
- 13 FLANGED JAMB

WINDOW FASTENER SCHEDULE		
SIZE	DESCRIPTION	INSTALLATION
4020	SINGLE HUNG VINYL SASH W/INSL. GLASS	1" ROOFG. NAILS 2 @ 6" FROM CORNERS, 18" O.C.
3046	SINGLE HUNG VINYL SASH W/INSL. GLASS	1" ROOFG. NAILS 2 @ 6" FROM CORNERS, 18" O.C.
3020	SINGLE HUNG VINYL SASH W/INSL. GLASS	1" ROOFG. NAILS 2 @ 6" FROM CORNERS, 18" O.C.
3050	SINGLE HUNG VINYL SASH W/INSL. GLASS	1" ROOFG. NAILS 2 @ 6" FROM CORNERS, 18" O.C.
3060	SINGLE HUNG VINYL SASH W/INSL. GLASS	1" ROOFG. NAILS 2 @ 6" FROM CORNERS, 18" O.C.
2-3050	TWIN - SINGLE HUNG VINYL SASH W/INSL. GLASS	5 - 1" ROOFG. NAILS EA. FLANGE, MAX. 18" O.C.

ALL WINDOWS ARE INSULATED AND WEATHERSTRIPPED AS MANUFACTURED BY "THE HOME PRODUCTS, INC."
OTHER MANUFACTURERS/PRODUCTS SHALL BE CONSIDERED AS EQUAL IF THEIR WIND DESIGN PERFORMANCE MEETS OR EXCEEDS THESE UNITS
NOTE, VERIFY ROUGH OPENING WINDOW REQUIREMENTS PRIOR TO CONSTRUCTION.
N1 - COMPLETE WITH FAN LITE AS PER SERIES 450
N2 - TESTING AS PER ASTM E1300

Digitally signed by: N. P. GEISLER
DN: CN = N. P. GEISLER C = US
O = AR0007005 OU = ARCHITECT
Date: 2020.06.23 11:21:33 -05'00'

AR0007005

DATE: 22/JAN/2019

COMP: A.9
9 of 14

SHEET: 9 of 14

NICHOLAS GEISLER ARCHITECT, INC.

1755 NE Brown Rd.
Lake City, FL 32055
386-365-4355

DAVID J. ROYAL ARCHITECTURAL DESIGNER

Lake City, Florida • 386-752-4610

REVISION:

DESIGN: DJR

CUSTOM DESIGNED HOME FOR:

Mr. Randy McRae

COLUMBIA COUNTY, FLORIDA

Door / Window Details