

Residential System Sizing Calculation

Summary

Project Title:
Lot 36 Jewel Lake II

, FL 32025


3/10/2022

Location for weather data: Gainesville, FL - Defaults: Latitude(29.7) Altitude(152 ft.) Temp Range(M)			
Humidity data: Interior RH (50%) Outdoor wet bulb (77F) Humidity difference(51gr.)			
Winter design temperature(TMY3 99%)	30 F	Summer design temperature(TMY3 99%)	94 F
Winter setpoint	70 F	Summer setpoint	75 F
Winter temperature difference	40 F	Summer temperature difference	19 F
Total heating load calculation	27307 Btuh	Total cooling load calculation	20893 Btuh
Submitted heating capacity	% of calc Btuh	Submitted cooling capacity	% of calc Btuh
Total (Electric Heat Pump)	100.0 27307	Sensible (SHR = 0.70)	87.3 14837
Heat Pump + Auxiliary(0.0kW)	100.0 27307	Latent	163.1 6359
		Total (Electric Heat Pump)	101.4 21195

WINTER CALCULATIONS

Winter Heating Load (for 1776 sqft)


Load component		Load	
Window total	159 sqft	2294 Btuh	
Wall total	1509 sqft	5356 Btuh	
Door total	40 sqft	736 Btuh	
Ceiling total	1865 sqft	1893 Btuh	
Floor total	1776 sqft	10101 Btuh	
Infiltration	37 cfm	1626 Btuh	
Duct loss		5300 Btuh	
Subtotal		27307 Btuh	
Ventilation	0 cfm	0 Btuh	
TOTAL HEAT LOSS		27307 Btuh	

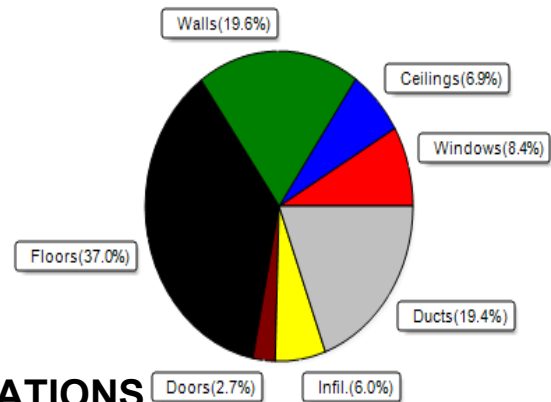

SUMMER CALCULATIONS

Summer Cooling Load (for 1776 sqft)

Load component		Load	
Window total	159 sqft	3568 Btuh	
Wall total	1509 sqft	3272 Btuh	
Door total	40 sqft	552 Btuh	
Ceiling total	1865 sqft	1609 Btuh	
Floor total		0 Btuh	
Infiltration	28 cfm	579 Btuh	
Internal gain		3040 Btuh	
Duct gain		4374 Btuh	
Sens. Ventilation	0 cfm	0 Btuh	
Blower Load		0 Btuh	
Total sensible gain		16995 Btuh	
Latent gain(ducts)		1338 Btuh	
Latent gain(infiltration)		961 Btuh	
Latent gain(ventilation)		0 Btuh	
Latent gain(internal/occupants/other)		1600 Btuh	
Total latent gain		3899 Btuh	
TOTAL HEAT GAIN		20893 Btuh	

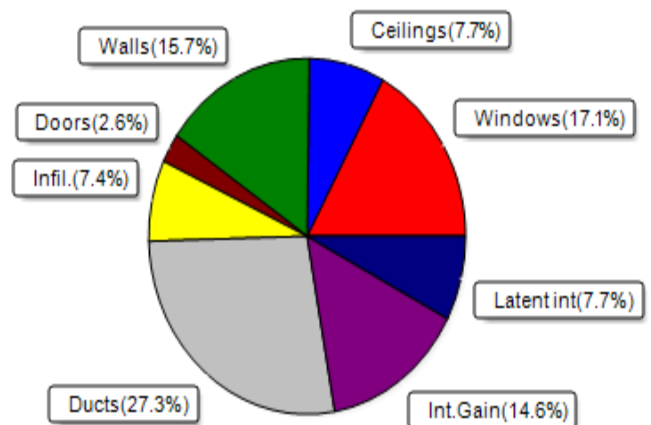

8th Edition

EnergyGauge® System Sizing

PREPARED BY: _____

DATE: 3 / 10 / 2022

System Sizing Calculations - Winter

Residential Load - Whole House Component Details

, FL 32025

Project Title:
Lot 36 Jewel Lake II
Building Type: User

3/10/2022

Reference City: Gainesville, FL (Defaults) Winter Temperature Difference: 40.0 F (TMY3 99%)

Component Loads for Whole House								
Window	Panes/Type	Frame	U	Orientation	Area(sqft)	X	HTM=	Load
1	2, NFRC 0.25	Vinyl	0.36	W	30.0		14.4	432 Btuh
2	2, NFRC 0.25	Vinyl	0.36	S	15.0		14.4	216 Btuh
3	2, NFRC 0.25	Vinyl	0.36	E	30.0		14.4	432 Btuh
4	2, NFRC 0.25	Metal	0.36	E	33.3		14.4	480 Btuh
5	2, NFRC 0.25	Vinyl	0.36	E	30.0		14.4	432 Btuh
6	2, NFRC 0.25	Vinyl	0.36	N	6.0		14.4	86 Btuh
7	2, NFRC 0.25	Vinyl	0.36	N	15.0		14.4	216 Btuh
Window Total					159.3(sqft)			2294 Btuh
Walls	Type	Ornt.	Ueff.	R-Value (Cav/Sh)	Area	X	HTM=	Load
1	Frame - Wood	- Adj	(0.089)	13.0/0.0	140		3.55	497 Btuh
2	Frame - Wood	- Adj	(0.089)	13.0/0.0	107		3.55	379 Btuh
3	Frame - Wood	- Ext	(0.089)	13.0/0.0	20		3.55	71 Btuh
4	Frame - Wood	- Ext	(0.089)	13.0/0.0	60		3.55	213 Btuh
5	Frame - Wood	- Ext	(0.089)	13.0/0.0	82		3.55	291 Btuh
6	Frame - Wood	- Ext	(0.089)	13.0/0.0	465		3.55	1651 Btuh
7	Frame - Wood	- Ext	(0.089)	13.0/0.0	66		3.55	234 Btuh
8	Frame - Wood	- Ext	(0.089)	13.0/0.0	64		3.55	227 Btuh
9	Frame - Wood	- Ext	(0.089)	13.0/0.0	71		3.55	251 Btuh
10	Frame - Wood	- Ext	(0.089)	13.0/0.0	64		3.55	227 Btuh
11	Frame - Wood	- Ext	(0.089)	13.0/0.0	82		3.55	291 Btuh
12	Frame - Wood	- Ext	(0.089)	13.0/0.0	288		3.55	1024 Btuh
Wall Total					1509(sqft)			5356 Btuh
Doors	Type	Storm	Ueff.		Area	X	HTM=	Load
1	Insulated - Garage,	n	(0.460)		20		18.4	368 Btuh
2	Insulated - Exterior,	n	(0.460)		20		18.4	368 Btuh
Door Total					40(sqft)			736Btuh
Ceilings	Type/Color/Surface		Ueff.	R-Value	Area	X	HTM=	Load
1	Vented Attic/L/Shing		(0.025)	38.0/0.0	1865		1.0	1893 Btuh
Ceiling Total					1865(sqft)			1893Btuh
Floors	Type		Ueff.	R-Value	Size	X	HTM=	Load
1	Slab On Grade		(1.180)	0.0	214.0 ft(perim.)		47.2	10101 Btuh
Floor Total					1776 sqft			10101 Btuh
	Envelope Subtotal:							20381 Btuh
Infiltration	Type	Wholehouse	ACH	Volume(cuft)	Wall Ratio		CFM=	Load
	Natural		0.16	14208	1.00		37.1	1626 Btuh
Duct load	Average sealed, R6.0, Supply(Att), Return(Att) (DLM of 0.241)							5300 Btuh

Manual J Winter Calculations

Residential Load - Component Details (continued)

, FL 32025

Project Title:
Lot 36 Jewel Lake II
Building Type: User

3/10/2022

All Zones	Sensible Subtotal All Zones	27307 Btuh
------------------	------------------------------------	-------------------

WHOLE HOUSE TOTALS

Totals for Heating	Subtotal Sensible Heat Loss Ventilation Sensible Heat Loss Total Heat Loss	27307 Btuh 0 Btuh 27307 Btuh
---------------------------	--	------------------------------------

EQUIPMENT

1. Electric Heat Pump	#	27307 Btuh
-----------------------	---	------------

Key: Window types - NFRC (Requires U-Factor and Shading coefficient(SHGC) of glass as numerical values)
or - Glass as 'Clear' or 'Tint' (Uses U-Factor and SHGC defaults)

U - (Window U-Factor)

HTM - (ManualJ Heat Transfer Multiplier)



Version 8

System Sizing Calculations - Summer

Residential Load - Whole House Component Details

Project Title:
Lot 36 Jewel Lake II

, FL 32025

3/10/2022

Reference City: Gainesville, FL

Temperature Difference: 19.0F(TMY3 99%) Humidity difference: 51gr.

Component Loads for Whole House

Window	Type*						Overhang		Window Area(sqft)			HTM		Load													
	Panes	SHGC	U	InSh	IS	Ornt	Len	Hgt	Gross	Shaded	Unshaded	Shaded	Unshaded														
1	2 NFRC	0.25, 0.36	No	No	W		1.0ft.	3.0ft.	30.0	0.0	30.0	12	31	928	Btuh												
2	2 NFRC	0.25, 0.36	No	No	S		1.5ft.	1.0ft.	15.0	15.0	0.0	12	14	181	Btuh												
3	2 NFRC	0.25, 0.36	No	No	E		1.5ft.	1.0ft.	30.0	1.5	28.5	12	31	901	Btuh												
4	2 NFRC	0.25, 0.36	No	No	E		9.5ft.	1.0ft.	33.3	33.3	0.0	12	31	403	Btuh												
5	2 NFRC	0.25, 0.36	No	No	E		1.5ft.	1.0ft.	30.0	1.5	28.5	12	31	901	Btuh												
6	2 NFRC	0.25, 0.36	No	No	N		1.5ft.	1.0ft.	6.0	0.0	6.0	12	12	73	Btuh												
7	2 NFRC	0.25, 0.36	No	No	N		1.5ft.	1.0ft.	15.0	0.0	15.0	12	12	181	Btuh												
Window Total									159 (sqft)					3568 Btuh													
Walls	Type						U-Value		R-Value		Area(sqft)	HTM		Load													
									Cav/Sheath																		
1	Frame - Wood - Adj						0.09		13.0/0.0		140.0	1.7		236	Btuh												
2	Frame - Wood - Adj						0.09		13.0/0.0		106.7	1.7		180	Btuh												
3	Frame - Wood - Ext						0.09		13.0/0.0		20.0	2.3		45	Btuh												
4	Frame - Wood - Ext						0.09		13.0/0.0		60.0	2.3		136	Btuh												
5	Frame - Wood - Ext						0.09		13.0/0.0		82.0	2.3		186	Btuh												
6	Frame - Wood - Ext						0.09		13.0/0.0		465.0	2.3		1052	Btuh												
7	Frame - Wood - Ext						0.09		13.0/0.0		66.0	2.3		149	Btuh												
8	Frame - Wood - Ext						0.09		13.0/0.0		64.0	2.3		145	Btuh												
9	Frame - Wood - Ext						0.09		13.0/0.0		70.7	2.3		160	Btuh												
10	Frame - Wood - Ext						0.09		13.0/0.0		64.0	2.3		145	Btuh												
11	Frame - Wood - Ext						0.09		13.0/0.0		82.0	2.3		186	Btuh												
12	Frame - Wood - Ext						0.09		13.0/0.0		288.3	2.3		653	Btuh												
Wall Total									1509 (sqft)					3272 Btuh													
Doors	Type										Area (sqft)	HTM		Load													
1	Insulated - Garage										20.0	13.8		276	Btuh												
2	Insulated - Exterior										20.0	13.8		276	Btuh												
Door Total									40 (sqft)					552 Btuh													
Ceilings	Type/Color/Surface						U-Value		R-Value		Area(sqft)	HTM		Load													
1	Vented AtticLight/Shingle/RB						0.025		38.0/0.0		1865.0	0.86		1609	Btuh												
Ceiling Total											1865 (sqft)			1609 Btuh													
Floors	Type								R-Value		Size	HTM		Load													
1	Slab On Grade								0.0		1776 (ft-perimeter)	0.0		0	Btuh												
Floor Total											1776.0 (sqft)			0 Btuh													
Envelope Subtotal:														9002 Btuh													
Infiltration	Type						Average ACH		Volume(cuft)		Wall Ratio	CFM=		Load													
	Natural						0.12		14208			27.8															
									Occupants		Btuh/occupant		Appliance	Load													
									8		X 230 +																
Sensible Envelope Load:														12621 Btuh													

Manual J Summer Calculations

Residential Load - Component Details (continued)

Project Title: Climate:FL_GAINESVILLE_REGIONAL_A
Lot 36 Jewel Lake II

, FL 32025

3/10/2022

Duct load	Average sealed,Supply(R6.0-Attic), Return(R6.0-Attic)	(DGM of 0.347)	4374 Btuh
	Sensible Load All Zones		16995 Btuh

Manual J Summer Calculations

Residential Load - Component Details (continued)

Project Title: Climate:FL_GAINESVILLE_REGIONAL_A
Lot 36 Jewel Lake II

, FL 32025

3/10/2022

WHOLE HOUSE TOTALS

Whole House Totals for Cooling	Sensible Envelope Load All Zones	12621 Btuh
	Sensible Duct Load	4374 Btuh
	Total Sensible Zone Loads	16995 Btuh
	Sensible ventilation	0 Btuh
	Blower	0 Btuh
	Total sensible gain	16995 Btuh
	Latent infiltration gain (for 51 gr. humidity difference)	961 Btuh
	Latent ventilation gain	0 Btuh
	Latent duct gain	1338 Btuh
	Latent occupant gain (8.0 people @ 200 Btuh per person)	1600 Btuh
	Latent other gain	0 Btuh
	Latent total gain	3899 Btuh
	TOTAL GAIN	20893 Btuh

EQUIPMENT

1. Central Unit	#	21195 Btuh
-----------------	---	------------

*Key: Window types (Panels - Number and type of panes of glass)
(SHGC - Shading coefficient of glass as SHGC numerical value)
(U - Window U-Factor)
(InSh - Interior shading device: none(No), Blinds(B), Draperies(D) or Roller Shades(R))
- For Blinds: Assume medium color, half closed
For Draperies: Assume medium weave, half closed
For Roller shades: Assume translucent, half closed
(IS - Insect screen: none(N), Full(F) or Half(½))
(Ornt - compass orientation)



Version 8