

- ROOF SHINGLES ON 15 LB FELT
- 15/32" PLYWOOD OR 1/2" PARTICLEBOARD SHEATHING; NAIL WITH 8d'S @ 6" O.C. AT EDGES AND 12" O.C. AT INTERIOR BEARINGS.

- TRUSSED RAFTERS @ 24" O.C.

- PRE-FABRICATED ALUMINUM FASCIA AND VENTED SOFFIT

- "SIMPSON" #ETA14 ANCHOR AT EACH TRUSS BEARING

- 8" x 16" TIE BEAM FROM U-LINTEL BLOCK POURED SOLID WITH CONCRETE GROUT AND 2 # 5'S CONTINUOUS

- 1 # 5 VERTICAL TIE FROM FOOTING TO TIE BEAM; SEE PLAN VIEWS; 6' O.C. MAXIMUM

- 8" x 8" x 16" CONCRETE BLOCK LAID IN RUNNING BOND

- 3/4" METAL OR P.T. WOOD FURRING @ 16" O.C., WITH 3/4" THICK RIGID INSULATION BETWEEN STRIPS.

- 1/2" GYPSUM BOARD LATH WITH VENEER PLASTER

- LIGHT TEXTURED STUCCO

- 4" THICK 3000 PSI CONCRETE SLAB WITH 6" x 6" # 10 GA. W.W.M. ON 6 MIL VAPOR BARRIER, ON CLEAN, COMPACTED, TERMITE TREATED SAND FILL. (TYPICAL FOR ALL SLABS)


- BASEBOARD AND FINISH FLOORING AS PER OWNER SELECTION

- 10" x 20" 3000 PSI CONCRETE FOOTING WITH 2 # 5'S CONTINUOUS

TYPICAL WALL SECTION

A/3

1" = 1' - 0"

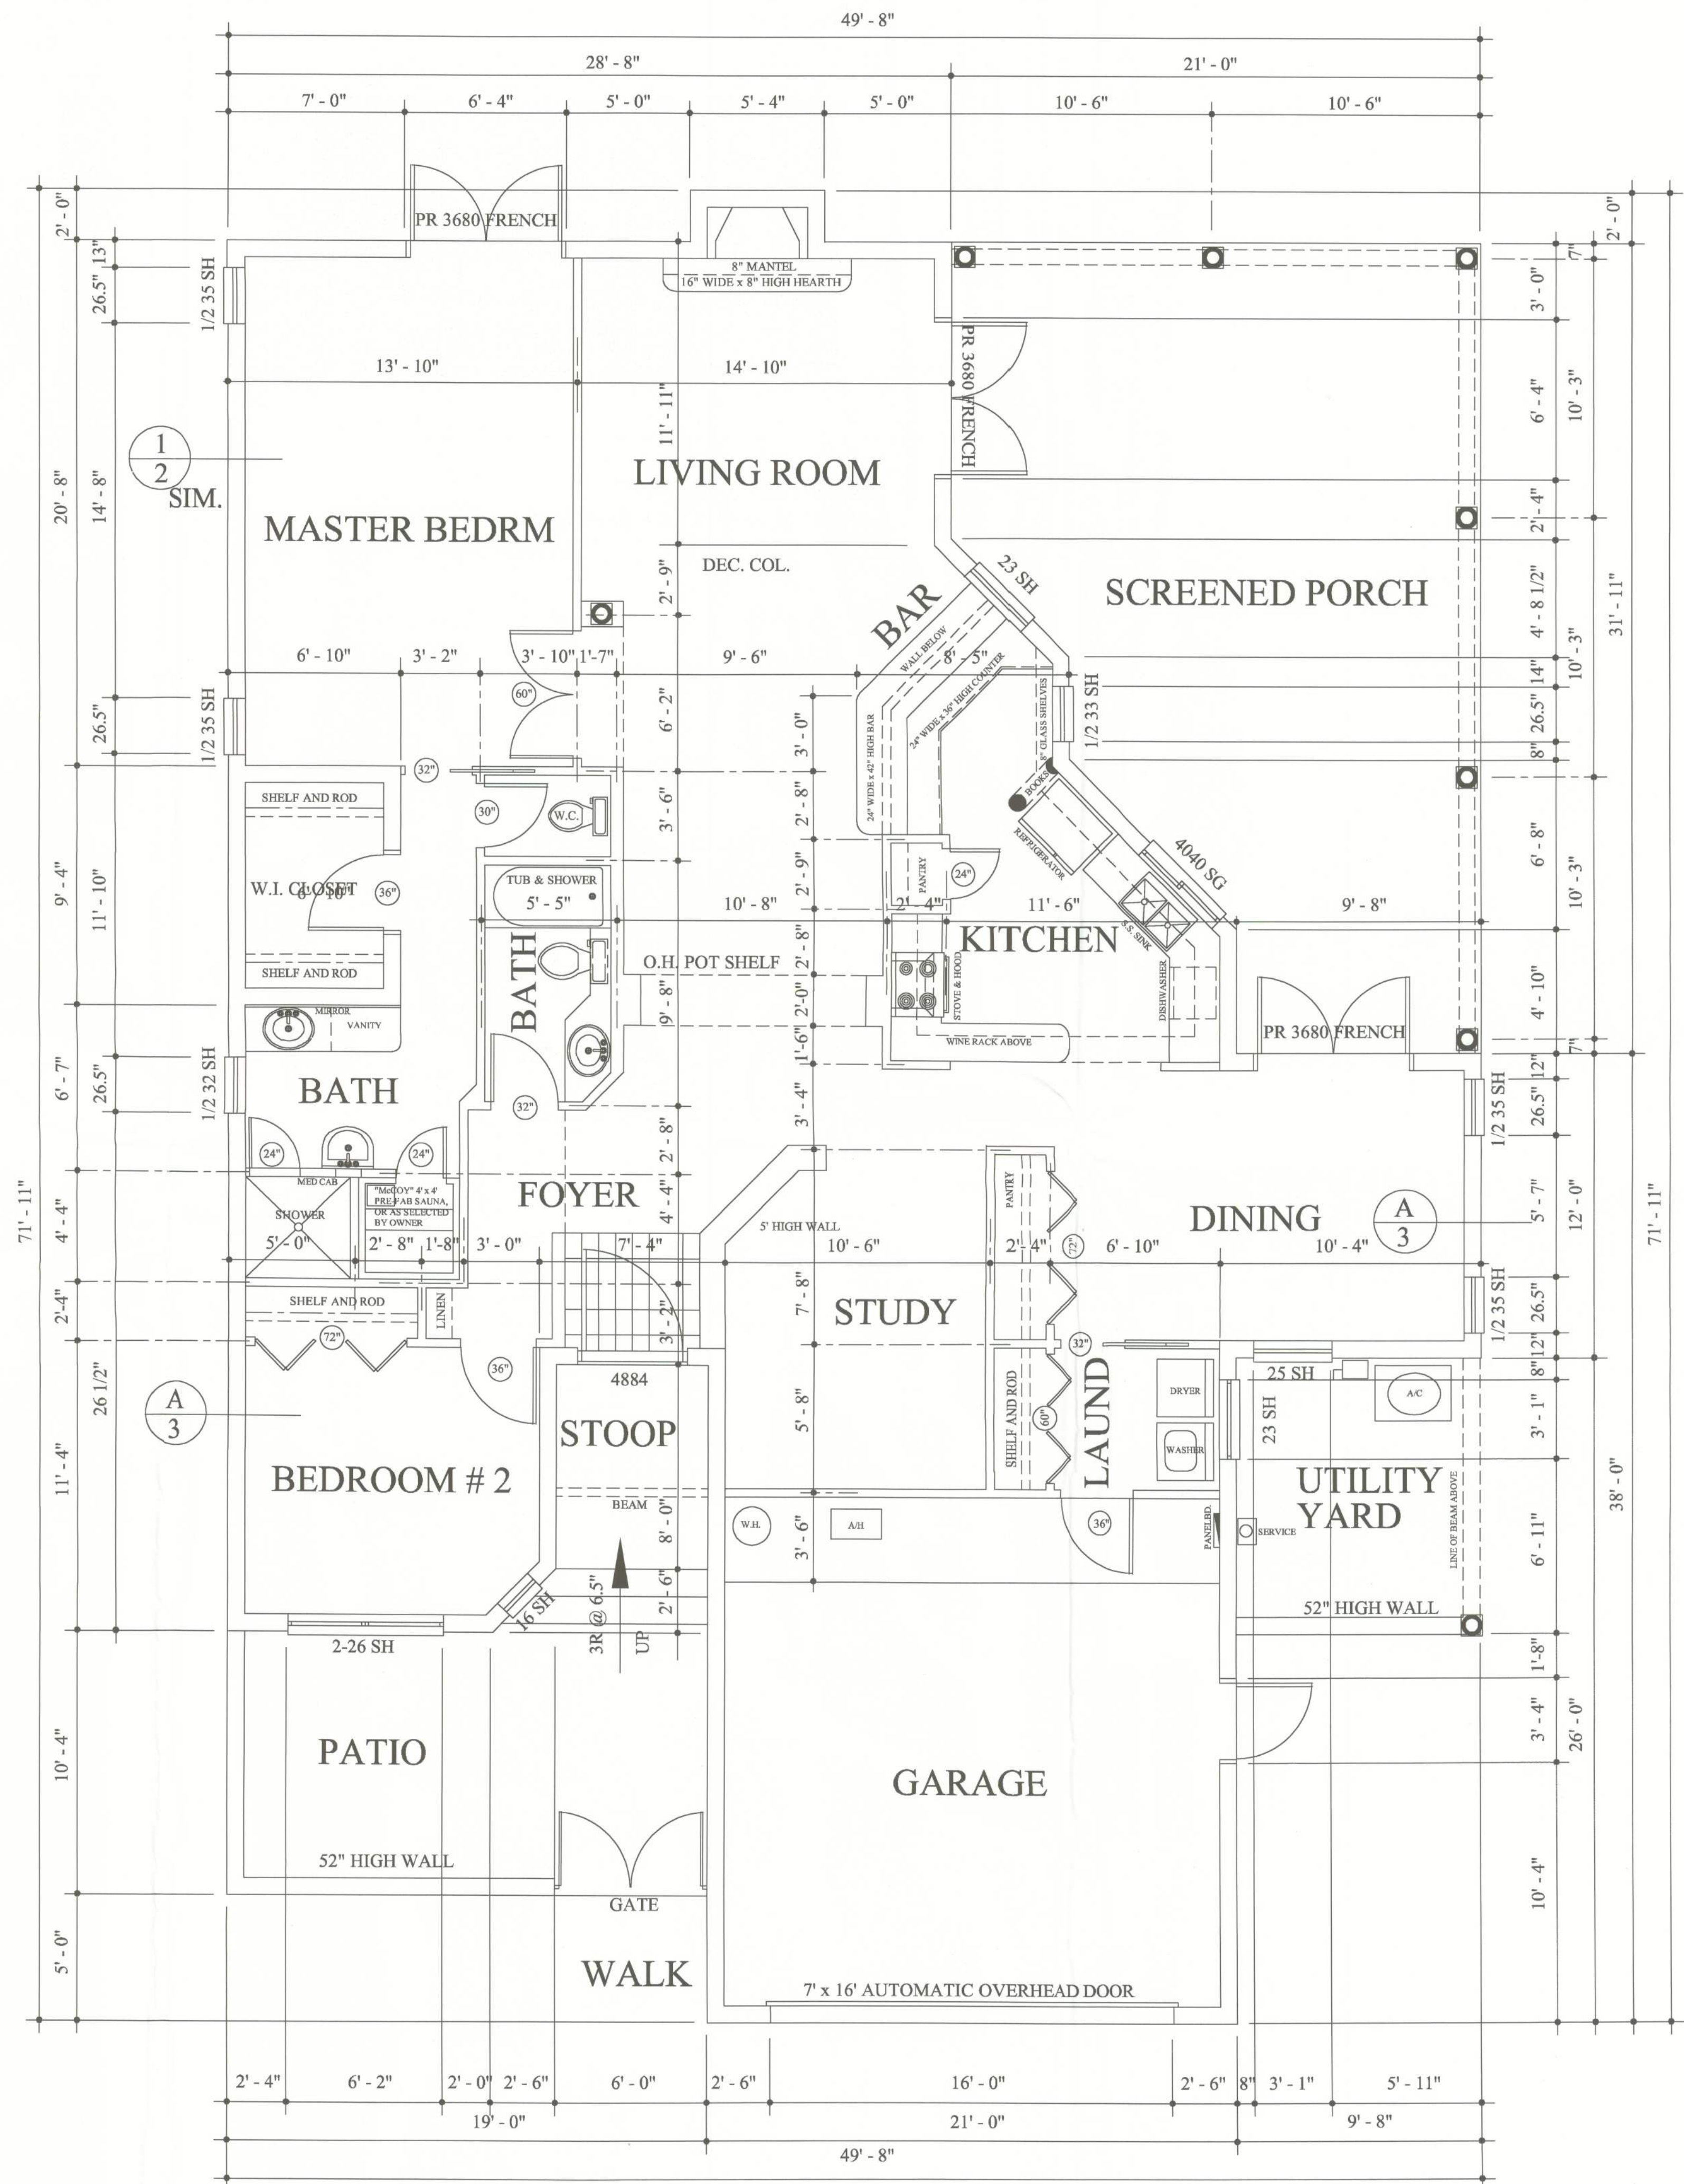

FLOOR PLAN

1/4" = 1' - 0"

A RESIDENCE For **MR. & MRS. GARY WALKER**

235 SW SIGNAL COURT, FORT WHITE, FLORIDA 32038

FLOOR PLAN
TYPICAL WALL SECTION

JAMES A. BLAIR, A.I.A.
ARCHITECT
5326 Northwest 102nd Place
Gainesville, Florida 32653-9703
386-462-2411
Call 352-339-9628
jblair55@cox.net

FEBRUARY 7, 2005

James Blair