


MANUFACTURED HOUSING UNIT

FEDERAL EMERGENCY MANAGEMENT AGENCY

NEXT GEN 1 BEDROOM UNIT (FURNACE / AC SYSTEM)

NOVEMBER 15, 2023

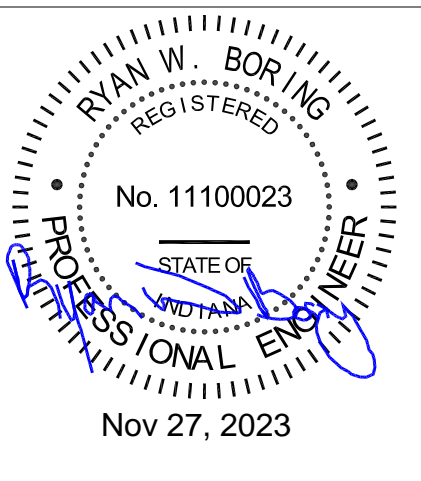

REV 11-15-23

FEMA

COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: COVER PAGE


DATE: 6/28/2019
SCALE: 1/8" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-1.1

INDEX

DWG. NO.	TITLE
14F1-1.1	COVER PAGE
14F1-1.2	INDEX
14F1-1.3	GENERAL NOTES
14F1-2	FLOOR PLAN
14F1-3	DOOR AND WINDOW SCHEDULE
14F1-4.1	FURNITURE PLAN
14F1-4.2	INSTALLED FURNITURE LAYOUT
14F1-5	UFAS LAYOUT
14F1-6	ELECTRICAL PLAN
14F1-7	WATER LINES
14F1-8	DRAIN LINES
14F1-9	HVAC DESIGN AND OVERHEAD DUCT LAYOUT
14F1-10	ELEVATIONS
14F1-11.1	CHASSIS
14F1-11.1.1	ALT. CHASSIS (95.5" I-BEAM SPACING)
14F1-11.2	CHASSIS DETAILS
14F1-12	FLOOR FRAMING LAYOUT
14F1-13	FLOOR DECKING LAYOUT
14F1-14	INTERIOR WALL AND BACKPANELING LAYOUT (HORIZONTAL)
14F1-15	INTERIOR WALL AND BACKPANELING LAYOUT (VERTICAL) - OPTIONAL
14F1-16.1-16.10	INTERIOR WALLS
14F1-17.1-17.2	ENDWALL FRAMING AND INTERIOR SHEATHING
14F1-18.1	SHEARWALL FRAMING AND EXTERIOR SHEATHING
14F1-18.2	RESERVED
14F1-19	FRONT DOOR SIDEWALL
14F1-20	BACK DOOR SIDEWALL
14F1-21	ROOF FRAMING LAYOUT
14F1-22	ROOF SHEATHING LAYOUT
14F1-23	ROOF OVERHANG DETAIL
14F1-24.1	KITCHEN ELEVATIONS
14F1-24.2	BATHROOM #1 ELEVATIONS
14F1-24.3	RESERVED
14F1-25.1	SPRINKLER SYSTEM LAYOUT
14F1-25.2	RESERVED
14F1-26	SHIP LOOSE LAYOUT
14F1-27	TRANSIT PROTECTION DETAILS
14F1-28	RESERVED
14F1-29.1	TIE DOWN SYSTEM
14F1-29.1.1	ALT. TIE DOWN SYSTEM (95.5" I-BEAM SPACING)
14F1-29.2	EXTERIOR WALL TIEDOWN DETAILS
14F1-29.2.1	ALT. EXTERIOR WALL TIEDOWN DETAILS (95.5" I-BEAM SPACING)
14F1-30	DOUBLE STACK PIER LAYOUT AND DETAILS
14F1-30.1	ALT. DOUBLE STACK PIER LAYOUT AND DETAILS (95.5" I-BEAM SPACING)

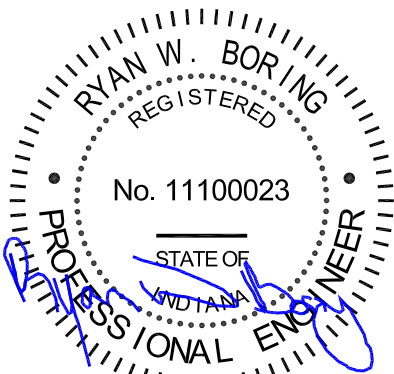

Nov 27, 2023

REV 04-30-21

FEMA

COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: INDEX

DATE: 6/28/2019
SCALE: 1/8" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-1.2

MANUFACTURED HOUSING UNIT

FEDERAL EMERGENCY MANAGEMENT AGENCY

GENERAL NOTES

CODES AND STANDARDS

Manufactured Home Construction and Safety Standards 24 CFR 3280

Manufactured Home Procedural and Enforcement Regulations 24 CFR 3282

Uniform Federal Accessibility Standards (UFAS)

Standard for the Installation of Sprinkler Systems in Manufactured Homes (NFPA 13D)

Referenced 2005 National Electrical Code (NFPA 70) Articles as Incorporated in HUD 24 CFR 3280

STRUCTURAL LOADS

Floor Live Load 40 PSF

Floor Dead Load 10 PSF


Roof Live Load 40 PSF


Roof Dead Load 10 PSF

Comply with Wind Zone 3 Requirements of 24 CFR 3280

Wood Roof Diaphragm

Wall Height: 7'-6"

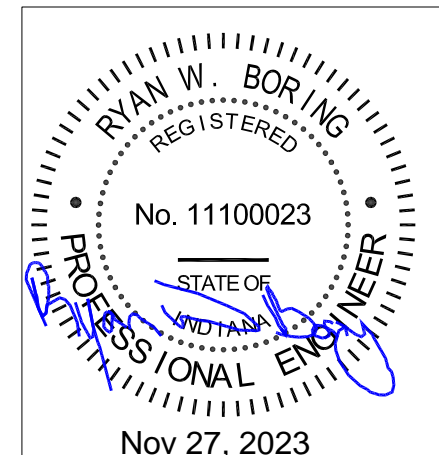

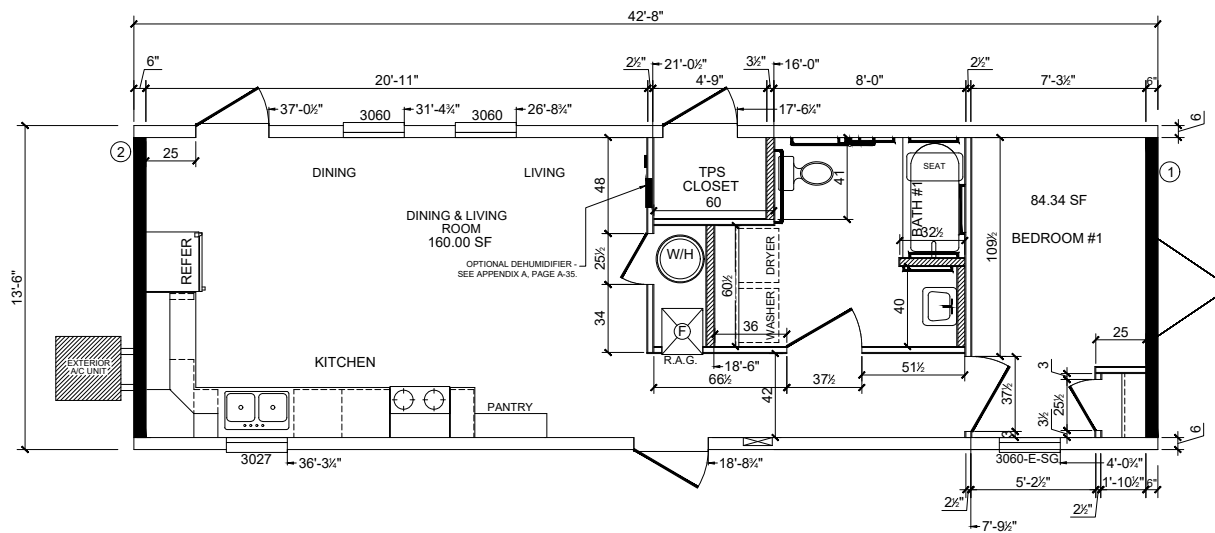


SHEARWALLS - WIND ZONE 3		
NO.	LENGTH	PLF
1	162"	341
2	162"	341

SIDEWALL HEIGHT = 90"
TRUSS HEEL HEIGHT = 9-15/16"

LIGHT AND VENT SCHEDULE			
ROOM TITLE	AREA	REQUIRED LIGHT	REQUIRED VENT
LIVING / DINING ROOM	160.00 S.F.	12.80 S.F.	6.40 S.F.
BEDROOM #1	84.00 S.F.	6.72 S.F.	3.36 S.F.

■ SHEAR WALLS FOR WIND ZONE 3
▨ DESIGNATES A 2X4 WALL

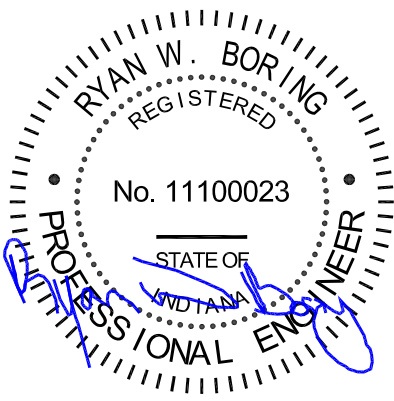

Nov 27, 2023

Floor Plan Notes:

1. All bedroom closet shelving shall be 12 inches deep.

REV 11-15-23

FEMA


COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: FLOOR PLAN

DATE: 6/28/2019
SCALE: 1/8" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-2

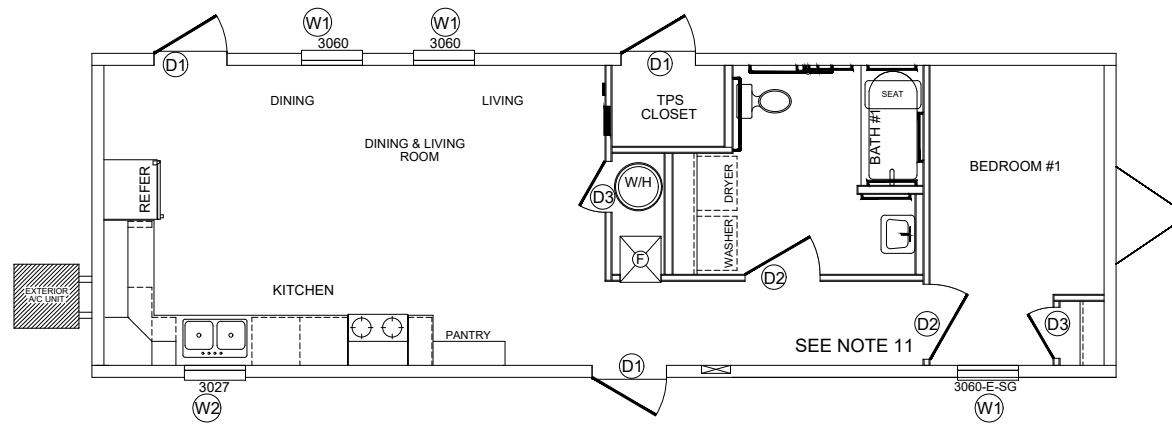

WINDOW SCHEDULE			
MARK	WIDTH	HEIGHT	TYPE
W1	2'-6"	5'-0"	Single Hung Window
W2	2'-6"	2'-3"	Fixed Pane Window

TOTAL WINDOW AREA: 44.2 SQ. FT.

DOOR SCHEDULE				
MARK	WIDTH	HEIGHT	THICKNESS	TYPE
D1	3'-0"	6'-8"	1-3/8"	Outswing Door
D2	3'-0"	6'-8"	1-3/8"	Hallway Doors
D3	2'-0"	6'-8"	1-3/8"	Closet & W/H Doors


TOTAL EXTERIOR DOOR AREA: 64.5 SQ. FT.

Window Notes

1. Windows shall meet 24 CFR 3280.403 and 3280.404 requirements and shall comply with Wind Zone 3 requirements.
2. Windows shall be double paned, low E with vinyl frame. Windows shall have a maximum SHGC of 0.30 and a maximum U-Value of 0.36.
3. Windows shall have a design pressure rating of 58.
4. Windows shall have screens.

Door Notes

1. Exterior doors shall meet 24 CFR 3280.405 requirements and shall comply with Wind Zone 3 requirements.
2. All exterior doors shall be insulated fiberglass or steel with a maximum U-Value of 0.33.
3. All doors shall have lever type handles in compliance with UFAS 4.13.9.
4. For additional information on exterior and interior doors see FEMA Additional Requirements document and Appendix A.
5. Return air grills shall be installed above doors unless the grill will be blocked by the sprinkler system and then may be installed in the door or wall.
6. Door stops shall be installed at all interior and wardrobe doors. Door stops may be installed on the door or the floor baseboard. Door stop finish to match interior hardware finish.
7. All bathroom and bedroom doors shall have a privacy lock. The lock mechanism shall be the button type (UFAS 4.13.9) and located on the inside of the bathroom or bedroom.
8. The water heater compartment side of the water heater access door shall be covered with minimum 5/16 inch thick gypsum board.
9. The closet door shall be equipped with a passage latchset with level handle.
10. All interior doors shall have a maximum gap of 1" between the finished floor and the bottom of the door.
11. 14x4 RAG centered in door with bottom of opening 2 1/2" above floor. Minimum 20 S.I. of free air return area.

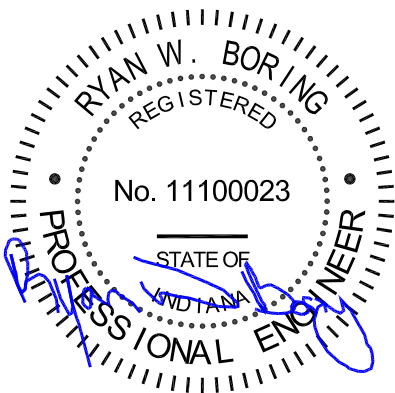

Nov 27, 2023

REV 09-20-21

FEMA


COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: DOOR AND WINDOW SCHEDULE

DATE: 6/28/2019
SCALE: 1/8" = 1'-0"


VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-3

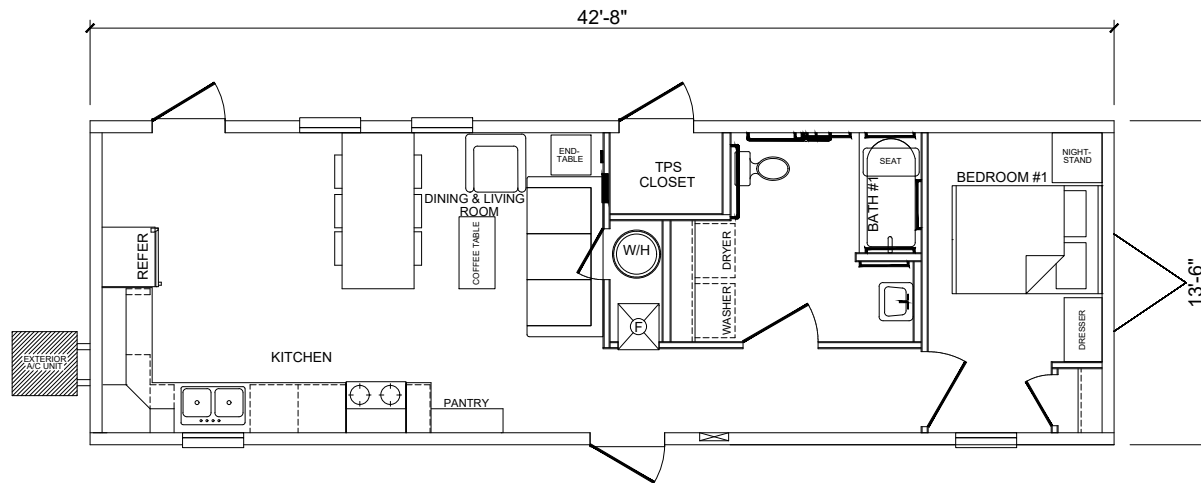

General Notes

1. Vendor to tape a copy of this drawing to the inside of the water heater compartment door.

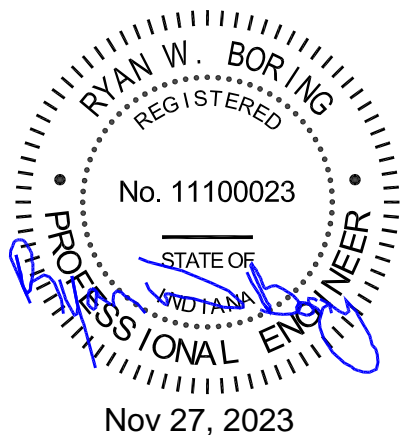

REV 11-15-23

FEMA


COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: INSTALLED FURNITURE LAYOUT

DATE: 6/28/2019
SCALE: 1/8" = 1'-0"


VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-4.2

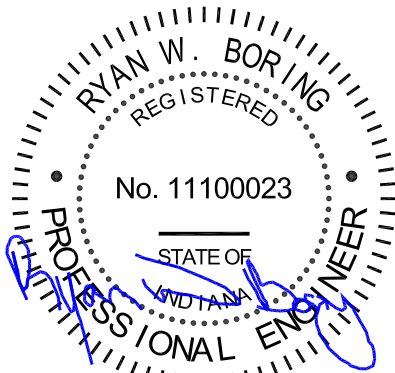


Nov 27, 2023

UFAS MANEUVERING CLEARANCES AT DOORS AND TURNING SPACE CONFIGURATION LAYOUT

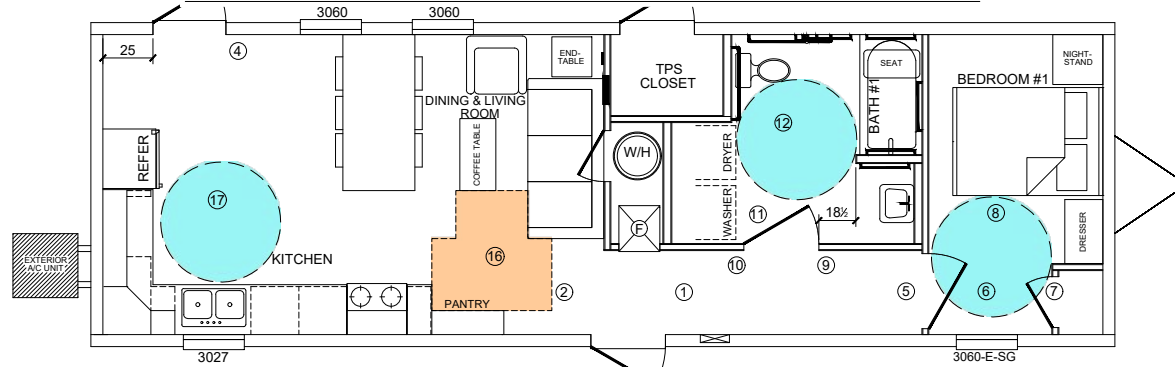

UFAS CLEAR FLOOR SPACE LAYOUT

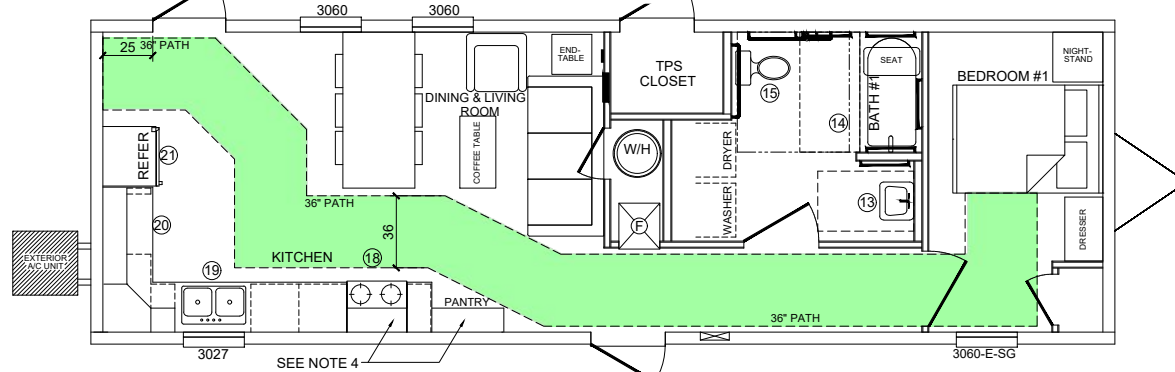

UFAS Maneuvering Clearances at Doors and Egress Chart

Location	UFAS Section and/or Figure References
Exterior Doors	
1. Front Door - Hall to Front Door	4.13.6 - Figure c - Push side
2. Front Door - Living Room to Front Door	4.13.6 - Figure b - Push side
4. Rear Door - Kitchen to Rear Door	4.13.6 - Figure c - Push side
Bedroom 1	
5. Hallway to Bedroom 1	4.13.6 - Figure a - Push side - See Note 1.
6. Bedroom 1 to Hallway	4.13.6 - Figure a - Pull side
7. Bedroom 1 to Closet	4.13.6 - Figure a - Pull side
8. Turning Space Configuration	4.2.3 - Figure a - 60" Diameter Space
Bath 1	
9. Bedroom/Hallway to Bath 1	4.13.6 - Figure c - Push side
10. Kitchen/Hallway to Bath 1	4.13.6 - Figure b - Push side
11. Bath 1 to Hallway	4.13.6 - Figure a - Pull side
12. Turning Space Configuration	4.2.3 - Figure a - 60" Diameter Space
13. Lavatory Clear Floor Space	4.19.3 - 30" x 48"
14. Tub/Shower Clear Floor Space	4.20.2 - Figure 33(a) - 30" x 60"
15. Toilet Clear Floor Space	4.16.2 - Figure 28 - 56" x 60"
Living Room	
16. Turning Space Configuration	4.2.3 - Figure b - T-Shaped Space

Location	UFAS Section and/or Figure References
Kitchen	
17. Turning Space Configuration	4.2.3 - Figure a - 60" Diameter Space
18. Range Clear Floor Space	4.34.6.2 - 30" x 48"
19. Sink Clear Floor Space	4.34.6.5(7) - 30" x 48"
20. Counter Work Surface Clear Floor Space	4.34.6.2 - 30" x 48"
21. Refrigerator Clear Floor Space	4.34.6.2 - 30" x 48"

Notes

- Door does not have closer.
- The minimum clear width for a single wheelchair continuous path is 36" (UFAS 4.2.1).
- All appliances shall be UFAS Compliant.
- 50% of shelf space shall be below 54" reach range (UFAS 4.25.3)
- Location of tub/shower seat shall be within UFAS forward reach range of tub/shower controls (UFAS 4.20.3 and Fig. 5(a)).

REV 11-15-23

FEMA

COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE:

UFAS LAYOUT

DATE:

6/28/2019



SCALE:

1/8" = 1'-0"

VERSION:

14' WIDE MHU (FURNACE)




DRAWING NO.
14F1-5

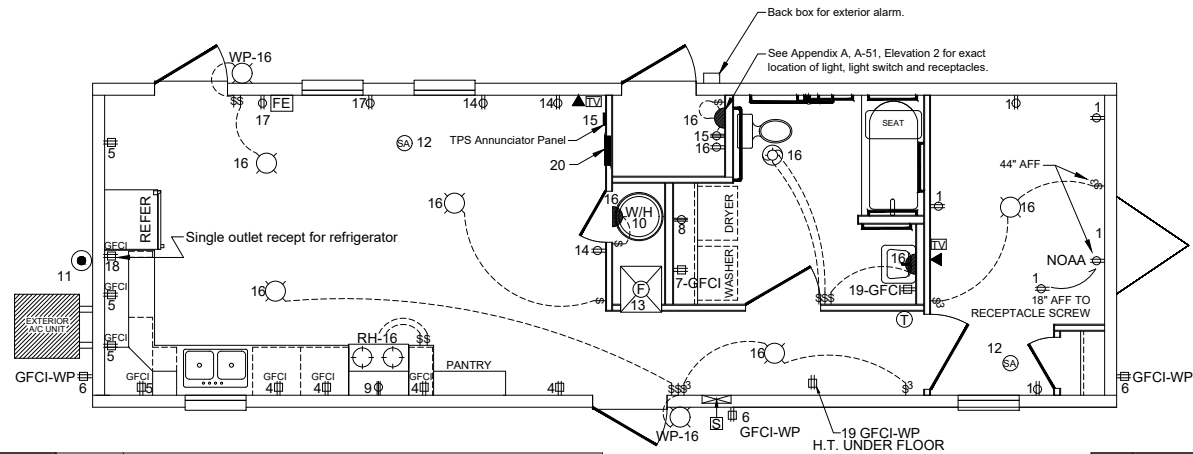


Cir.	Purpose	Type	Wire Size	Amps	Pole
1	Bedroom 1		14-2	15	1
2	N/A		-	-	-
3	N/A		-	-	-
4	Kitchen	GFCI	12-2	20	1
5	Kitchen	GFCI	12-2	20	1
6	Ext. Recep	GFCI	12-2	20	1
7	Washer	GFCI	12-2	20	1
8	Dryer		10-3	30	2
9	Electric Range		Per MFR. Specs.		
10	Water Heater		Per MFR. Specs.		
11	A/C		Per MFR. Specs.		
12	Smoke Detectors		14-3	15	1
13	Furnace		Per MFR. Specs.		
14	Living Room		14-2	15	1
15	TPS System		Per MFR. Specs.		
16	Lights/Recep		14-2	15	1
17	Dining Room		12-2	20	1
18	Refrigerator	GFCI	12-2	20	1
19	Bath Recepts / Heat Tape	GFCI	12-2	20	1
20	Optional Dehumidifier	GFCI	14-2	15	1

13	Furnace				Per MFR. Specs.
14	Living Room		14-2	15	1
15	TPS System				Per MFR. Specs.
16	Lights/Recep		14-2	15	1
17	Dining Room		12-2	20	1
18	Refrigerator	GFCI	12-2	20	1
19	Bath Recepts / Heat Tape	GFCI	12-2	20	1
20	Optional Dehumidifier	GFCI	14-2	15	1

REV 11-15-23

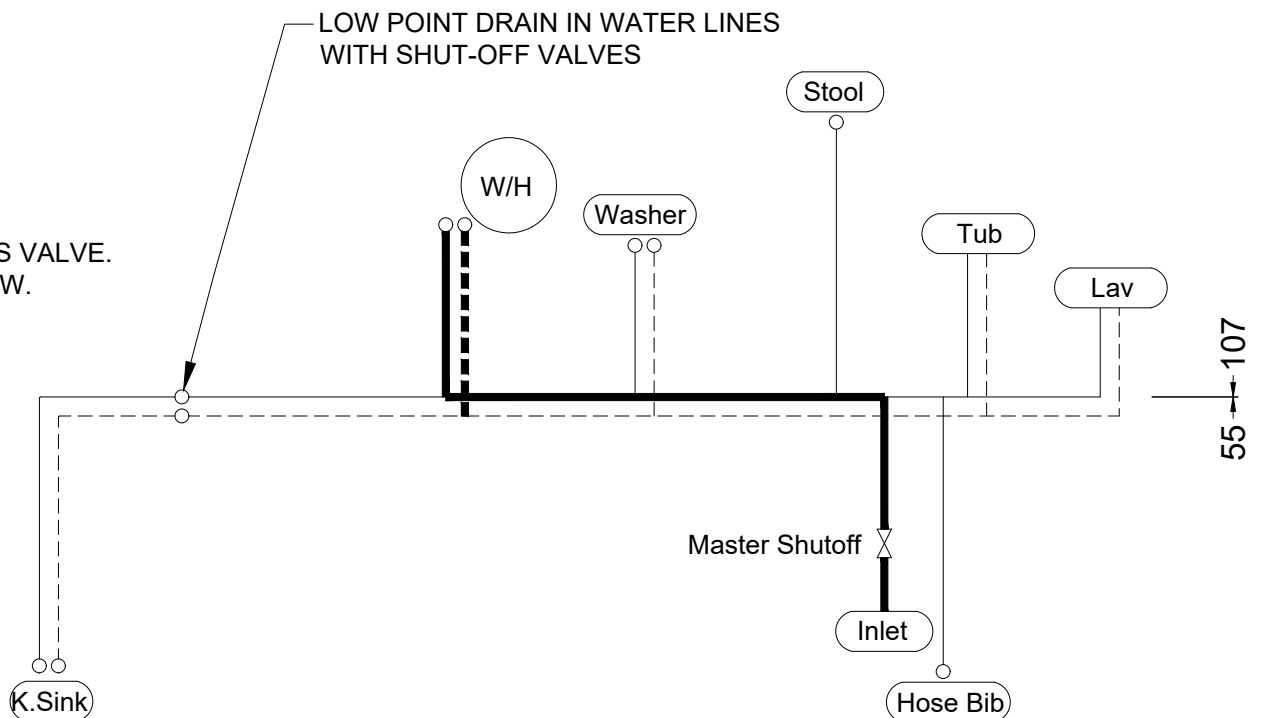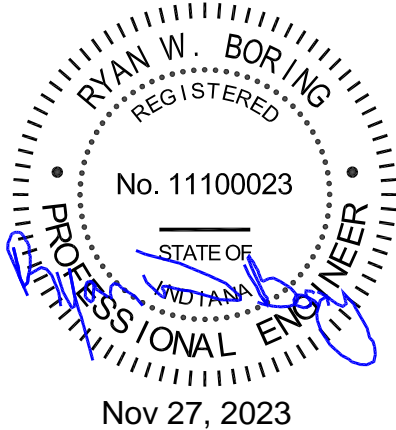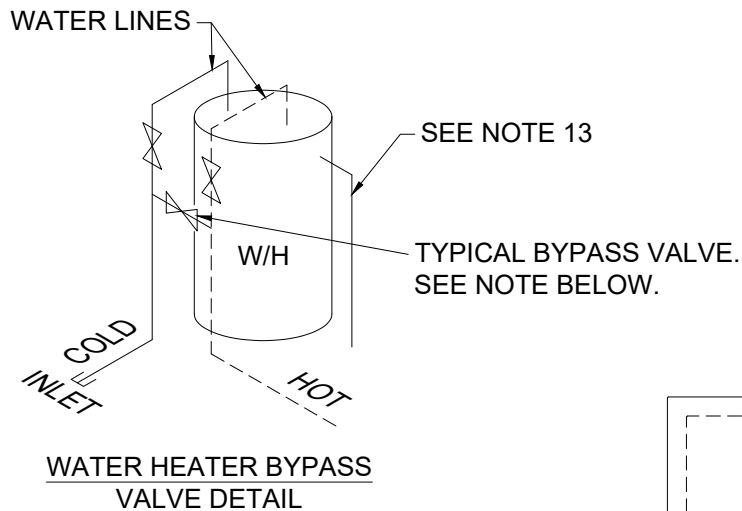

Legend

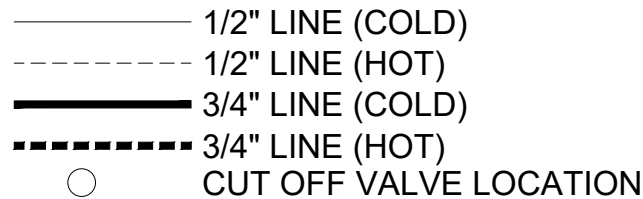

Notes

- 1) FITTING SIZES TO CORRESPOND TO ADJACENT PIPE SIZES.
- 2) ALL SIZING OF PIPE + OR -, MUST MEET OR EXCEED ANY APPLICABLE CODES.

Water Supply System Notes

1. The water supply lines shall be Cross-linked polyethylene (PEX) or chlorinated polyvinyl chloride (CPVC) and comply with the requirements of 24 CFR 3280.
2. All water lines shall be 1/2" unless noted.
3. The water supply inlet shall be 3/4" and have a brass quarter turn ball valve.
4. The water supply inlet shall extend not more than 6" below the bottom board.
5. The water supply inlet shall be located within 12" of the curb side of the home.
6. The water supply inlet shall not be located under an exterior door.
7. Individual shut off valves shall be located on each water line at each fixture, except at the tub/shower or shower.
8. All water line floor penetrations shall be caulked or foamed. Caulk or foam shall be acceptable to be in contact with the water line material.
9. Adequately sized access panels (12" x 12" min) shall be located in the walls at all points where concealed plumbing slip joints exist. The access panels shall match the wall color and finish. Access panels shall be unobstructed and accessible for inspection and repair.
10. The MHU shall be equipped with a frost-free hose bib located near the main water supply inlet. It shall not be located under an exterior door.
11. Low point drain in water lines with shut-off valves shall be located above bottom board and insulation. Vendor to provide access panel, labeled "Low Point Drain".
12. By-pass valves shall be quarter turn on-off valves.
13. Water heater pressure relief valve drain line shall be run to the exterior of the home.

REV 11-15-23

FEMA

COMPANY: Manufactured Housing Units
Federal Emergency Management Agency


TITLE: WATER LINES

DATE: 6/28/2019
SCALE: NTS

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-7

DEHUMIDIFIER DRAIN IS STANDARD. SEE APPENDIX A, PAGE A-35 FOR ADDITIONAL INFORMATION.

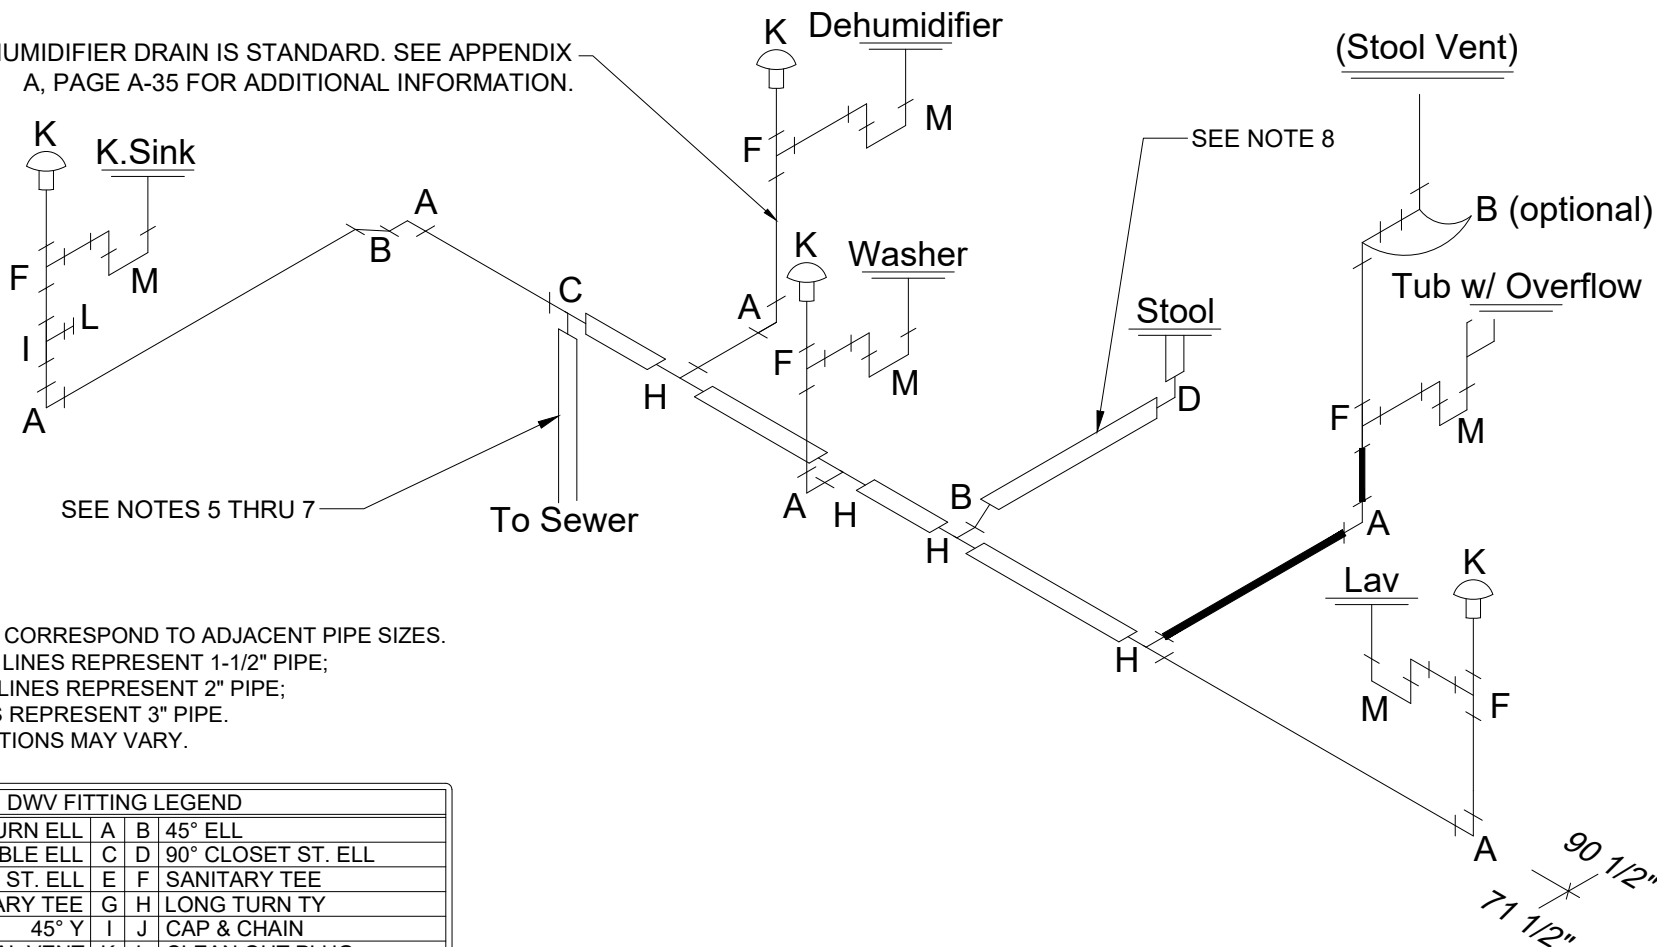

NOTES


1. FITTING SIZES CORRESPOND TO ADJACENT PIPE SIZES.
2. SINGLE (THIN) LINES REPRESENT 1-1/2" PIPE;
DARK (THICK) LINES REPRESENT 2" PIPE;
DOUBLE LINES REPRESENT 3" PIPE.
3. P-TRAP DIRECTIONS MAY VARY.

DWV FITTING LEGEND			
90° LONG TURN ELL	A	B	45° ELL
DOUBLE ELL	C	D	90° CLOSET ST. ELL
90° LONG TURN ST. ELL	E	F	SANITARY TEE
DOUBLE SANITARY TEE	G	H	LONG TURN TY
45° Y	I	J	CAP & CHAIN
MECHANICAL VENT	K	L	CLEAN OUT PLUG
P-TRAP	M	N	REDUCER BUSHING
COUPLING	O	P	22.5° ELL
	Q	R	
	S	T	

Drain System General Notes

1. Drain lines shall be ABS or PVC and comply with the requirements of 24 CFR 3280.
2. All drain lines shall be 1 1/2" diameter unless noted.
3. The drain line system shall be accessible without removing the axles and wheels.
4. All drain line floor penetrations, except at tub/shower and shower floor penetrations shall be caulked or foamed. Caulk or foam shall be acceptable to be in contact with the drain line material.
5. The drain line which shall run below the floor and above the bottom board to the place of drain outlet not less than two feet (2') but not more than three feet (3') in front of the axle group.
6. The drain line outlet shall protrude at least six inches (6"), but not more than eight inches (8"), below the bottom board.
7. The drain line outlet shall be capped with a removable plastic cap and chain or strap.
8. Stool trap arm developed length shall not be over 72".

REV 11-15-23

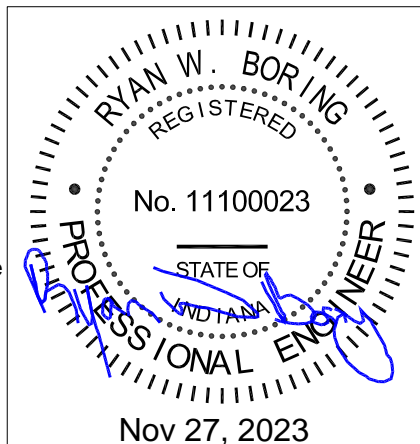

FEMA


COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: DRAIN LINES


DATE: 6/28/2019
SCALE: NTS

14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-8

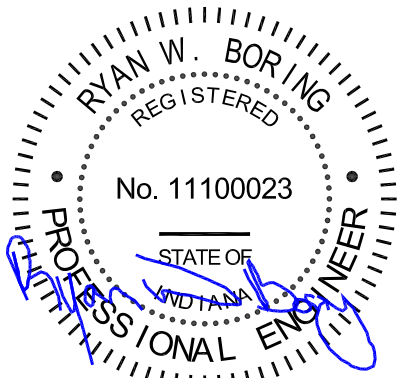

Nov 27, 2023

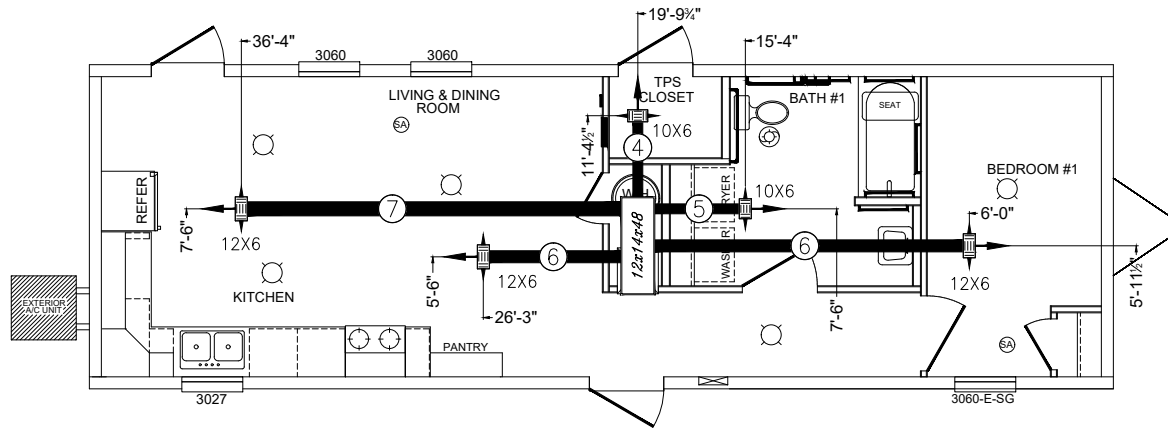

HVAC PACKAGES UNIT SPECIFICATIONS	
Heating	(10 KW Electric Furnace)
Cooling	(Min. 1.5-Ton Air Conditioner)

Duct Capacity	22,459 Btuh	
U Values	Heating	Cooling
Walls (without windows and doors)	0.0575	0.0555
Ceilings and roofs of light color	0.0257	0.0258
Floors	0.0356	0.0362
Air ducts in ceiling	0.0868	0.0896
Air ducts in ceiling (Duct Area)	229 Sq. Ft.	

HVAC General Notes

- See FEMA specifications for programable and configurable thermostat requirements.
- Duct system shall be constructed of class 0 or class 1 circular insulated flex ductwork or equal. All ducts to be insulated with a minimum of R-4 insulation.
- Metal supply register sizes as shown on duct layout.
- All supply ducts shall be in the roof attic space.
- All supply duct seams and fasteners shall be sealed with UL-181A or UL-181B listed duct tape.
- The manufacturer shall provide a duct pressure test report (See FEMA Spec for testing procedure) for each MHU duct system showing duct leakage of 5 percent or less prior to FEMA acceptance of the MHU.
- No construction debris or sawdust shall be left in the duct system.
- N/A
- Return air grilles shall be sized per 24 CFR 3280.715(b)(4).
- N/A
- 14x4 RAG centered in bedroom entry door with bottom of opening 2 1/2" above floor. Minimum 20 S.I. of free air return area.
- A 12" x 6" return air register shall be located 8" above the floor in the TPS Compartment/ bathroom wall. A register shall be placed on each side of the wall.
- Bathroom exhaust fan location shall not be located next to the bathroom supply register.

HVAC Split Furnace / AC Notes

- The furnace shall be at least a ninety-five percent (95%) efficient electric furnace (central heating system) capable of maintaining an average temperature of seventy degrees Fahrenheit (70°F) in the MHU.
- The MHU shall be equipped with a specifically engineered HVAC split furnace /AC system based on the size and intended use of the MHU, in accordance with 24 CFR 3280.506, that is compatible with the HVAC split furnace /AC system size.
- The furnace shall also be built or equipped for the installation of a split type air conditioner and have enclosed space in water heater/furnace compartment for an A-coil evaporator unit, and with a 4-wire thermostat completely wired and installed.
- A vibration damping pad shall be placed between the condensing unit and the mounting platform.
- A 1" ratchet strap with 500 lb. capacity shall be installed around the outside of the condenser unit and bracket extension for transportation.
- Air conditioning lines shall be pre-charged in the factory per manufacturers specifications and shall not have any leaks. Refrigerant lines shall be run next to the I-beam between the crossmembers and the bottom board where they will be protected from transportation damage. Refrigerant lines shall be secured to the I-beam at 48" O.C.
- Furnace return air return grill shall be sized per furnace manufacturer's installation instructions.
- Duct penetrations thru ceiling board shall be sealed.

REV 11-15-23

FEMA


COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: HVAC DESIGN AND
OVERHEAD DUCT LAYOUT


DATE: 6/28/2019
SCALE: 1/8" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)


DRAWING NO.
14F1-9

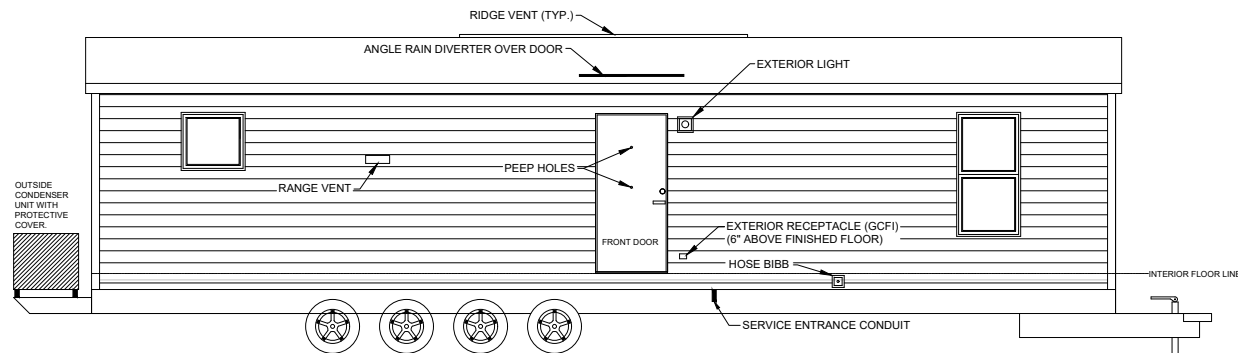


FRONT DOOR SIDE ELEVATION

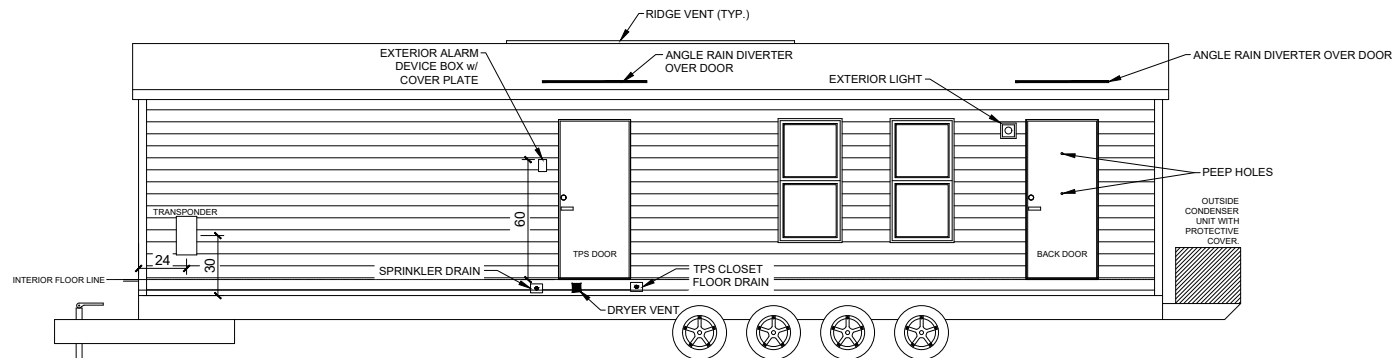

BACK DOOR SIDE ELEVATION

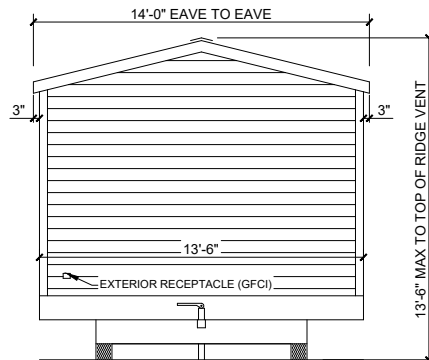


HITCH END ELEVATION

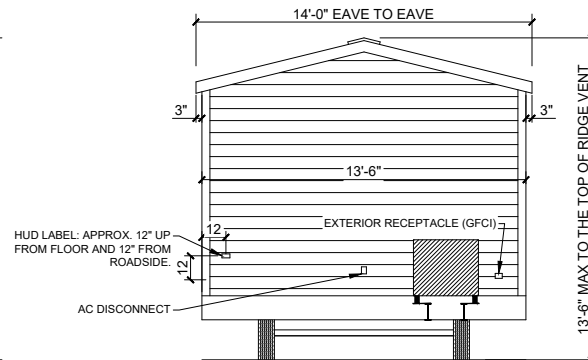

TAIL END ELEVATION

Exterior Finishes Notes

1. Siding shall be light gray vinyl.
2. Siding shall be double 4" lap.
3. Siding shall be approved for HUD Wind Zone 3 requirements.
4. The manufacturer shall provide a transponder sled. See Appendix A.
5. The sled shall be painted with a powder coat paint to match the exterior color of the MHU or White.
6. The transponder sled shall be made out of sheet metal.
7. Vinyl siding, Versatek trim board, or equivalent shall be installed below all exterior doors, cover 2X8 perimeter rails, light gray in color and installed per Wind Zone 3 requirements.

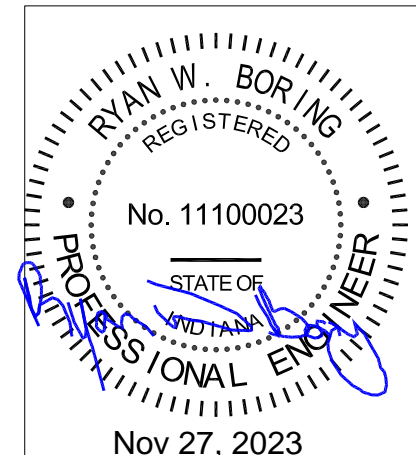

REV 11-15-23

Nov 27, 2023

FEMA

Manufactured Housing Units
Federal Emergency Management Agency

TITLE:



ELEVATIONS


Date: 6/28/2019


Scale: 1/8" = 1'-0"

14' WIDE MHU (FURNACE)


DRAWING NO.
14F1-10

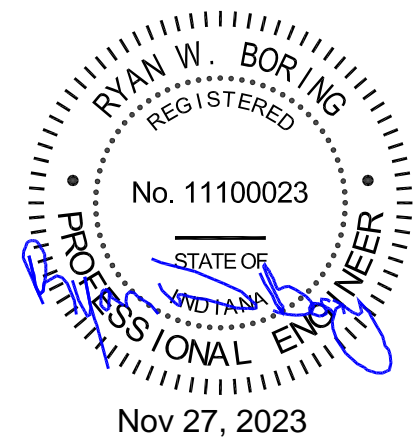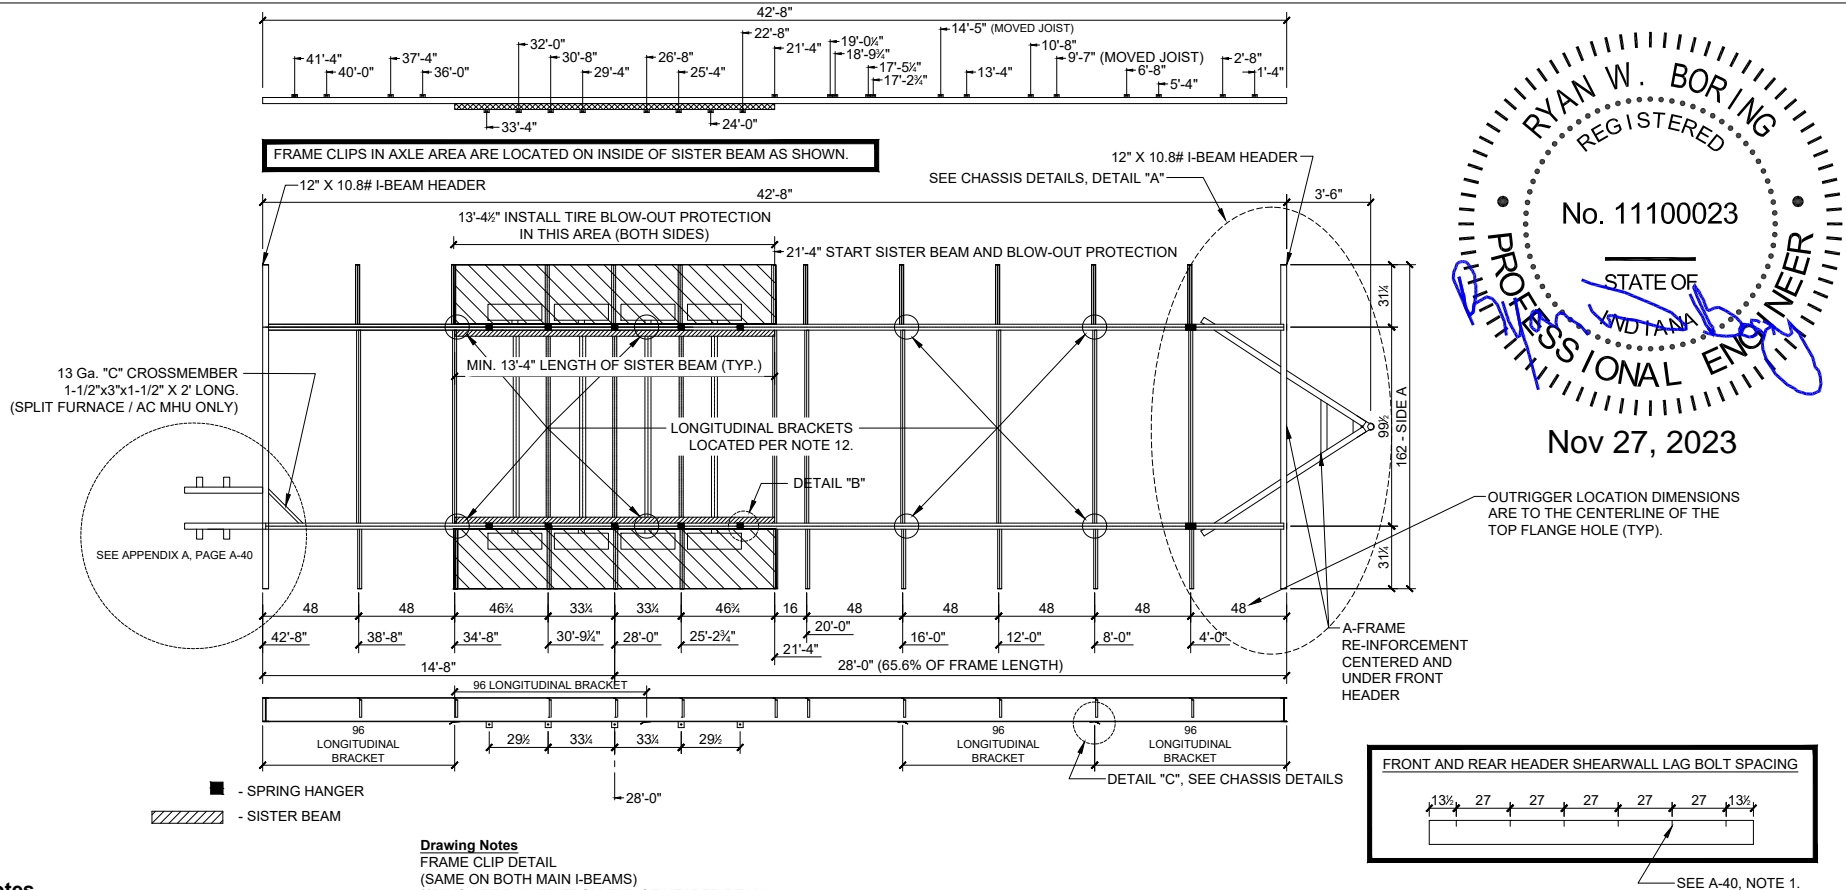

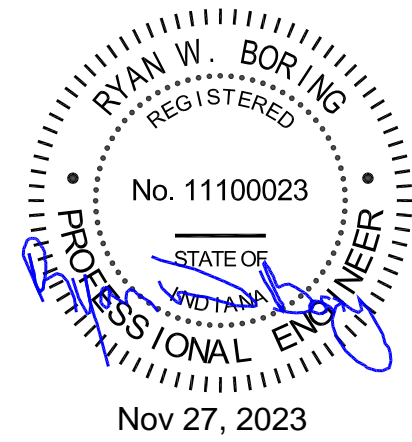

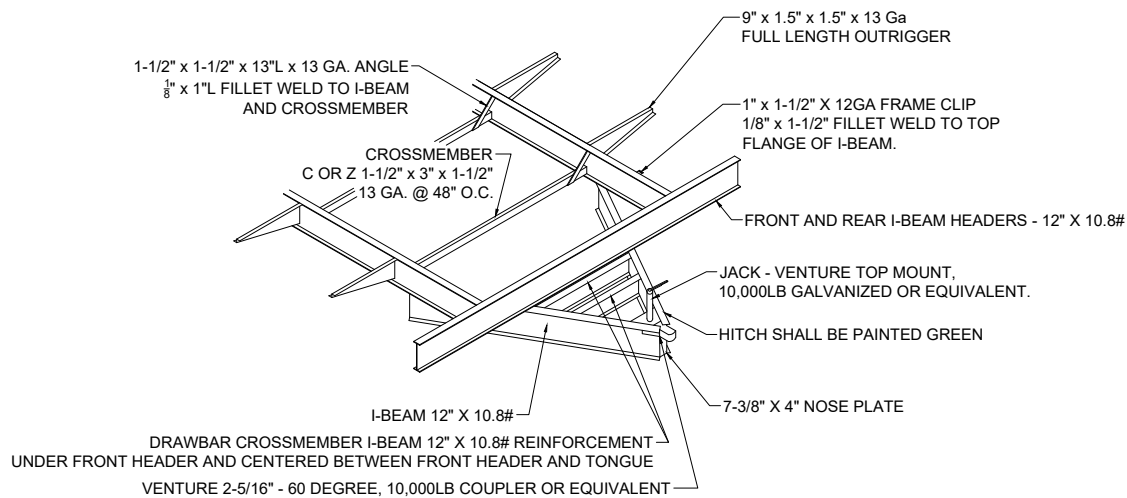


DETAIL A: HITCH ASSEMBLY

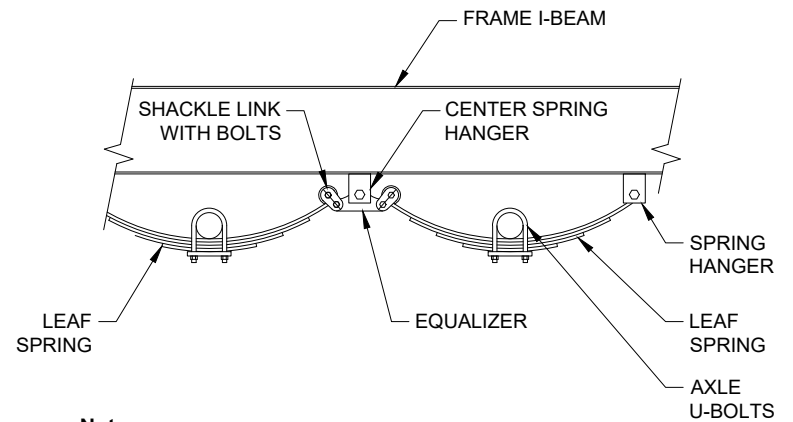

Notes

1. Shoulder bolts are to be used at all equalizer and shackle link locations.
2. Shoulder bolts shall be torqued per axle manufacturer requirements. (Approximately 30 to 50 ft. lbs.)
3. Equalizer and shackle links are to move freely after shoulder bolts have been torqued.
4. Axle U-bolts shall be torqued per axle manufacturer requirements (Approximately 70 to 95 ft. lbs.)




DETAIL D: EQUALIZER & SHACKLE LINK FASTENING

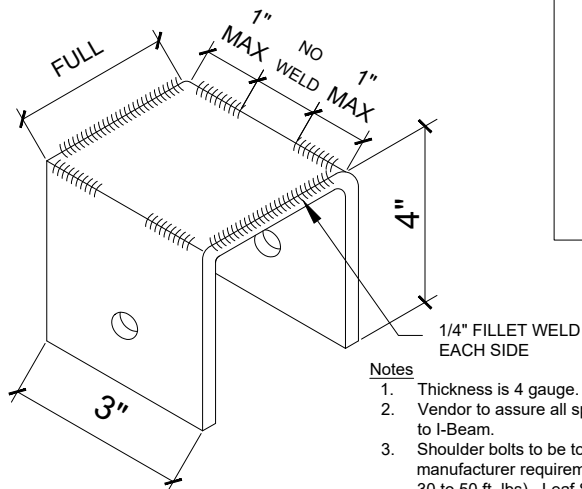

Notes

1. Thickness is 4 gauge.
2. Vendor to assure all spring hangers are 90° to I-Beam.
3. Shoulder bolts to be torqued per axle manufacturer requirements (Approximately 30 to 50 ft. lbs.). Leaf Spring to move freely in hanger.
4. Welds are not continuous around corners.

DETAIL B: AXLE HANGER

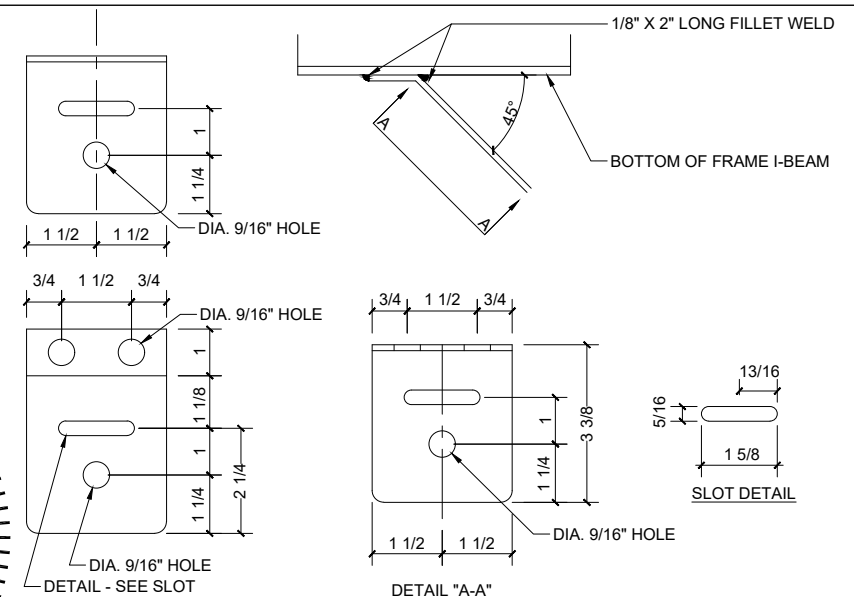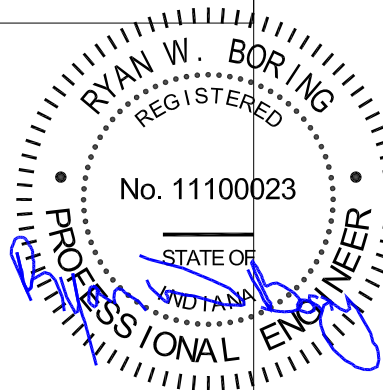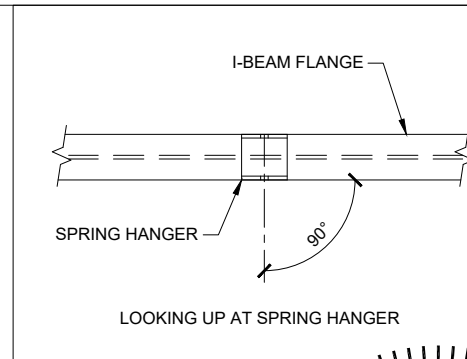

LONGITUDINAL TIE-DOWN BRACKET (12Ga. MIN.) SHALL HAVE
3150 LB WORKING LOAD CAPACITY.

DETAIL C: LONGITUDINAL TIE-DOWN BRACKET

REV 11-29-21

FEMA


COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: CHASSIS DETAILS
Nov 27, 2023

DATE: 6/28/2019
SCALE: 1/8" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-11.2

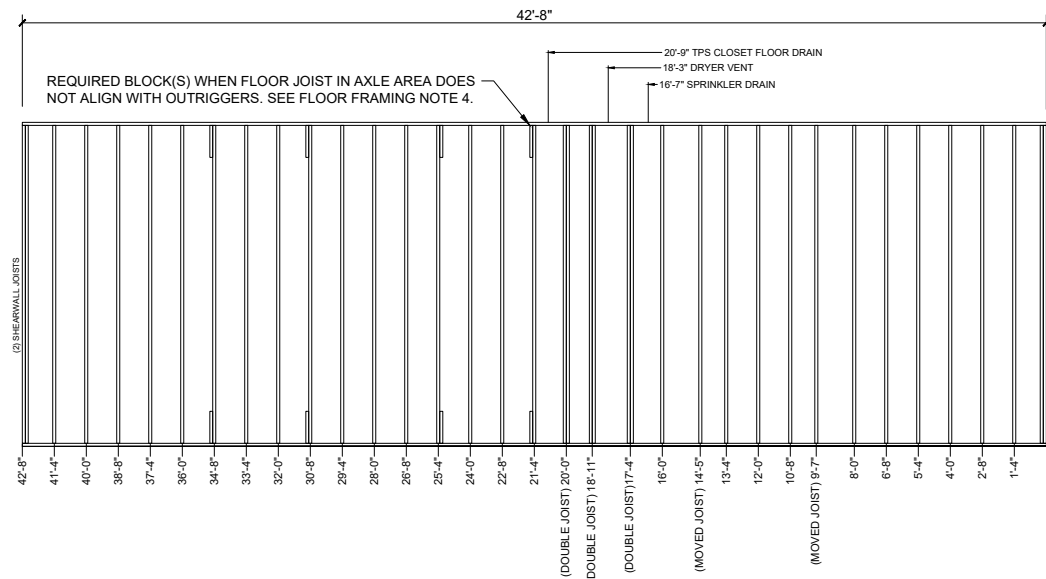

FASTENING SCHEDULE - FLOOR FRAMING		
DESCRIPTION	FASTENER	QTY
Floor joists to rim joist	7/16 x 2-1/2 x 15Ga staple	7 each
	OR 0.131 x 3" Nail	5 each
Multiple joists (to each other) (80% PVA glue coverage)	7/16 x 2-1/2 x 15Ga staple	12" o.c.
	OR 0.131 x 3" Nail	12" o.c.

Floor Framing Notes

- The floor joists shall be 2 x 8 #2 SPF 16" o.c.
- Edge rails shall be 2 x 8 #2 SPF.
- Edge rail splice 4 x 5 x 20 GA metal connector plate on each side, or 2 x 8 x minimum 6" each side of joint centered +/- 1", to be fastened with 7/16 x 2 1/2 x 15 GA staples or .131 x 3" PD nails (8) each side of edge rail, with minimum 80% PVA coverage.
- In the axle area floor joists that do not align with chassis outriggers add a 2x8x16" min. #2 SPF block to the side of the floor joist to meet lagging requirements. Fasten block to side of joist with 80% PVA glue and (4) .131 x 3" PD nails or (6) - 7/16 x 2 1/2 x 15 GA staples staggered. if floor joist is offset from outrigger more than 1 3/4" a second block must be fastened to the side of first block. Second block, if required, same grade, specie and fastening.
- TPS and Sprinkler drain lines to be installed through the perimeter rail. Hole size is a max. of 1 3/4" and must be a min. of 2 inches away from the top and bottom of the 2x8 perimeter rail.


Floor Insulation Notes

- The insulation shall have a flame spread of 25 or less and a smoke develop of 450 or less.
- The floor insulation shall be a minimum of R-26 (R-11 blanket with R-15 batts) fiberglass insulation. One full batt, one additional full width batt between the I-beams, and one additional 16" wide batt between joist outside of I-beams.

Bottom Board Notes

- All penetrations sealed per bottom board manufacturer's installation instructions.
- Bottom board shall be a minimum of twenty (20) mil thickness.
- Multiple layers of acceptable material per 3280.305(g)(6) may be used.
- Fasten bottom board to perimeter framing per manufacturer's installation instructions.

REV 01-17-23

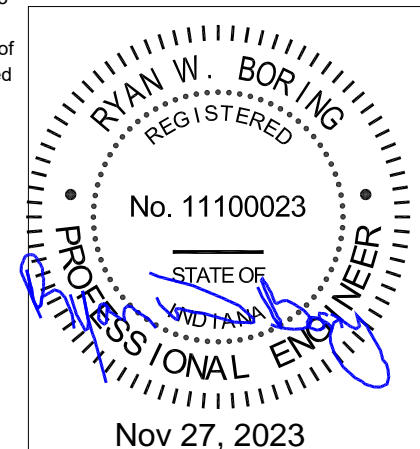

Nov 27, 2023

FEMA


Manufactured Housing Units
Federal Emergency Management Agency

FLOOR FRAMING LAYOUT

DATE: 6/28/2019
SCALE: 1/8" = 1'-0"

14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-12

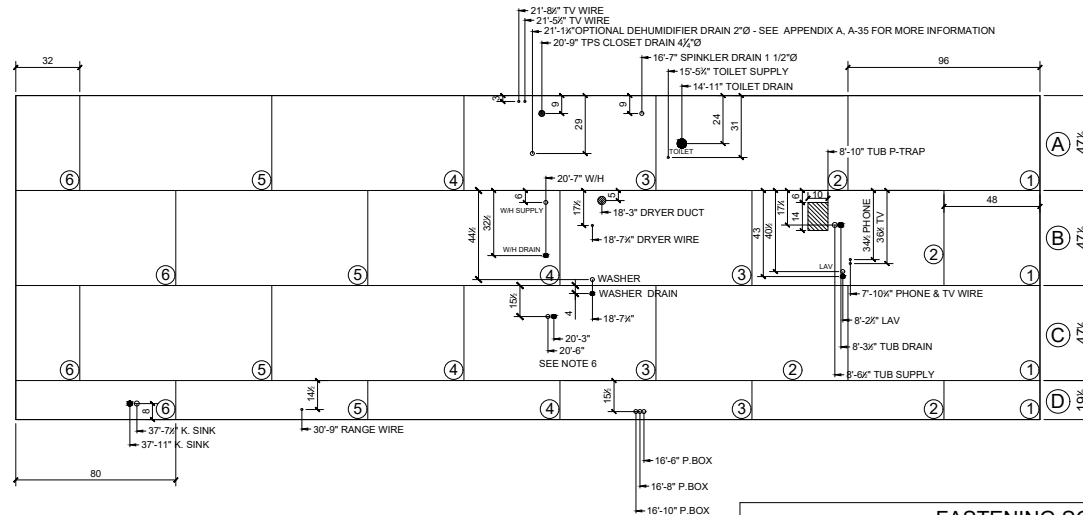

FASTENING SCHEDULE - FLOOR DECKING		
DESCRIPTION	FASTENER	APPLICATION
Decking to Joists	7/16 x 1-3/4 x 16Ga staple	4" edges / 6" field w/ glue
	OR 0.092 x 2" Nail	6" edges / 10" field w/ glue


Legend

- = Plumbing fixture water line hole unless noted.
- = Plumbing fixture drain line hole unless noted.

Floor Decking Notes

- The floor decking shall be 23/32" APA rated (24" o.c. panel span rating), laid out as shown on decking layout.
- Decking shall be Exposure 1 rated.
- Long edges of the panel shall be T&G installed perpendicular to the floor joists.
- PVA (polyvinyl acetate) or equal shall be used as adhesive with 80% coverage.
- Vinyl flooring shall be installed on all interior floors of the home installed per manufacturer's instructions.
- Location of A/C line(s) and condensate drain line hole will vary based on furnace manufacturer. Hole locations to be adjusted based on furnace manufacturer's installation instructions. Provide a 3" PVC sleeve for the furnace HVAC line set and conduit. Extend the sleeve 2" above the floor. A coupler shall be attached to the end of the sleeve and the coupler shall sit on the floor. Coupler shall be attached to the floor. Sleeve to extend down through the bottom board a minimum of 3". After the line set and conduit are installed, seal both sleeve ends with non-expansive foam sealant. Sealant to be compatible with PVC sleeve, conduit and line set. Seal bottom board to sleeve with bottom board tape.
- The run of 19 1/2" wide floor decking may be installed on the curb side (MHU back door side) of the floor decking layout. When this option is utilized, it is the responsibility of the manufacturer to assure all floor decking hole dimensions are adjusted so all floor decking holes remain in the same location.

REV 11-15-23

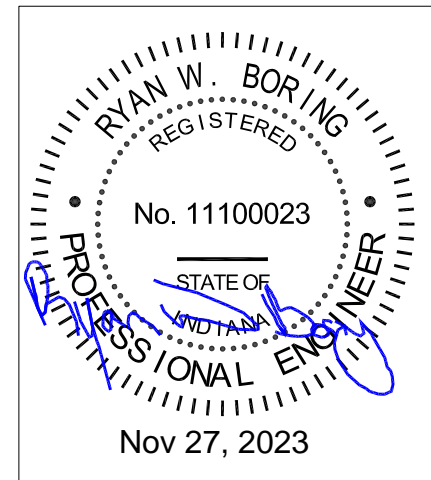

FEMA


COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: FLOOR DECKING LAYOUT

DATE: 6/28/2019
SCALE: 1/8" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-13

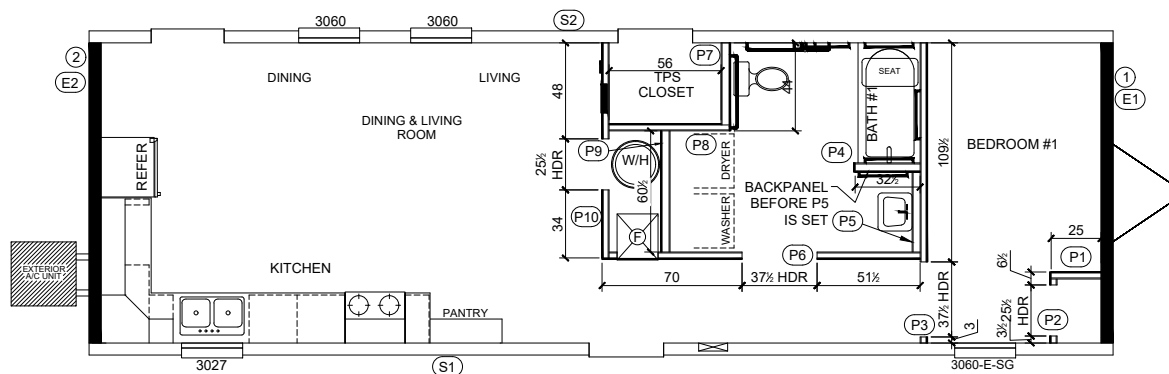

General Notes

1. Gypsum to be jointed above all doors in line with jambs.
2. 1x6 SPF backers may be used only for sprinkler system supports.

TOP PLATE SPLICE

2" x 4" x 20 Ga. Metal Connector Plate, one each side

Min 2x by top plate width by 10" splice block centered over splice, plus or minus 1 inch. Fastened with (6) - 7/16" x 2-1/2" x 15 Ga staples each side of splice.


BOTTOM PLATE SPLICE

2" x 4" x 20 Ga. Metal Connector Plate, one each side

Min 2x by bottom plate width by 10" splice block centered over splice, plus or minus 1 inch. Fastened with (6) - 7/16" x 15 Ga staples (min. 1/2" penetration) each side of splice.

FASTENING SCHEDULE - INTERIOR WALLS

DESCRIPTION	FASTENER	APPLICATION
STUD TO TOP/BOTTOM PLATE	15Ga. x 7/16" x 2-1/2" STAPLES	3 EACH
	or 0.131" X 3" NAIL	2 EACH
DOOR HEADER TO STUD	15Ga. x 7/16" x 2-1/2" STAPLES	3 EACH
	or 0.131" X 3" NAIL	2 EACH
BOTTOM PLATE TO FLOOR	15Ga. x 7/16" x 2-1/2" STAPLES	12" O.C.
	or 0.131" X 3" NAIL	12" O.C.
TOP PLATE TO CEILING	15Ga. x 7/16" x 2-1/2" STAPLES	12" O.C.
	or 0.131" X 3" NAIL	12" O.C.
INTO LAYFLAT	or #8 x 3" WOOD SCREW	12" O.C.
	15Ga. x 7/16" x 2-1/2" STAPLES	12" O.C.
INTO TRUSS	19Ga. x 3/16" x 1-1/4" STAPLES	6" Edges / 12" Field
	or DRYWALL SCREWS	6" Edges / 12" Field
GYPSUM TO STUDS, 80% PVA GLUE	19Ga. x 3/16" x 1-1/4" STAPLES	6" EDGES
	or DRYWALL SCREWS	6" EDGES
ALTERNATE GYPSUM TO STUDS		
100% ONE PART URETHANE GLUE		
GYPSUM TO STUDS	As per product manufacturer's instructions	
STUD TO STUD	15Ga. x 7/16" x 2-1/2" STAPLES	12" O.C.
	or 0.131" X 3" NAIL	12" O.C.
	or #8 x 3" WOOD SCREW	12" O.C.
LAYFLAT TO TOP/BOTTOM PLATE	15Ga. x 7/16" x 2-1/2" STAPLES	2 EACH
	or 0.131" X 3" NAIL	
INTERIOR WALL TO SIDEWALL	#8 SCREWS, MIN. 1" PENETRATION	16" O.C.
INTERIOR WALL TO INTERIOR WALL	.131" NAIL, MIN. 1" PENTRATION	16" O.C.
BACKERS TO STUD - BACKERS SHALL BE #3 SPF MIN. AND SIZE AS SHOWN ON DRAWINGS.	15Ga. x 7/16" x 2-1/2" STAPLES (END GRAIN ONLY)	6 EACH
	OR .131" X 3" NAIL (END GRAIN OR TOED)	3 EACH

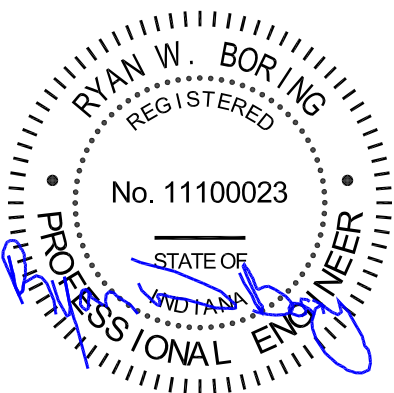

Nov 27, 2023

REV 06-03-22

FEMA


COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: INTERIOR WALL AND
BACK PANEL LAYOUT (HORIZONTAL)

DATE: 6/28/2019
SCALE: 1/8" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)


DRAWING NO.
14F1-14

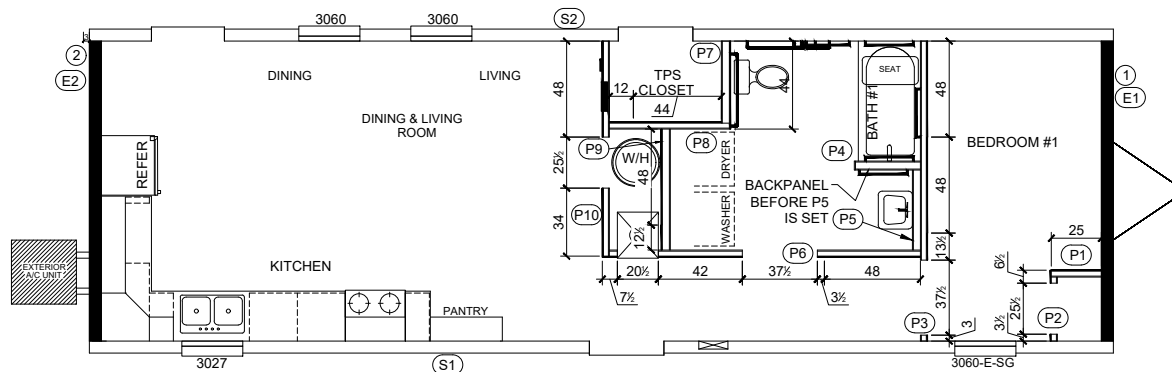

General Notes


1. Gypsum to be jointed above all doors in line with jambs.
2. 1x6 SPF backers may be used only for sprinkler system supports.

TOP PLATE SPLICE

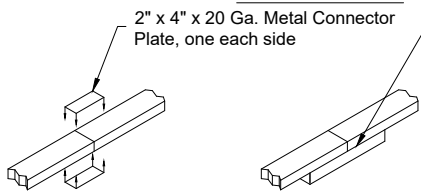

Min 2x by top plate width by 10" splice block centered over splice, plus or minus 1 inch. Fastened with (6) - 7/16" x 2-1/2" x 15 Ga staples each side of splice.


BOTTOM PLATE SPLICE

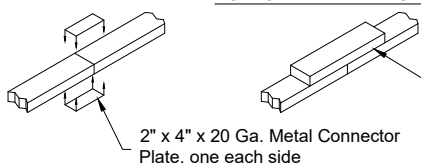

Min 2x by bottom plate width by 10" splice block centered over splice, plus or minus 1 inch. Fastened with (6) - 7/16" x 15 Ga staples (min. 1/2" penetration) each side of splice.

FASTENING SCHEDULE - INTERIOR WALLS

DESCRIPTION	FASTENER	APPLICATION
STUD TO TOP/BOTTOM PLATE	15Ga. x 7/16" x 2-1/2" STAPLES	3 EACH
	or 0.131" X 3" NAIL	2 EACH
DOOR HEADER TO STUD	15Ga. x 7/16" x 2-1/2" STAPLES	3 EACH
	or 0.131" X 3" NAIL	2 EACH
BOTTOM PLATE TO FLOOR	15Ga. x 7/16" x 2-1/2" STAPLES	12" O.C.
	or 0.131" X 3" NAIL	12" O.C.
TOP PLATE TO CEILING INTO LAYFLAT INTO TRUSS	or #8 x 3" WOOD SCREW	12" O.C.
	15Ga. x 7/16" x 2-1/2" STAPLES	12" O.C.
	or 0.131" X 3" NAIL	12" O.C.
GYPSUM TO STUDS, 80% PVA GLUE	or #8 x 3" WOOD SCREW	12" O.C.
	19Ga. x 3/16" x 1-1/4" STAPLES	6" Edges / 12" Field
ALTERNATE GYPSUM TO STUDS 100% ONE PART URETHANE GLUE	or DRYWALL SCREWS	6" Edges / 12" Field
	19Ga. x 3/16" x 1-1/4" STAPLES	6" EDGES
GYPSUM TO STUDS	or DRYWALL SCREWS	6" EDGES
	As per product manufacturer's instructions	
STUD TO STUD	15Ga. x 7/16" x 2-1/2" STAPLES	12" O.C.
	or 0.131" X 3" NAIL	12" O.C.
	or #8 x 3" WOOD SCREW	12" O.C.
LAYFLAT TO TOP/BOTTOM PLATE	15Ga. x 7/16" x 2-1/2" STAPLES	2 EACH
	or 0.131" X 3" NAIL	
INTERIOR WALL TO SIDEWALL	#8 SCREWS, MIN. 1" PENETRATION	16" O.C.
INTERIOR WALL TO INTERIOR WALL	.131" NAIL, MIN. 1" PENTRATION	16" O.C.
BACKERS TO STUD - BACKERS SHALL BE #3 SPF MIN. AND SIZE AS SHOWN ON DRAWINGS.	15Ga. x 7/16" x 2-1/2" STAPLES (END GRAIN ONLY)	6 EACH
	OR .131" X 3" NAIL (END GRAIN OR TOED)	3 EACH

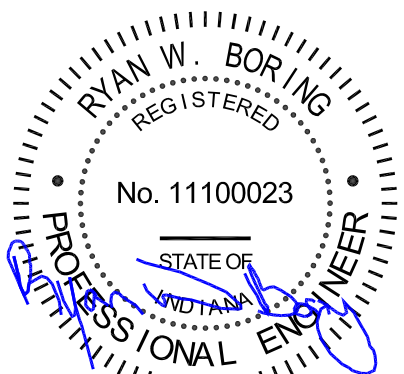

Nov 27, 2023

REV 06-03-22

FEMA



COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: INTERIOR WALL AND BACK
PANEL LAYOUT (VERTICAL) - OPTIONAL


DATE: 6/28/2019
SCALE: 1/8" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-15

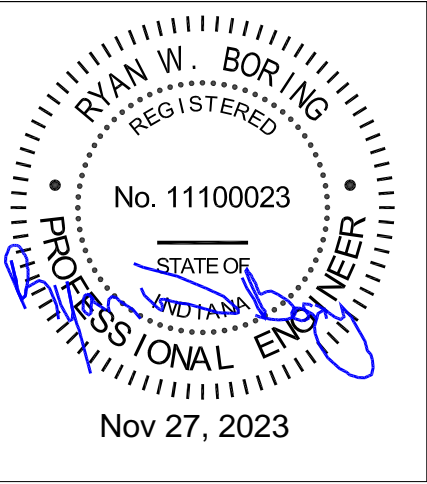

VERTICAL WALL BOARD PANEL BREAKS

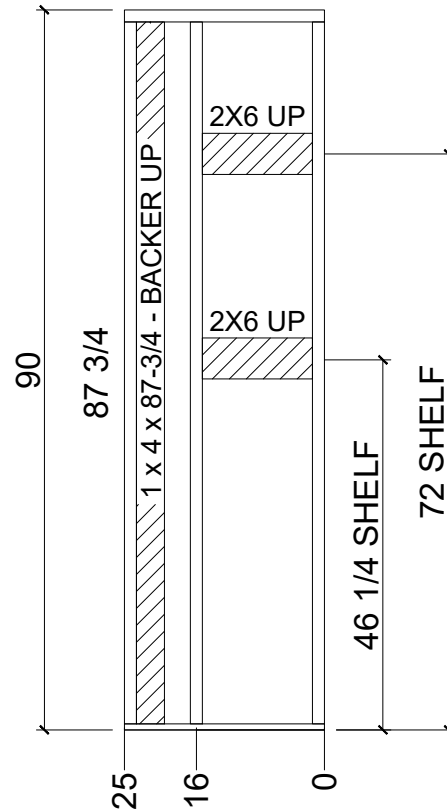

P1

Interior Wall Framing Notes

1. All interior walls are 2 x 3 (unless noted) #2 SPF at 16" maximum o.c., except washer wall.
2. Top plates to be 2 x 3 (unless noted) #2 SPF.
3. Bottom plates to be 1 x 3 SPF (unless noted).
4. Wall interiors shall be faced with 1/2" Gold Bond XP gypsum board with paint or equivalent installed per ASTM C840 and GA-216.

5. Gypsum board shall run vertically or horizontally along the entire height of wall interiors. See fastening schedule.
6. Wall panel trim (1/8" x 2") shall be used to cover the gypsum panel joints. Trim fastened to only one of the two gypsum panels into stud, 10" O.C. fastener spacing.
7. Walls shall be sanded as needed to assure a smooth finish (level 3 finish minimum)
8. Paint shall be any latex paint. See FEMA spec.

REV 6-18-21

FEMA


COMPANY:
Manufactured Housing Units
Federal Emergency Management Agency

TITLE:
INTERIOR WALLS


DATE:
6/28/2019
SCALE:
1/2" = 1'-0"

VERSION:
14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-16.1



VERTICAL WALL BOARD PANEL BREAKS

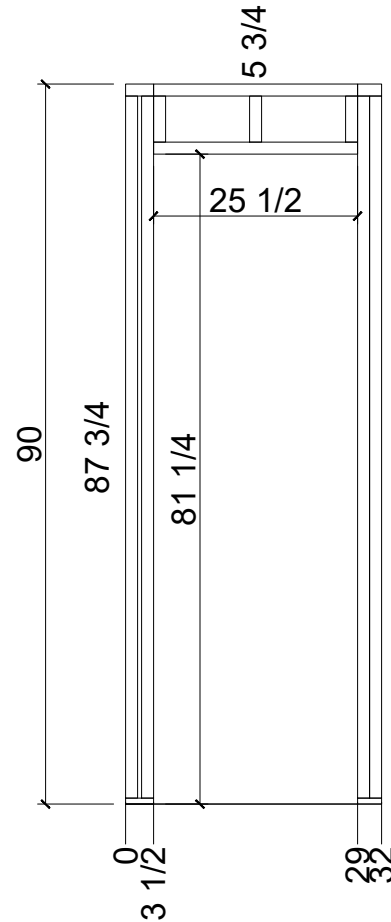

P2

Interior Wall Framing Notes

1. All interior walls are 2 x 3 (unless noted) #2 SPF at 16" maximum o.c., except washer wall.
2. Top plates to be 2 x 3 (unless noted) #2 SPF.
3. Bottom plates to be 1 x 3 SPF (unless noted).
4. Wall interiors shall be faced with 1/2" Gold Bond XP gypsum board with paint or equivalent installed per ASTM C840 and GA-216.

5. Gypsum board shall run vertically or horizontally along the entire height of wall interiors. See fastening schedule.
6. Wall panel trim (1/8" x 2") shall be used to cover the gypsum panel joints. Trim fastened to only one of the two gypsum panels into stud, 10" O.C. fastener spacing.
7. Walls shall be sanded as needed to assure a smooth finish (level 3 finish minimum)
8. Paint shall be any latex paint. See FEMA spec.

REV 11-29-21

FEMA



COMPANY:
Manufactured Housing Units
Federal Emergency Management Agency

TITLE:
INTERIOR WALLS

DATE:
6/28/2019
SCALE:
1/2" = 1'-0"

VERSION:
14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-16.2

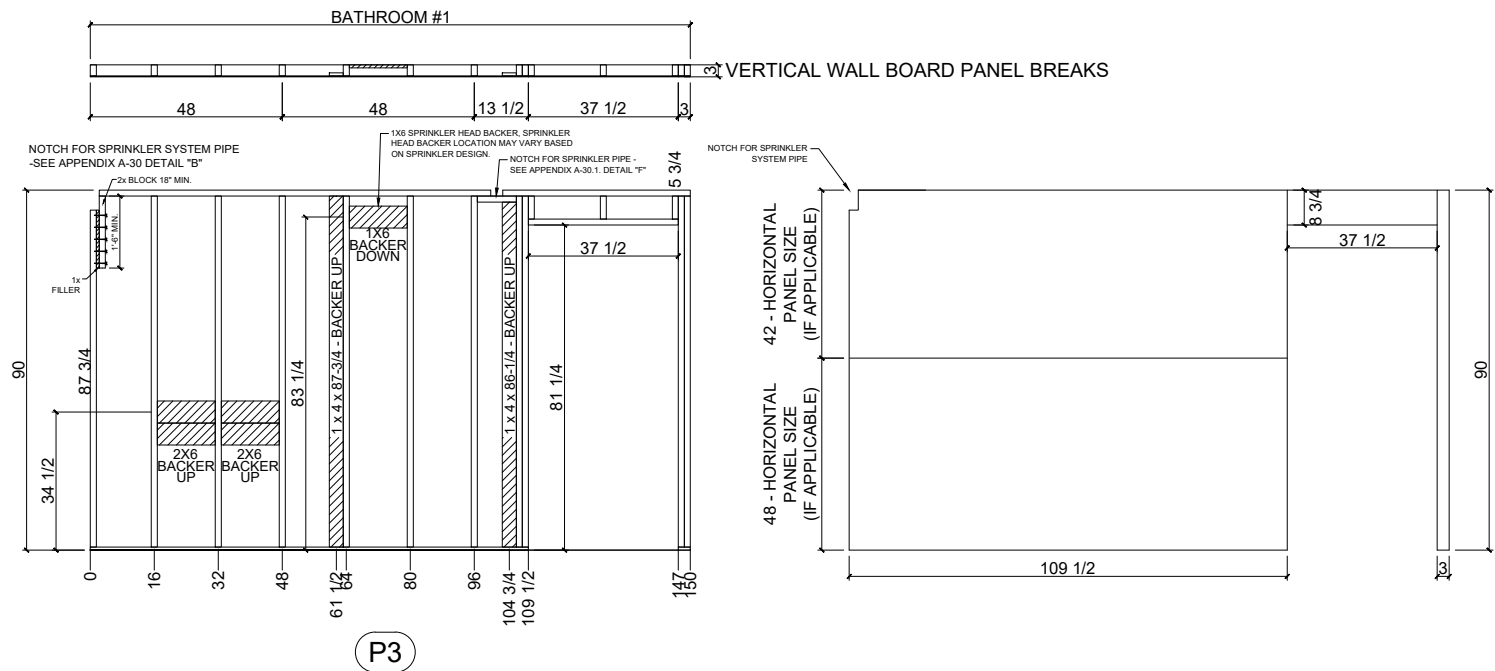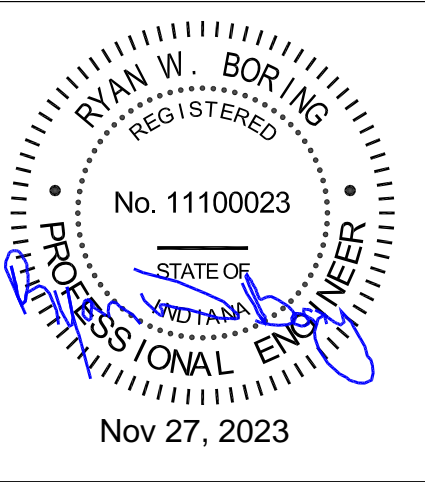

Interior Wall Framing Notes

- All interior walls are 2 x 3 (unless noted) #2 SPF at 16" maximum o.c., except washer wall.
- Top plates to be 2 x 3 (unless noted) #2 SPF.
- Bottom plates to be 1 x 3 SPF (unless noted).
- Wall interiors shall be faced with 1/2" Gold Bond XP gypsum board with paint or equivalent installed per ASTM C840 and GA-216.

- Gypsum board shall run vertically or horizontally along the entire height of wall interiors. See fastening schedule.
- Wall panel trim (1/8" x 2") shall be used to cover the gypsum panel joints. Trim fastened to only one of the two gypsum panels into stud, 10" O.C. fastener spacing.
- Walls shall be sanded as needed to assure a smooth finish (level 3 finish minimum)
- Paint shall be any latex paint. See FEMA spec.

REV 02-25-22

FEMA



COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: INTERIOR WALLS

DATE: 6/28/2019
SCALE: 1/4" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-16.3

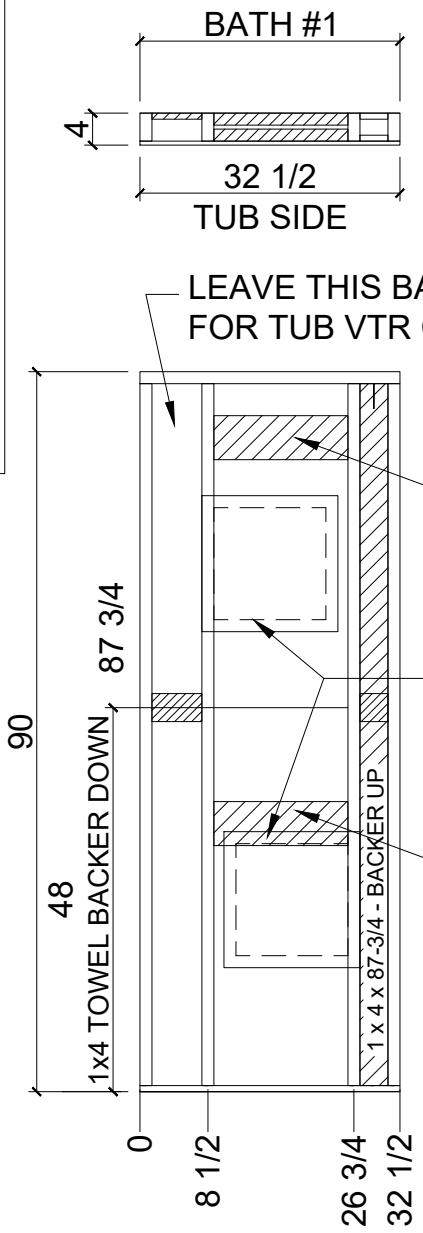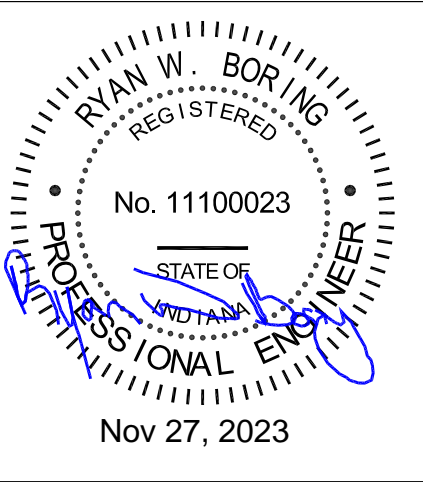

VERTICAL WALL BOARD PANEL BREAKS


SHOWER ACCESS
PANEL TO BE
LOCATED AT HEIGHT
TO PROVIDE ACCESS
TO SHOWER HEAD

2X6 BACKER UP - LOCATE
PER ADJUSTABLE SHOWER
HEAD MFR. REQUIREMENTS

14" x 14" ACCESS PANEL IN GYPSUM (DOWN)
(OATLEY 34056 OR EQUIVALENT)
CUT GYPSUM ACCESS PANELS ARE
NOT ACCEPTABLE.

TUB DIVERTER HEIGHT WILL VARY
PER MANUFACTURER. ADJUST
HEIGHT OF BACKER TO AVOID
BACKER HITTING TUB DIVERTER.

2x4 WALL
2x4 TOP PLATE
2x4 STUDS
1x4 TOP PLATE

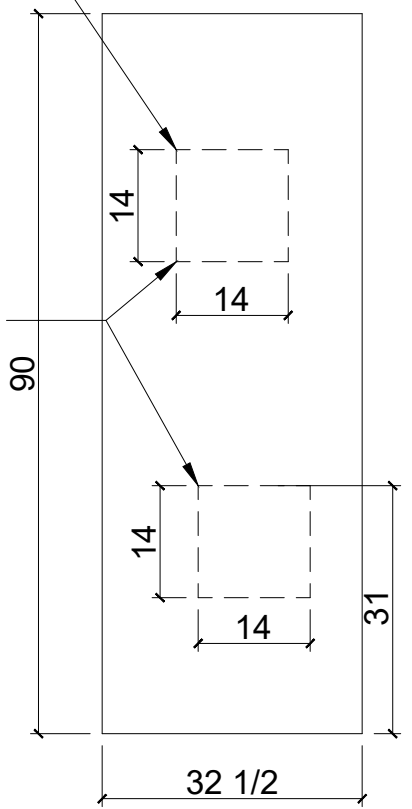

P4

Interior Wall Framing Notes

1. All interior walls are 2 x 3 (unless noted) #2 SPF at 16" maximum o.c., except washer wall.
2. Top plates to be 2 x 3 (unless noted) #2 SPF.
3. Bottom plates to be 1 x 3 SPF (unless noted).
4. Wall interiors shall be faced with 1/2" Gold Bond XP gypsum board with paint or equivalent installed per ASTM C840 and GA-216.

5. Gypsum board shall run vertically or horizontally along the entire height of wall interiors. See fastening schedule.
6. Wall panel trim (1/8" x 2") shall be used to cover the gypsum panel joints. Trim fastened to only one of the two gypsum panels into stud, 10" O.C. fastener spacing.
7. Walls shall be sanded as needed to assure a smooth finish (level 3 finish minimum)
8. Paint shall be any latex paint. See FEMA spec.

REV 06-03-22

FEMA



Manufactured Housing Units
Federal Emergency Management Agency

INTERIOR WALLS


DATE: 6/28/2019
SCALE: 1/2" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-16.4

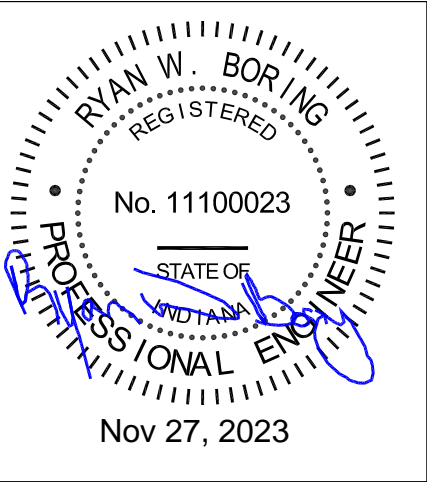

VERTICAL WALL BOARD PANEL BREAKS

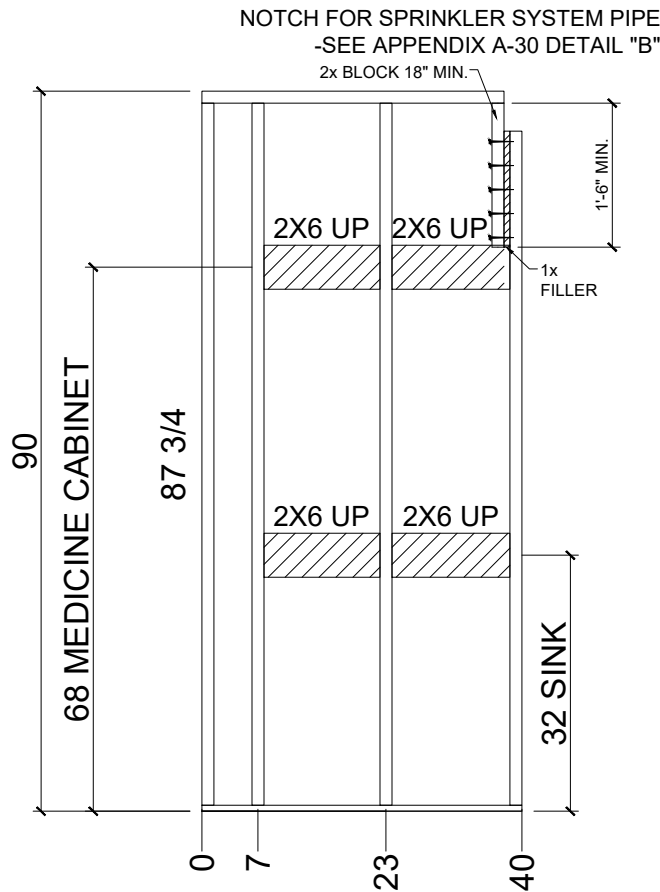

Note

This wall not to be paneled on framing jig. To be paneled after floor plumbing installed.

2x4 WALL

2x4 TOP PLATE

2x4 STUDS

1x4 TOP PLATE

Interior Wall Framing Notes

1. All interior walls are 2 x 3 (unless noted) #2 SPF at 16" maximum o.c., except washer wall.
2. Top plates to be 2 x 3 (unless noted) #2 SPF.
3. Bottom plates to be 1 x 3 SPF (unless noted).
4. Wall interiors shall be faced with 1/2" Gold Bond XP gypsum board with paint or equivalent installed per ASTM C840 and GA-216.

5. Gypsum board shall run vertically or horizontally along the entire height of wall interiors. See fastening schedule.
6. Wall panel trim (1/8" x 2") shall be used to cover the gypsum panel joints. Trim fastened to only one of the two gypsum panels into stud, 10" O.C. fastener spacing.
7. Walls shall be sanded as needed to assure a smooth finish (level 3 finish minimum)
8. Paint shall be any latex paint. See FEMA spec.

REV 11-15-23

FEMA



COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: INTERIOR WALLS


DATE: 6/28/2019
SCALE: 1/2" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-16.5

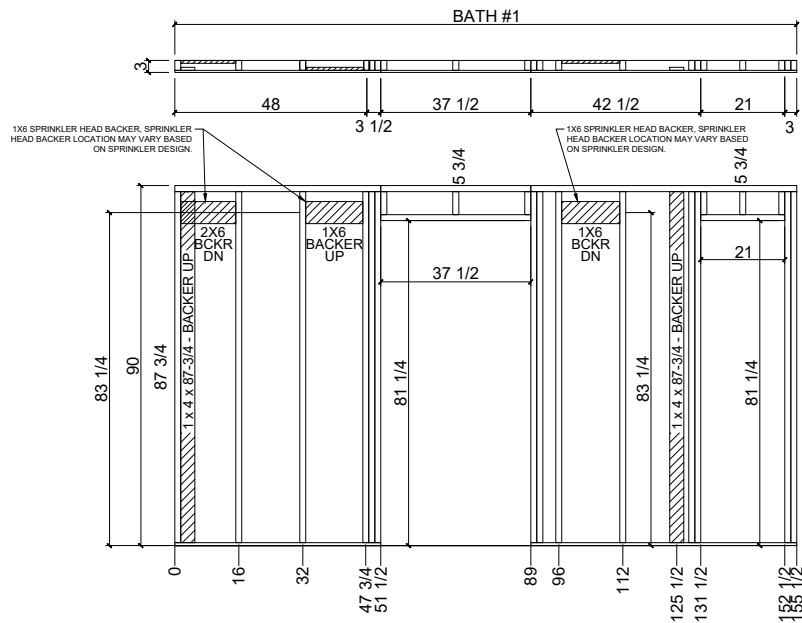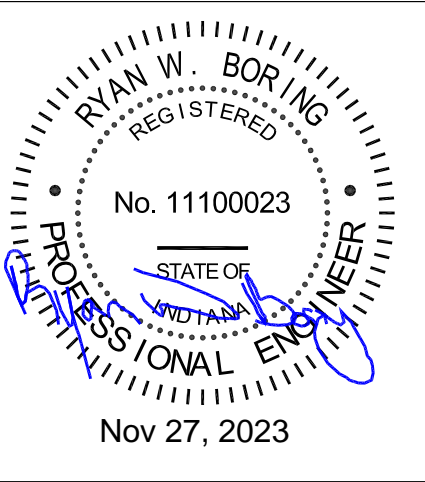

VERTICAL WALL BOARD PANEL BREAKS

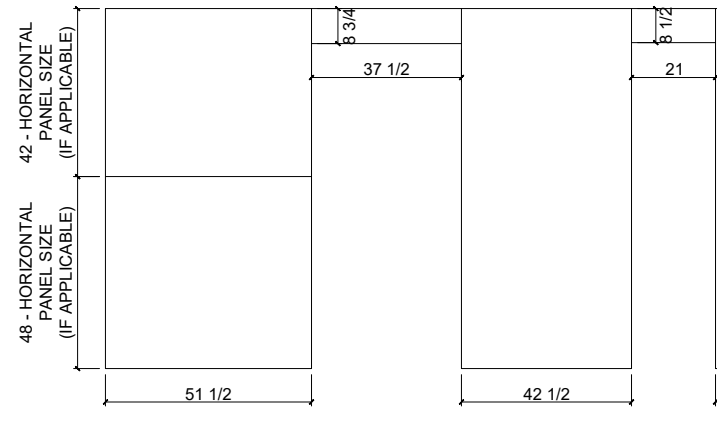

Interior Wall Framing Notes

1. All interior walls are 2 x 3 (unless noted) #2 SPF at 16" maximum o.c., except washer wall.
2. Top plates to be 2 x 3 (unless noted) #2 SPF.
3. Bottom plates to be 1 x 3 SPF (unless noted).
4. Wall interiors shall be faced with 1/2" Gold Bond XP gypsum board with paint or equivalent installed per ASTM C840 and GA-216.

5. Gypsum board shall run vertically or horizontally along the entire height of wall interiors. See fastening schedule.
6. Wall panel trim (1/8" x 2") shall be used to cover the gypsum panel joints. Trim fastened to only one of the two gypsum panels into stud, 10" O.C. fastener spacing.
7. Walls shall be sanded as needed to assure a smooth finish (level 3 finish minimum)
8. Paint shall be any latex paint. See FEMA spec.

REV 02-25-22

FEMA



COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: INTERIOR WALLS

DATE: 6/28/2019
SCALE: 1/4" = 1'-0"


VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-16.6

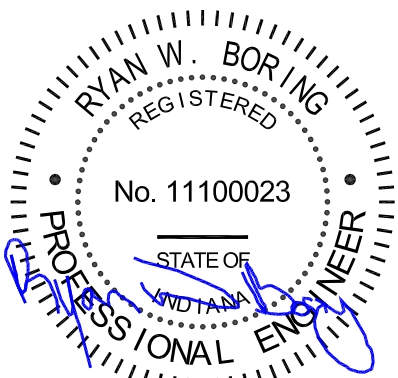


VERTICAL WALL BOARD PANEL BREAKS

TPS CLOSET

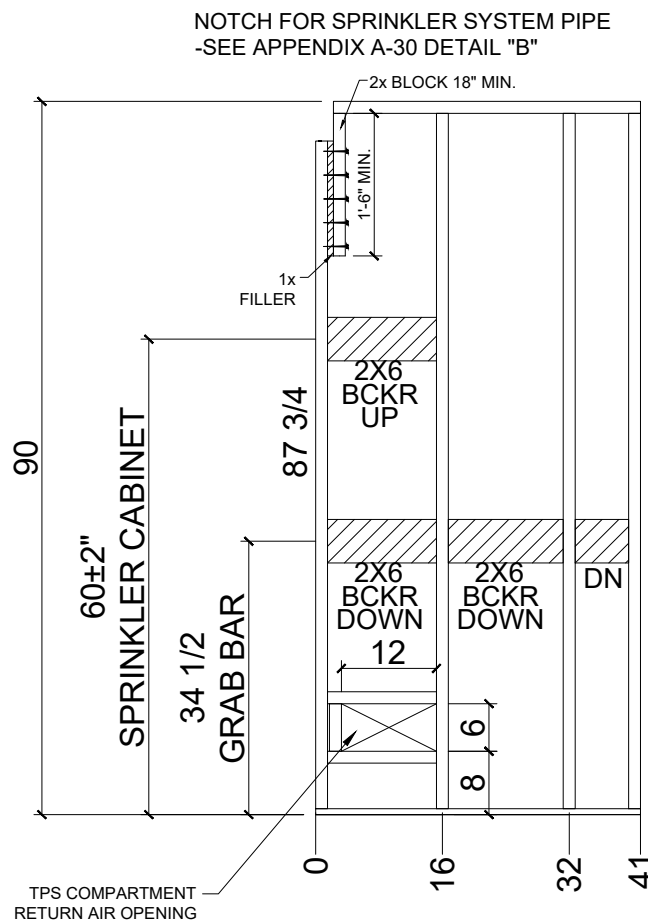

2x4 WALL
2x4 TOP PLATE
2x4 STUDS
1x4 TOP PLATE

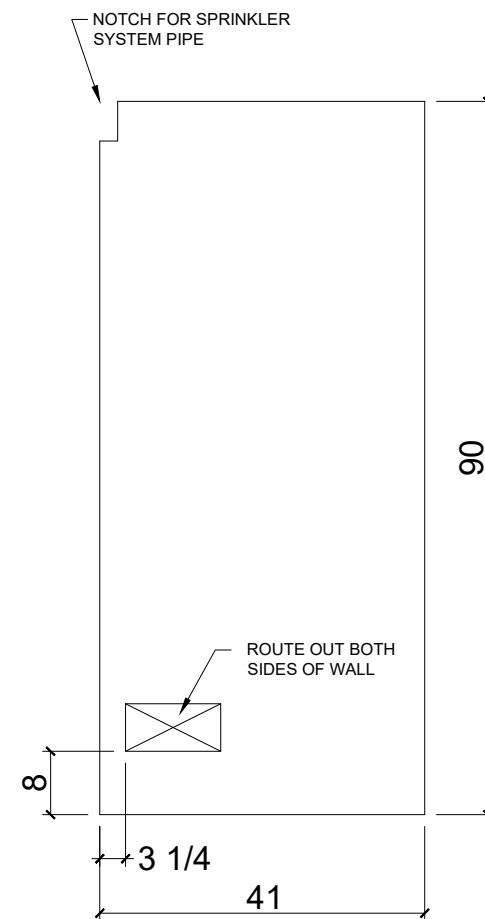

P7

Interior Wall Framing Notes

- All interior walls are 2 x 3 (unless noted) #2 SPF at 16" maximum o.c., except washer wall.
- Top plates to be 2 x 3 (unless noted) #2 SPF.
- Bottom plates to be 1 x 3 SPF (unless noted).
- Wall interiors shall be faced with 1/2" Gold Bond XP gypsum board with paint or equivalent installed per ASTM C840 and GA-216.

- Gypsum board shall run vertically or horizontally along the entire height of wall interiors. See fastening schedule.
- Wall panel trim (1/8" x 2") shall be used to cover the gypsum panel joints. Trim fastened to only one of the two gypsum panels into stud, 10" O.C. fastener spacing.
- Walls shall be sanded as needed to assure a smooth finish (level 3 finish minimum)
- Paint shall be any latex paint. See FEMA spec.

REV 11-29-21

FEMA


COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: INTERIOR WALLS


DATE: 6/28/2019
SCALE: 1/2" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-16.7


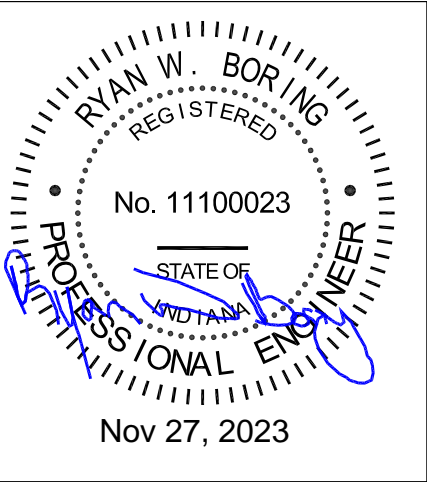


BATH #1



W/H / DRYER

VERTICAL WALL BOARD PANEL BREAKS

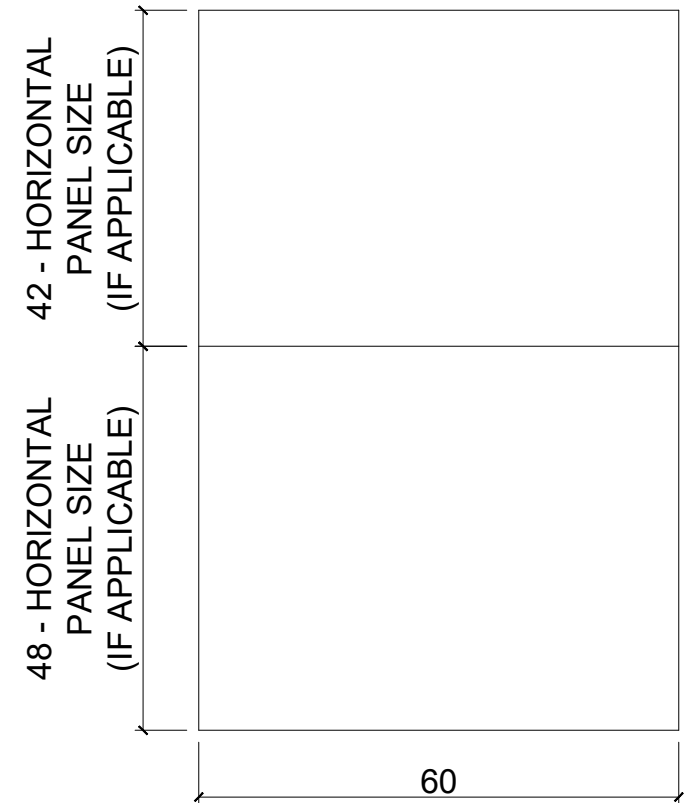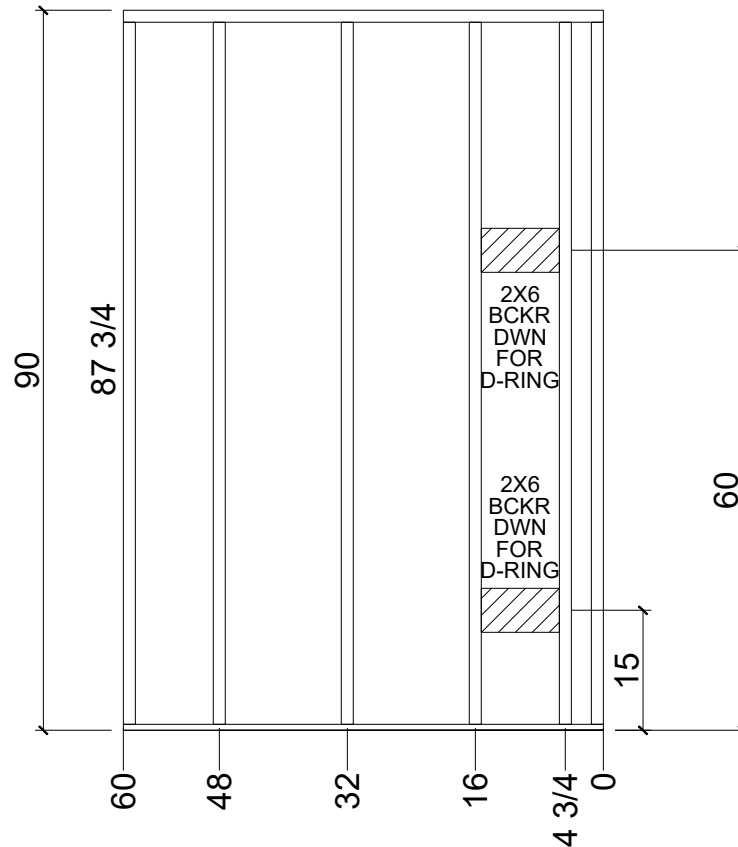

Interior Wall Framing Notes

1. All interior walls are 2 x 3 (unless noted) #2 SPF at 16" maximum o.c., except washer wall.
2. Top plates to be 2 x 3 (unless noted) #2 SPF.
3. Bottom plates to be 1 x 3 SPF (unless noted).
4. Wall interiors shall be faced with 1/2" Gold Bond XP gypsum board with paint or equivalent installed per ASTM C840 and GA-216.

5. Gypsum board shall run vertically or horizontally along the entire height of wall interiors. See fastening schedule.
6. Wall panel trim (1/8" x 2") shall be used to cover the gypsum panel joints. Trim fastened to only one of the two gypsum panels into stud, 10" O.C. fastener spacing.
7. Walls shall be sanded as needed to assure a smooth finish (level 3 finish minimum)
8. Paint shall be any latex paint. See FEMA spec.

REV 11-29-21

FEMA


COMPANY:
Manufactured Housing Units
Federal Emergency Management Agency

TITLE:
INTERIOR WALLS

DATE:
6/28/2019
SCALE:
1/2" = 1'-0"

VERSION:
14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-16.8

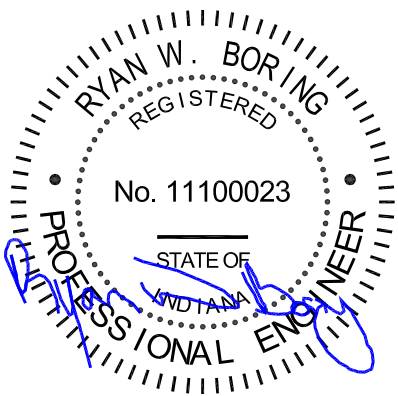


Nail on washer box size will vary. Manufacturer to verify size from the washer box vendor that will be used.

Standpipe cannot be more than 30" above the p-trap weir.


6"x9" louvered access panel (Oatley 34247 or equivalent) for recessed autovent

14"x14" washer p-trap access panel (Oatley 34056 or equivalent) for p-trap.

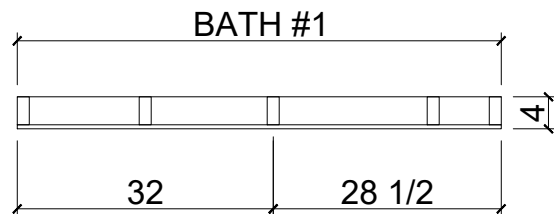

W/H SIDE

VERTICAL WALL BOARD PANEL BREAKS

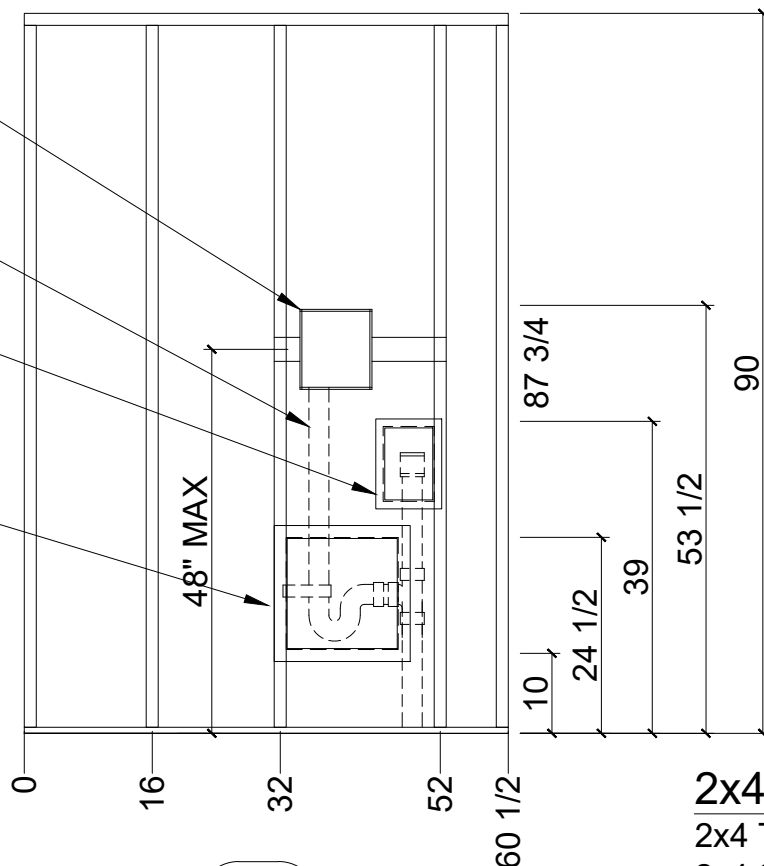


P9

42 - HORIZONTAL
PANEL SIZE
(IF APPLICABLE)

48 - HORIZONTAL
PANEL SIZE
(IF APPLICABLE)

2x4 WALL
2x4 TOP PLATE
2x4 STUDS
1x4 TOP PLATE

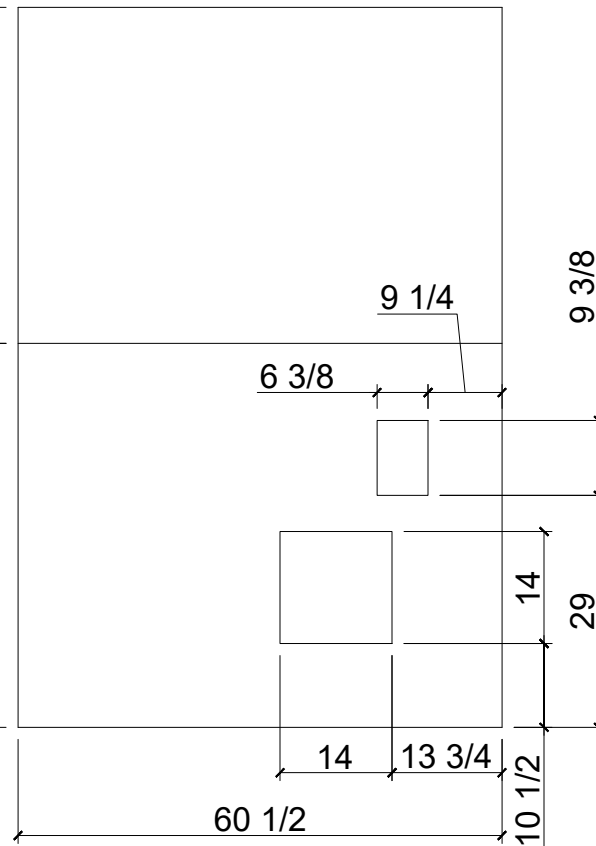

Interior Wall Framing Notes

- All interior walls are 2 x 3 (unless noted) #2 SPF at 16" maximum o.c., except washer wall.
- Top plates to be 2 x 3 (unless noted) #2 SPF.
- Bottom plates to be 1 x 3 SPF (unless noted).
- Wall interiors shall be faced with 1/2" Gold Bond XP gypsum board with paint or equivalent installed per ASTM C840 and GA-216.

- Gypsum board shall run vertically or horizontally along the entire height of wall interiors. See fastening schedule.
- Wall panel trim (1/8" x 2") shall be used to cover the gypsum panel joints. Trim fastened to only one of the two gypsum panels into stud, 10" O.C. fastener spacing.
- Walls shall be sanded as needed to assure a smooth finish (level 3 finish minimum)
- Paint shall be any latex paint. See FEMA spec.

REV 11-29-21

FEMA


COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: INTERIOR WALLS


DATE: 6/28/2019
SCALE: 1/2" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)


DRAWING NO.
14F1-16.9

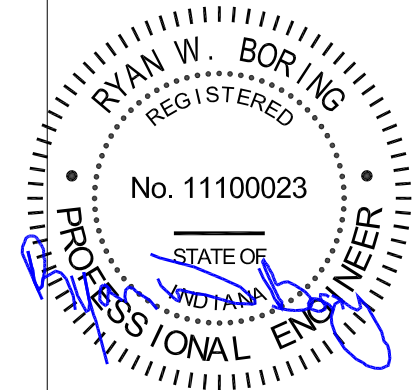

Nov 27, 2023

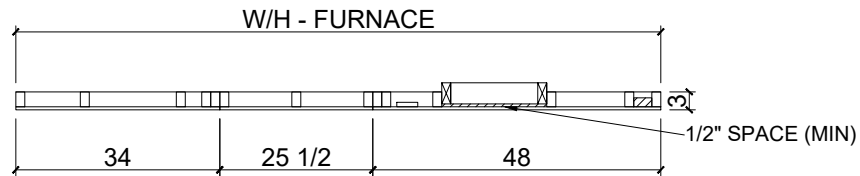

VERTICAL WALL BOARD PANEL BREAKS

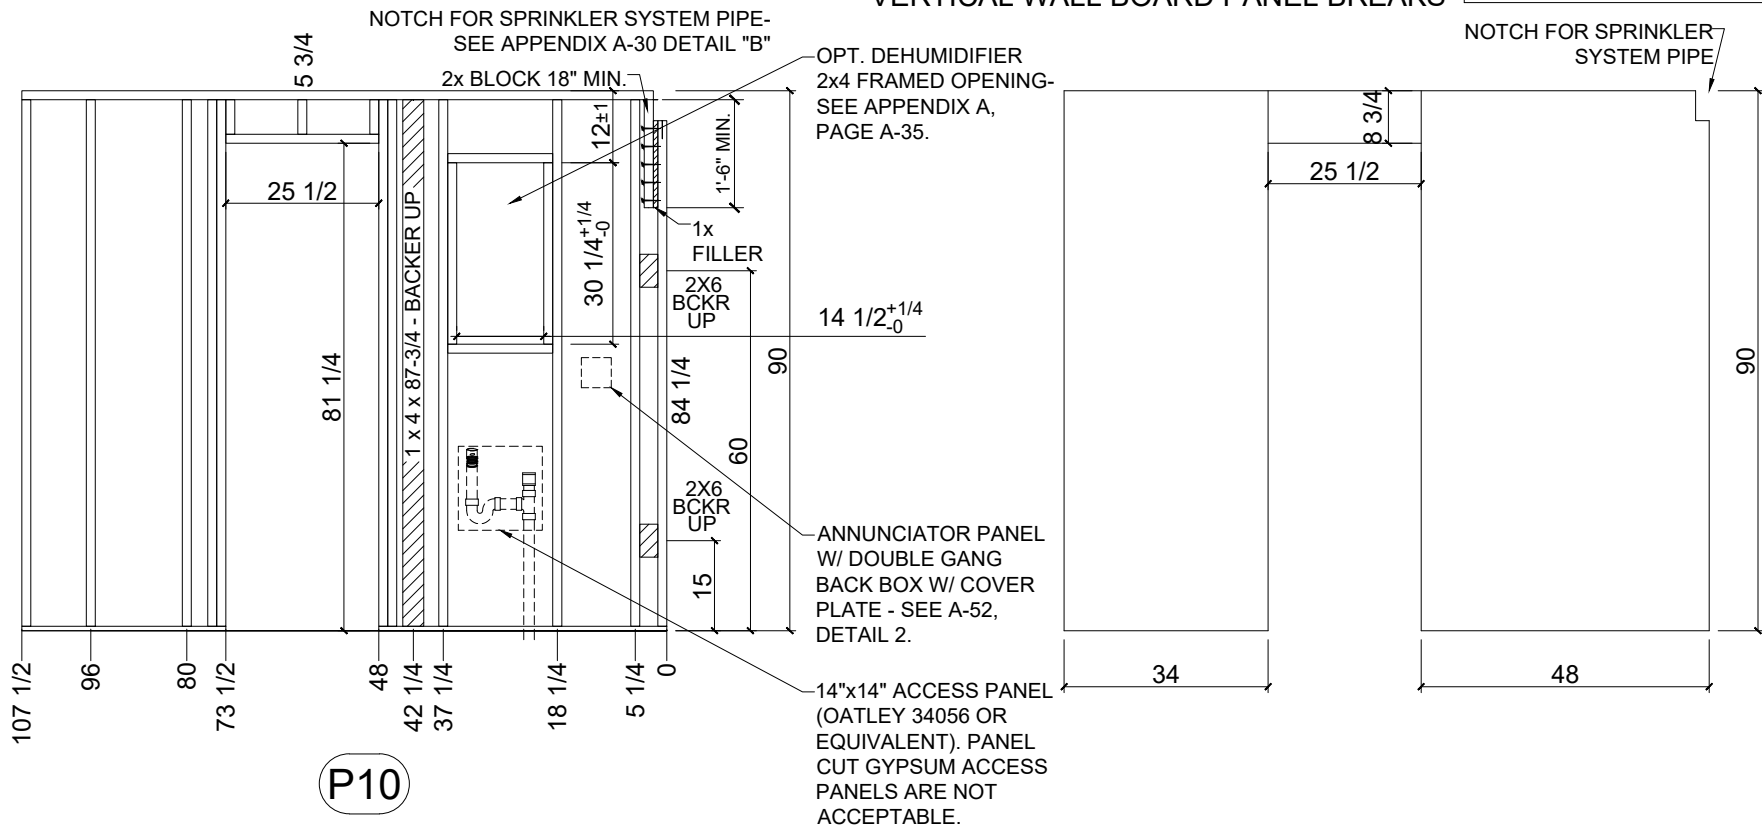

Interior Wall Framing Notes

1. All interior walls are 2 x 3 (unless noted) #2 SPF at 16" maximum o.c., except washer wall.
2. Top plates to be 2 x 3 (unless noted) #2 SPF.
3. Bottom plates to be 1 x 3 SPF (unless noted).
4. Wall interiors shall be faced with 1/2" Gold Bond XP gypsum board with paint or equivalent installed per ASTM C840 and GA-216.
5. Gypsum board shall run vertically or horizontally along the entire height of wall interiors. See fastening schedule.
6. Wall panel trim (1/8" x 2") shall be used to cover the gypsum panel joints. Trim fastened to only one of the two gypsum panels into stud, 10" O.C. fastener spacing.
7. Walls shall be sanded as needed to assure a smooth finish (level 3 finish minimum)
8. Paint shall be any latex paint. See FEMA spec.
9. For optional dehumidifier wall framing see Appendix A, A-35.

REV 11-15-23

FEMA


COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: INTERIOR WALLS


DATE: 6/28/2019
SCALE: 3/8" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-16.10

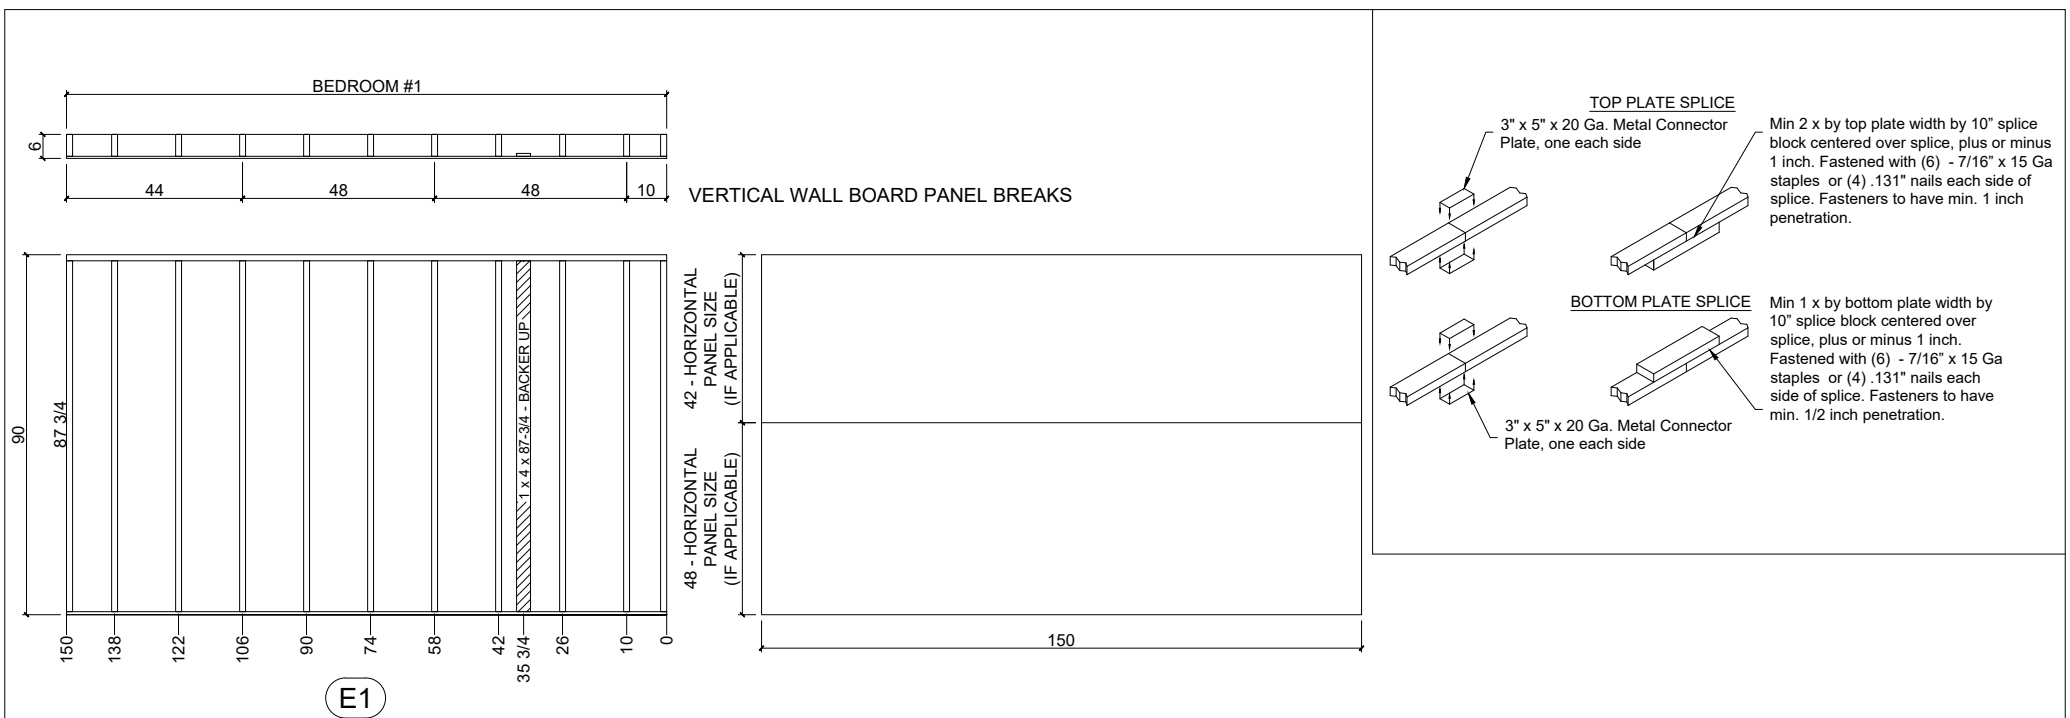

E1

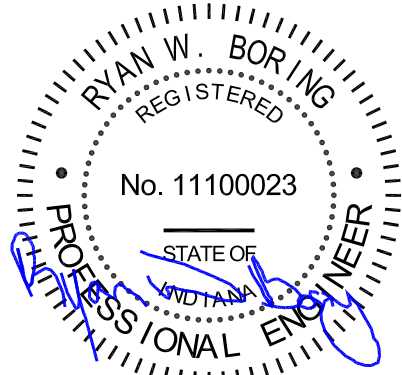

Nov 27, 2023

Wall Framing Notes

1. The exterior wall framing shall be 2 x 6 nominal #2 SPF at 16" o.c.
2. Wall framing shall be 7'-6" from floor to ceiling.
3. Sidewall top plates shall be single 2 x 6 nominal #2 SPF.
4. Sidewall bottom plate shall be single 1 x 6 nominal SPF.
5. All major joints - wall to wall, wall to ceiling, wall to floor shall be caulked or gasketed to prevent air infiltration.
6. The wall insulation shall be kraft backed R-19 and will be installed without voids, gaps, or compression.
7. 7/16" APA-rated 24/16 index oriented strand board (OSB) shall be attached to the wall studs.
8. The walls shall be painted with latex, low VOC paint.
9. Housewrap applied over exterior sheathing.
10. All exterior penetrations (doors, vents, lights, outlets, etc.) shall be flashed with ice and water shield 12" wide around penetration.
11. Wall interiors shall be faced with 1/2" Gold Bond XP gypsum board with paint or equivalent installed per ASTM C840 and GA-216.

FASTENING SCHEDULE - EXTERIOR WALLS		
DESCRIPTION	FASTENER	APPLICATION
STUD TO PLATE	15Ga. x 7/16" x 2-1/2" STAPLES	7 EACH
	or 0.131" X 3" NAIL	4 EACH
BOTTOM PLATE TO FLOOR	0.131" X 3" NAIL	6" O.C.
	or #8 x 3" WOOD SCREW	6" O.C.
TOP PLATE TO TRUSS	0.131" X 3" NAIL	3 EACH
	or #8 x 4" WOOD SCREW	3 EACH
HEADER TO STUD	15Ga. x 7/16" x 2-1/2" STAPLES	9 EACH PLY
	or 0.131" X 3" NAIL	6 EACH PLY
SILL MEMBER (@ OPENING) TO STUD	15Ga. x 7/16" x 2-1/2" STAPLES	6 EACH
	or 0.131" X 3" NAIL	4 EACH
MULTIPLE STUDS (TO EACH OTHER)	15Ga. x 7/16" x 2-1/2" STAPLES	12" O.C.
	or 0.131" X 3" NAIL	12" O.C.
MULTIPLE FLAT HEADER MEMBERS - (2) ROWS OF FASTENERS 80% GLUE COVERAGE	15Ga. x 7/16" x 2-1/2" STAPLES	6" O.C.
	or 0.131" X 3" NAIL	6" O.C.
CRIPPLES TO HEADER, SILL AND PLATES	15Ga. x 7/16" x 2-1/2" STAPLES	4 EACH
	or 0.131" X 3" NAIL	3 EACH
GYPSUM TO STUDS , 80% PVA GLUE	19Ga. x 3/16" x 1-1/4" STAPLES	6" Edges / 12" Field
	or DRYWALL SCREWS	6" Edges / 12" Field
ALTERNATE GYPSUM TO STUDS 100% ONE PART URETHANE GLUE	19Ga. x 3/16" x 1-1/4" STAPLES	6" EDGES
	or DRYWALL SCREWS	6" EDGES
EXTERIOR SIDING	AS PER TEST REPORT REQUIREMENTS	
LAYFLATS TO TOP/BOTTOM PLATE	15 Ga. x 7/16" x 2-1/2" STAPLES	2 EACH
OSB TO STUDS	0.131" X 2" NAIL	6" Edges / 6" Field Unless Noted Elsewhere
BACKERS TO STUD - BACKERS SHALL BE #3 SPF MIN. AND SIZE AS SHOWN ON DRAWINGS.	15Ga. x 7/16" x 2-1/2" STAPLES (END GRAIN ONLY)	6 EACH
	OR .131" X 3" NAIL (END GRAIN OR TOED)	3 EACH

REV 11-15-23

FEMA




COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: ENDWALL FRAMING
&
INTERIOR SHEATHING

DATE: 6/28/2019
SCALE: 1/4" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-17.1

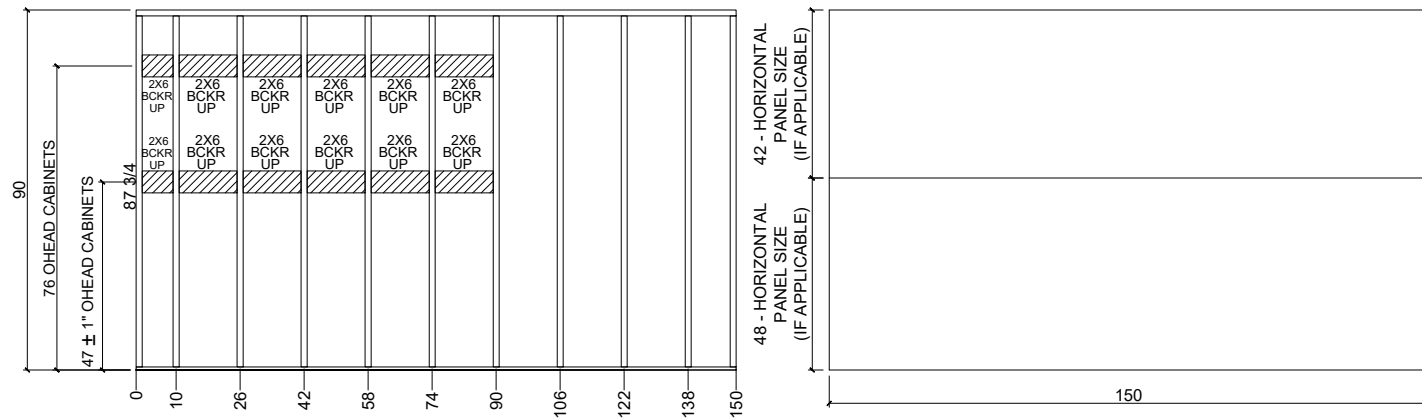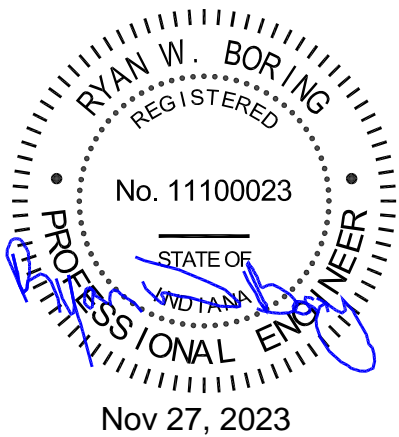

E2

Wall Framing Notes

1. The exterior wall framing shall be 2 x 6 nominal #2 SPF at 16" o.c.
2. Wall framing shall be 7'-6" from floor to ceiling.
3. Sidewall top plates shall be single 2 x 6 nominal #2 SPF.
4. Sidewall bottom plate shall be single 1 x 6 nominal SPF.
5. All major joints - wall to wall, wall to ceiling, wall to floor shall be caulked or gasketed to prevent air infiltration.
6. The wall insulation shall be kraft backed R-19 and will be installed without voids, gaps, or compression.
7. 7/16" APA-rated 24/16 index oriented strand board (OSB) shall be attached to the wall studs.
8. The walls shall be painted with latex, low VOC paint.
9. Housewrap applied over exterior sheathing.
10. All exterior penetrations (doors, vents, lights, outlets, etc.) shall be flashed with ice and water shield 12" wide around penetration.
11. Wall interiors shall be faced with 1/2" Gold Bond XP gypsum board with paint or equivalent installed per ASTM C840 and GA-216.

REV 11-15-23

FEMA

COMPANY:
Manufactured Housing Units
Federal Emergency Management Agency

TITLE:
ENDWALL FRAMING
&
INTERIOR SHEATHING

DATE:
6/28/2019
SCALE:
1/4" = 1'-0"

VERSION:
14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-17.2

END TRUSSES ONLY - ADD VERTICALS TO MAINTAIN 16" O.C. SPACING. ADDED VERTICALS SHALL BE 2X4 #2 SPF. FASTEN WITH (2) - .131" X 3" NAILS TOED EACH CONNECTION.

7/16" OSB ON EXTERIOR SIDE FASTENED WITH 0.131X2-1/2" NAILS @ 4" OC ON EDGES, 6" OC IN FIELD

SHEATHING FASTENED TO TRUSS PER SHEARWALL SCHEDULE
#8x4" SCREWS @ 2-3/4" OC THRU DOUBLE TRUSSES INTO TOP PLATE (STAGGER FASTENERS). SEE NOTE 6.

(6) 1 1/2"x12"x26Ga. STRAPS W/ (6)- 15Ga STAPLES (MIN. 1" PENETRATION) EACH END OF STRAP. ONE STRAP EACH STUD IN END ZONE

(1)-2x6 TOPLATE
#8x4" SCREWS INTO SIDEWALL STUD @ 8-3/4" OC


1x6 BOTTOM PLATE
#8x4" SCREWS @ 4-1/4" OC THRU BOTTOM PLATE INTO END FLOOR JOISTS

(3) MSTA STRAPS. SEE DETAIL BELOW (TYP.)

(6) 1 1/2"x12"x26Ga. STRAPS W/ (6)- 15Ga STAPLES (MIN. 1" PENETRATION) EACH END OF STRAP. ONE STRAP EACH STUD IN END ZONE

(2)-2x8 #2 SPF SHEARWALL JOISTS
12" x 10.8# HEADER


(3) MSTA 15 STRAPS FASTENED WITH (6) 0.148 X 3" NAILS EACH END OF STRAP

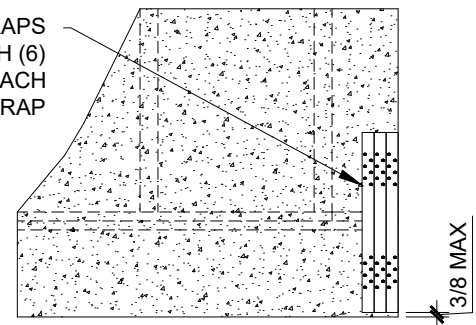

(INSTALL OVER SHEATHING)

MSTA STRAP DETAIL

REV 9-8-22

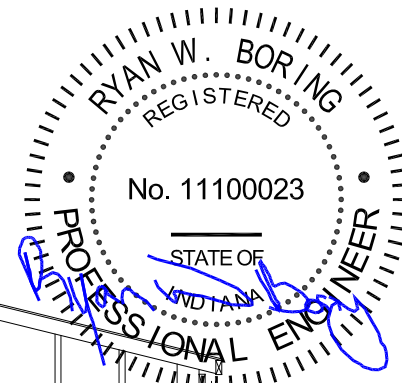

Nov 27, 2023

(E1) FRONT SHEARWALL

(E2) REAR SHEARWALL

Shearwall Notes

1. Shearwall joists shall be (2)-2x8 #2 SPF.
2. Shearwall shall be lagged to 12" x 10.8# I-Beam header with six (6) equally spaced, Fastec 9mm x 76mm listed lags or equivalent.
3. 7/16" (24/16 span index) OSB shearwall sheathing shall be continuous over the shearwall joist and fastened with 1 row of .131 x 3" nails @ 4" o.c.
4. OSB shearwall sheathing shall be fastened to studs with .131 x 3" nails @ 4" o.c. at edges and 6" o.c. in field.
5. OSB shearwall sheathing shall be continuous over the truss bottom chord and fastened with 1 row of .131 x 3" nails at 4" o.c.
6. Truss to truss bottom chord fastening NOT required for double trusses over end shearwalls. Truss bottom chord fastening to top plate to be staggered from one truss bottom chord to the other truss bottom chord.
7. N/A
8. N/A
9. See Appendix A, Detail F.2 for clarification of shearwall OSB sheathing joint and fastening.

FEMA

COMPANY: Manufactured Housing Units
Federal Emergency Management Agency


TITLE: SHEARWALL FRAMING
AND EXTERIOR SHEATHING

DATE: 6/28/2019
SCALE: 1/4" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-18.1

RESERVED

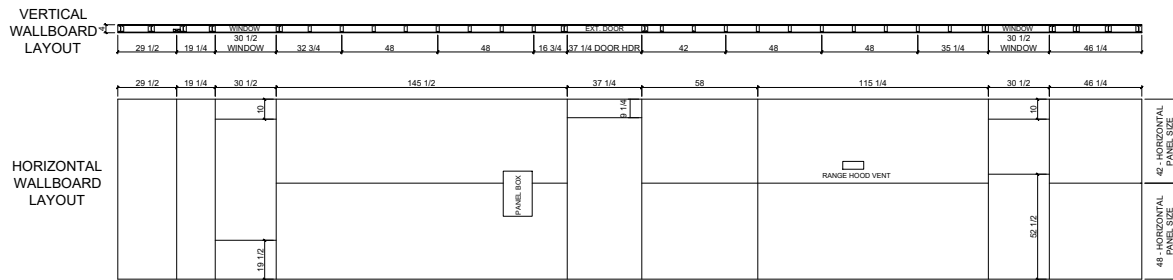

(6) 1 1/2"x12"x26 Ga STRAPS W/ (6) - 15Ga STAPLES
(MIN. 1" PENETRATION) EACH END OF STRAP.
ONE STRAP EACH STUD IN END ZONE

1 1/2"x12"x26 GA. STRAP W/ (7)
7/16" x 2" MIN. x 15 GA.
STAPLES EACH END OF STRAP

(6) 1 1/2"x12"x26 Ga STRAPS W/ (6) - 15Ga STAPLES
(MIN. 1" PENETRATION) EACH END OF STRAP.
ONE STRAP EACH STUD IN END ZONE

(6) 1 1/2"x12"x26 Ga STRAPS W/ (6) - 15Ga STAPLES
(MIN. 1" PENETRATION) EACH END OF STRAP.
ONE STRAP EACH STUD IN END ZONE

1 1/2"x12"x26 GA. STRAP W/ (7)
7/16" x 2" MIN. x 15 GA.
STAPLES EACH END OF STRAP


(6) 1 1/2"x12"x26 Ga STRAPS W/ (6) - 15Ga STAPLES
(MIN. 1" PENETRATION) EACH END OF STRAP.
ONE STRAP EACH STUD IN END ZONE

Wall Framing Notes

- The exterior wall framing shall be 2 x 6 nominal #2 SPF at 16" o.c.
- Wall framing shall be 7'-6" from floor to ceiling.
- Sidewall top plates shall be single 2 x 6 nominal #2 SPF.
- Sidewall bottom plate shall be single 1 x 6 nominal SPF.
- All major joints - wall to wall, wall to ceiling, wall to floor shall be caulked or gasketed to prevent air infiltration.
- The wall insulation shall be kraft backed R-19 and will be installed without voids, gaps, or compression.
- 7/16" APA-rated 24/16 index oriented strand board (OSB) shall be attached to the wall studs.
- The walls shall be painted with latex, low VOC paint.
- Headers shall be (2) 2 x 6 #2 SPF flat or equal fastened together with 80% adhesive and 7/16 x 2 1/2 x 15 GA staples or .131 x 3" pd nails, 2 rows @ 6" o.c.
- Housewrap applied over exterior sheathing.
- All exterior penetrations (doors, vents, lights, outlets, etc.) shall be flashed with ice and water shield 12" wide around penetration.
- OSB to lap floor and roof edge rails fastened to edge with .131 nails @ 4" o.c. (or 7/16 x 2 1/2 x 15 GA staples at 2" o.c.).
- Vertical tie-down connectors to be installed 2' from each end of home and spaced 5'-4" o.c. maximum. See 14F1-29.2.
- Grab bar backers to be centered at grab bar mounting height.
- Toilet paper holder backer to be centered at toilet paper holder mounting height.
- Range hood vent through wall size and location may vary. Manufacturer to verify size and location from range hood vendor that will be used.
- Gypsum to be jointed above all doors in line with jambs.
- Gypsum to be jointed above and below all windows in line with jambs.
- Wall interiors shall be faced with 1/2" Gold Bond XP gypsum board with paint or equivalent installed per ASTM C840 and GA-216.
- Sheathing lap (2" min.) onto floor rim rail and roof edge rail.
- Backers shall be #3 SPF min. and size as shown on drawings.

REV 11-15-23

Nov 27, 2023

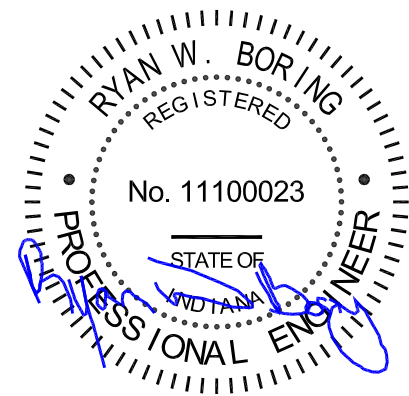

FEMA


COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: FRONT DOOR SIDEWALL


DATE: 6/28/2019
SCALE: 1/8" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-19

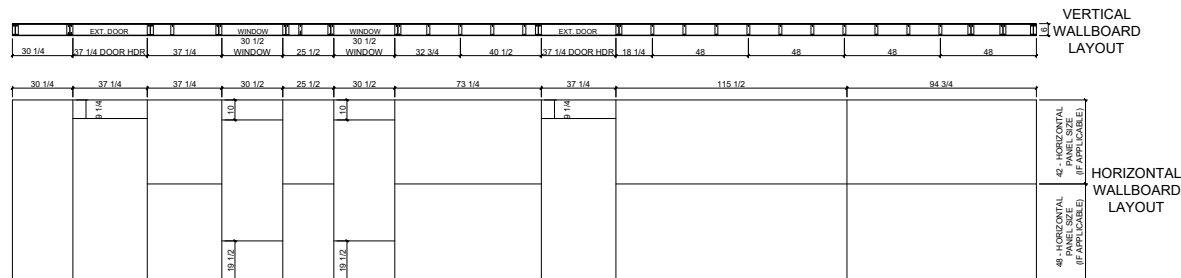

(6) 1 1/2"x12"x26 Ga STRAPS W/ (6) - 15Ga STAPLES (MIN. 1" PENETRATION) EACH END OF STRAP. ONE STRAP EACH STUD IN END ZONE

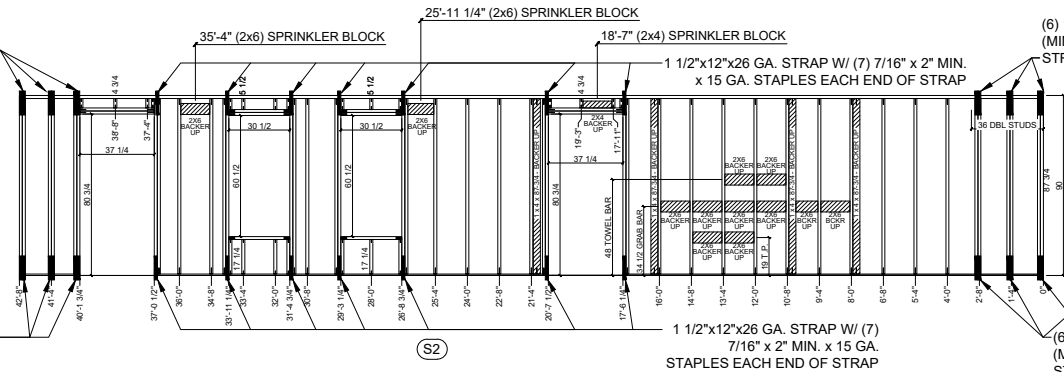


(6) 1 1/2"x12"x26 Ga STRAPS W/ (6) - 15Ga STAPLES (MIN. 1" PENETRATION) EACH END OF STRAP. ONE STRAP EACH STUD IN END ZONE

1 1/2"x12"x26 GA. STRAP W/ (7) 7/16" x 2" MIN. x 15 GA. STAPLES EACH END OF STRAP

(6) 1 1/2"x12"x26 Ga STRAPS W/ (6) - 15Ga STAPLES (MIN. 1" PENETRATION) EACH END OF STRAP. ONE STRAP EACH STUD IN END ZONE


(6) 1 1/2"x12"x26 Ga STRAPS W/ (6) - 15Ga STAPLES (MIN. 1" PENETRATION) EACH END OF STRAP. ONE STRAP EACH STUD IN END ZONE



Wall Framing Notes

- The exterior wall framing shall be 2 x 6 nominal #2 SPF at 16" o.c.
- Wall framing shall be 7'-6" from floor to ceiling.
- Sidewall top plates shall be single 2 x 6 nominal #2 SPF.
- Sidewall bottom plate shall be single 1 x 6 nominal SPF.
- All major joints - wall to wall, wall to ceiling, wall to floor shall be caulked or gasketed to prevent air infiltration.
- The wall insulation shall be kraft backed R-19 and will be installed without voids, gaps, or compression.
- 7/16" APA-rated 24/16 index oriented strand board (OSB) shall be attached to the wall studs.
- The walls shall be painted with latex, low VOC paint.
- Headers shall be (2) 2 x 6 #2 SPF flat or equal fastened together with 80% adhesive and 7/16 x 2 1/2 x 15 GA staples or .131 x 3" pd nails, 2 rows @ 6" o.c.
- Housewrap applied over exterior sheathing.
- All exterior penetrations (doors, vents, lights, outlets, etc.) shall be flashed with ice and water shield 12" wide around penetration.
- OSB to lap floor and roof edge rails fastened to edge with .131 nails @ 4" o.c. (or 7/16 x 2 1/2 x 15 GA staples at 2" o.c.).
- Vertical tie-down connectors to be installed 2' from each end of home and spaced 5'-4" o.c. maximum. See 14F1-29.2.
- Grab bar backers to be centered at grab bar mounting height.
- Toilet paper holder backer to be centered at toilet paper holder mounting height.
- Gypsum to be jointed above all doors in line with jambs.
- Gypsum to be jointed above and below all windows in line with jambs.
- Sprinkler head backer location may vary based on sprinkler design.
- Wall interiors shall be faced with 1/2" Gold Bond XP gypsum board with paint or equivalent installed per ASTM C840 and GA-216.
- Sheathing lap (2" min.) onto floor rim rail and roof edge rail.
- Backers shall be #3 SPF min. and size as shown on drawings.

REV 11-15-23

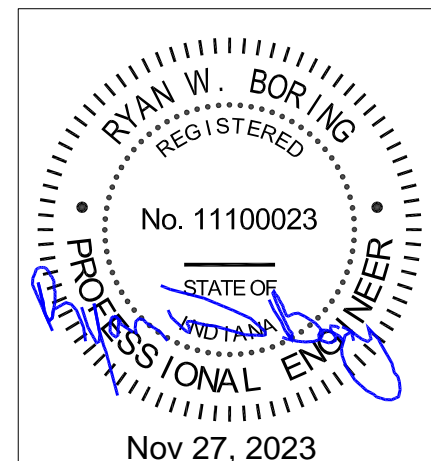

Nov 27, 2023

FEMA



COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: BACK DOOR SIDEWALL

DATE: 6/28/2019
SCALE: 1/8" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO. 14F1-20

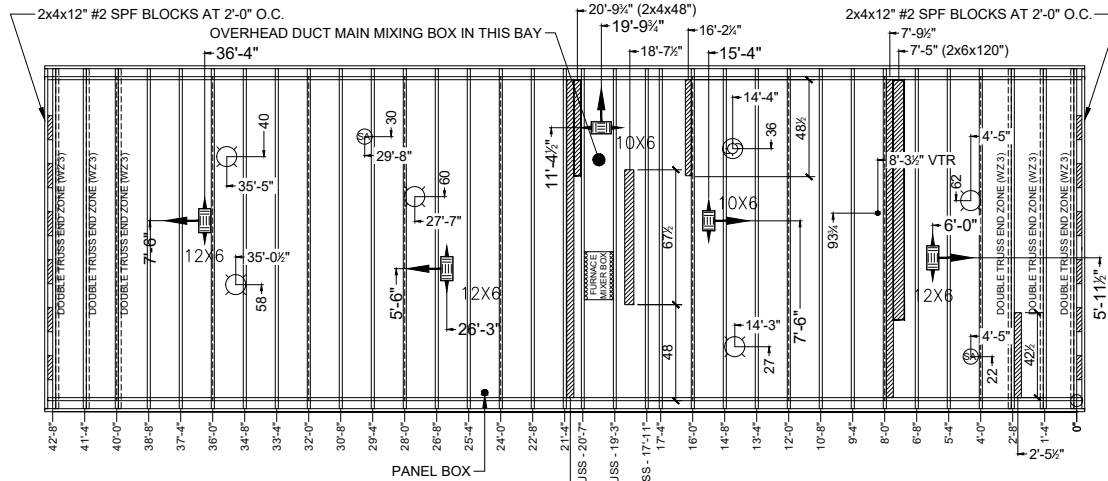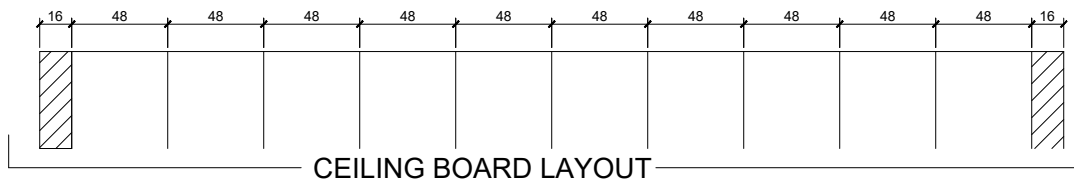


DRAWING NOTES:

- START WITH A 32" CUT PIECE OF CEILING BOARD
- 1x4 OR PLANT STANDARD CEILING BACKERS FOR WALL TIE-IN.
- ALL DUCTS TO BE MINIMUM R-4.


Roof Framing Notes

1. The roof trusses shall be spaced at 16" o.c. maximum.
2. Overall shipping width shall not exceed 14'-0".
3. The roof pitch shall be nominal 3:12.
4. The attic insulation shall be R-38 blown insulation.
5. The roof sheathing shall be at least 7/16" structurally rated OSB with 24/16 index minimum span rating.
6. Roof felt shall be 2 layers of 15# felt or 1 layer of 30# felt or equivalent synthetic underlayment.
7. The roof covering shall be cemented to the roof decking with 6" wide strip cement, around the perimeter.
8. Ice and water shield, per ASTM D1970 to be self-adhering rubberized asphalt 40 mils minimum thick shall be installed (36" width from eaves).
9. The roof shall have a light or white colored composition 240# architectural style shingle.
10. The roof shall have Cor-A-Vent V-600 ridge vents or equivalent.
11. The roof sheathing shall span at least 2 truss bays.
12. 24" x 24" ice and water shield shall be installed around all roof penetrations.
13. All roof penetrations shall be capped with a galvanized or aluminum metal cap.
14. Foam baffles designed for 16" o.c. truss spacing to be used to maintain 1" air gap between the roof decking and insulation.
15. All framing members to be #2 SPF or equal.
16. 3" x 26 GA sheet metal strap (per N370C) at panel edges. See Roof Sheathing Layout for location. Fasten with 2 rows of 7/16" x 1" x 16 GA staples @ 1.7" o.c. (one row each side of panel seam).
17. In place of sheet metal straps, block roof decking panel edges 10 truss bays (13 ft) from gable end. Fasten roof sheathing to blocking in this area with .131 nails @ 4" o.c. edge/10" o.c. field into each truss/2 1/2" o.c. boundary. Blocks shall be 2x4 stud grade SPF min. Fasten thru truss top chord to block with 2-7/16"x2 1/2"x15 ga. staples each end of block. Staples may be toed.
18. Foam nail polyurethane structural foam adhesive, or equivalent, to be installed per dead load test fastening requirements.
19. Roof trusses must be aligned with studs below.

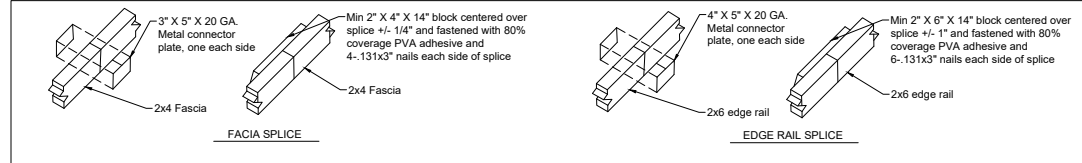

FASTENING SCHEDULE - ROOF

DESCRIPTION	FASTENER	APPLICATION
Top plate to truss.	0.131 x 3" Nail OR #8 x 4" screw	3 each 3 each
Sheathing to trusses (for optional blocked diaphragm see Note 17.)	0.131 x 2" nail	4" o.c. edges 7-1/2" o.c. field into each truss unblocked diaphragm
Blocking to truss	7/16"C x 2-1/2"L x 15Ga staple	2 each at each end.
Gypsum ceiling to truss	Foam adhesive (as per installation instructions.)	
Layflat to Gypsum ceiling - Lay flats shall be #3 SPF min. and size as shown on drawings.	Tack in place with foam adhesive.	
Fascia to truss	(3) each, 7/16"C x 2-1/2"L x 15Ga. staples through fascia	
Double trusses	7/16"C x 2-1/2"L x 15Ga. staples or .131 x 3" nail, 8" o.c.	
Edge rail to truss	(8) 7/16"C x 2-1/2"L x 15Ga. staples or (5) .131 x 3" nails	
Edge rail to top plate	0.131 x 3-1/2" nails or #10 x 4" screws @ 12" o.c. toed.	
Strap to edge rail	See sidewall drawings for type and quantity of fasteners	

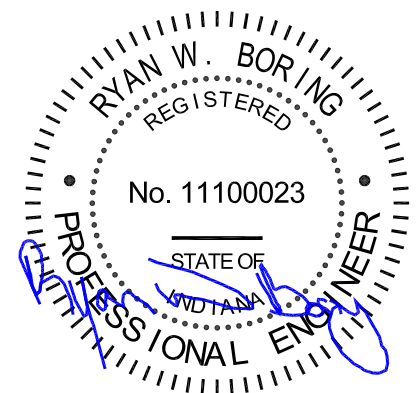

Nov 27, 2023

FEMA


COMPANY: Manufactured Housing Units
Federal Emergency Management Agency


TITLE: ROOF FRAMING LAYOUT

DATE: 6/28/2019
SCALE: 1/8" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

REV 1-17-23
DRAWING NO.
14F1-21

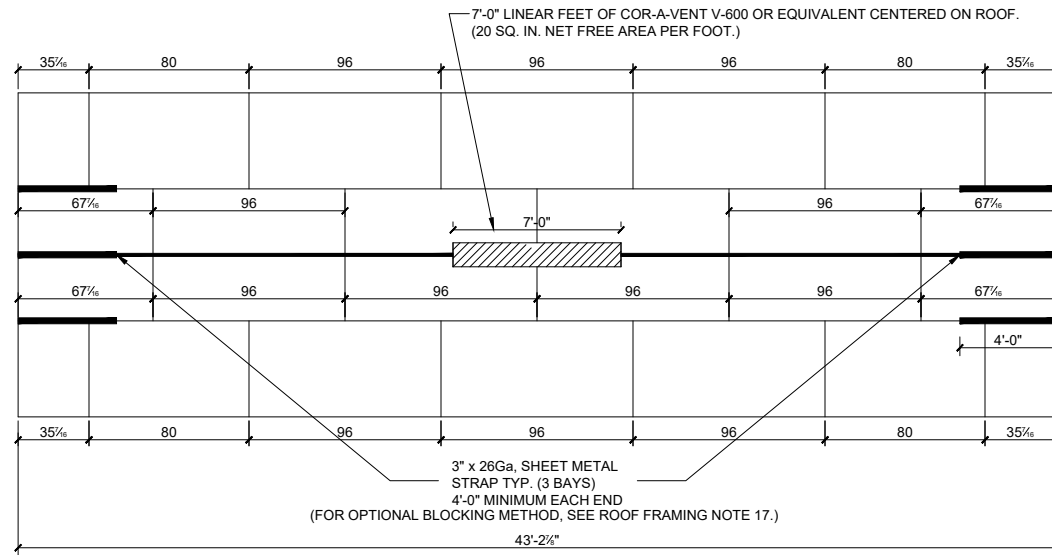


 - ATTIC RIDGE VENT (INSTALL PER MANUFACTURER'S INSTALLATION INSTRUCTIONS).


Roof Edge Detail Notes

1. The roof sheathing shall be at least 7/16" structurally rated OSb with 24/16 index minimum span rating.
2. Decking cuts include endwall overhangs.
3. Use roof decking off-fall for roof wind diverters and vinyl siding.
4. H-Clips shall be used at all joints between trusses.

Note: Roof decking cut back only at ridge vent area.

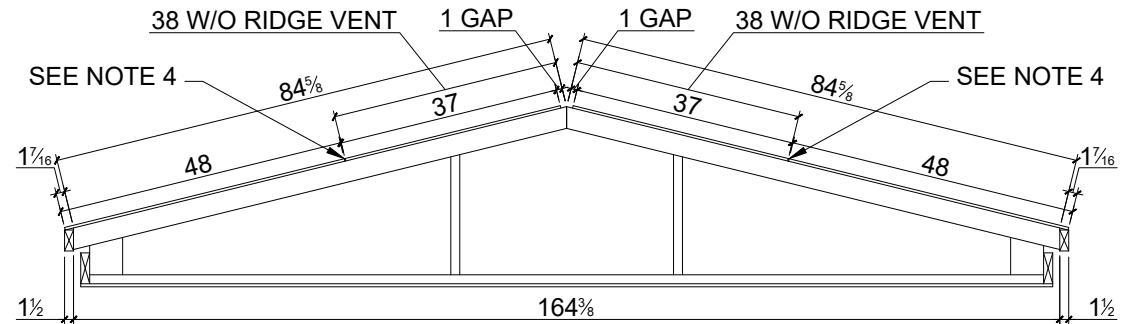

GAP DETAIL - ROOF DECKING AT RIDGE VENT LOCATION
SCALE 3/8" = 1'

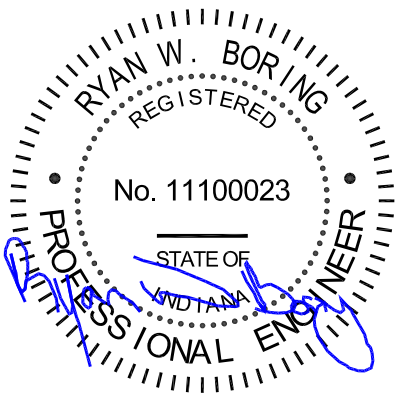

Nov 27, 2023

REV 11-29-21

FEMA



COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: ROOF SHEATHING LAYOUT

DATE: 6/28/2019
SCALE: 1/8" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-22

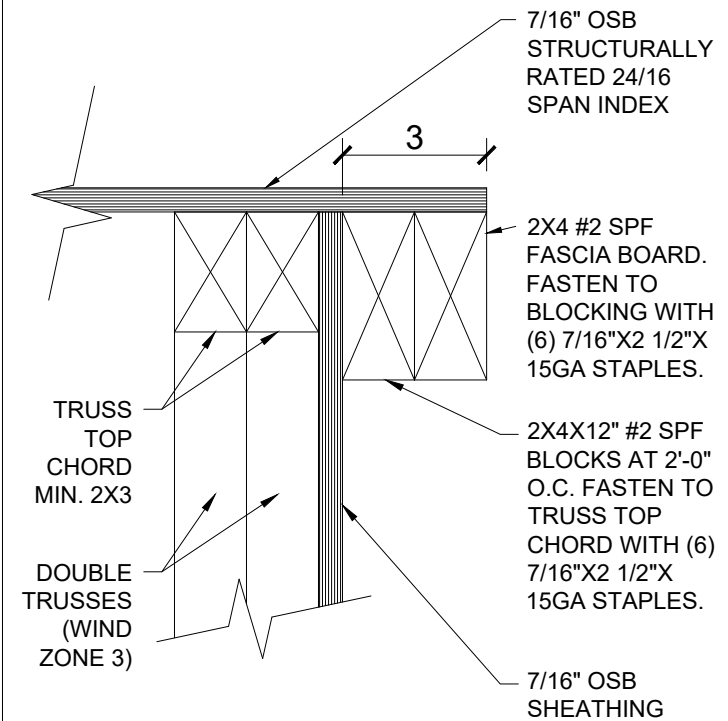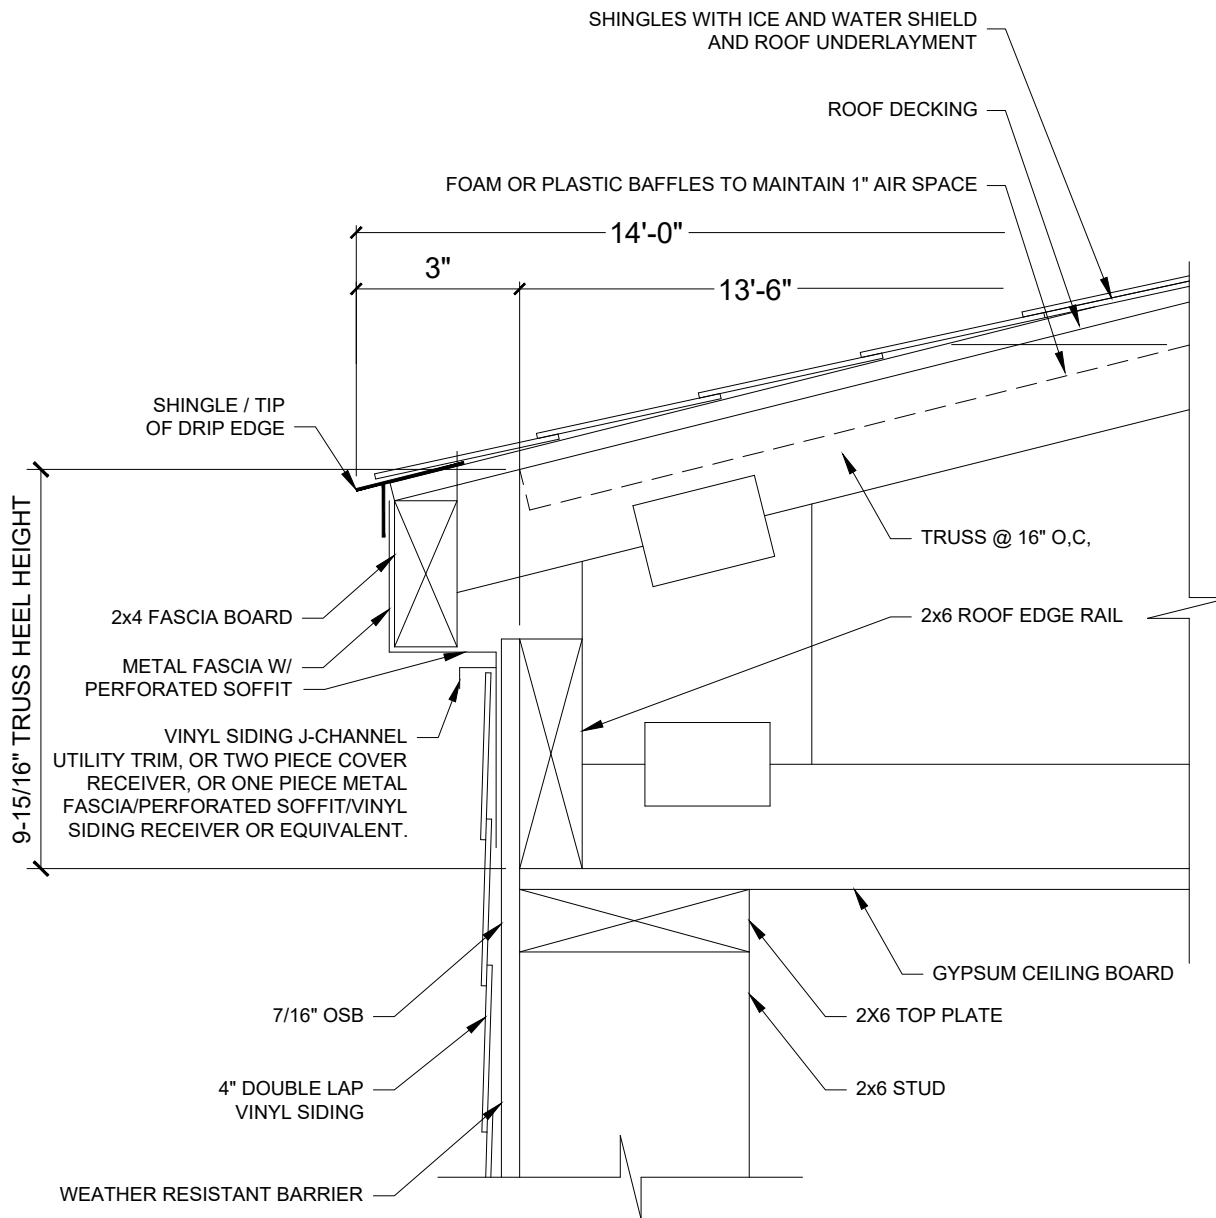


Note:
Fasteners to be a minimum of 1/2" to a maximum of 1" from the top or bottom of the truss top chord or 2x4 fascia. Fasteners to be staggered top and bottom.

GABLE ENDWALL OVERHANG DETAIL

Roof Overhang General Notes

1. The roof trusses shall be spaced at 16" O.C. with a 3" overhang. Overall shipping width shall not exceed 14 feet.
2. The roof pitch shall be nominal 3:12.
3. The attic insulation shall be R-38 blown.
4. Foam baffles designed for 16" o.c. truss spacing to be used to maintain 1" air gap between the roof decking and insulation.
5. Perforated soffit at eave shall provide the free air area required by 3280.504(d)(1)(i), (72 square inches per side).
6. R Value per inch is a minimum of 2.81.

REV 11-29-21

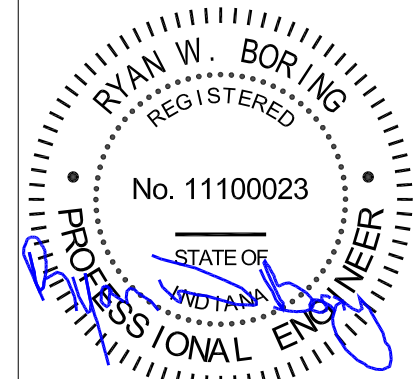

Nov 27, 2023

FEMA




COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: ROOF OVERHANG DETAIL


DATE: 6/28/2019
SCALE: 1/2" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)


DRAWING NO.
14F1-23

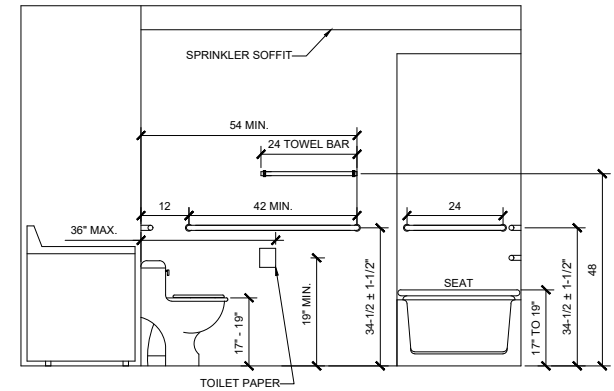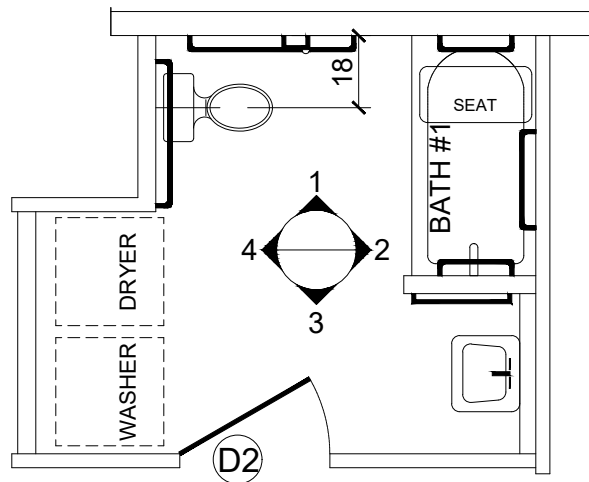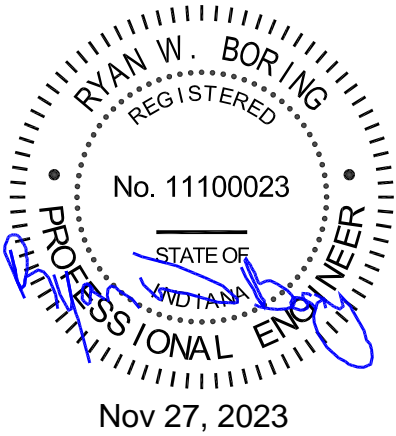


1 BATHROOM ELEVATION

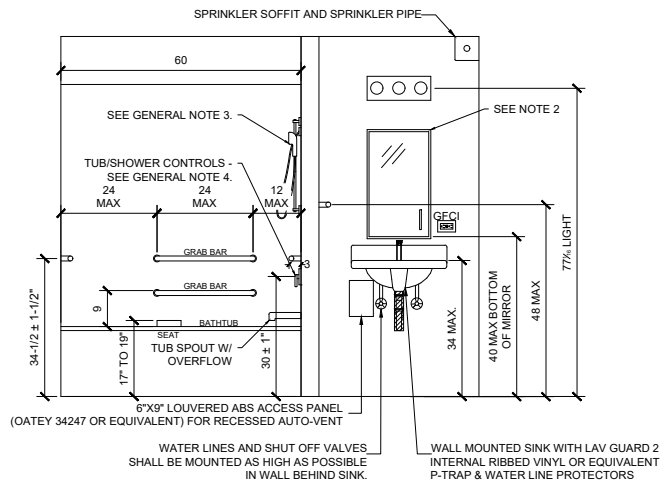

2 BATHROOM ELEVATION

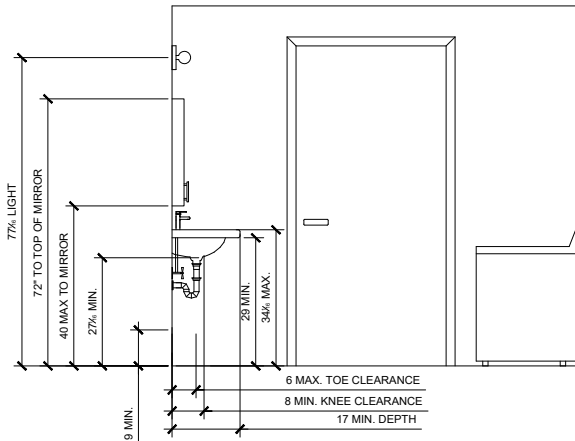

3 BATHROOM ELEVATION

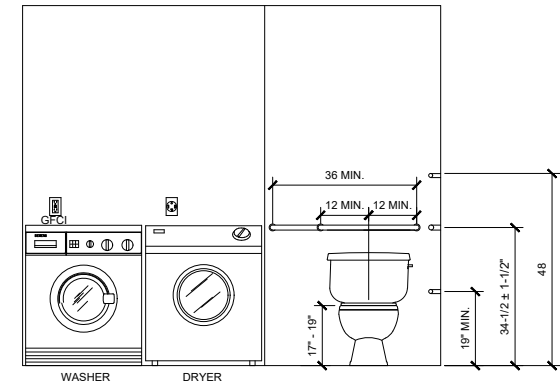

4 BATHROOM ELEVATION

General Notes

1. The diameter of a grab bar shall be 1-1/4" to 1-1/2" and the space between the grab bar and wall shall be 1-1/2".
2. Broan - NuTone medicine cabinet model 260P26CH or equivalent.
3. Shower wand and vertical bar to be centered in tub/shower.
4. Controls to be offset to entry side of tub/shower (UFAS figure 34). Approximately 8" plus/minus 2" from the edge of the tub/shower.

REV 9-8-22

FEMA

COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: BATHROOM #1 ELEVATIONS

DATE: 6/28/2019
SCALE: 1/4" = 1'-0"



VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-24.2

RESERVED

REV 12-20-19

FEMA	COMPANY: Manufactured Housing Units Federal Emergency Management Agency	TITLE: RESERVED	DATE: 6/28/2019	VERSION: 14' WIDE MHU (FURNACE)	DRAWING NO. 14F1-24.3
			SCALE: 1/8" = 1'-0"		

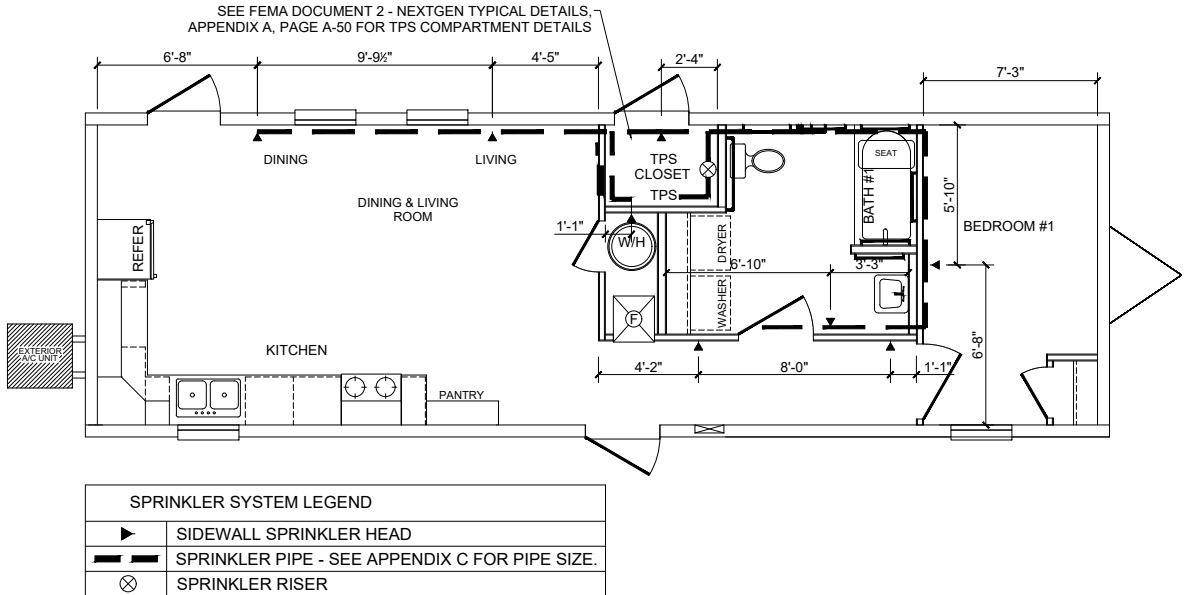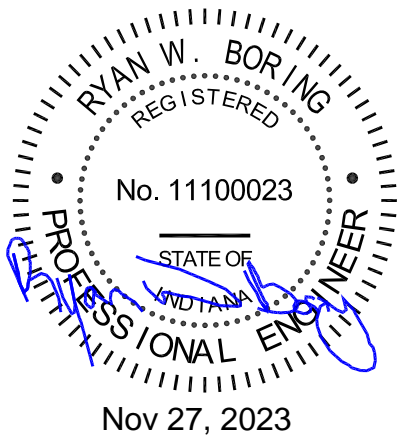


Sprinkler Notes:

- For sprinkler system installation and TPS installation see FEMA Document 2 - NextGen typical details, Appendix A & Appendix C.



REV 9-8-22

RESERVED

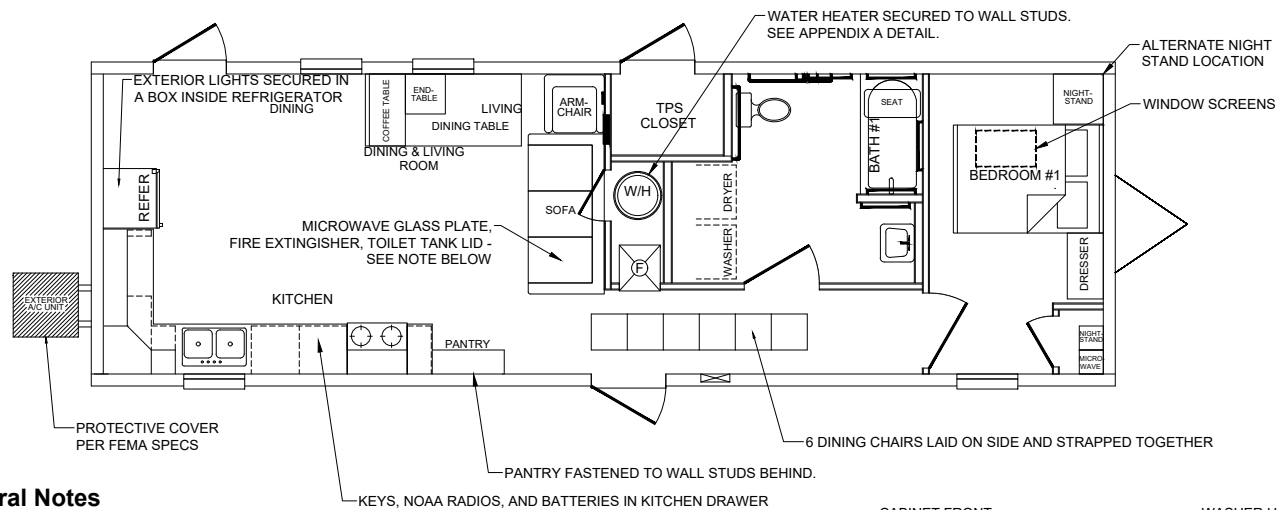


14' Wide - Ship Loose Plan General Notes

Sofa	Place against the interior wall. Microwave glass plate and fire extinguisher to be placed under cushions OR when cushions are not removable secured within the MHU where they will not cause damage during transportation.
Coffee & end table	Turn upside down and place in the dining table.
Dining table	Laid upside down on the floor against the sidewall.
Dining table chairs	Chairs to be laid on their side in the hallway and strapped together.
Kitchen cabinets	All upper and lower cabinets to be held shut with rubber bands around door pulls.
Range / Oven	Secure to the floor and installed anti-tip bracket provided by the manufacturer.
Refrigerator	Secure to the floor and wall stud at top rear. Refrigerator is to be unplugged.
Dresser	Fasten to wall studs with 2 - #8 x 3" screws. Drawers secured with plastic banding.
Night Stand	Turn upside down and place in closet or alternate location shown on layout.
Microwave	Place in the bedroom closet.
Window Screens	Place under Bedroom #1 Bed.
Bunk Bed	Fasten to wall with (2) - #8 x 3" screws.
Pantry Shelves	Place all at bottom of pantry
Toilet Tank Lid	Place in sofa under cushions OR when cushions are not removable secured within the MHU where they will not cause damage during transportation.

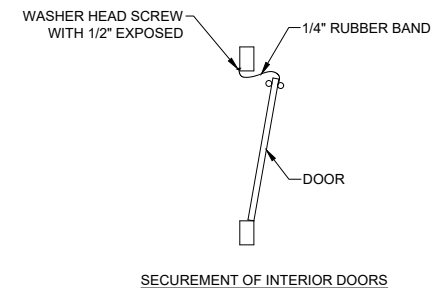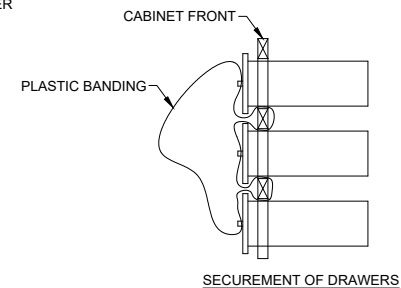

REV 9-20-21

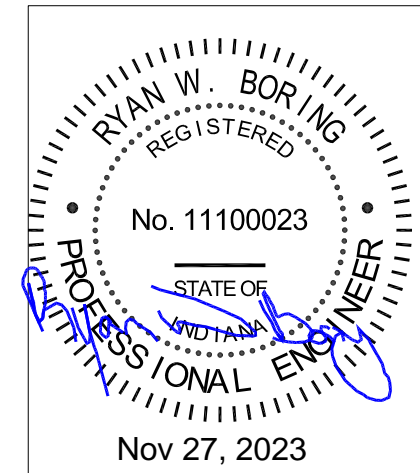

Nov 27, 2023

FEMA


COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: SHIP LOOSE LAYOUT


DATE: 6/28/2019
SCALE: 1/8" = 1'-0"

14' WIDE MHU (FURNACE)


DRAWING NO.
14F1-26

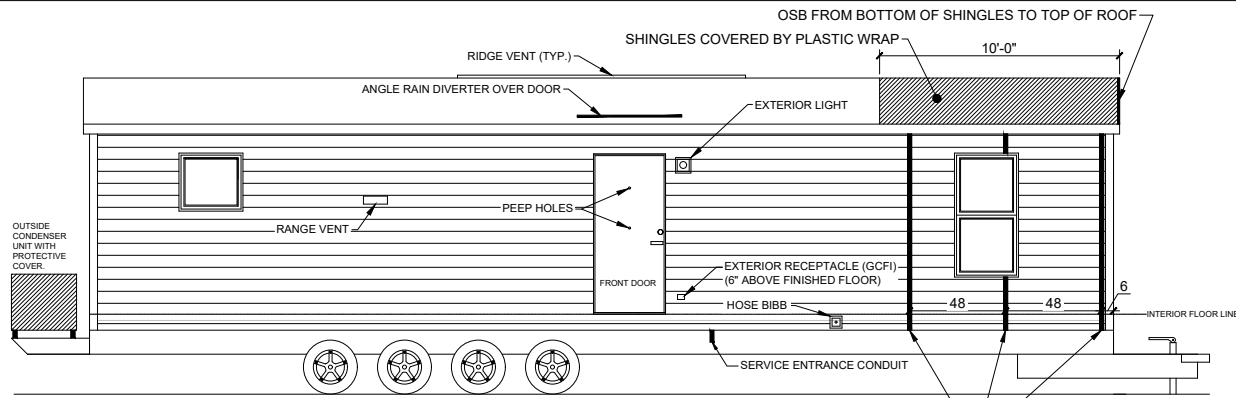


FRONT DOOR SIDE ELEVATION

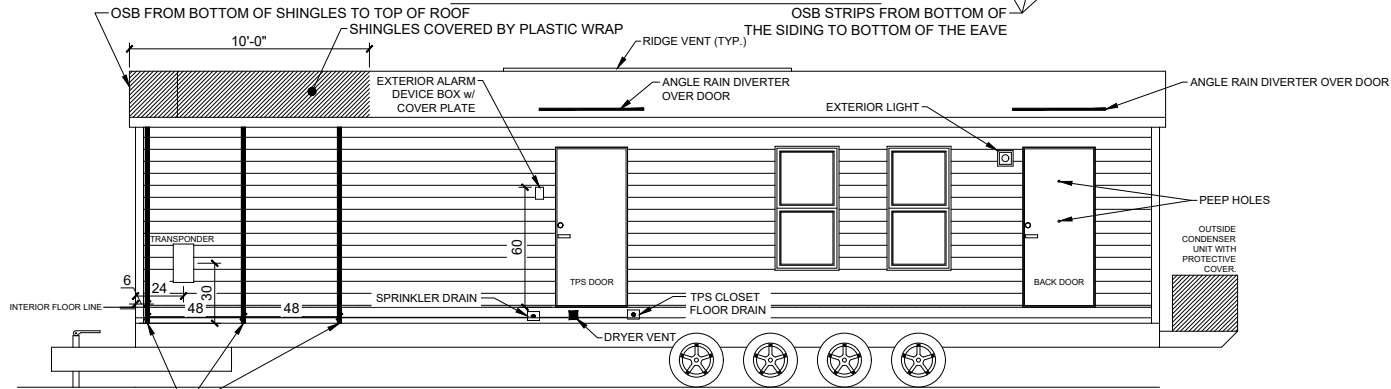

BACK DOOR SIDE ELEVATION

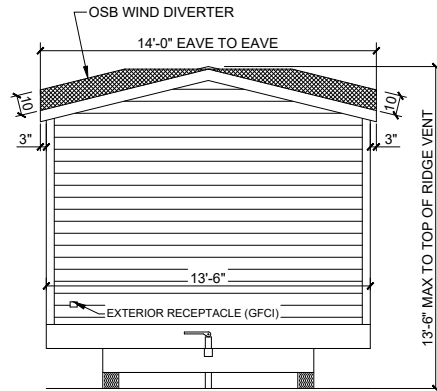

HITCH END ELEVATION

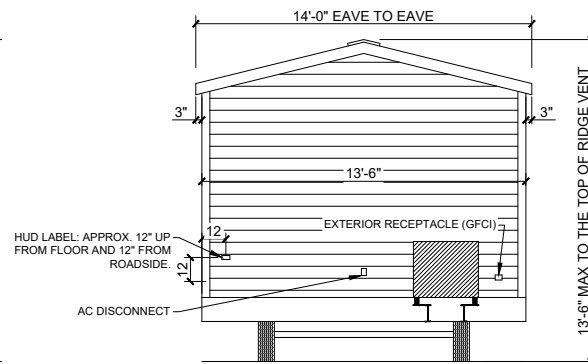


TAIL END ELEVATION

General Notes

1. Temporary wind guards for both shingles and siding shall be installed on the MHU exterior.
2. Vinyl siding wind guards shall be made of OSB or 1x2's.
3. Shingle wind guards shall be made of OSB.
4. Shingle wind guards shall not extend above the maximum transportation height.
5. Shingles shall be secured with a plastic wrap on the first 10'-0" of the MHU from the hitch end.
6. OSB off-fall from roof decking may be used for roof wind diverter and vinyl siding wind guards.

REV 11-15-23

Nov 27, 2023

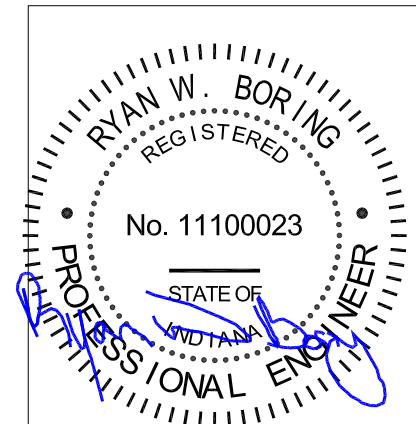

FEMA

Manufactured Housing Units
Federal Emergency Management Agency

TRANSIT PROTECTION (EXTERIOR)


DATE: 6/28/2019
SCALE: 1/8" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)



DRAWING NO.
14F1-27

RESERVED

TYPICAL SIDE ELEVATION SHOWING TIEDOWN SPACINGS.

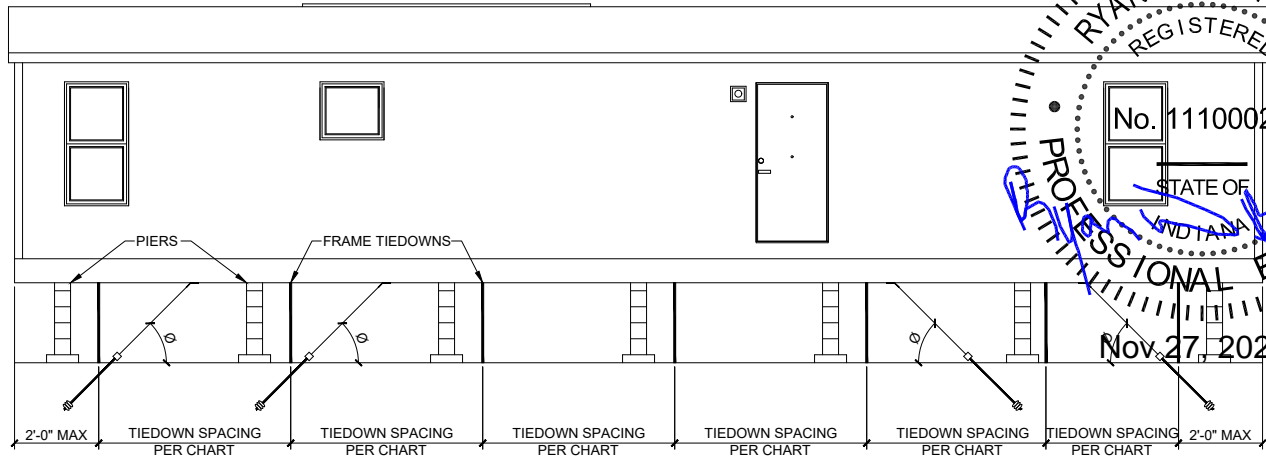

Tiedowns are based on roof diaphragm spanning the entire length of the unit (68'-0" Max) (i.e. Based on uplift and load into floor diaphragm only). Therefore tiedowns are required at each end for end shearwall overturning and lateral forces as follows.

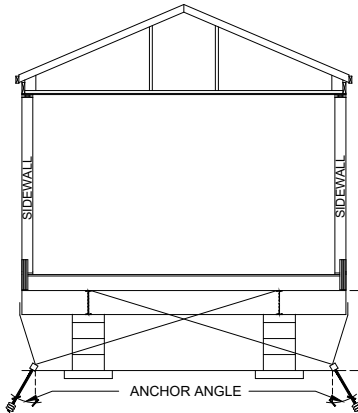


TYPICAL CROSS SECTION SHOWING TIEDOWNS

* PIER HEIGHT INCLUDES DEPTH OF I-BEAM

"H" MAX = MAXIMUM VERTICAL DISTANCE TO DIAGONAL TIE POINT OF LOAD.

ATTACHMENT DETAIL

1. TYPICAL LONGITUDINAL I-BEAM
2. FACTORY INSTALLED LONGITUDINAL TIEDOWN BRACKET
3. TIEDOWN STRAP
4. BANDING SEAL
5. GROUND ANCHOR - INSTALLED TO FULL DEPTH OF ANCHOR HEAD

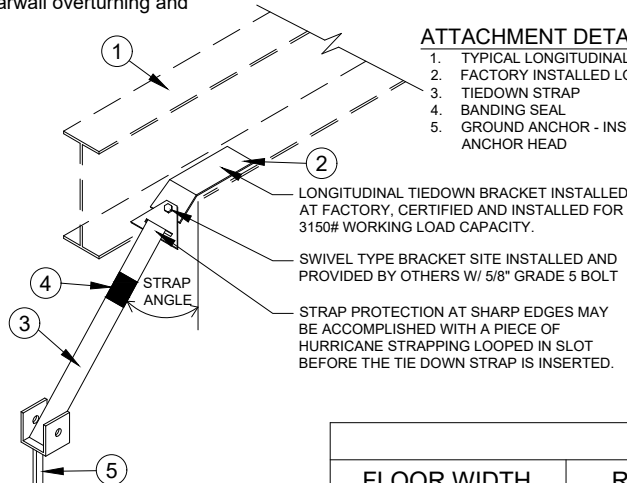

Nov. 27, 2023

NOTES

1. VERTICAL TIES ARE REQUIRED IN ADDITION TO FRAME TIEDOWNS
2. VERTICAL TIES MAYBE SECURED TO THE SAME GROUND ANCHOR AS THE FRAME TIEDOWNS WHEN DOUBLE HEADED ANCHOR IS CAPABLE OF RESISTING COMBINED LOADING.
3. FRAME TIEDOWNS AND ANCHORS ARE NOT SUPPLIED BY FEMA.
4. VERTICAL TIE STRAPS ARE NOT SUPPLIED BY FEMA. ANCHORS AND END TREATMENTS ARE TO BE SUPPLIED BY OTHERS.
5. GROUND ANCHORS AND FRAME TIES SHALL BE CAPABLE OF RESISTANCE AN ULTIMATE TENSION LOAD OF 4,725# AND ARE TO BE INSTALLED PER THE MANUFACTURER'S INSTALLATION INSTRUCTIONS, BUT ARE NOT TO EXTEND BEYOND THE SIDE-WALL OF THE HOME.
6. STEEL ANCHORING EQUIPMENT EXPOSED TO THE WEATHER SHALL BE PROTECTED WITH AT LEAST 0.300Z OF ZINC PER SQUARE FOOT OF STEEL.
7. DESIGN BASED ON 99-1/2" I-BEAM SPACING AND A MAXIMUM SIDEWALL HEIGHT OF 7'-6".
8. LONGITUDINAL TIES ARE INSTALLED AT BOTTOM OF I-BEAMS IN ACCORDANCE WITH THE TABLE AND NOTES 4, 6, AND 7.
9. ANCHORS SHALL BE CERTIFIED FOR THESE CONDITIONS BY A PROFESSIONAL ENGINEER, ARCHITECT, OR A NATIONALLY RECOGNIZED TESTING LABORATORY AS TO THEIR RESISTANCE, BASED ON THE INSTALLED ANGLE OF DIAGONAL TIE AND/OR VERTICAL TIE LOADING AND ANGLE OF ANCHOR INSTALLATION AND TYPE OF SOIL IN WHICH ANCHOR IS TO BE INSTALLED.
10. GROUND ANCHORS SHALL BE IMBEDDED BELOW THE FROST LINE AND BE AT LEAST 12" ABOVE THE WATER TABLE.
11. GROUND ANCHORS SHALL BE INSTALLED TO THEIR FULL DEPTH AND STABILIZER PLATES SHALL BE INSTALLED TO PROVIDE ADDED RESISTANCE TO OVER TURNING OR SLIDING FORCES.
12. ANCHORING EQUIPMENT SHALL BE CERTIFIED BY A REGISTERED PROFESSIONAL ENGINEER OR ARCHITECT TO RESIST THE SPECIFIED FORCES IN ACCORDANCE WITH TESTING PROCEDURES IN ASTM STANDARD SPECIFICATION D3593-97. STANDARDS SPECIFICATION FOR STRAPPING FLAT STEEL AND SEALS.
13. STRAPPING TO BY TYPE 1, FINISH B, GRADE 1 STEEL STRAPPING , 1-1/4" WIDE AND .035 INCHES IN THICKNESS, CERTIFIED BY A REGISTERED PROFESSIONAL ENGINEER OR ARCHITECT AS CONFORMING WITH ASTM STANDARD SPECIFICATION D3953-97 STANDARD SPECIFICATION FOR STRAPPING STEEL AND SEALS.

FRAME TIEDOWN SPACING CHART (SEE NOTE 10)

FLOOR WIDTH	ROOF SLOPE MAXIMUM	EAVE OVERHANG	WIND ZONE 3		
			SPACING	"H" MAX	ANCHOR ANGLE
162"	2.95 / 12	3" MAX	5'-4"	57"	24.6°

LONGITUDINAL TIEDOWN QUANTITY CHART

FLOOR WIDTH	ROOF SLOPE MAXIMUM	QUANTITY MIN. EACH END OF EACH SECTION	WIND ZONE 3	
			MINIMUM ANCHOR ANGLE Ø	MAXIMUM ANCHOR ANGLE Ø
162"	2.95 / 12	4	28.2°	45.0°

REV 9-8-20

FEMA

COMPANY: Manufactured Housing Units
Federal Emergency Management Agency


TITLE: TIEDOWN SYSTEM

DATE: 6/28/2019
SCALE: 1/8" = 1'-0"



VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-29.1

TYPICAL SIDE ELEVATION SHOWING TIEDOWN SPACINGS.

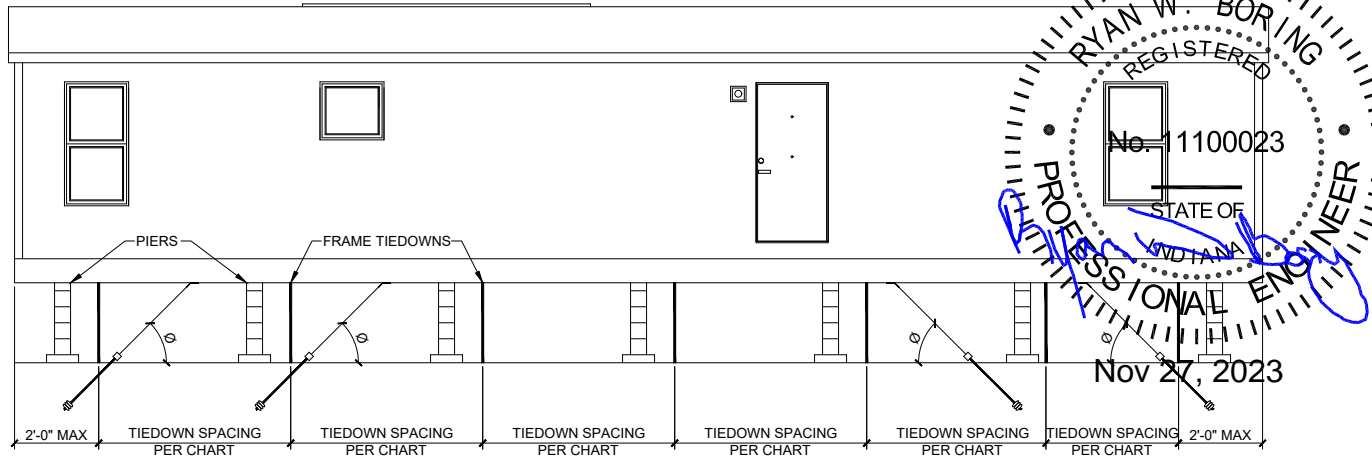

Tiedowns are based on roof diaphragm spanning the entire length of the unit (68'-0" Max) (i.e. Based on uplift and load into floor diaphragm only). Therefore tiedowns are required at each end for end shearwall overturning and lateral forces as follows.

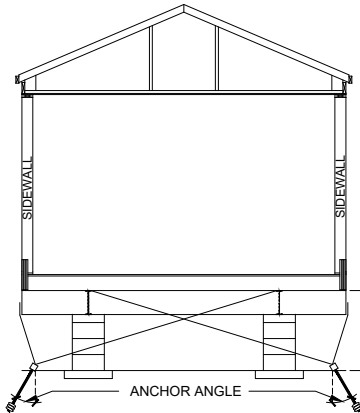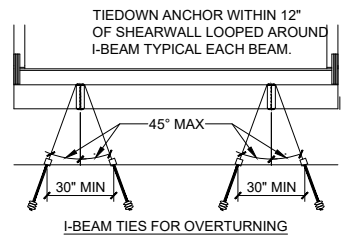


* PIER HEIGHT INCLUDES DEPTH OF I-BEAM

"H" MAX = MAXIMUM VERTICAL DISTANCE TO DIAGONAL TIE POINT OF LOAD.

TYPICAL CROSS SECTION SHOWING TIEDOWNS

ATTACHMENT DETAIL

1. TYPICAL LONGITUDINAL I-BEAM
2. FACTORY INSTALLED LONGITUDINAL TIEDOWN BRACKET
3. TIEDOWN STRAP
4. BANDING SEAL
5. GROUND ANCHOR - INSTALLED TO FULL DEPTH OF ANCHOR HEAD

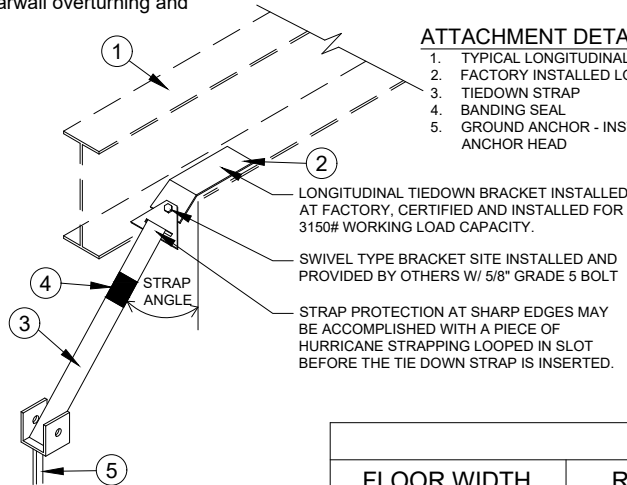

NOTES

1. VERTICAL TIES ARE REQUIRED IN ADDITION TO FRAME TIEDOWNS
2. VERTICAL TIES MAYBE SECURED TO THE SAME GROUND ANCHOR AS THE FRAME TIEDOWNS WHEN DOUBLE HEADED ANCHOR IS CAPABLE OF RESISTING COMBINED LOADING.
3. FRAME TIEDOWNS AND ANCHORS ARE NOT SUPPLIED BY FEMA.
4. VERTICAL TIE STRAPS ARE NOT SUPPLIED BY FEMA ANCHORS AND END TREATMENTS ARE TO BE SUPPLIED BY OTHERS.
5. GROUND ANCHORS AND FRAME TIES SHALL BE CAPABLE OF RESISTANCE AN ULTIMATE TENSION LOAD OF 4,725# AND ARE TO BE INSTALLED PER THE MANUFACTURER'S INSTALLATION INSTRUCTIONS, BUT ARE NOT TO EXTEND BEYOND THE SIDE-WALL OF THE HOME.
6. STEEL ANCHORING EQUIPMENT EXPOSED TO THE WEATHER SHALL BE PROTECTED WITH AT LEAST 0.300Z OF ZINC PER SQUARE FOOT OF STEEL.
7. DESIGN BASED ON 95-1/2" I-BEAM SPACING AND A MAXIMUM SIDEWALL HEIGHT OF 7'-6".
8. LONGITUDINAL TIES ARE INSTALLED AT BOTTOM OF I-BEAMS IN ACCORDANCE WITH THE TABLE AND NOTES 4, 6, AND 7.
9. ANCHORS SHALL BE CERTIFIED FOR THESE CONDITIONS BY A PROFESSIONAL ENGINEER, ARCHITECT, OR A NATIONALLY RECOGNIZED TESTING LABORATORY AS TO THEIR RESISTANCE, BASED ON THE INSTALLED ANGLE OF DIAGONAL TIE AND/OR VERTICAL TIE LOADING AND ANGLE OF ANCHOR INSTALLATION AND TYPE OF SOIL IN WHICH ANCHOR IS TO BE INSTALLED.
10. GROUND ANCHORS SHALL BE IMBEDDED BELOW THE FROST LINE AND BE AT LEAST 12" ABOVE THE WATER TABLE.
11. GROUND ANCHORS SHALL BE INSTALLED TO THEIR FULL DEPTH AND STABILIZER PLATES SHALL BE INSTALLED TO PROVIDE ADDED RESISTANCE TO OVER TURNING OR SLIDING FORCES.
12. ANCHORING EQUIPMENT SHALL BE CERTIFIED BY A REGISTERED PROFESSIONAL ENGINEER OR ARCHITECT TO RESIST THE SPECIFIED FORCES IN ACCORDANCE WITH TESTING PROCEDURES IN ASTM STANDARD SPECIFICATION D3593-97. STANDARDS SPECIFICATION FOR STRAPPING FLAT STEEL AND SEALS.
13. STRAPPING TO BY TYPE 1, FINISH B, GRADE 1 STEEL STRAPPING , 1-1/4" WIDE AND .035 INCHES IN THICKNESS, CERTIFIED BY A REGISTERED PROFESSIONAL ENGINEER OR ARCHITECT AS CONFORMING WITH ASTM STANDARD SPECIFICATION D3953-97 STANDARD SPECIFICATION FOR STRAPPING STEEL AND SEALS.

FRAME TIEDOWN SPACING CHART (SEE NOTE 10)

FLOOR WIDTH	ROOF SLOPE MAXIMUM	EAVE OVERHANG	WIND ZONE 3		
			SPACING	"H" MAX	ANCHOR ANGLE
162"	2.95 / 12	3" MAX	5'-4"	57"	24.6°

LONGITUDINAL TIEDOWN QUANTITY CHART

			WIND ZONE 3	
FLOOR WIDTH	ROOF SLOPE MAXIMUM	QUANTITY MIN. EACH END OF EACH SECTION	MINIMUM ANCHOR ANGLE Ø	MAXIMUM ANCHOR ANGLE Ø
162"	2.95 / 12	4	28.2°	45.0°

FEMA



COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: ALT. TIEDOWN SYSTEM
(95.5" I-BEAM SPACING)

DATE: 4/30/2021
SCALE: 1/8" = 1'-0"

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-29.1.1

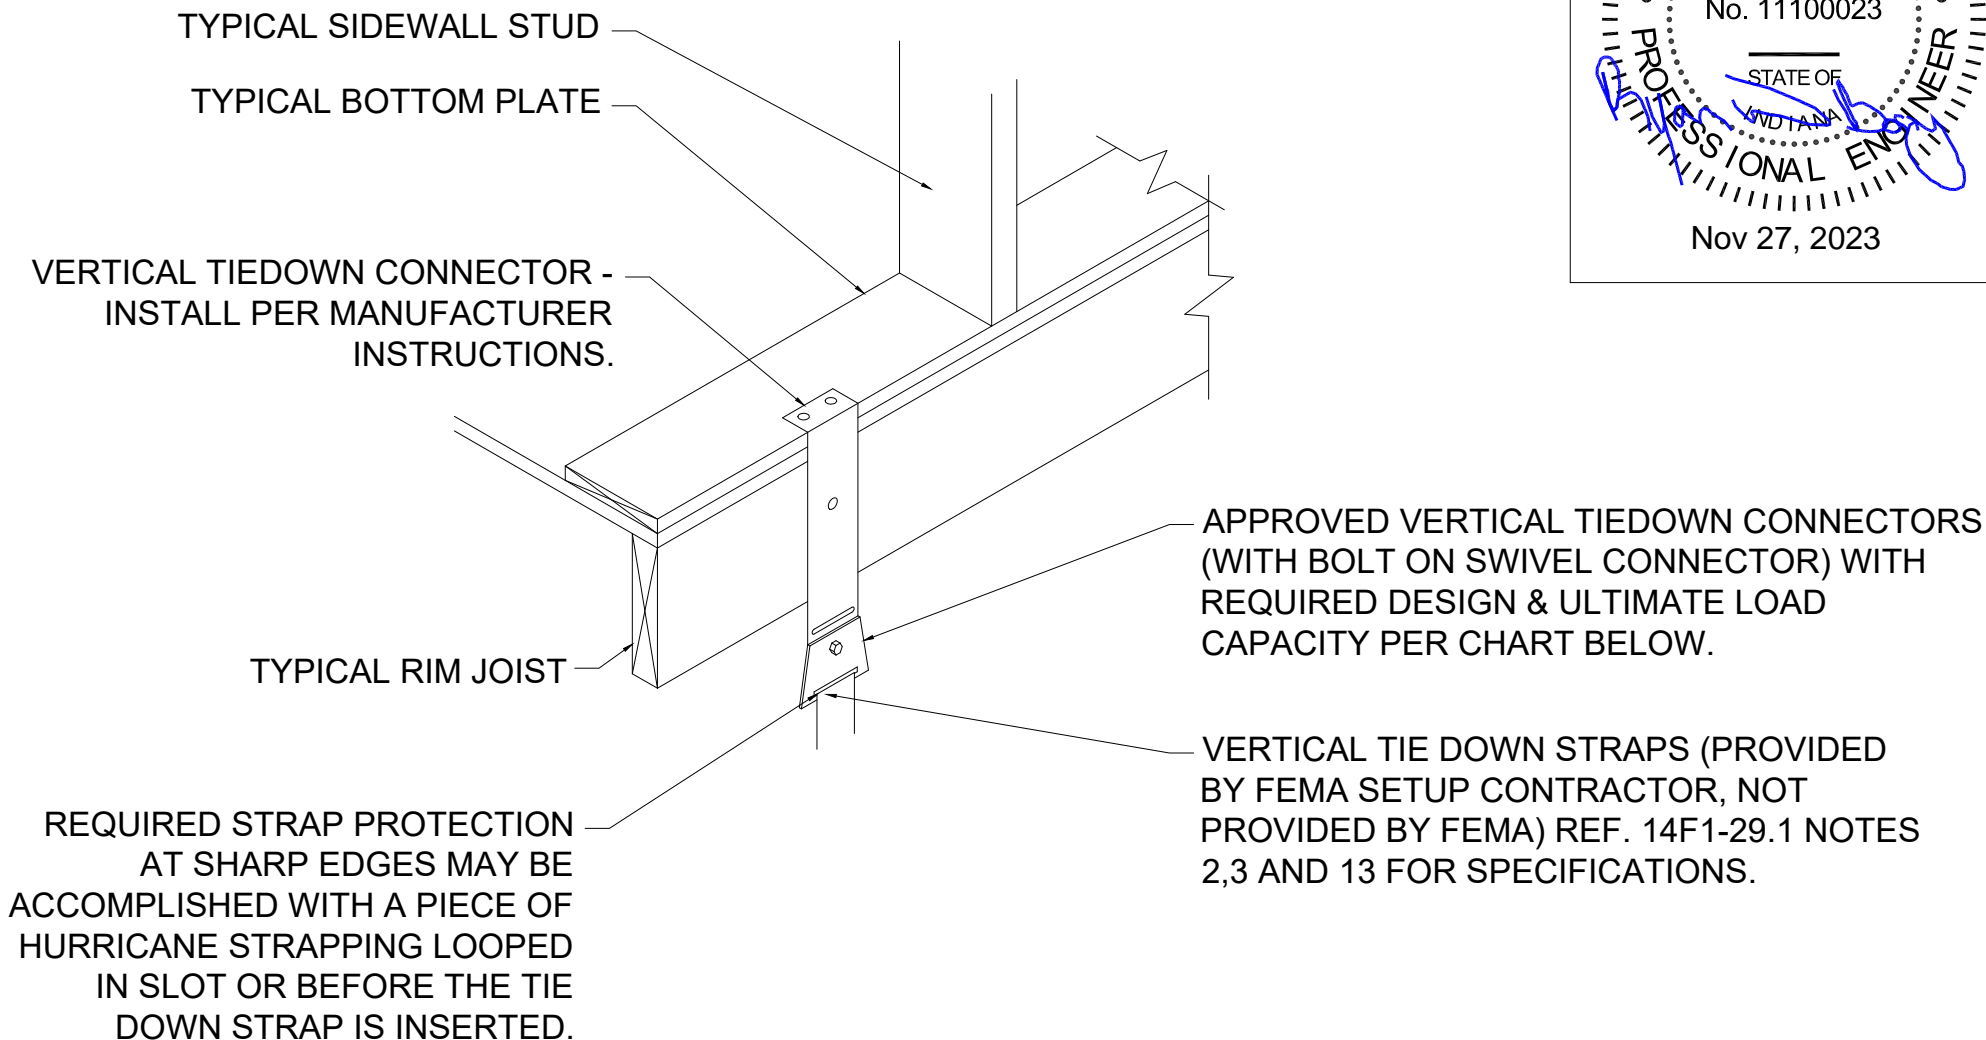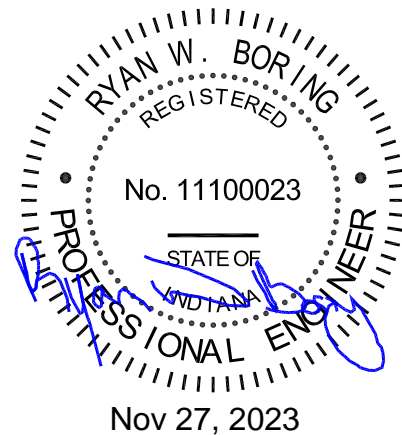

Notes

1. FOR USE IN WIND ZONE 3.
2. FOR USE WITH 99-1/2" I-BEAM SPACING.
3. REF ELIXIR METALS COMPANY TEST REPORT 18-218.

REV 1-17-23

FLOOR WIDTH	SIDEWALL HEIGHT	ROOF SLOPE MAXIMUM	WIND ZONE 3		
			SPACING	REQUIRED DESIGN LOAD CAPACITY	REQUIRED ULTIMATE LOAD CAPACITY
162"	90"	2.95 / 12	5'-4"	1296#	1944#

FEMA



COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: EXTERIOR WALL TIEDOWN DETAILS

6/28/2019
SCALE: NTS

14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-29.2

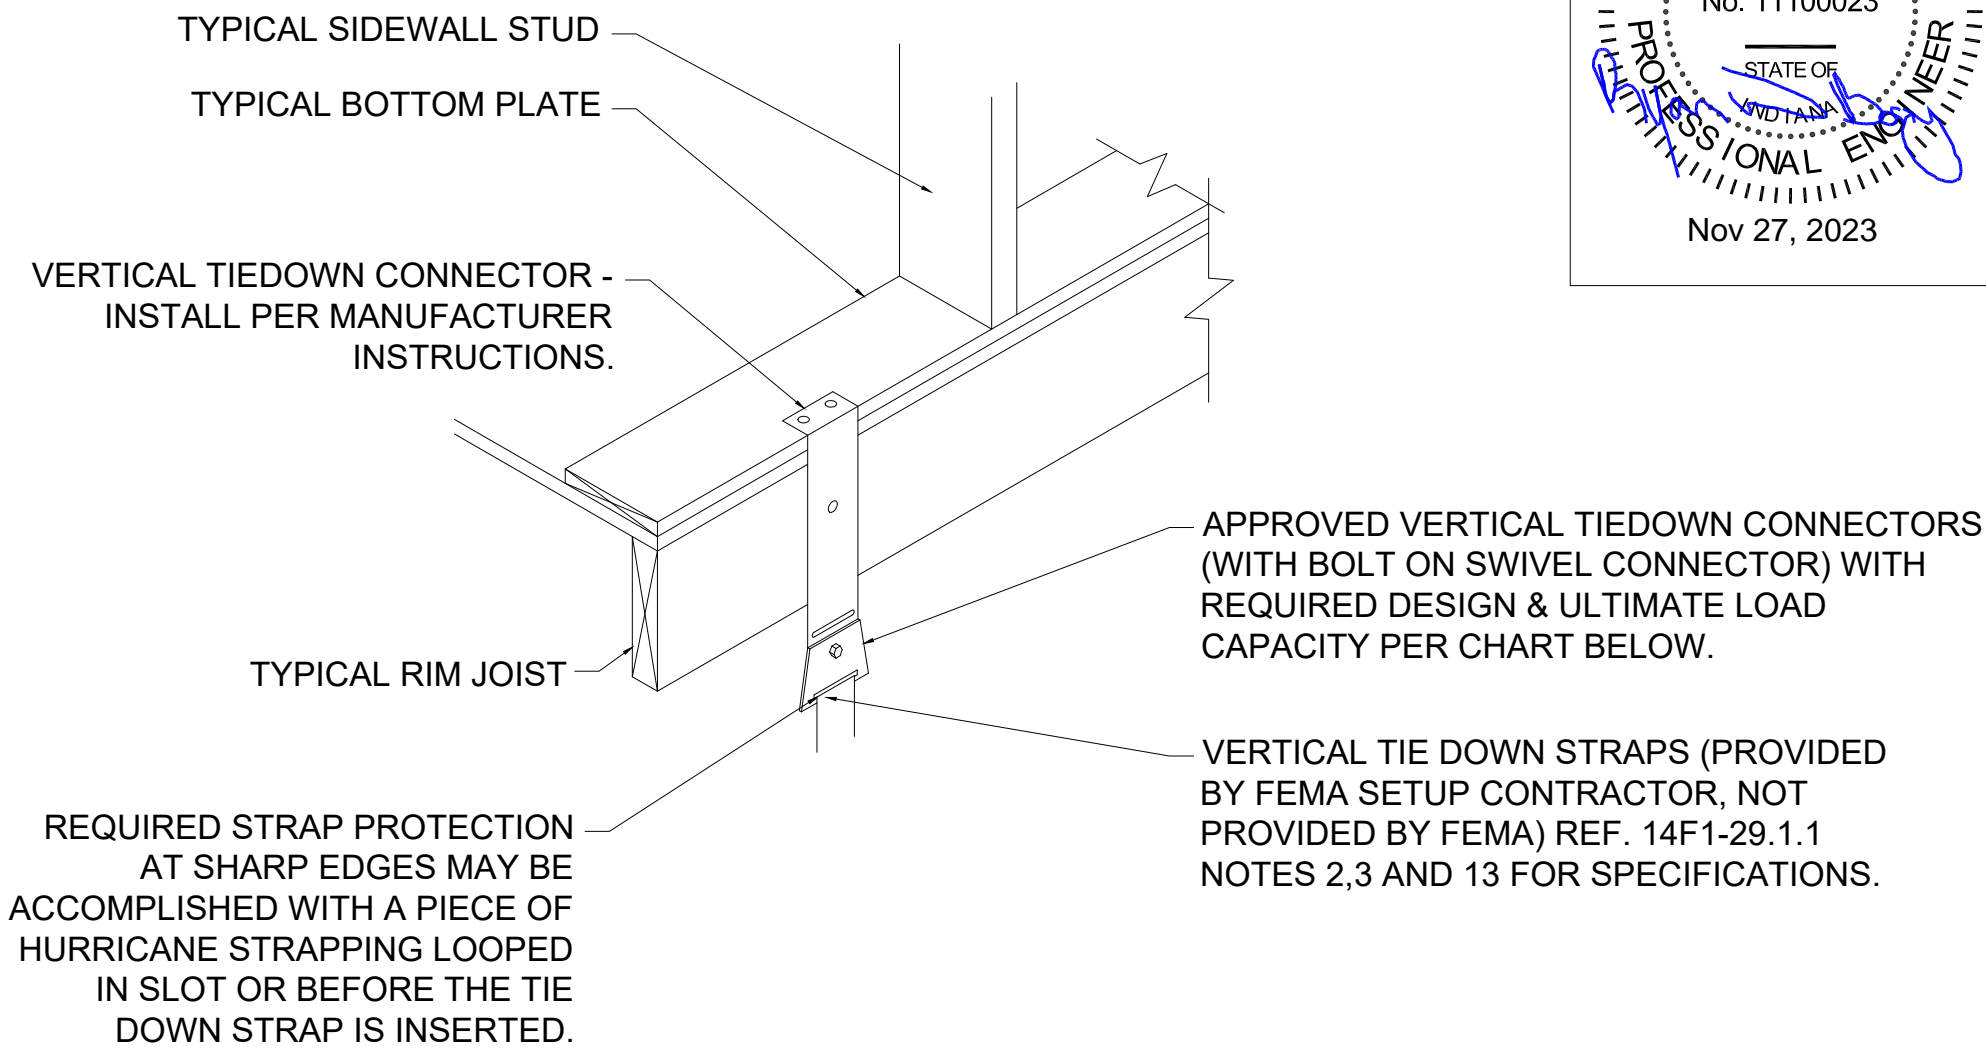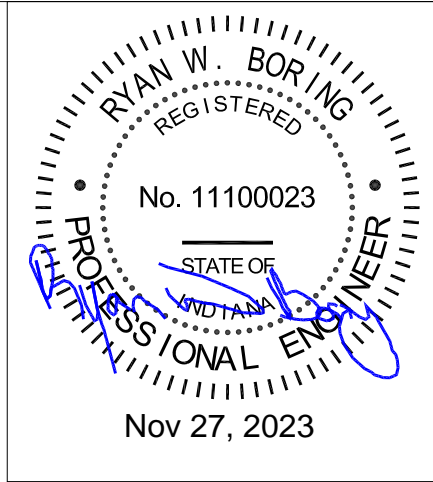



Notes

- 1. FOR USE IN WIND ZONE 3.
- 2. FOR USE WITH 95-1/2" I-BEAM SPACING.
- 3. REF ELIXIR METALS COMPANY TEST REPORT 18-218.

REV 1-17-23

FLOOR WIDTH	SIDEWALL HEIGHT	ROOF SLOPE MAXIMUM	WIND ZONE 3		
			SPACING	REQUIRED DESIGN LOAD CAPACITY	REQUIRED ULTIMATE LOAD CAPACITY
162"	90"	2.95 / 12	5'-4"	1298#	1947#

TYPICAL BLOCKING LAYOUT FOR 14' WIDE MHU

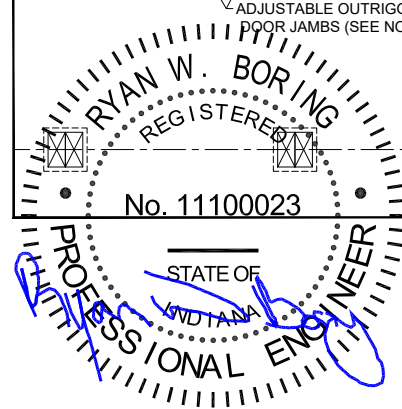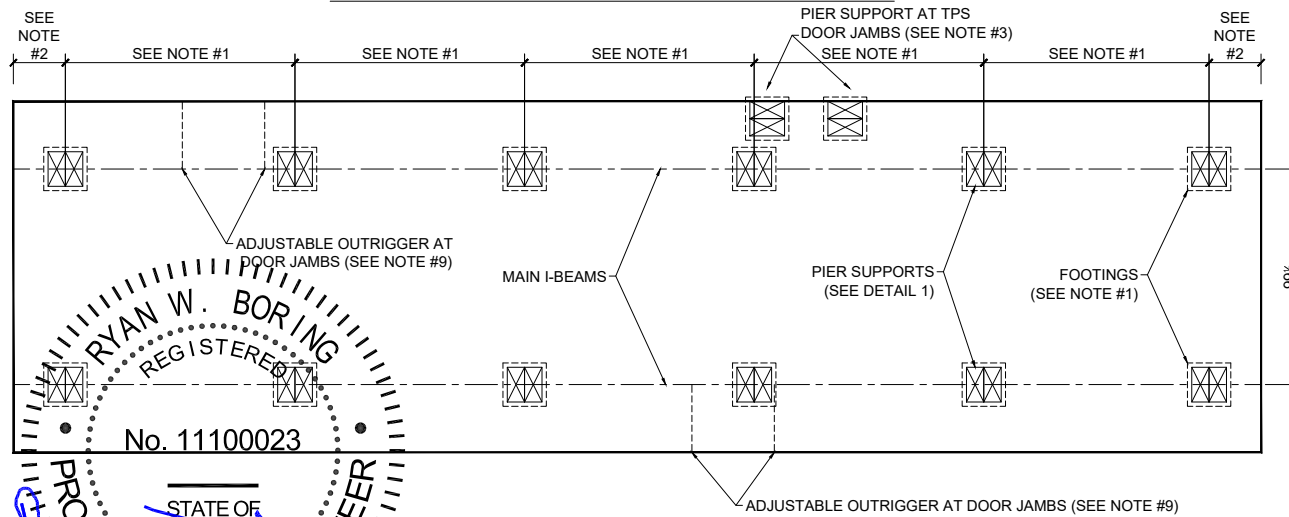

Nov 27, 2023

TABLE A - MINIMUM PIER CAPACITY (FRAME BLOCKING ONLY)

SECTION WIDTH (FEET)	SIDE OVERHANG (INCHES)	ROOF LIVE LOAD (PSF)	MINIMUM PIER CAPACITY (POUNDS)			
			MAXIMUM PIER SPACING (FEET)			
			4	6	8	10
14'-0" WIDE (162" FLOOR)	3" MAX	40	3420#	4875#	6330#	7785#

TABLE B - MINIMUM FOOTER SIZE TABLE

DOUBLE STACK SQUARE FOOTERS


FOOTER LOAD	SOIL BEARING CAPACITY (PSF)											
	1000			1500			2000			3000		
	Y	X	THICKNESS	Y	X	THICKNESS	Y	X	THICKNESS	Y	X	THICKNESS
3000	21	21	4	17	17	4	16	16	4	16	16	4
3500	23	23	4	19	19	4	16	16	4	16	16	4
4000	24	24	4	20	20	4	17	17	4	16	16	4
4500	26	26	5	21	21	4	18	18	4	16	16	4
5000	27	27	6	22	22	4	19	19	4	16	16	4
5500	29	29	7	23	23	4	20	20	4	17	17	4
6000	30	30	7	24	24	4	21	21	4	17	17	4
6500	31	31	8	25	25	5	22	22	4	18	18	4
7000	32	32	8	26	26	5	23	23	4	19	19	4
7500	33	33	9	27	27	6	24	24	4	19	19	4
8000	34	34	9	28	28	6	24	24	4	20	20	4

PIER AND FOOTING NOTES


- SEE TABLE A FOR PIER CAPACITY AND SPACING. SEE TABLE B - MINIMUM FOOTER SIZE TABLE FOR FOOTER SIZE AND THICKNESS.
- PIERS SHALL BE LOCATED AT A MAXIMUM OF 2 FEET FROM BOTH ENDS.
- PERIMETER PIERS ARE REQUIRED AT TPS EXTERIOR DOOR.
- FOR DOUBLE STACK PIER CONSTRUCTION SEE DETAIL 1.
- PIER LOADS ARE BASED ON:
 - 40 PSF FLOOR LIVE LOAD
 - 10 PSF FLOOR DEAD LOAD
 - 5 PSF WALL LOAD
 - 40 PSF ROOF LIVE LOAD
 - 10 PSF ROOF DEAD LOAD
- TABULATED LOADS INCLUDE 150 POUNDS FOR THE PIER LOAD AND 150 PSF FOR THE ASSUMED WEIGHT OF THE 6" THICK CONCRETE FOOTER.
- SHIMS, WHEN REQUIRED, ARE TO BE USED IN PAIRS, INSTALLED IN OPPOSITE DIRECTIONS AND BE FITTED AND DRIVEN TIGHT BETWEEN MAIN I-BEAM FRAME AND SHIMS OR CAPS BELOW. SHIMS MUST BE INSTALLED SO THAT ALL GAPS BETWEEN THE HOME'S BEARING MEMBER (I-BEAM OR RIM OR CENTERLINE JOISTS) ARE FILLED FOR THE LENGTH OF THE PIER OR REQUIRED PLATES. MINIMUM COMPRESSIVE STRESS CAPACITY FOR SHIMS IS 425 PSI.
- STEEL CAPS MUST BE PROTECTED BY A MINIMUM OF A 10 MIL COATING OF AN EXTERIOR PAINT OR AN EQUIVALENT CORROSION RESISTANT PROTECTION.
- ADJUSTABLE OUTRIGGER, PART 1055-18 BY OLIVER TECHNOLOGIES, OR EQUIVALENT SHALL BE INSTALLED AT EXTERIOR DOOR JAMBS, EXCLUDING TPS DOOR LOCATION. MANUFACTURER SHALL PROVIDE 4 ADJUSTABLE OUTRIGGERS WITH EACH NEXTGEN MHU.
- FEMA SET-UP VENDOR SHALL ADJUST PIER SPACING TO AVOID CONFLICT WITH PLANT INSTALLED TIEDOWN BRACKETS.
- A DOUBLE BLOCK PERIMETER PIER OR FEMA JACK STAND SUPPORT MUST BE INSTALLED BELOW THE DRYER DUCT VENT.

DETAIL 1 - DOUBLE STACKED CONCRETE BLOCKS

(MAX. HEIGHT IS 67")

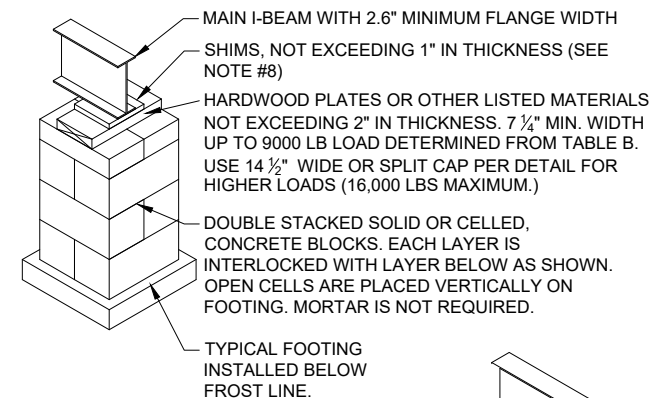

WHEN SPLIT CAPS ARE USED AND THE JOINT RUNS PERPENDICULAR TO THE MAIN I-BEAMS, SHIMS AND BLOCKS MUST BE INSTALLED OVER EACH INDIVIDUAL CAP.



REV 02-25-22

FEMA

COMPANY: Manufactured Housing Units
Federal Emergency Management Agency



TITLE: DOUBLE STACK PIER
LAYOUT AND DETAILS

DATE: 6/28/2019
SCALE: NTS

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO. 14F1-30

TYPICAL BLOCKING LAYOUT FOR 14' WIDE MHU

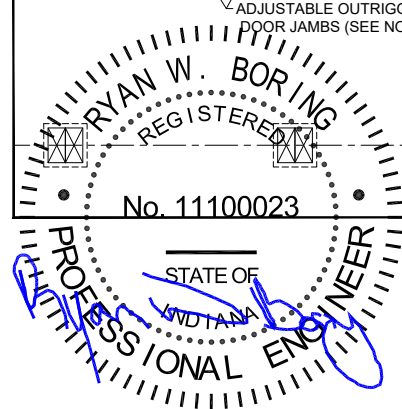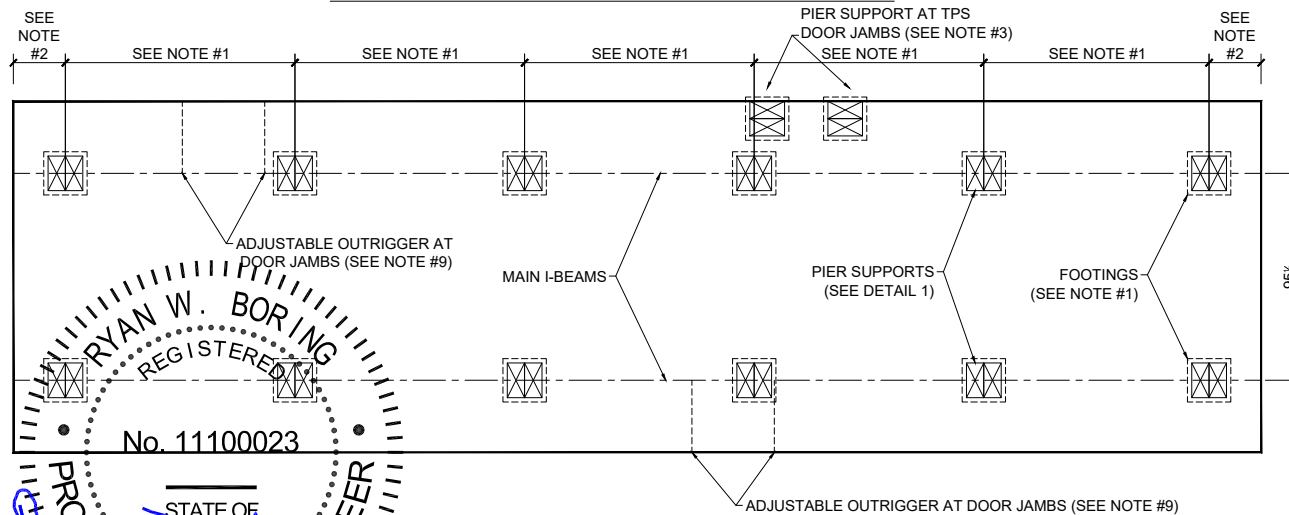

Nov 27, 2023

TABLE A - MINIMUM PIER CAPACITY (FRAME BLOCKING ONLY)

SECTION WIDTH (FEET)	SIDE OVERHANG (INCHES)	ROOF LIVE LOAD (PSF)	MINIMUM PIER CAPACITY (POUNDS)			
			MAXIMUM PIER SPACING (FEET)			
			4	6	8	10
14'-0" WIDE (162" FLOOR)	3" MAX	40	3420#	4875#	6330#	7785#

TABLE B - MINIMUM FOOTER SIZE TABLE

DOUBLE STACK SQUARE FOOTERS


FOOTER LOAD	SOIL BEARING CAPACITY (PSF)											
	1000			1500			2000			3000		
	Y	X	THICKNESS	Y	X	THICKNESS	Y	X	THICKNESS	Y	X	THICKNESS
3000	21	21	4	17	17	4	16	16	4	16	16	4
3500	23	23	4	19	19	4	16	16	4	16	16	4
4000	24	24	4	20	20	4	17	17	4	16	16	4
4500	26	26	5	21	21	4	18	18	4	16	16	4
5000	27	27	6	22	22	4	19	19	4	16	16	4
5500	29	29	7	23	23	4	20	20	4	17	17	4
6000	30	30	7	24	24	4	21	21	4	17	17	4
6500	31	31	8	25	25	5	22	22	4	18	18	4
7000	32	32	8	26	26	5	23	23	4	19	19	4
7500	33	33	9	27	27	6	24	24	4	19	19	4
8000	34	34	9	28	28	6	24	24	4	20	20	4

PIER AND FOOTING NOTES


- SEE TABLE A FOR PIER CAPACITY AND SPACING. SEE TABLE B - MINIMUM FOOTER SIZE TABLE FOR FOOTER SIZE AND THICKNESS.
- PIERS SHALL BE LOCATED AT A MAXIMUM OF 2 FEET FROM BOTH ENDS.
- PERIMETER PIERS ARE REQUIRED AT TPS EXTERIOR DOOR.
- FOR DOUBLE STACK PIER CONSTRUCTION SEE DETAIL 1.
- PIER LOADS ARE BASED ON:
 - 40 PSF FLOOR LIVE LOAD
 - 10 PSF FLOOR DEAD LOAD
 - 5 PSF WALL LOAD
 - 40 PSF ROOF LIVE LOAD
 - 10 PSF ROOF DEAD LOAD
- TABULATED LOADS INCLUDE 150 POUNDS FOR THE PIER LOAD AND 150 PSF FOR THE ASSUMED WEIGHT OF THE 6" THICK CONCRETE FOOTER.
- SHIMS, WHEN REQUIRED, ARE TO BE USED IN PAIRS, INSTALLED IN OPPOSITE DIRECTIONS AND BE FITTED AND DRIVEN TIGHT BETWEEN MAIN I-BEAM FRAME AND SHIMS OR CAPS BELOW. SHIMS MUST BE INSTALLED SO THAT ALL GAPS BETWEEN THE HOME'S BEARING MEMBER (I-BEAM OR RIM OR CENTERLINE JOISTS) ARE FILLED FOR THE LENGTH OF THE PIER OR REQUIRED PLATES. MINIMUM COMPRESSIVE STRESS CAPACITY FOR SHIMS IS 425 PSI.
- STEEL CAPS MUST BE PROTECTED BY A MINIMUM OF A 10 MIL COATING OF AN EXTERIOR PAINT OR AN EQUIVALENT CORROSION RESISTANT PROTECTION.
- ADJUSTABLE OUTRIGGER, PART 1055-18 BY OLIVER TECHNOLOGIES, OR EQUIVALENT SHALL BE INSTALLED AT EXTERIOR DOOR JAMBS, EXCLUDING TPS DOOR LOCATION. MANUFACTURER SHALL PROVIDE 4 ADJUSTABLE OUTRIGGERS WITH EACH NEXTGEN MHU.
- FEMA SET-UP VENDOR SHALL ADJUST PIER SPACING TO AVOID CONFLICT WITH PLANT INSTALLED TIEDOWN BRACKETS.
- A DOUBLE BLOCK PERIMETER PIER OR FEMA JACK STAND SUPPORT MUST BE INSTALLED BELOW THE DRYER DUCT VENT.

DETAIL 1 - DOUBLE STACKED CONCRETE BLOCKS

(MAX. HEIGHT IS 67")

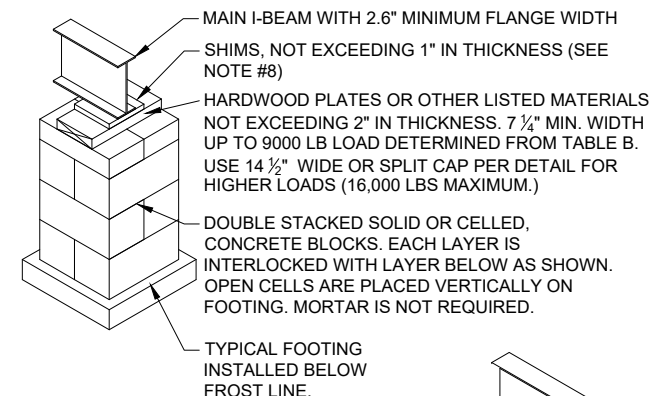

WHEN SPLIT CAPS ARE USED AND THE JOINT RUNS PERPENDICULAR TO THE MAIN I-BEAMS, SHIMS AND BLOCKS MUST BE INSTALLED OVER EACH INDIVIDUAL CAP.



REV 02-25-22

FEMA

COMPANY: Manufactured Housing Units
Federal Emergency Management Agency

TITLE: ALT. DOUBLE STACK PIER LAYOUT
AND DETAILS (95.5" I-BEAM SPACING)

DATE: 4/30/2021
SCALE: NTS

VERSION: 14' WIDE MHU (FURNACE)

DRAWING NO.
14F1-30.1