Solar Install Overview




24@ Canadian Solar Panels installed On West facing or Street side of Roof.

2 Rows of 12 panels portrait oriented

SOL-ARK 12K HYBRID INVERTER PRE-WIRED SYSTEM OUTDOOR

Inverter and Battery Banks to be installed on wall inside the house

26 % more power than

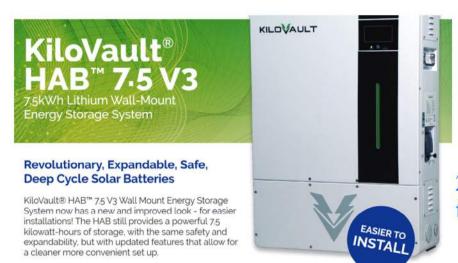

Sol-Ark

1@ Sol-Ark Inverter to handle solar panel output and power distribution.

Grid Failure UPS
Transfer Time 8ms

2@ KiloVault battery banks at 7.5 kw or a total of 15kw of backup power.