


MODEL DESIGNATION: Simonton Horizontal EndVent Series 07-09 / 07-10 Vinyl Impact Window
MAXIMUM OVERALL NOMINAL SIZE: Single up to 113" x 63"
DESIGN PRESSURE RATING: Positive: 50.0 PSF
 Negative: 50.0 PSF
USABLE CONFIGURATIONS: XOX (Quarter / Half / Quarter)

GENERAL DESCRIPTION: The head, sill, and side jambs are extruded PVC. The wall thickness through which the anchor screw penetrates is a minimum of 0.070".

NO P.E. SEAL REQUIRED
 INSTALLATION SUPPORTED
 BY AAMA TEST REPORTS

REV. #:	REVISIONS:	REVISED BY:	DATE:
1	UPDATED FOR 7TH EDITION 2020 FBC.	LMH	12/06/20
2	UPDATE TO CURRENT FBC.	KKB	05/20/24
.	.	.	.
.	.	.	.
.	.	.	.

B

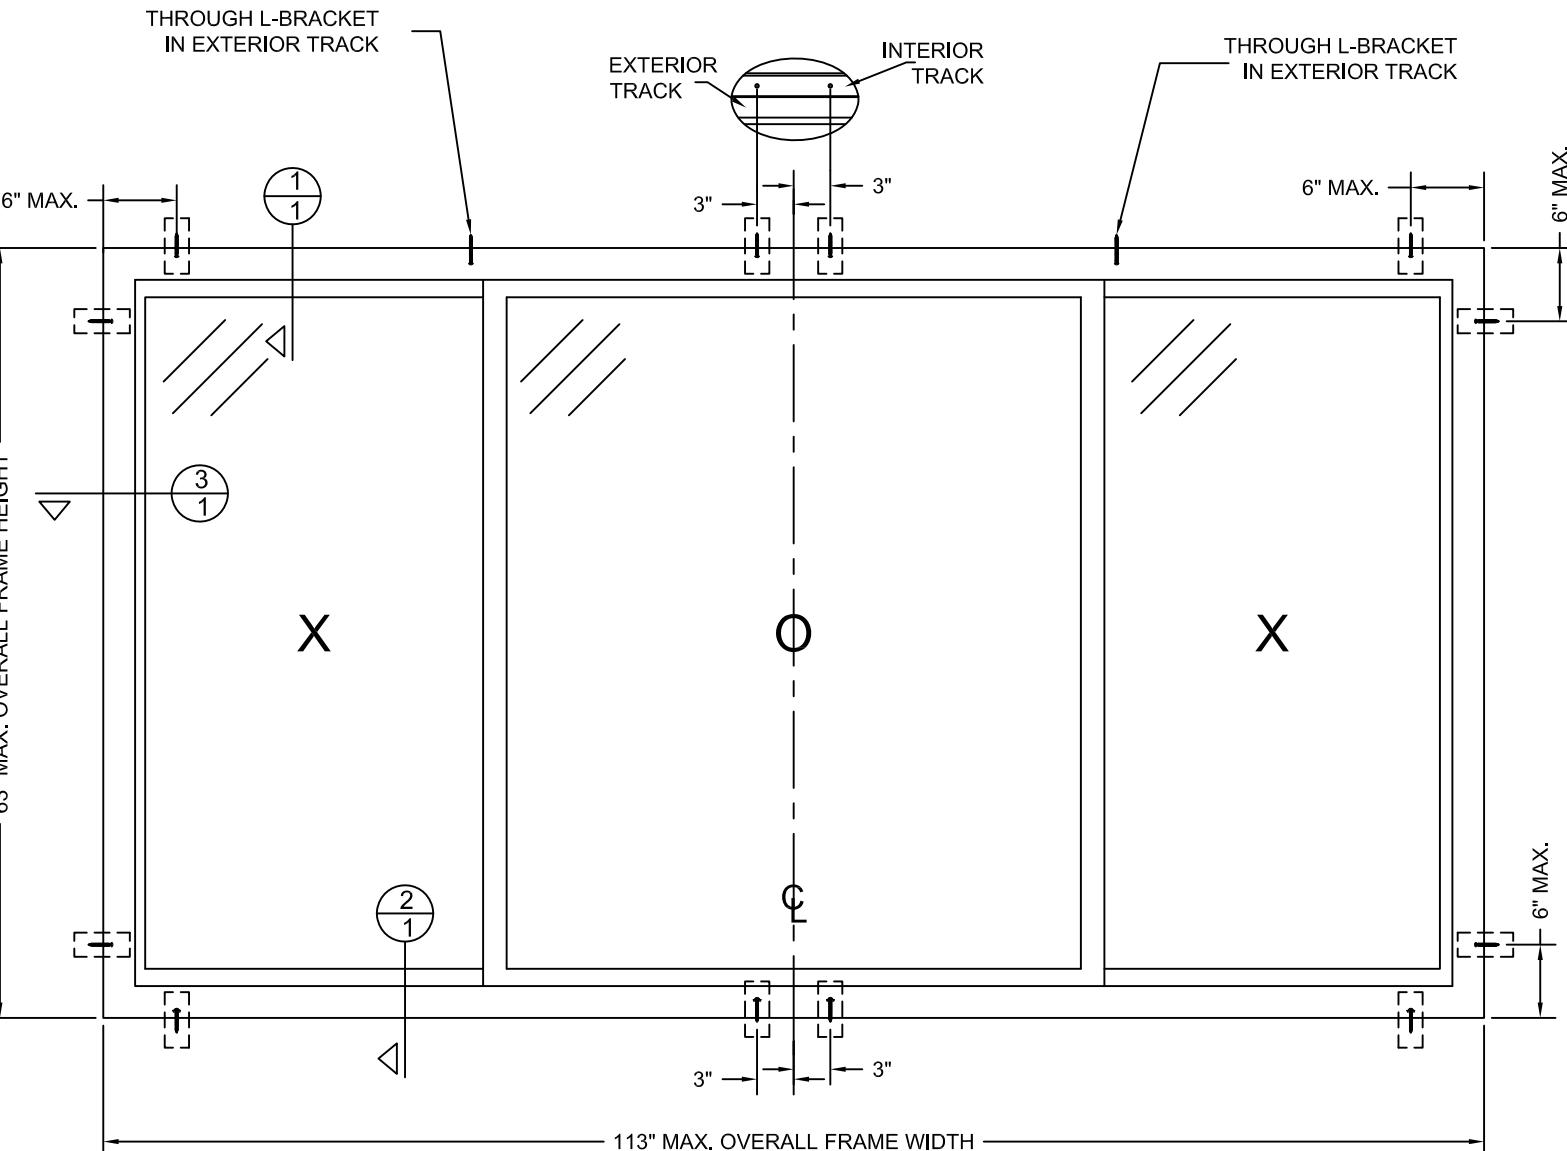


INSTALLED HOLE PRE-DRILLED
 BY MANUFACTURER


DISCLOSURE STATEMENT
 This document is the property of Simonton Windows, which retains all proprietary and other rights to its subject matter. This document is provided to the recipient on the expressed condition that it is not to be disclosed, reproduced in whole or part, nor used in conjunction with the design, manufacture or repair of goods for anyone other than Simonton Windows without its consent. This restriction does not limit the recipient's rights to utilize information contained in this document which is properly obtained from another source.

FILE: FL 10160


**QUALIFIED
 FRAME
 TYPES:**



07-09 FRAME EQUAL LEG
 (FOR ANCHORAGE SEE SHEET 3)



07-10 FRAME WITH INTEGRAL
 MASONRY FLANGE (ANCHORAGE
 SIMILAR TO 07-09, SEE SHEET 3)



07-20 FRAME WITH INTEGRAL NAILING FIN
 (REMOVED) & J-CHANNEL (ANCHORAGE
 SIMILAR TO 07-09, SEE SHEET 3)

MATERIAL:		Dimensional Tolerances Unless Otherwise Specified	0° 30 min.	SIZE: DRAWING NO.: REV.:			
RMS FINISH:				.X ± .03			
EXCEPT AS NOTED				.XX ± .01			
ALLOY & TEMPER:				.XXX ± .005			
WEIGHT:				FIT			
VOLUME:				SHEET: 1 of 4			
SURFACE AREA:				APPRV'D BY: DATE:			
PERIMETER:				SERIES: 07-09 / 07-10 IMPACT HORIZONTAL ENDVENT			
FINISH TREATMENT:				TITLE: 2X BUCK INSTALLATION - QHQ (AS TESTED)			

SIMONTON
 W I N D O W S

1 Cochrane Avenue
 Pennsboro, WV 26415

DRAWN BY: DATE:
 T.D.D./LMH 01/11/17

CHECKED BY: DATE:

SCALE: FIT

SIZE: SHEET: 1 of 4

APPRV'D BY: DATE:


07-09 / 07-10 IMPACT HORIZONTAL ENDVENT

TITLE: 2X BUCK INSTALLATION - QHQ (AS TESTED)


MODEL DESIGNATION: Simonton Horizontal EndVent Series 07-09 / 07-10 Vinyl Impact Window
MAXIMUM OVERALL NOMINAL SIZE: Single up to 113" x 63"
DESIGN PRESSURE RATING: Positive: 50.0 PSF
Negative: 50.0 PSF
USABLE CONFIGURATIONS: XOX (Equal Lites)
GENERAL DESCRIPTION: The head, sill, and side jambs are extruded PVC. The wall thickness through which the anchor screw penetrates is a minimum of 0.070".

**NO P.E. SEAL REQUIRED
INSTALLATION SUPPORTED
BY AAMA TEST REPORTS**


REV. #:	REVISIONS:	REVISED BY:	DATE:
1	UPDATED FOR 7TH EDITION 2020 FBC.	LMH	12/06/20
2	UPDATED TO CURRENT FBC.	KKB	05/20/24
.	.	.	.
.	.	.	.
.	.	.	.

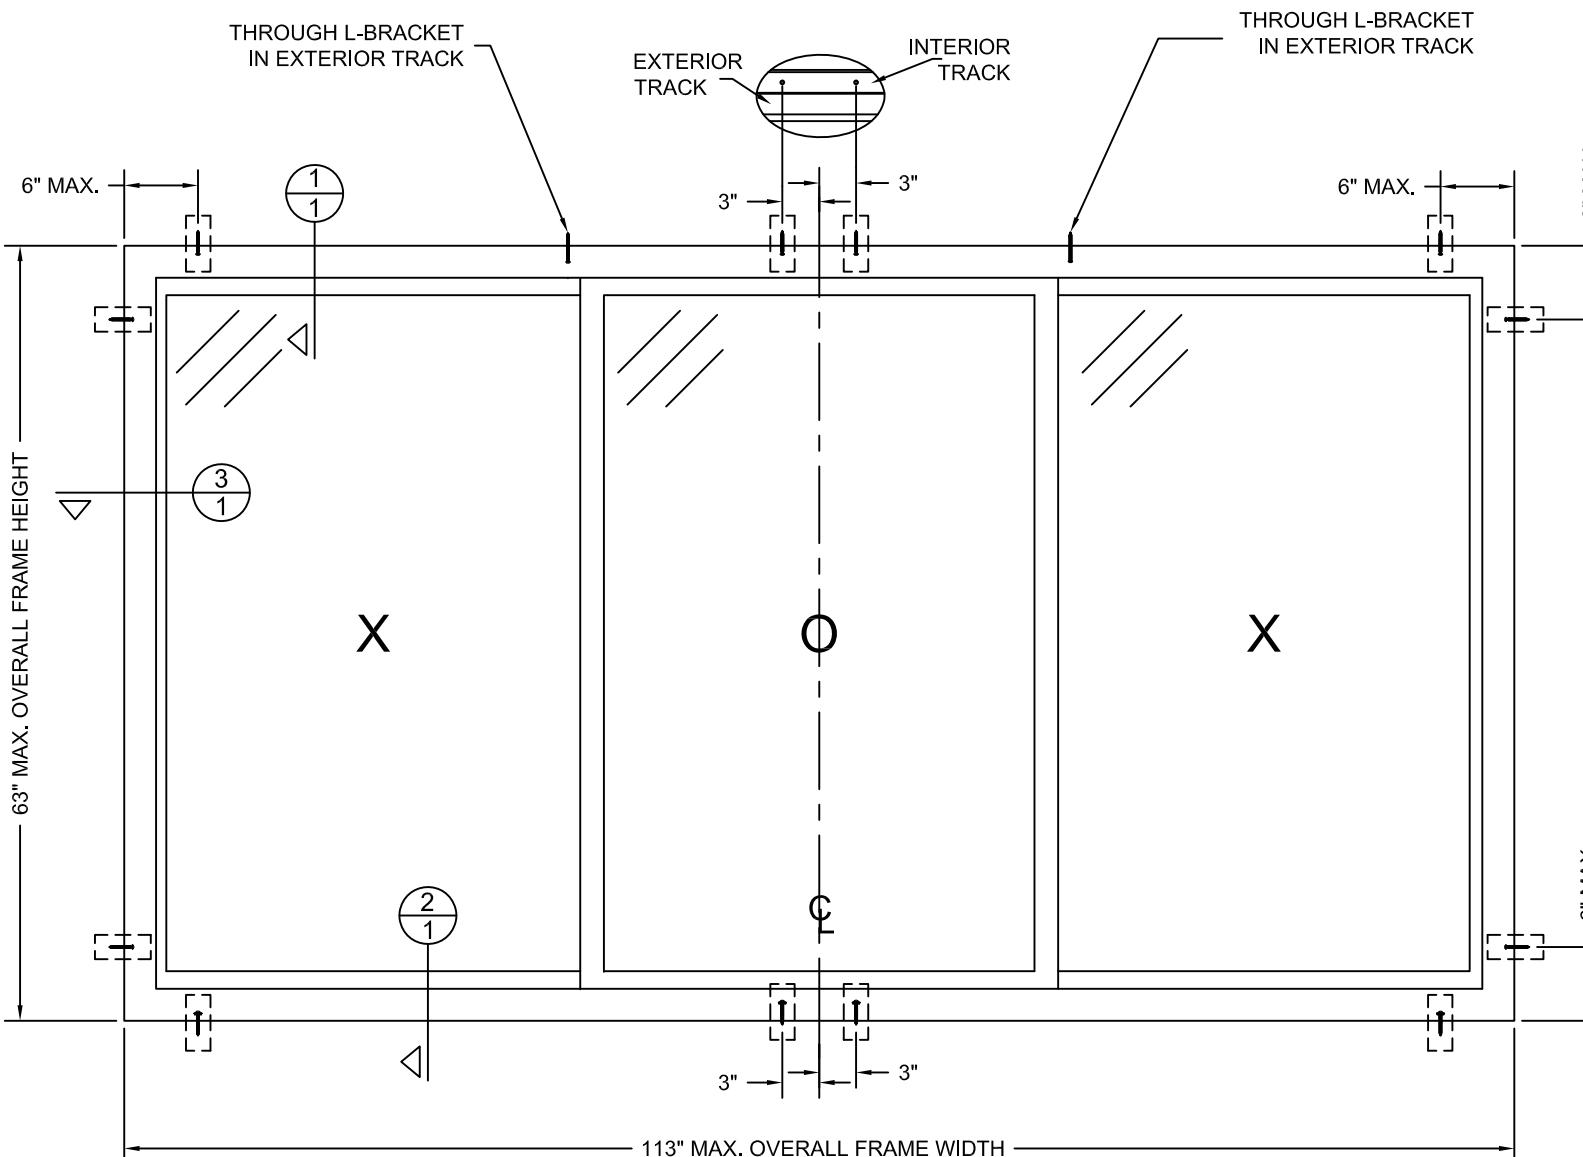


**QUALIFIED
FRAME
TYPES:**

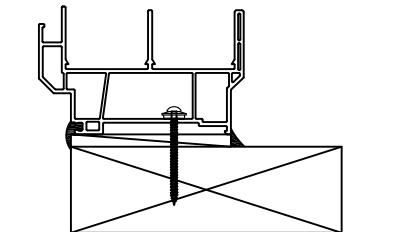

07-09 FRAME EQUAL LEG
(FOR ANCHORAGE SEE SHEET 3)



07-10 FRAME WITH INTEGRAL
MASONRY FLANGE (ANCHORAGE
SIMILAR TO 07-09, SEE SHEET 3)



07-20 FRAME WITH INTEGRAL NAILING FIN
(REMOVED) & J-CHANNEL (ANCHORAGE
SIMILAR TO 07-09, SEE SHEET 3)




INSTALLATION HOLE PRE-DRILLED
BY MANUFACTURER

DISCLOSURE STATEMENT	
This document is the property of Simonton Windows, which retains all proprietary and other rights to its subject matter. This document is provided to the recipient on the expressed condition that it is not to be disclosed, reproduced in whole or part, nor used in conjunction with the design, manufacture or repair of goods for anyone other than Simonton Windows without its consent. This restriction does not limit the recipient's rights to utilize information contained in this document which is properly obtained from another source.	
FILE: FL 10160	
RMS FINISH:	EXCEPT AS NOTED
ALLOY & TEMPER:	
WEIGHT:	VOLUME:
SURFACE AREA:	PERIMETER:
FINISH TREATMENT:	


MATERIAL:		Dimensional Tolerances Unless Otherwise Specified	0° 30 min.	SIMONTON® WINDOWS 1 Cochrane Avenue Pennsboro, WV 26415	DRAWN BY: T.D.D./LMH 01/11/17 CHECKED BY: DATE: SCALE: FIT 0° 30 min. SERIES: 07-09 / 07-10 IMPACT HORIZONTAL ENDVENT TITLE: 2X BUCK INSTALLATION - EQ (AS TESTED)	SIZE:	DRAWING NO.:	REV.:				
RMS FINISH:	EXCEPT AS NOTED					Decimals	Angles	XX ± .03				
ALLOY & TEMPER:						XX ± .01		XXX ± .005				
WEIGHT:	VOLUME:											
SURFACE AREA:	PERIMETER:											
FINISH TREATMENT:												

NO P.E. SEAL REQUIRED
INSTALLATION SUPPORTED
BY AAMA TEST REPORTS


REV. #:	REVISIONS:	REVISED BY:	DATE:
1	UPDATED FOR 7TH EDITION 2020 FBC.	LMH	12/06/20
2	UPDATED TO CURRENT FBC.	KKB	5/20/24

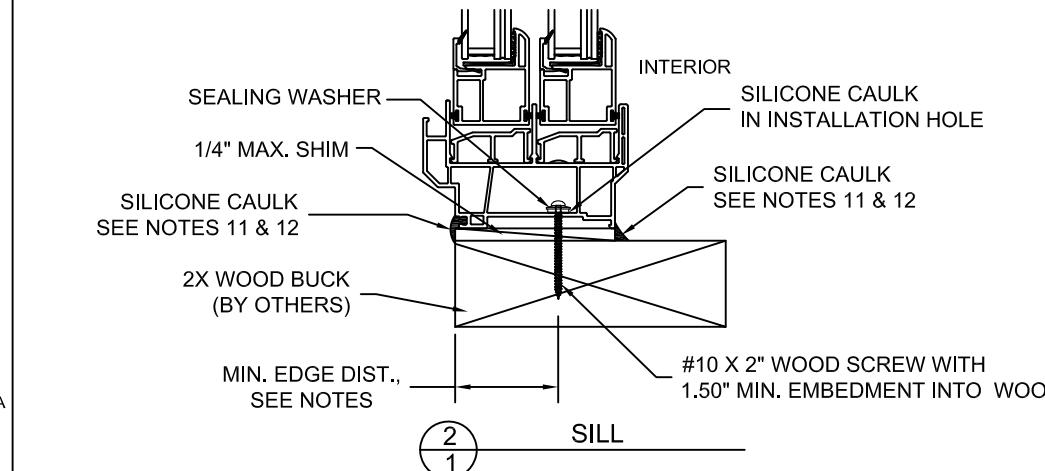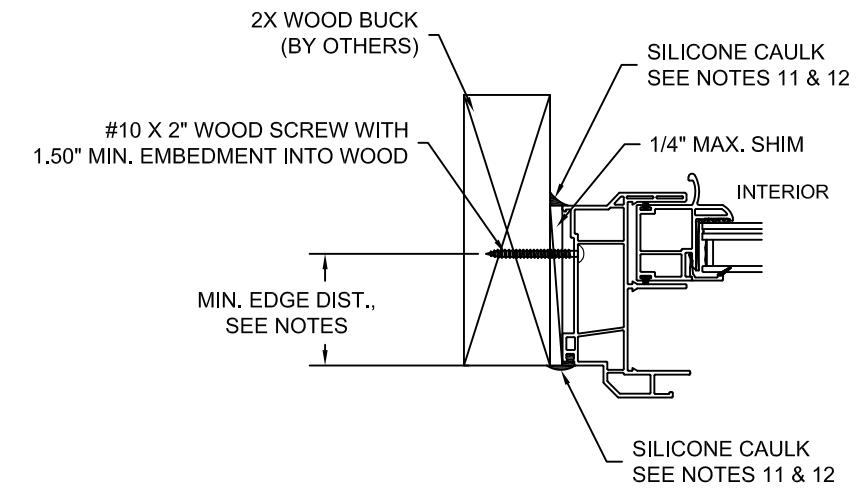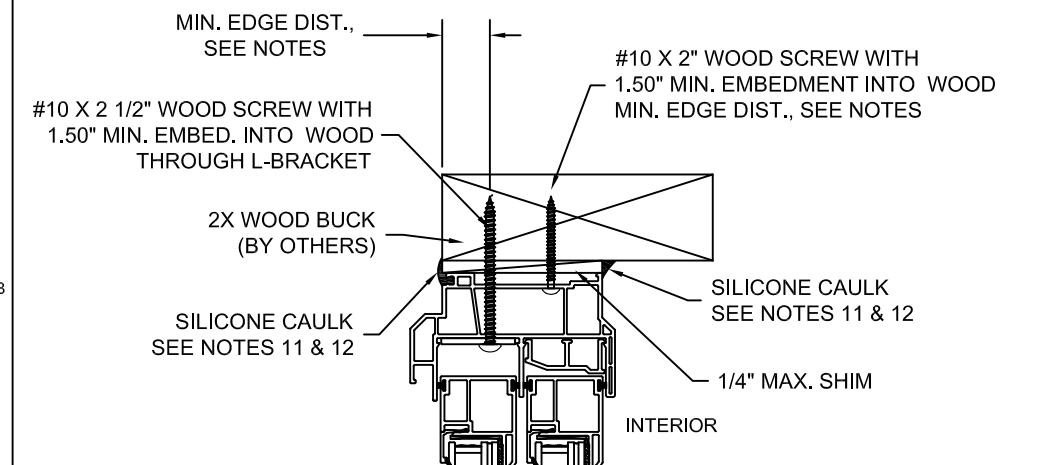

XOX - Quarter / Half / Quarter

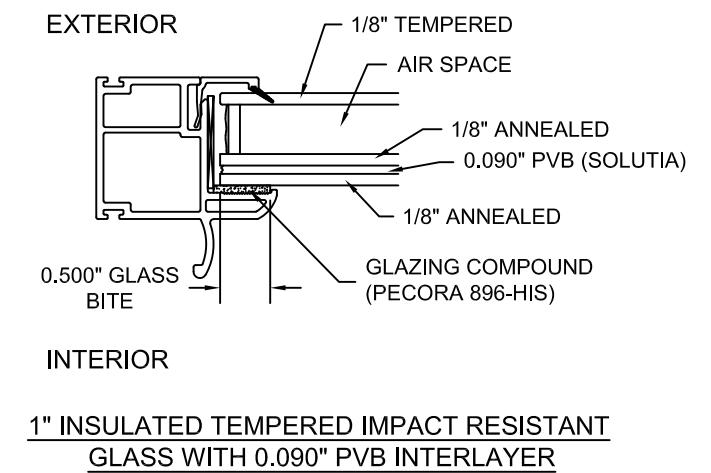

XOX - Equal

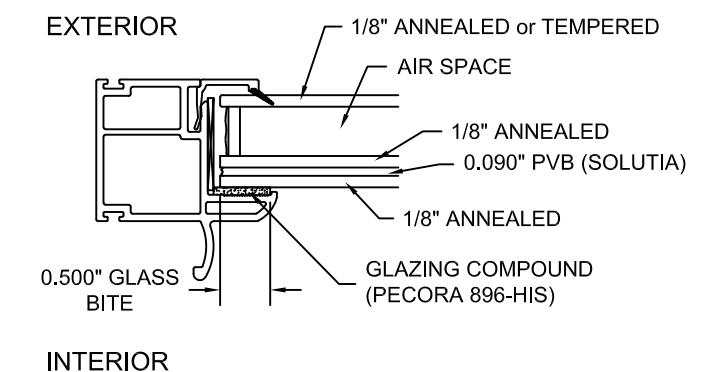

DISCLOSURE STATEMENT	
This document is the property of Simonton Windows, which retains all proprietary and other rights to its subject matter. This document is provided to the recipient on the expressed condition that it is not to be disclosed, reproduced in whole or part, nor used in conjunction with the design, manufacture or repair of goods for anyone other than Simonton Windows without its consent. This restriction does not limit the recipient's rights to utilize information contained in this document which is properly obtained from another source.	
FILE: FL 10160	
3	

MATERIAL:	Dimensional Tolerances Unless Otherwise Specified		SIMONTON [®] W I N D O W S 1 Cochrane Avenue Pennsboro, WV 26415	SIZE: DRAWING NO.: B IN0587 2 DRAWN BY: T.D.D./LMH DATE: 01/11/17 CHECKED BY: DATE: SCALE: FIT SHEET: 3 of 4 APPRV'D BY: DATE: SERIES: 07-09 / 07-10 IMPACT HORIZONTAL ENDVENT TITLE: ANCHOR & GLAZING DETAILS
RMS FINISH:	EXCEPT AS NOTED	Decimals Angles		
ALLOY & TEMPER:				
WEIGHT:	VOLUME:			
SURFACE AREA:	PERIMETER:			
FINISH TREATMENT:				
		.X ± .03 .XX ± .01 .XXX ± .005	0° 30 min.	

NO P.E. SEAL REQUIRED
INSTALLATION SUPPORTED
BY AAMA TEST REPORTS

REV. #:	REVISIONS:	REVISED BY:	DATE:
1	UPDATED FOR 7TH EDITION 2020 FBC.	LMH	12/06/20
2	UPDATED TO CURRENT FBC.	KKB	5/20/24

NOTES:

- I. THIS INSTALLATION HAS BEEN EVALUATED FOR USE IN LOCATIONS ADHERING TO THE FLORIDA BUILDING CODE AND WHERE PRESSURE REQUIREMENTS AS DETERMINED BY ASCE 7 MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES DO NOT EXCEED THE DESIGN PRESSURE RATINGS HEREIN, FOR USE OUTSIDE THE H.V.H.Z.
2. ALL INTERIOR AND EXTERIOR PERIMETER SURFACES OF THE WINDOW MUST BE CAULKED.
3. ANCHORS SHALL BE SPECIFIED AND SPACED AS SHOWN ANCHOR EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO AND INTO WOOD.
4. THE RESPONSIBILITY FOR SELECTION OF SIMONTON PRODUCTS TO MEET ANY APPLICABLE LOCAL LAWS, BUILDING CODES, ORDINANCES, OR OTHER SAFETY REQUIREMENTS RESTS SOLELY WITH THE ARCHITECT, BUILDING OWNER, OR CONTRACTOR.
5. SHIMS ARE OPTIONAL. MAXIMUM SHIM STACK IS 1/4".
6. WOOD BUCKS (BY OTHERS) MUST BE ENGINEERED AND ANCHORED PROPERLY TO TRANSFER LOADS TO THE STRUCTURE.
7. WHEN USED IN AREAS REQUIRING IMPACT PROTECTION, THIS PRODUCT DOES NOT REQUIRE THE USE OF IMPACT RESISTANT SHUTTERS OR OTHER EXTERNAL PROTECTION.
8. FLASHING SHOULD BE APPLIED USING THE ASTM E 2112 METHOD APPROPRIATE FOR THE OPENING INTO WHICH THE WINDOW IS BEING INSTALLED.
9. INSTALLATION SCREWS MUST BE AT LEAST 3/4" FROM THE EDGE OF THE WOOD.
10. THIS PRODUCT COMPLIES WITH ASTM E 1300.
- II. USE A BACKER ROD ON ALL JOINTS >3/4" DEEP AND/OR WIDER THAN 1/4". FINISHED CAULK JOINT SHOULD BE A MINIMUM OF 3/8" DEEP.
12. DESIGNATION "X" AND "O" STAND FOR THE FOLLOWING:

X: OPERABLE PANEL

O: FIXED PANEL

DISCLOSURE STATEMENT	
This document is the property of Simonton Windows, which retains all proprietary and other rights to its subject matter. This document is provided to the recipient on the expressed condition that it is not to be disclosed, reproduced in whole or part, nor used in conjunction with the design, manufacture or repair of goods for anyone other than Simonton Windows without its consent. This restriction does not limit the recipient's rights to utilize information contained in this document which is properly obtained from another source.	
FILE: FL 10160	

MATERIAL:		Dimensional Tolerances Unless Otherwise Specified	0° 30 min.		
RMS FINISH:	EXCEPT AS NOTED				
ALLOY & TEMPER:					
WEIGHT:	VOLUME:				
SURFACE AREA:	PERIMETER:				
FINISH TREATMENT:					
.X ± .03					
.XX ± .01					
.XXX ± .005					

SIMONTON®		SIZE:	DRAWING NO.:	REV.:
B	IN0587	2		
DRAWN BY:		DATE:		
T.D.D./LMH		01/11/17		
CHECKED BY:		DATE:		
SCALE:	SHEET:	APPRV'D BY:	DATE:	
FIT	4 of 4			
SERIES:	07-09 / 07-10 IMPACT HORIZONTAL ENDVENT			
TITLE:	NOTES & INSTALL ANCHOR TABLE			