

# WEST SIDE COMMUNITY CENTER

128 SW NASSAU STREET  
LAKE CITY, FL 32025  
(386)758-4203


CERTIFICATE OF AUTHORIZATION # 00030701



DATE  
11/5/10  
DRAWN BY  
W.H.F.  
APPROVED  
W.H.F.

REVISIONS

SHEET E-5  
OF 5  
PROJECT NO.  
09.C037

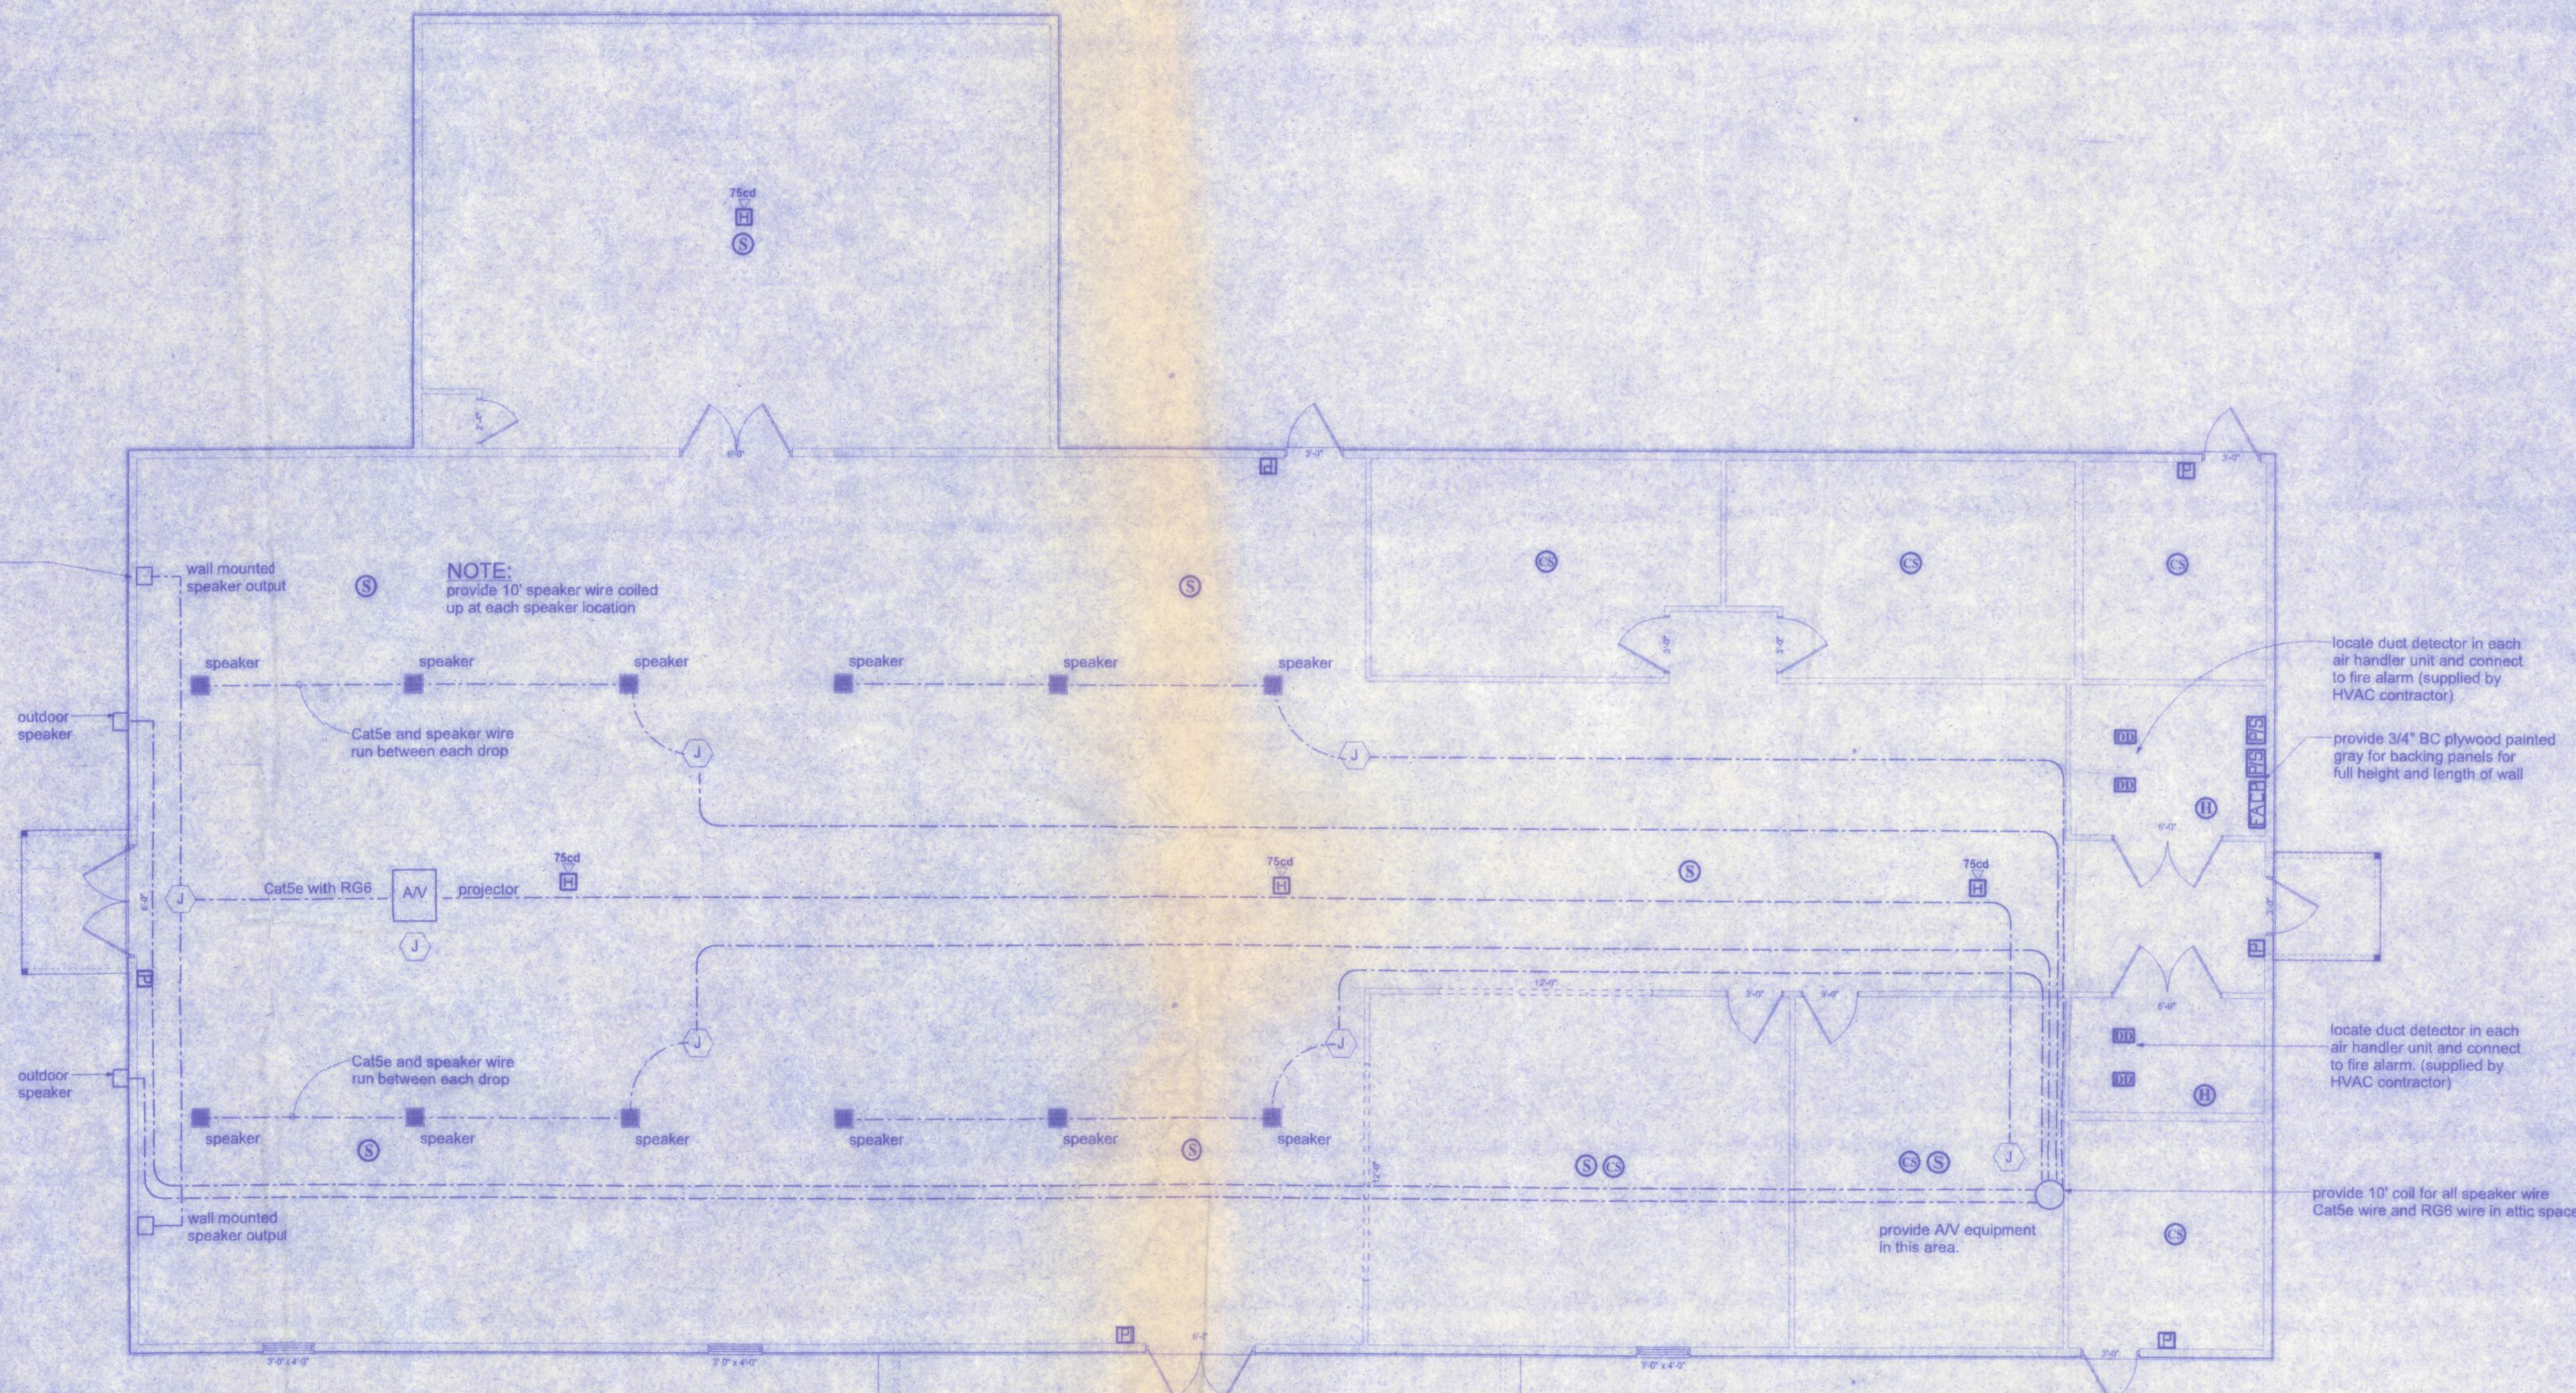

| FIRE ALARM SCHEDULE |                       |                    |                                   |
|---------------------|-----------------------|--------------------|-----------------------------------|
| QUANTITY            | MAKE                  | CAT. NO.           | DESCRIPTION                       |
| 1                   | Fire-Lite Alarms Inc. | MS-5UD-3           | 5 zone conventional panel         |
| 2                   | Toyo/US Power         | 6FM7               | 7AH 12 V sealed lead acid battery |
| 6                   | Fire-Lite Alarms Inc. | BG12               | dual action pull station          |
| 8                   | Generic Vendor        | 2WB Smoke Detector |                                   |
| 2                   | GS Bldg. Sys.         | 281B-PL            | heat detector 135F ROR            |
| 2                   | Fire-Lite Alarms Inc. | PC2W               | horn/strobe white ceiling mount   |
| 6                   | Fire-Lite Alarms Inc. | SCW                | strobe white ceiling mount        |

| AUDIO VIDEO PREWIRE SCHEDULE |                                                             |          |
|------------------------------|-------------------------------------------------------------|----------|
| ITEM                         | DESCRIPTION                                                 | QUANTITY |
| FA-TR6                       | Atlas Sound New Construction Ring 6" Strategy Series (each) | 12       |
| HDVAVMINI                    | Mini-HDAV Cable - foot                                      | 100      |
| CAT5ES                       | 24/4pr - shielded category cable - foot                     | 600      |
| SC182                        | 18/2 HiFlex Speaker Cable - Foot                            | 500      |
| SC224                        | 22/4 HiFlex IR Cable                                        | 600      |
| RG6QSC                       | Quadshield Solid Copper 3 GHz Cable - foot                  | 600      |
| Misc.                        | Misc. parts - Low Voltage Boxes                             | 1        |

**ALARM/AUDIO/VISUAL PLAN**  
SCALE: 3/16" = 1'-0"

| ELECTRICAL               | SYMBOL    |
|--------------------------|-----------|
| Ceiling Strobe           | CS        |
| Duct Detector            | DD        |
| Fire Alarm Control Panel | FACP      |
| Heat Detector            | H         |
| Horn-Strobe 75cd         | 75cd<br>H |
| Power Supply             | PS        |
| Pull Station             | PS        |
| Smoke Detector           | S         |
| Junction box             | J         |