ROOM FINISH SCHEDULE

(Filled Out By Owner)

ROOM NO	ROOM NAME	FLOOR					WALLS																								CEILING				NOTES
							SOUTH							WEST						NORTH							EAST									
							MATERIAL					FINISH		MATERIAL				FINISH		MATERIAL				FINISH			MATERIAL				FINISH			MATERIAL	FINISH	HEIGHT	
		CARPET	CT	VCT	TEXTURE FINISH	PAINTED CONC	G.W.B.	DENSE SHIELD	1/2" B-C PLYWOOD	PAINT	FRP PANEL	CT	WAINSCOT/CHAIRRAIL	G.W.B.	DENSE SHIELD	1/2" B-C PLYWOOD	PAINT	FRP PANEL	CT	WAINSCOT/CHAIRRAIL	G.W.B.	DENSE SHIELD	1/2" B-C PLYWOOD	PAINT	FRP PANEL	CT	WAINSCOT/CHAIRRAIL	G.W.B.	DENSE SHIELD	1/2" B-C PLYWOOD	PAINT	FRP PANEL	CT	WAINSCOT/CHAIRRAIL	G.W.B.	SUSPENDED A.T.	1/2" B-C PLYWOOD	1/2" CMT BACKER BD	PAINT	STUCCO	* 9'-6 U.N.O.	
101	ACTIVITY AREA			●			●			●			●	●			●			●	●			●			●	●			●			●	●			vaulted	color selected by owner
102	STORAGE					●			●	●				●		●	●			●			●	●			●			●	●			●	●			*	color selected by owner
103	SERVING AREA			●			●			●				●			●			●	●			●			●	●			●			●	●			*	color selected by owner
104	OFFICE			●			●			●				●			●			●	●			●			●	●			●			●				*	color selected by owner
105	MEN			●				●			●				●			●				●			●			●			●			●		●		10'-0"	color selected by owner
106	WOMEN			●				●			●				●			●				●			●			●			●			●		●		10'-0"	color selected by owner
107	MEN (OUTSIDE)					●			●			●				●			●				●			●			●			●			●	●		10'-0"	color selected by owner
108	MECHANICAL					●	●							●						●							●												unfinished ceiling
109	MECHANICAL					●	●							●						●							●												unfinished ceiling
110	WOMEN (OUTSIDE)					●			●			●				●			●				●			●			●			●			●	●		10'-0"	color selected by owner
	PORTE-CO																																		●	●	11'-4"	color selected by owner

NOTE:
ALL WOOD TRIM RECEIVING PAINT SHALL BE PAINT GRADE FINGER JOINTED.
ALL WOOD TRIM RECEIVING STAIN, SHALL BE STAIN GRADE, NOT FINGER JOINTED.

NOTE:
ALL WALLS SHALL RECEIVE A LEVEL 5 SMOOTH FINISH.
ALL WALLS SHALL RECEIVE ONE PRIMER COAT AND 2 FINISH COATS OF LATEX PAINT, COLOR BY OWNER.
WALL PAINT SHALL BE SATIN FINISH.
TRIM AND DOORS SHALL BE SEMI-GLOSS FINISH.

NOTE:
PROVIDE TRANSITION STRIPS BETWEEN DIFFERENT TYPES OF FLOORING.

MATERIAL	MANUFACTURER	SPECIFICATION	COMMENTS
ACCOUSTICAL CEILING	Armstrong	2' x 4' panels #942 Textured square edged panels	
FRP panel	Marlite	0.090" x 4'W x 8'H White FRP Wall Panel sand pepple texture	install per mfgr. provide molding at joints
V.C.T.	Armstrong	Imperial Texture 51908 1/8" thick	Pewter
CERAMIC WALL TILE	Laufen	6" x 6" ceramic tile	color by owner
DECORATIVE MOSAIC STRIP	American Olean	Lyndhurst Mosaics 2"x2"	color by owner
CERAMIC FLOOR TILE	Laufen	13" x 13" ceramic tile	color by owner
PAINT	Sherwin Williams	DTM Acrylic Gloss SW1013 - Trim, Door Jambs,Metal Exterior Doors Pro Mar 200 Eggs-hell SW1018 - Walls	
CORNER GUARD	Wall Protex	4200 HWF Clear, corner guard with holes and fasteners, 2" x 48"	locate at each outside corner
4" x 0.125" VINYL BASE	Johnsonite	4" x 0.125" standard toe	color to match existing



NOTE:
locate at all corners not receiving wainscott

CORNER GUARD

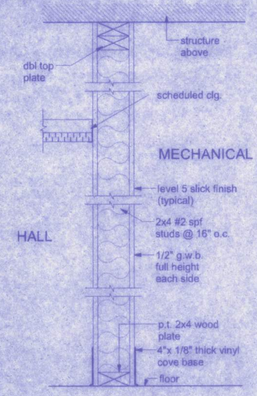

1 FULL HEIGHT PARTITION
@ MECHANICAL ROOM

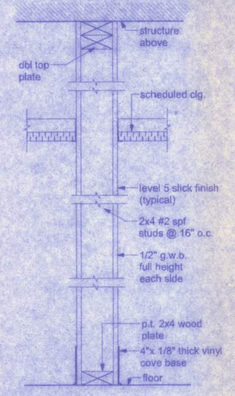

2 FULL HEIGHT PARTITION
@ INTERIOR PARTITIONS

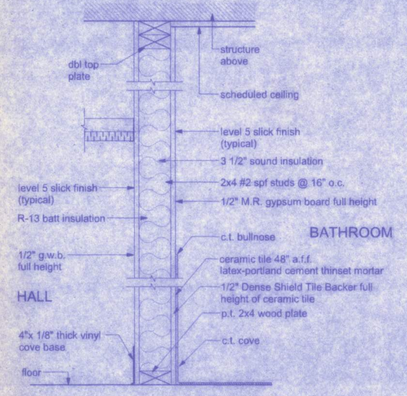

3 FULL HEIGHT BATHROOM PARTITION
CERAMIC WALL TILE TO 4'-0" HEIGHT

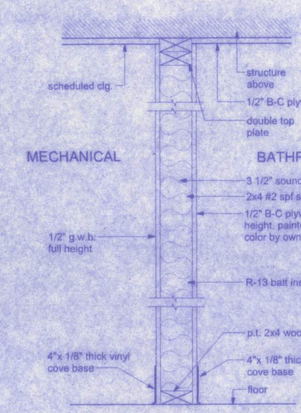

4 FULL HEIGHT EXTERIOR BATHROOM PARTITION

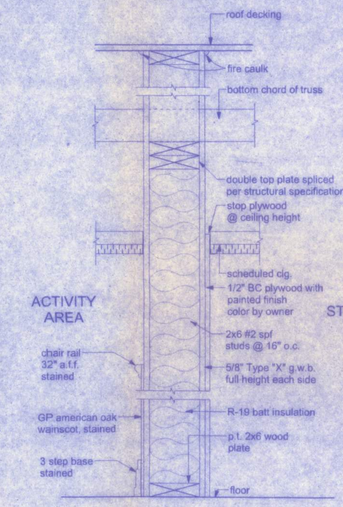

5 FULL HEIGHT LOAD BRG. 1 HR PARTITION - (UL - U305)
continuous to roof deck

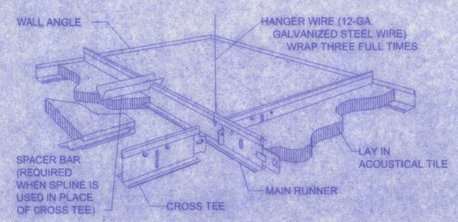

CEILING DETAIL
NTS





CERAMIC TILE FINISH

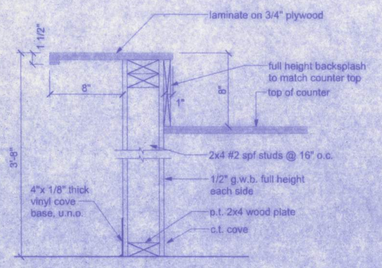

SECTION AT PASS THROUGH

WEST SIDE COMMUNITY CENTER

128 SW NASSAU STREET
LAKE CITY, FL. 32025
(386)758-4209

CERTIFICATE OF AUTHORIZATION # 00008701

Freeman Design Group Inc

DATE	DRAWN BY
11/5/10	W.H.F.
	APPROVED W.H.F.

REVISIONS

SHEET A-10
OF 11

PROJECT NO.
09.C037