


BEARING HEIGHT SCHEDULE

PLATE1

Lot's
Block F

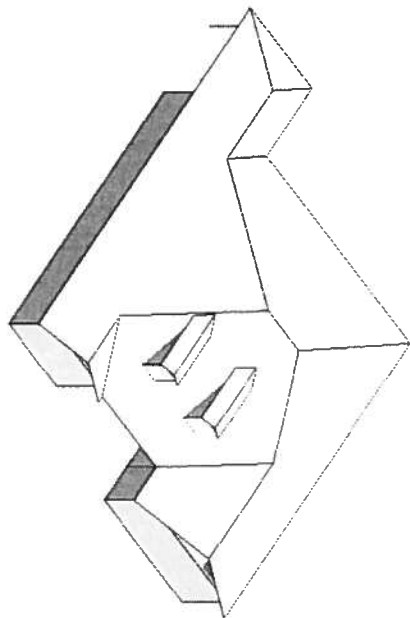

NOTES:

- 1) REFER TO HIB 91 (RECOMMENDATIONS FOR HANDLING INSTALLATION AND TEMPORARY BRACING), REFER TO ENGINEERED DRAWINGS FOR PERMANENT BRACING REQUIRED
- 2) ALL TRUSSES (INCLUDING TRUSSES UNDER VALLEY BRACING) ARE TO BE COMPLETELY VALUED OR REFER TO DESIGN FOR ALTERNATE BRACING REQUIREMENTS
- 3) ALL VALLEYS ARE TO BE CONVENTIONALLY FRAMED BY BUILDER
- 4) ALL TRUSSES ARE DESIGNED FOR 2' o.c. MAXIMUM SPACING, UNLESS OTHERWISE NOTED
- 5) ALL WALLS SHOWN ON PLACEMENT PLAN ARE CONSIDERED TO BE LOAD BEARING, UNLESS OTHERWISE NOTED
- 6) S142 TRUSSES MUST BE INSTALLED WITH THE TOP BEING UP
- 7) ALL ROOF TRUSS HANGERS TO BE SIMPSON HUS28 UNLESS OTHERWISE NOTED. ALL FLOOR TRUSS HANGERS TO BE SIMPSON TH4422 UNLESS OTHERWISE NOTED
- 8) BEAM/HEADER, INTEL. (DPS) TO BE FURNISHED BY BUILDER

SHOP DRAWING APPROVAL

THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND VOIDS. ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS, REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.

Engineered Drawing Date _____

Approved by _____ Date _____



Burnell
PHONE 904-437-5349 FAX 904-437-5994
Jacksonville
PHONE 904-772-6100 FAX 904-772-1975
Lake City
PHONE 904-755-6894 FAX 904-755-7973
Sanford
PHONE 407-322-0094 FAX 407-322-9953

BUILDER: **AARON SIMQUE**

LOT 5 SVE

ARLINGTON

DATE 12-21-05 JRD L143613