


END WALL BRACING FOR CEILING DIAPHRAGM

(ALTERNATIVE TO BALLOON FRAMING)

NOTE: ALL WOOD TO BE NUMBER 2 GRADE SOUTHERN YELLOW PINE

ROOF SHEATHING FASTENINGS				
NAILING ZONE	SHEATHING TYPE	FASTENER	SPACING	
1	1/16 " 0.\$.B. OR 15/32 CDX	2 ½"XO,131" RING SHANK NAILS or 3"XO,120" RING SHANK NAILS	6 in. o.c. EDGE 6 in. o.c. FIELD	
2			6 in. o.c. EDGE 6 in. o.c. FIELD	
W			4 in. o.c. @ GABLE ENDWALL OR GABLE TRUSS 6 in. o.c. EDGE 6 in. o.c. FIELD	

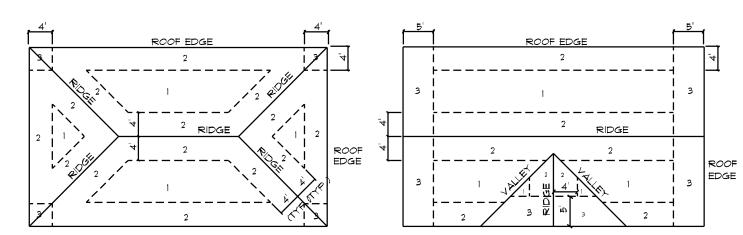


ROOF SHEATHING NAILING ZONES (HIP ROOF)

ROOF SHEATHING NAILING ZONES (GABLE ROOF)

B




DBL, TOP PLATE

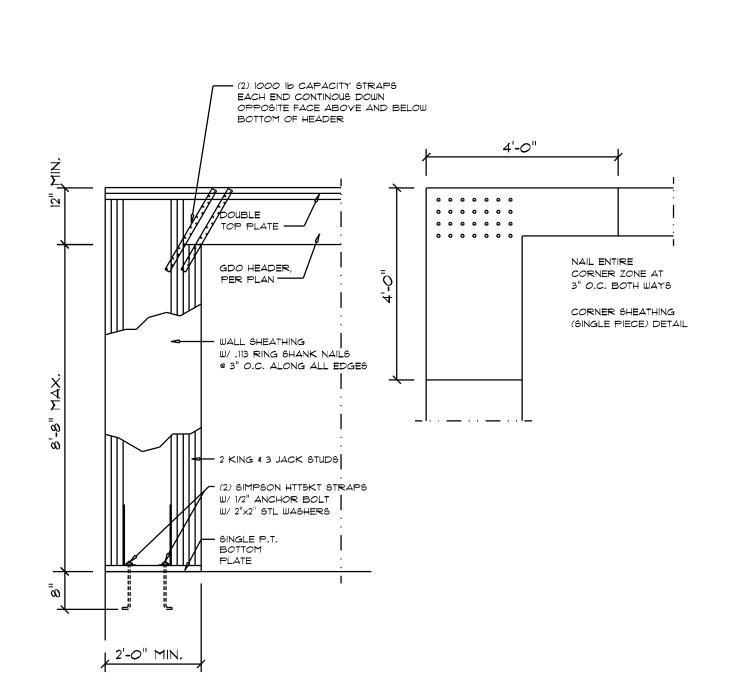


Garage End Wall DETAILS


SCALE: 1/2" = 1'-0"

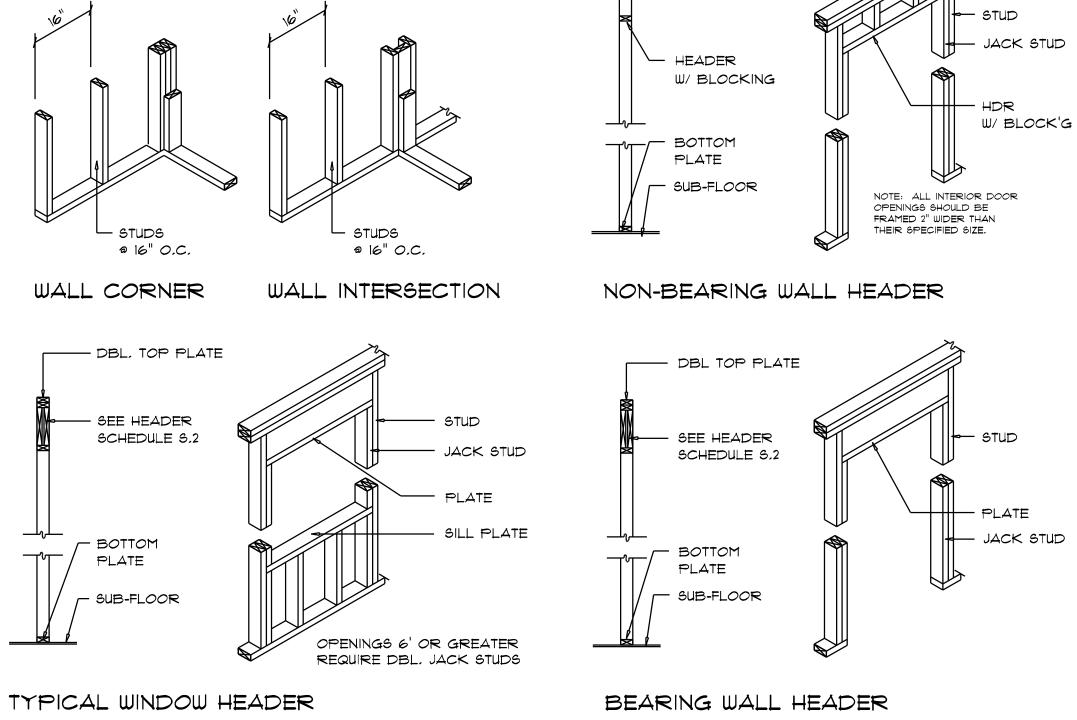

Wall Framing/Header DETAILS

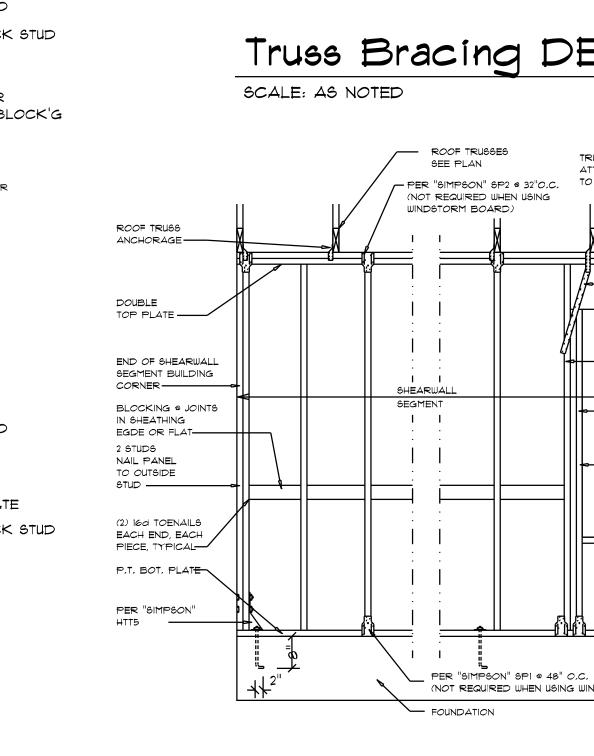


X 1/8" STEEL PLATE (NOT REQUIRED WHEN USING WINDSTORM BOARDS) WASHER, TYP. @ 48" O.C. - FOUNDATION

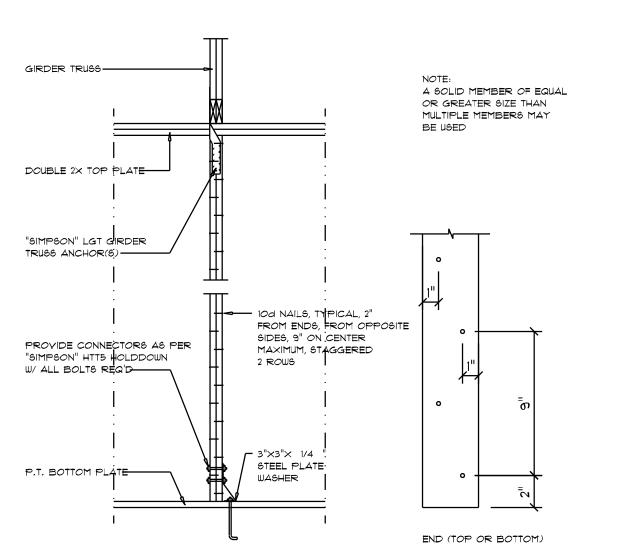


Girder Truss Column DET.

SCALE: 1/2" = 1'-0"

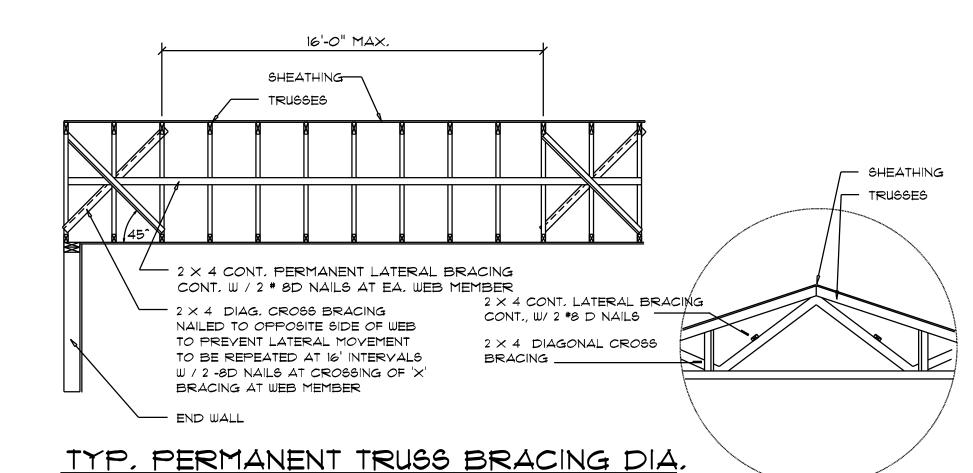

NOTE: ALL WOOD TO BE NUMBER 2 GRADE SOUTHERN YELLOW PINE

Truss Bracing DETAILS

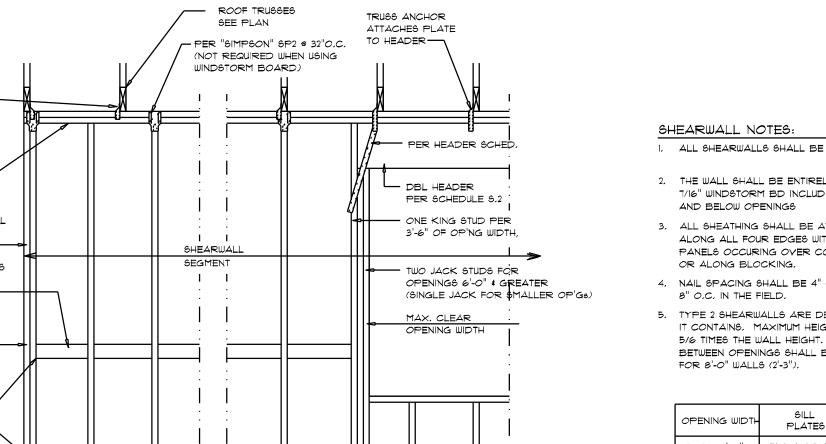

1. ALL SHEARWALLS SHALL BE TYPE 2 SHEARWALLS

D

- 1/2"~ BOLTS W/ 2"×2"

- 2. THE WALL SHALL BE ENTIRELY SHEATHED WITH 7/16" WINDSTORM BD INCLUDING AREAS ABOVE
- 3. ALL SHEATHING SHALL BE ATTACHED TO FRAMING ALONG ALL FOUR EDGES WITH JOINTS FOR ADJACENT PANELS OCCURING OVER COMMON FRAMING MEMBERS
- 4. NAIL SPACING SHALL BE 4" O.C. EDGES AND
- 5. TYPE 2 SHEARWALLS ARE DESIGNED FOR THE OPENING IT CONTAINS, MAXIMUM HEIGHT OF OPENING SHALL BE 5/6 TIMES THE WALL HEIGHT, THE MINIMUM DISTANCE BETWEEN OPENINGS SHALL BE THE WALL HEIGHT/3,5

OPENING WIDTH	SILL PLATES	16d TOE NAILS EACH END
UP TO 6'-0"	(1) 2x4 OR (1) 2x6	1
> 6' TO 9'-0"	(3) 2x4 OR (1) 2x6	2
> 9' TO 12'-0"	(5) 2x4 OR (2) 2x6	3

Nicholas P Geisler DN: CN = Nicholas P P Geisler C = US O = Date: 2024.09.25 15: 12:47 -04'00'

Shear Wall DETAILS

SCALE: NONE

SIDENC

ARK

SHEET NUMBER

OF 4 SHEETS