


MECHANICAL DISCLAIMER
THE DUCT ROUTING AND HVAC EQUIPMENT SHOWN ON THESE DRAWINGS ARE DIAGRAMATIC ONLY. THE BUILDER IS SOLELY RESPONSIBLE FOR COORDINATING ALL ASPECTS OF MECHANICAL INSTALLATION WITH ALL TRADES. THE BUILDER SHALL COORDINATE BETWEEN THE PRE-ENGINEERED TRUSS MFR. AND/OR FRAMING REQUIREMENTS WITH THE MECHANICAL CONTRACTOR TO ENSURE ADEQUATE SPACE FOR DUCT ROUTING AND EQUIPMENT PLACEMENT AND SUPPORT. HVAC INSTALLATION SHALL BE INSTALLED ACCORDING TO ALL CURRENT STATE AND LOCAL MECHANICAL CODES.

LIGHTING PACKAGE
(3) SURFACE MOUNT
(2) WALL MOUNT
PACKAGE #6

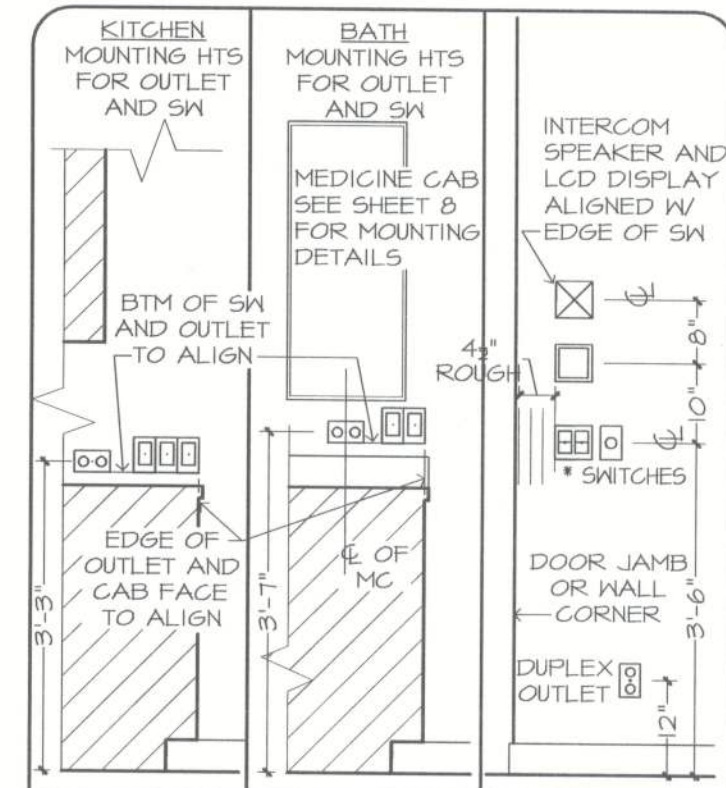

THE ITEMS BELOW ARE SHOWN FOR LOCATION PURPOSES ONLY. PLEASE REFER TO LOCAL SPECS TO DETERMINE WHETHER OR NOT THE FOLLOWING ITEMS ARE INCLUDED:
INTERCOM
MASTER STATION
LIGHTING OR ELECTRONICS (LCD DISPLAY OR LIGHTING AUTOMATION PUSH BUTTON CONTROLLER)
VOLUME CONTROL KNOB
* USE MAX OF 6 GANG BOXES FOR GANG BOXES OF 3 OR MORE THAT ARE LOCATED ON BLOCK WALL. CHIP OUT THE BLOCK TO ACCOMMODATE DEEPER BOX.
NOTE: ALL DIMENSIONS ARE FOR ROUGH FRAMING.
ELECTRICAL DETAILS
SCALE: 1/2"=1'-0"

ELECTRICAL LEGEND
● DUPLEX OUTLET (110V AT 12" OR AS NTD)
● DUPLEX OUTLET (110V AT 36")
● DUPLEX OUTLET (110V AT 48")
● DUPLEX OUTLET (110V AT 48")
● SPLIT DPLX OUTLET (110V AT 12") TOP IS HOT
● WEATHERPROOF DPLX OUTLET (110V AT 12") TOP PLUG IS HOT
● WEATHERPROOF DPLX OUTLET (110V AT 12") TOP PLUG IS HOT
● 220V OUTLET AT 30"
● RECESS FLOOR OUTLET
● SPECIAL PURPOSE CONN
● TELEPHONE OUTLET AT 12" OR AS NTD
● STRUCTURED WIRE COMBO OUTLET WALL OR FL MOUNT
● STRUCTURED WIRE QUAD COMBO OUTLET
● SW SEE ELEC DTL
● 3-WAY SW SEE ELEC DTL
● 4-WAY SW SEE ELEC DTL
● 1-GANG COMBINATION FAN / LIGHT SWITCH
● PUSH-BUTTON FOR GARAGE DOOR AT 60"
● DIMMER SW AT 36"
● PUSH-BUTTON DOORBELL (DELETE W/ INTERCOM)
● CLG MNT LT FIXTURE
● CLG MNT PREWIRE - FIXTURE BY OWNER
● SURFACE MNT FIXTURE
● WALL MNT FIXTURE
● ROUND RECESS FOR TUB/SHOWER
● ROUND RECESS OPEN BAFFLE TRIM (INTERIOR FLAT CLG)
● MINI ROUND RECESS OPEN BAFFLE TRIM (BAR LOCATIONS)
● MINI ROUND RECESS EYEBALL TRIM
● ROUND RECESS REGRESSED EYEBALL (INTERIOR SLOPED CLG)
● MINI HALOGEN (CABINET LOCATIONS)
● CLG FANLIGHT PREWIRE AND SWITCHES
● SMOKE & CARBON MONOXIDE DETECTOR
● 4-12" UNDER CABT 12"
● 4-24" UNDER CABT 24"
● 4-36" UNDER CABT 36"
● 5-24" SINGLE 24" FLUOR STRIP
● 5-36" SINGLE 36" FLUOR STRIP
● 5-48" SINGLE 48" FLUOR STRIP
● 4-24" DOUBLE 24" FLUOR STRIP
● 4-36" DOUBLE 36" FLUOR STRIP
● 4-48" DOUBLE 48" FLUOR STRIP
● 24" CLG MNT FLUOR. LT, WRAPPED
● 48" CLG MNT FLUOR. LT, WRAPPED
● 24" VANITY LIGHTING (SEE SPECS)
● 36" VANITY LIGHTING (SEE SPECS)
● EXHAUST FAN / LIGHT FIXTURE COMBO
● EXHAUST FAN
● SOFFIT MNT FLOOD LIGHT
● CLG MNT SPEAKER
● CHIMES (DELETE W/ INTERCOM)
● ELEC PANEL
● STRUCTURED WIRING PANEL
● CLG RETURN AIR
● A/C REGISTER
● THERMOSTAT
● SECURITY PAD
● NOTE: ALL OUTLETS ABOVE COUNTERS SHALL BE MOUNTED HORIZONTALLY
● NOTE: ALL EXTERIOR OUTLETS, WALL OUTLETS IN GARAGE, KITCHENS, BATHROOMS AND ALL OUTLETS WITHIN 6'-0" OF A WATER SOURCE SHALL BE GFI.
● ALL NON-GFI OR 220V OUTLETS ARE PROTECTED BY AN ARC-FAULT CIRCUIT INTERRUPTER. ALL HEIGHTS TO CENTERLINE AFF.
● NOTE: LIGHTS, FANS, SMOKE DETECTORS, A/C SUPPLIES AND RETURN AIRS TO BE PLACED ON CENTERLINES OF DOORS, WINDOWS AND HALLWAYS, TYP UNO
● NOTE: SMOKE DETECTORS SHALL BE INSTALLED PER NFPA72 AND 2001 FBC-R SECTION R313.
● NOTE: COORDINATE LOCATION OF ALL REQ. ELECTRICAL, CABLE, AUDIO/VIDEO & DATA RECEPTACLES W/ MOUNTING HARDWARE & MFR. INSTALLATION REQ. FOR ALL FLAT PANEL DISPLAYS.

Arthur Rutenberg Homes
ALL RIGHTS RESERVED

05/14/10 5:11 PM
05/04/12 5:11 PM

THE JASMINE 1136F - GARRISON RESIDENCE
BUILDER: BRYAN ZECHER HOMES, INC.
AN INDEPENDENT, LICENSED AND OPERATED FRANCHISE

THE JASMINE 1136F - GARRISON RESIDENCE
BUILDER: BRYAN ZECHER HOMES, INC.
AN INDEPENDENT, LICENSED AND OPERATED FRANCHISE

ELECTRICAL PLAN
PLAN 1136F-2F-01-10"

7